

TEST REPORT

Report No.: **BCTC2211041097-4E**

Applicant: **OKdo Technology Limited**

Product Name: **Radxa CM3**

Model/Type Ref.: **RM116-D2E16W2**

Tested Date: **2022-11-09 to 2022-12-14**

Issued Date: **2022-12-15**

Shenzhen BCTC Testing Co., Ltd.



Product Name: Radxa CM3
Trademark: N/A
Model/Type Ref.: RM116-D2E16W2
RM116-D1E0W0, RM116-D1E8W0, RM116-D2E0W0, RM116-D2E8W0,
RM116-D2E16W0, RM116-D4E0W0, RM116-D4E8W0, RM116-D4E16W0,
RM116-D4E32W0, RM116-D8E0W0, RM116-D8E8W0, RM116-D8E16W0,
RM116-D8E32W0, RM116-D1E8W2, RM116-D4E32W2, RM116-D8E32W2
Prepared For: OKdo Technology Limited
Address: 5th Floor, 2 Pancras Square, King's Cross, London N1C 4AG, United Kingdom
Manufacturer: OKdo Technology Limited
Address: 5th Floor, 2 Pancras Square, King's Cross, London N1C 4AG, United Kingdom
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng,
Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2022-11-09
Sample tested Date: 2022-11-09 to 2022-12-14
Issue Date: 2022-12-15
Report No.: BCTC2211041097-4E
Test Standards: ARIB STD-T71 Ver.6.1
Article2 Paragraph 1, item 19-3
Test Results: PASS
Remark: This is JAPAN RADIO test report.

Tested by:


Lei Chen

Lei Chen/Project Handler

Approved by:


Zhou

Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

| Test Report Declaration | Page |
|--|------|
| 1. Version | 5 |
| 2. Test Summary | 6 |
| 3. Measurement Uncertainty | 7 |
| 4. Product Information And Test Setup | 8 |
| 4.1 Product Information..... | 8 |
| 4.2 Block Digram Parameters Of Text Software Setting | 9 |
| 4.3 Description Of Support Units (Conducted Mode) | 9 |
| 4.4 Channel List | 9 |
| 4.5 Test Mode | 10 |
| 4.6 Test Conditions | 10 |
| 4.7 Table Of Parameters Of Test Software Setting..... | 11 |
| 5. Test Facility And Test Instrument Used..... | 12 |
| 5.1 Test Facility..... | 12 |
| 5.2 Test Instrument Used..... | 12 |
| 6. RF Shielding Method..... | 13 |
| 7. Frequency Error | 14 |
| 7.1 Block Diagram Of Test Setup..... | 14 |
| 7.2 Limit | 14 |
| 7.3 Measuring Instruments And Setting | 14 |
| 7.4 Test Procedure | 14 |
| 7.5 Test Result..... | 15 |
| 8. Antenna Power..... | 19 |
| 8.1 Block Diagram Of Test Setup..... | 19 |
| 8.2 Limit | 19 |
| 8.3 Measuring Instruments And Setting | 19 |
| 8.4 Test Procedure | 20 |
| 8.5 Test Result..... | 21 |
| 9. Occupied Bandwidth | 23 |
| 9.1 Block Diagram Of Test Setup..... | 23 |
| 9.2 Limit | 23 |
| 9.3 Test Procedure | 23 |
| 9.4 Test Result..... | 24 |
| 10. Unwanted Emission Intensity Measurement..... | 32 |
| 10.1 Block Diagram Of Test Setup..... | 32 |
| 10.2 Limit | 32 |
| 10.3 Measuring Instruments And Setting | 32 |
| 10.4 Test Procedure | 32 |
| 10.5 Test Result..... | 33 |
| 11. Secondary Radiated Emissions Measurement..... | 75 |
| 11.1 Block Diagram Of Test Setup..... | 75 |
| 11.2 Limit | 75 |
| 11.3 Measuring Instruments And Setting | 75 |
| 11.4 Test Procedure | 75 |

| | | |
|------|---|-----|
| 11.5 | Test Result..... | 76 |
| 12. | Transmitter Burst Length Measurement..... | 82 |
| 12.1 | Block Diagram Of Test Setup..... | 82 |
| 12.2 | Limit | 82 |
| 12.3 | Measuring Instruments And Setting | 82 |
| 12.4 | Test Result..... | 83 |
| 13. | Interference Prevention Function Measurement..... | 91 |
| 14. | Carrier Sense Capability Measurement..... | 92 |
| 14.1 | Block Diagram Of Test Setup..... | 92 |
| 14.2 | Limit | 92 |
| 14.3 | Test Procedure | 93 |
| 14.5 | Test Result..... | 93 |
| 15. | Adjacent Channel Emitted Power Measurement | 94 |
| 15.1 | Block Diagram Of Test Setup..... | 94 |
| 15.2 | Limit | 94 |
| 15.3 | Measuring Instruments And Setting | 94 |
| 15.4 | Test Result..... | 95 |
| 16. | EUT Photographs..... | 102 |
| 17. | EUT Test Setup Photographs..... | 103 |

(Note: N/A Means Not Applicable)

1. Version

| Report No. | Issue Date | Description | Approved |
|-------------------|------------|-------------|----------|
| BCTC2211041097-4E | 2022-12-15 | Original | Valid |
| | | | |



STING
ED
001

2. Test Summary

Test procedures according to the technical standards:

| Article 49-20 | |
|--------------------------------------|---------------|
| Description of Test | Result |
| Frequency Error | Complies |
| Occupied Bandwidth (99%) | Complies |
| Unwanted Emission Intensity | Complies |
| Antenna Power and Tolerance | Complies |
| Secondary Radiated Emissions | Complies |
| Transmitter Burst Length | Complies |
| Interference Prevention Function | Complies |
| Carrier Sense Capability | Complies |
| Adjacent Channel Emitted Power | Complies |
| Out-Band Leakage Power | Complies |
| Construction Protection Confirmation | Complies |

NOTE:

- (1) MIC Notice No.88 Appendix No.45
- (2) MIC Ordinance Regulating Radio Equipment Section 4.17 of Article 49.20



3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.


| No. | Item | Uncertainty |
|-----|------------------------------|---------------------|
| 1 | Conducted Emission Test | $\pm 3.2\text{dB}$ |
| 2 | Radiated Emission Test | $\pm 4.7\text{dB}$ |
| 3 | RF power,conducted | $\pm 0.16\text{dB}$ |
| 4 | Spurious emissions,conducted | $\pm 0.21\text{dB}$ |
| 5 | All emissions,radiated(<1G) | $\pm 4.68\text{dB}$ |
| 6 | All emissions,radiated(>1G) | $\pm 5.0\text{dB}$ |
| 7 | frequency error ppm | $\pm 0.5\text{ppm}$ |

4. Product Information And Test Setup

4.1 Product Information

| | |
|-------------------------------|---|
| Model/Type Ref.: | RM116-D2E16W2 RM116-D1E0W0, RM116-D1E8W0, RM116-D2E0W0, RM116-D2E8W0, RM116-D2E16W0, RM116-D4E0W0, RM116-D4E8W0, RM116-D4E16W0, RM116-D4E32W0, RM116-D8E0W0, RM116-D8E8W0, RM116-D8E16W0, RM116-D8E32W0, RM116-D1E8W2, RM116-D4E32W2, RM116-D8E32W2 |
| Model differences: | All the model are the same circuit and RF module, except model names. |
| Hardware Version: | V1.3 |
| Software Version: | 4.19 |
| Wi-Fi Specification: | 802.11a/n/ac(20MHz channel bandwidth) 802.11n/ac(40MHz channel bandwidth) 802.11ac(80MHz channel bandwidth) |
| Operation Frequency: | 5180MHz-5240MHz for 802.11a/n(HT20)/ac20; 5190MHz-5230MHz for 802.11n(HT40)/ac40; 5210MHz for 802.11 ac80; 802.11a: 3mW/MHz ; 802.11n20: 3mW/MHz; |
| Rated RF Output Power Density | 802.11 n40: 2mW/MHz; 802.11 ac20: 3mW/MHz; 802.11 ac40: 2mW/MHz; 802.11 ac80: 1mW/MHz; 802.11a: 2.858 mW/MHz ; 802.11n20: 2.359 mW/MHz; |
| Conducted Power Density | 802.11 n40: 1.437 mW/MHz; 802.11 ac20: 2.495 mW/MHz; 802.11 ac40: 1.483 mW/MHz; 802.11 ac80: 0.745 mW/MHz; |
| Type of Modulation: | OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac; |
| Data Rate | 802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS16 |
| Number Of Channel: | 4 channels for 802.11a/n20 in the 5180-5240MHz band ; 2 channels for 802.11 n40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; |
| Antenna installation: | FPC antenna |
| Antenna Gain: | 1.36dBi |
| Ratings: | DC 12V |

4.2 Block Diagram Parameters Of Text Software Setting

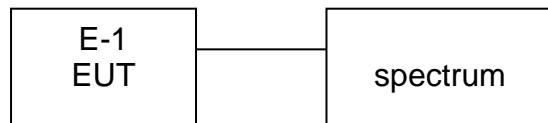

4.3 Description Of Support Units (Conducted Mode)

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|-----------|-----------|----------------|------------|------|
| E-1 | Radxa CM3 | N/A | RM116-D2E16W2 | N/A | EUT |
| | | | | | |

Notes:

1. The support equipment was authorized by Declaration of Confirmation.
2. For detachable type I/O cable should be specified the length in cm in 『Length』 column
3. "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

4.4 Channel List

| 802.11a/n/ac(20MHz) Frequency Channel | | | |
|--|-----------------|---------|-----------------|
| Channel | Frequency (GHz) | Channel | Frequency (GHz) |
| 36 | 5.180 | 44 | 5.220 |
| 40 | 5.200 | 48 | 5.240 |

| 802.11n/ac(40MHz) Frequency Channel | | | |
|--------------------------------------|-----------------|---------|-----------------|
| Channel | Frequency (GHz) | Channel | Frequency (GHz) |
| 38 | 5.190 | 45 | 5.230 |

| 802.11ac(80MHz) Frequency Channel | | | |
|------------------------------------|-----------------|---------|-----------------|
| Channel | Frequency (GHz) | Channel | Frequency (GHz) |
| 42 | 5.210 | \ | \ |

4.5 Test Mode

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description | |
|--------------|-------------|------------|
| Mode 1 | CH36 | 802.11a |
| Mode 2 | CH40 | |
| Mode 3 | CH48 | |
| Mode 4 | RX | |
| Mode 5 | CH36 | 802.11n20 |
| Mode 6 | CH40 | |
| Mode 7 | CH48 | |
| Mode 8 | RX | |
| Mode 9 | CH38 | 802.11n40 |
| Mode 10 | CH46 | |
| Mode 11 | RX | |
| Mode 12 | CH36 | |
| Mode 13 | CH40 | 802.11ac20 |
| Mode 14 | CH48 | |
| Mode 15 | RX | |
| Mode 16 | CH38 | |
| Mode 17 | CH46 | 802.11ac40 |
| Mode 18 | RX | |
| Mode 19 | CH42 | 802.11ac80 |

4.6 Test Conditions

The devices was tested while in a continuous transmitter/receiver mode.

The EUT was tuned to a low, middle, and high channel for all tests. For all test case pre/scans were completed in all Modes to determine worst case levels.

Power Supply Voltage Fluctuation Test

| Voltage Fluctuation Test | Normal Voltage | High Voltage +10% of Normal Voltage | Low Voltage -10% of Normal Voltage |
|--------------------------|----------------|-------------------------------------|------------------------------------|
| Input DC Power | 12V | 13.2V | 10.8V |
| Voltage Variation (%) | 0% | +10% | -10% |

Note:

Voltage Variation (%) = (Output high or Low Voltage - Output Normal Voltage) / Output Normal Voltage * 100

During the input supply voltage to the EUT from the external power source is varied by +/-10%, +/-10% of the external power change, will not affect the voltage of the RF, so only operated in normal voltage to test all regulations.

4.7 Table Of Parameters Of Test Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

| Test software Version | CMD | | |
|-----------------------|----------|----------|---------|
| Frequency | DEF | DEF | DEF |
| Parameters | 5180 MHz | 5190 MHz | 5200MHz |
| Frequency | DEF | DEF | DEF |
| Parameters | 5210 MHz | 5230 MHz | 5240MHz |

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

5.2 Test Instrument Used

| Item | Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------|-------------------------------|--------------|--------------|------------|------------------|------------------|
| 1 | Power meter | Keysight | E4419 | \ | May 26, 2022 | May 25, 2023 |
| 2 | Signal Analyzer 20kHz-26.5GHz | Keysight | N9020A | MY49100060 | May 26, 2022 | May 25, 2023 |
| 3 | D.C. Power Supply | LongWei | TPR-6405D | \ | May 24, 2022 | May 23, 2023 |
| 4. | Signal Generator | Keysight | N5182B | MY56200519 | May 24, 2022 | May 23, 2023 |
| 5. | Attenuator | \ | 10dB DC-6GHz | 1650 | May 24, 2022 | May 23, 2023 |


6. RF Shielding Method

Chipset:

The product structure is uses SMD patch process.


As shown in the picture, If the will be open so the product be damage.

Number of the pins: 44 interval distance 0.5mm

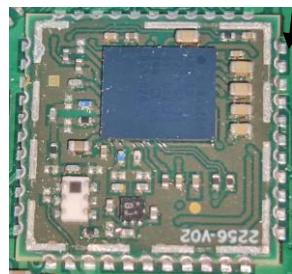

7. Frequency Error

7.1 Block Diagram Of Test Setup

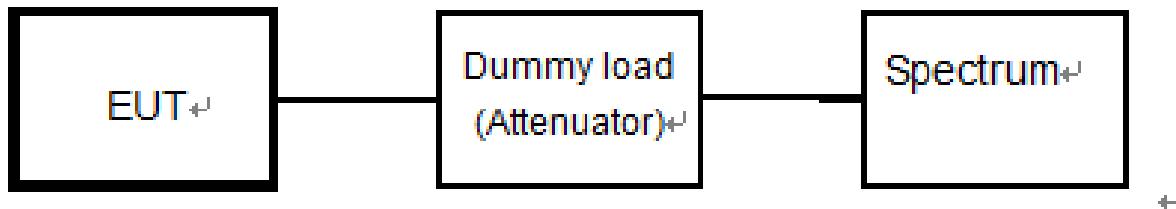

7.2 Limit

| Item | Limits |
|-----------------|--------|
| Frequency Error | ±20ppm |

7.3 Measuring Instruments And Setting

The following table is the setting of Spectrum Analyzer.

| Spectrum Parameter | Setting |
|--------------------|----------|
| Attenuation | Auto |
| RB / VB | 30KHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

7.4 Test Procedure


- (1) In the case of unmodulated signal (continuous or continuous burst), measure the frequency directly by a frequency meter.
- (2) In the case of burst waves, the measurement shall be done for enough time in order to obtain the enough measuring accuracy, and the average of the measured values becomes the final value.
- (3) In the case of a test mode with a specific frequency spectrum, measure the frequency of the specific spectrum by a spectrum analyzer.
- (4) In the cases above, if the frequency equivalent to the test frequency is not directly measured in principle, it shall be obtained by necessary calculation.



In the case of modulated signal, if there is no specific spectrum measurable by a spectrum analyzer but a specific dip is observed, it is allowed to measure the frequency with the signal generator (synthesized). That is, observe a signal of the signal generator concurrently (or alternately) with the tested signal using the spectrum analyzer while setting the frequency of the signal generator to the position of the dip on the screen of the spectrum analyzer, and determine the frequency of the signal generator at the time as a measured value.



7.5 Test Result


| | |
|-----------------|---------------------------------|
| Operation Mode: | Transmitting- unmodulation mode |
|-----------------|---------------------------------|

| Test Voltage | Test Frequency (MHz) | Measured Frequency (MHz) | Frequency Error(ppm) | Limit (ppm) | P/F |
|----------------|----------------------|--------------------------|----------------------|-------------|------|
| Normal Voltage | 5180 | 5180.005 | 0.97 | ±20 | PASS |
| | 5190 | 5190.005 | 0.96 | ±20 | PASS |
| | 5200 | 5200.005 | 0.96 | ±20 | PASS |
| | 5210 | 5210.005 | 0.96 | ±20 | PASS |
| | 5230 | 5230.005 | 0.96 | ±20 | PASS |
| | 5240 | 5240.005 | 0.95 | ±20 | PASS |

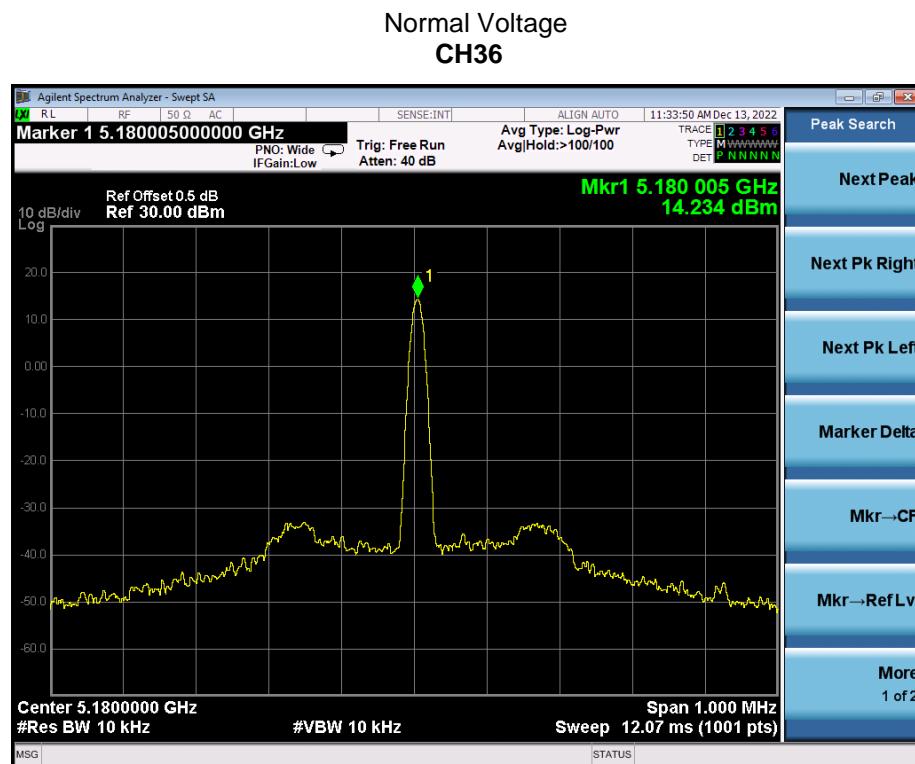

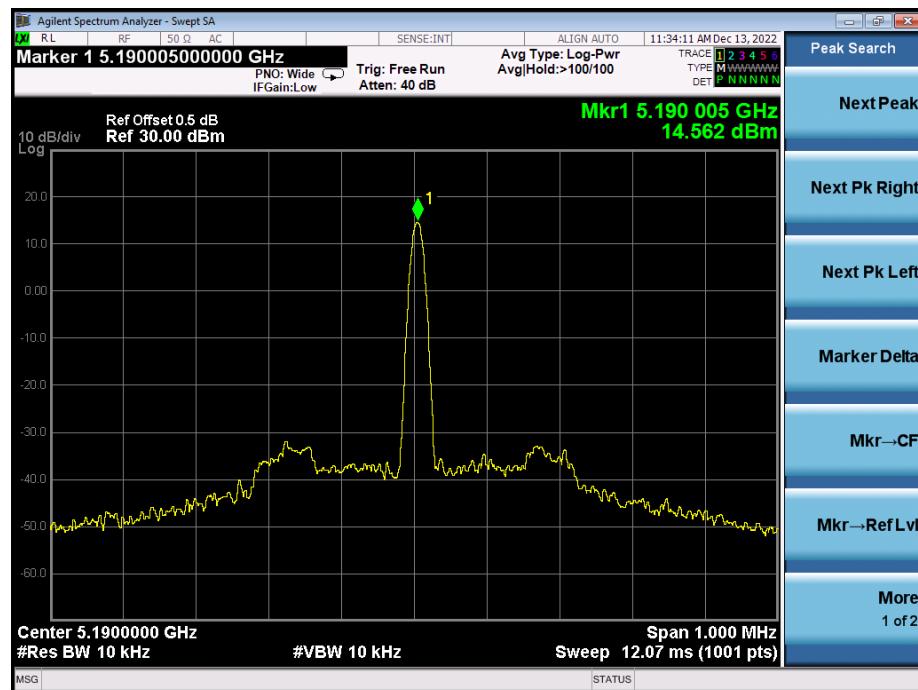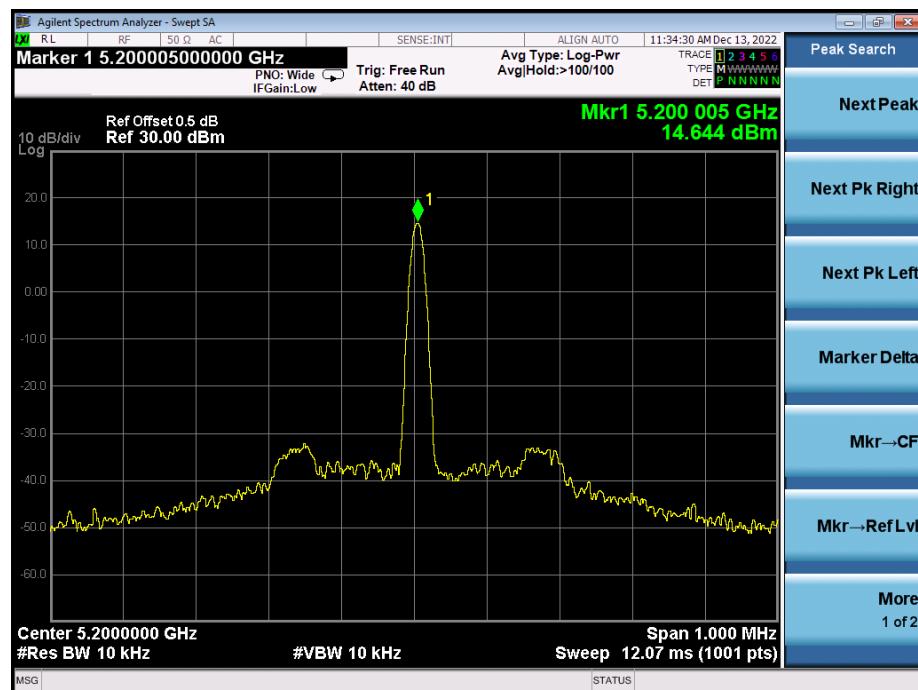
CH38

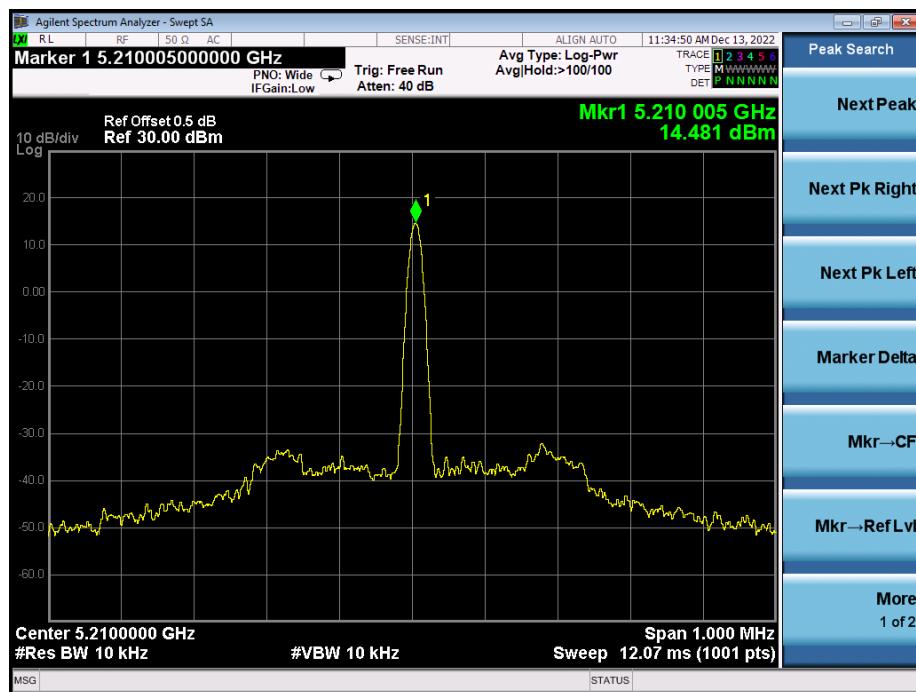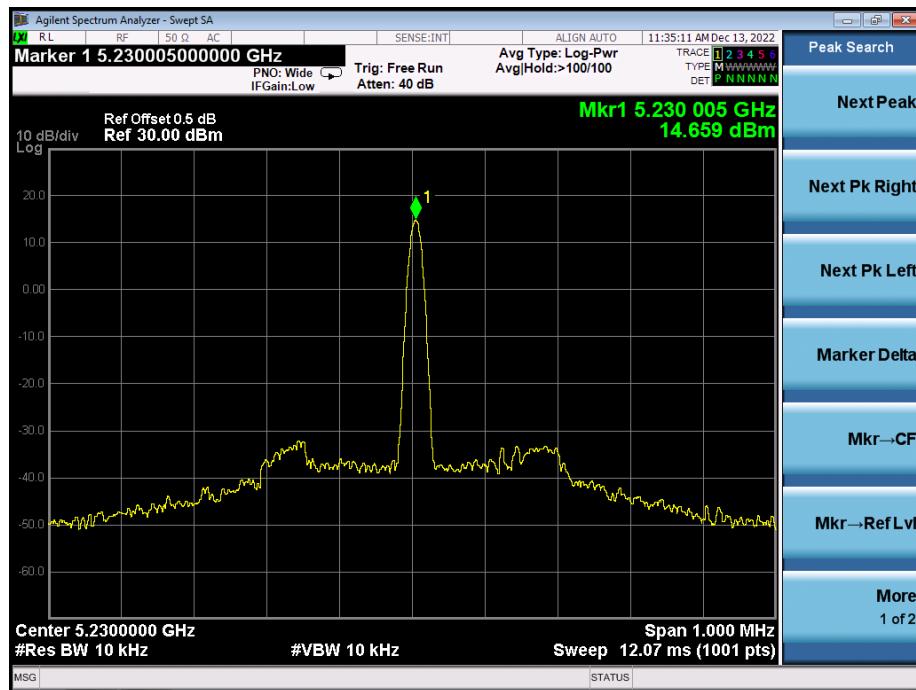CH40

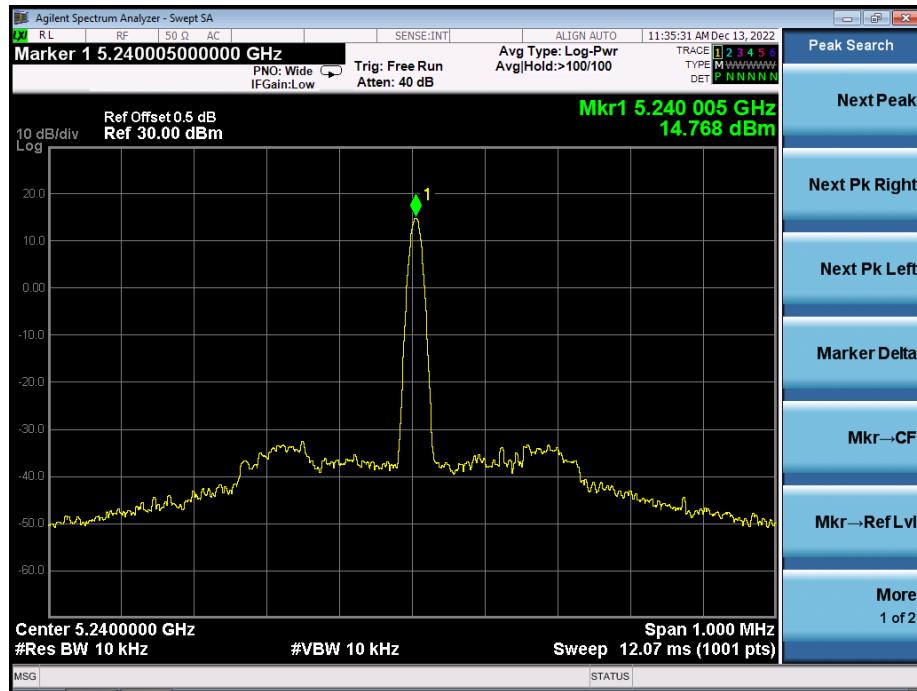
CH42

CH45


CH48

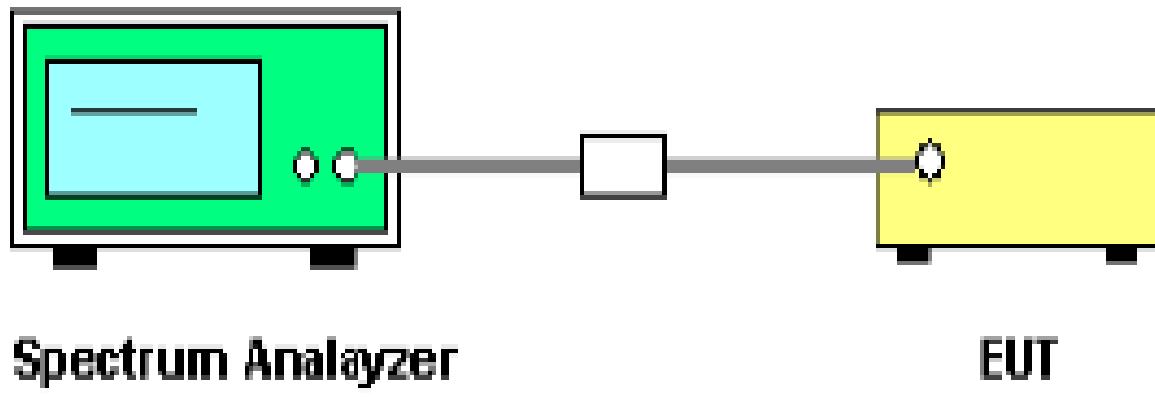CO,LTS

8. Antenna Power

8.1 Block Diagram Of Test Setup



8.2 Limit

| Item | Limits |
|-------------------------|--|
| Antenna Power | 802.11a20/n20/ac20 \leq 10mW/MHz 802.11n40/ac40 \leq 5mW/MHz 802.11ac80 \leq 2.5mW/MHz |
| Antenna Power tolerance | +20%, -80% (Base on manufacturer declare antenna power density) |

8.3 Measuring Instruments And Setting

The following table is the setting of Spectrum Analyzer.

| Spectrum Parameter | Setting |
|--------------------|----------|
| Attenuation | Auto |
| RB / VB | 1 MHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

8.4 Test Procedure

1. EUT Connect the to the spectrum analyzer.
2. Adjust the spectrum analyzer to have the center frequency the same with the measured carrier. RBW=VBW=1MHz, detector mode is positive peak. Turn off the averaging function and use zero span.
3. The calibrating signal power shall be reduced to 0 dBm and it shall be verified that the power meter reading also reduces by 10 dB.
- 4 . Connect the equipment to be measured. Using the following settings of the spectrum analyzer in combination with "max hold" function, find the frequency of highest power output in the power envelope: center frequency equal to operating frequency; RBW & VBW: 1 MHz; detector mode: positive peak; averaging: off; span: 3 times the spectrum width; amplitude: adjust for middle of the instrument' range. The frequency found shall be recorded.
- 5 . Set the center frequency of the spectrum analyzer to the found frequency and switch to zero span. The power meter indicates the measured power density "E".
6. Calculate antenna power density by the formula below $PD = Pt + 10 \cdot \log(1/x)$.
x: The duty cycle of the EUT in continuously transmitting mode
Pt: Output power of the SSG
7. Antenna Power Error is definition that actual measure antenna power tolerance between + 20% to - 80% power range that base on manufacturer declare the conducted power density.

8.5 Test Result

| Operation Mode: | | Normal Voltage-802.11a Mode | | | | | |
|--|---|--|------------------------------|--------------------|---------------|---------------------|-------------------------|
| Test Frequency | Conducted RF output power density (dBm/MHz) | Conducted RF output power density (mW/MHz) | Rated power density (mW/MHz) | Antenna Gain (dBi) | EIRP (mW/MHz) | EIRP Limit (mW/MHz) | Antenna Power Error (%) |
| 5180MHz | 3.745 | 2.369 | 3 | 1.36 | 3.240 | 10 | -21 |
| 5200MHz | 4.560 | 2.858 | 3 | 1.36 | 3.908 | 10 | -5 |
| 5240MHz | 4.118 | 2.581 | 3 | 1.36 | 3.530 | 10 | -14 |
| Limit : +20%, -80% (Base on manufacturer declare antenna power density) | | | | | | | |

| Operation Mode: | | Normal Voltage-802.11n20 Mode | | | | | |
|--|---|--|------------------------------|--------------------|---------------|---------------------|-------------------------|
| Test Frequency | Conducted RF output power density (dBm/MHz) | Conducted RF output power density (mW/MHz) | Rated power density (mW/MHz) | Antenna Gain (dBi) | EIRP (mW/MHz) | EIRP Limit (mW/MHz) | Antenna Power Error (%) |
| 5180MHz | 2.594 | 1.817 | 3 | 1.36 | 2.485 | 10 | -39 |
| 5200MHz | 2.333 | 1.711 | 3 | 1.36 | 2.340 | 10 | -43 |
| 5240MHz | 3.727 | 2.359 | 3 | 1.36 | 3.226 | 10 | -21 |
| Limit : +20%, -80% (Base on manufacturer declare antenna power density) | | | | | | | |

| Operation Mode: | | Normal Voltage-802.11n40 Mode | | | | | |
|--|---|--|------------------------------|--------------------|---------------|---------------------|-------------------------|
| Test Frequency | Conducted RF output power density (dBm/MHz) | Conducted RF output power density (mW/MHz) | Rated power density (mW/MHz) | Antenna Gain (dBi) | EIRP (mW/MHz) | EIRP Limit (mW/MHz) | Antenna Power Error (%) |
| 5190MHz | 1.243 | 1.331 | 2 | 1.36 | 1.821 | 5 | -33 |
| 5230MHz | 1.576 | 1.437 | 2 | 1.36 | 1.966 | 5 | -28 |
| Limit : +20%, -80% (Base on manufacturer declare antenna power density) | | | | | | | |


| Operation Mode: | | Normal Voltage-802.11ac20 Mode | | | | | |
|--|---|--|------------------------------|--------------------|---------------|---------------------|-------------------------|
| Test Frequency | Conducted RF output power density (dBm/MHz) | Conducted RF output power density (mW/MHz) | Rated power density (mW/MHz) | Antenna Gain (dBi) | EIRP (mW/MHz) | EIRP Limit (mW/MHz) | Antenna Power Error (%) |
| 5180MHz | 2.57 | 1.807 | 3 | 1.36 | 2.472 | 10 | -40 |
| 5200MHz | 2.914 | 1.956 | 3 | 1.36 | 2.675 | 10 | -35 |
| 5240MHz | 3.971 | 2.495 | 3 | 1.36 | 3.413 | 10 | -17 |
| Limit : +20%, -80% (Base on manufacturer declare antenna power density) | | | | | | | |

| Operation Mode: | | Normal Voltage-802.11ac40 Mode | | | | | |
|--|---|--|------------------------------|--------------------|---------------|---------------------|-------------------------|
| Test Frequency | Conducted RF output power density (dBm/MHz) | Conducted RF output power density (mW/MHz) | Rated power density (mW/MHz) | Antenna Gain (dBi) | EIRP (mW/MHz) | EIRP Limit (mW/MHz) | Antenna Power Error (%) |
| 5190MHz | 1.712 | 1.483 | 2 | 1.36 | 2.029 | 5 | -26 |
| 5230MHz | 0.862 | 1.220 | 2 | 1.36 | 1.668 | 5 | -39 |
| Limit : +20%, -80% (Base on manufacturer declare antenna power density) | | | | | | | |

| Operation Mode: | | Normal Voltage-802.11ac80 Mode | | | | | |
|--|---|--|------------------------------|--------------------|---------------|---------------------|-------------------------|
| Test Frequency | Conducted RF output power density (dBm/MHz) | Conducted RF output power density (mW/MHz) | Rated power density (mW/MHz) | Antenna Gain (dBi) | EIRP (mW/MHz) | EIRP Limit (mW/MHz) | Antenna Power Error (%) |
| 5210MHz | -1.280 | 0.745 | 1 | 1.36 | 1.019 | 2.5 | -26 |
| Limit : +20%, -80% (Base on manufacturer declare antenna power density) | | | | | | | |

9. Occupied Bandwidth

9.1 Block Diagram Of Test Setup

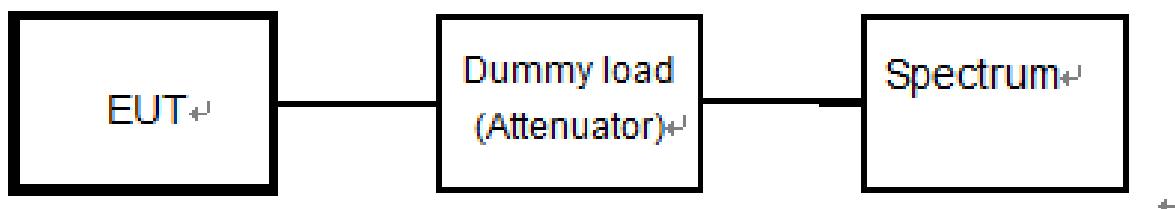

9.2 Limit

| Item | Limits |
|--------------------|--|
| Occupied Bandwidth | Not exceed 20MHz(DSSS 20MHz system) 20MHz(OFDM 20MHz system), 40MHz(OFDM 40MHz system) , 80MHz(OFDM 80MHz system) |


9.3 Test Procedure


- Setting of SA is following as: RB: 300kHz / VB:300kHz / SPAN: 3MHz / AT: 20dB Ref: 10dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
- EUT have transmitted the maximum modulation signal and fixed channelize (For DSSS or OFDM Device) or continuous maximum power of hopping mode(For FHSS Device).


9.4 Test Result


| Condition | Mode | Frequency (MHz) | 99% OBW (MHz) | Limit (MHz) | Verdict |
|-----------|------|-----------------|---------------|-------------|---------|
| NVNT | a | 5180 | 16.445 | 20 | Pass |
| NVNT | a | 5200 | 16.448 | 20 | Pass |
| NVNT | a | 5240 | 16.451 | 20 | Pass |
| NVNT | n20 | 5180 | 17.653 | 20 | Pass |
| NVNT | n20 | 5200 | 17.659 | 20 | Pass |
| NVNT | n20 | 5240 | 17.653 | 20 | Pass |
| NVNT | n40 | 5190 | 36.006 | 40 | Pass |
| NVNT | n40 | 5230 | 36.032 | 40 | Pass |
| NVNT | ac20 | 5180 | 17.648 | 20 | Pass |
| NVNT | ac20 | 5200 | 17.643 | 20 | Pass |
| NVNT | ac20 | 5240 | 17.66 | 20 | Pass |
| NVNT | ac40 | 5190 | 35.991 | 40 | Pass |
| NVNT | ac40 | 5230 | 36.046 | 40 | Pass |
| NVNT | ac80 | 5210 | 75.427 | 80 | Pass |


 CO.LTS?

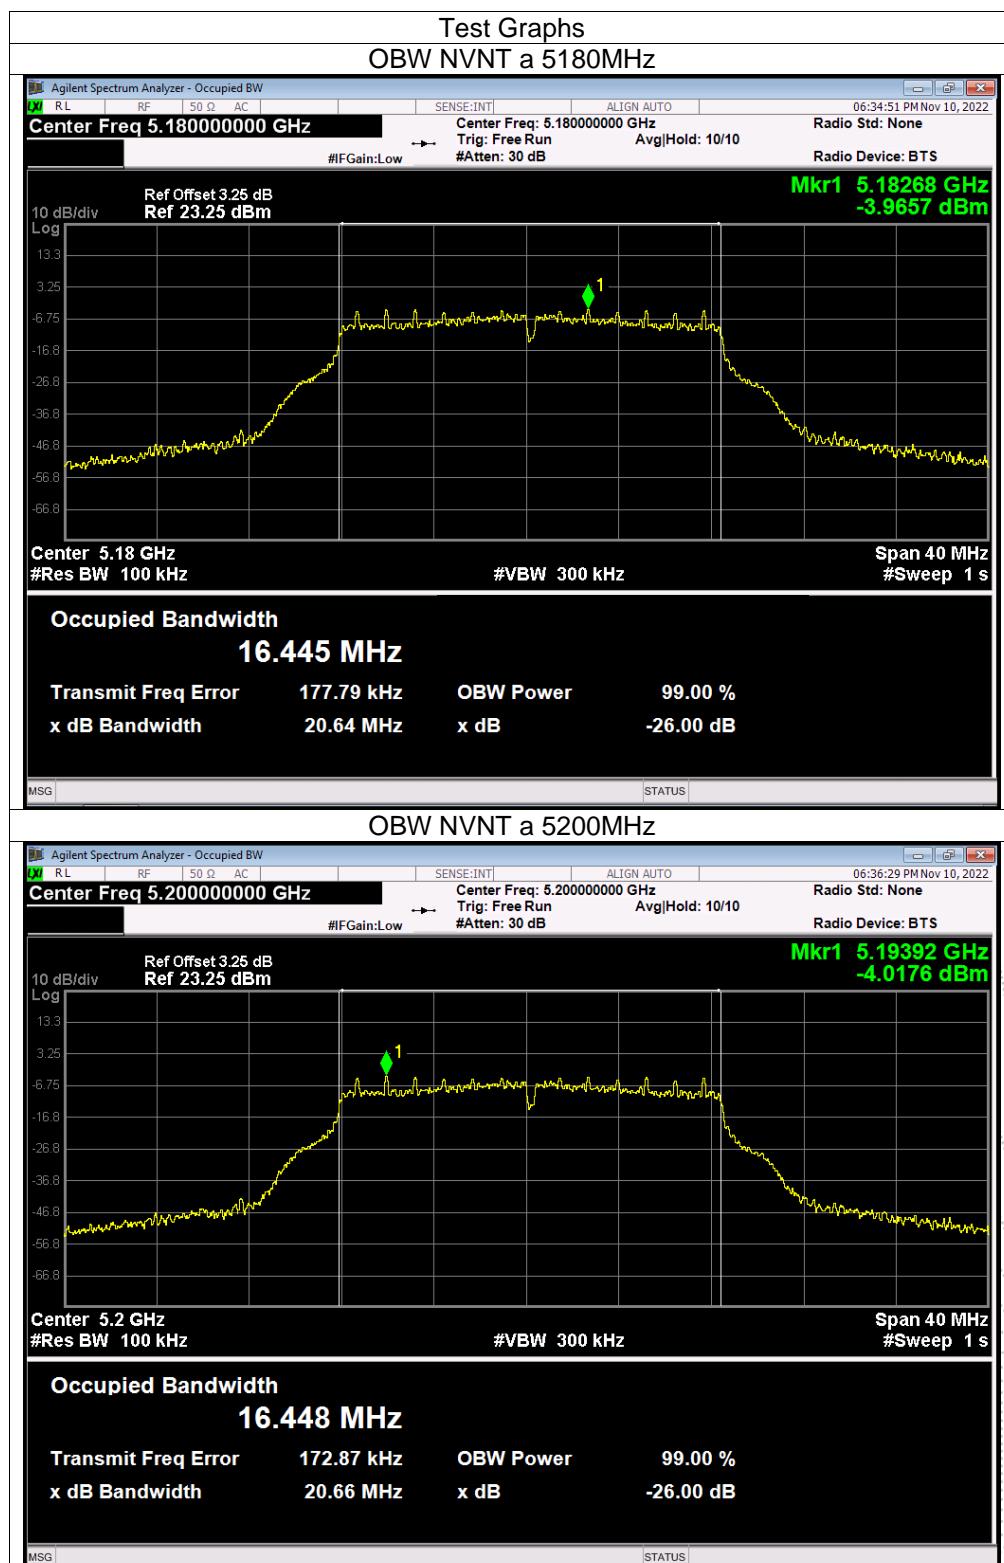


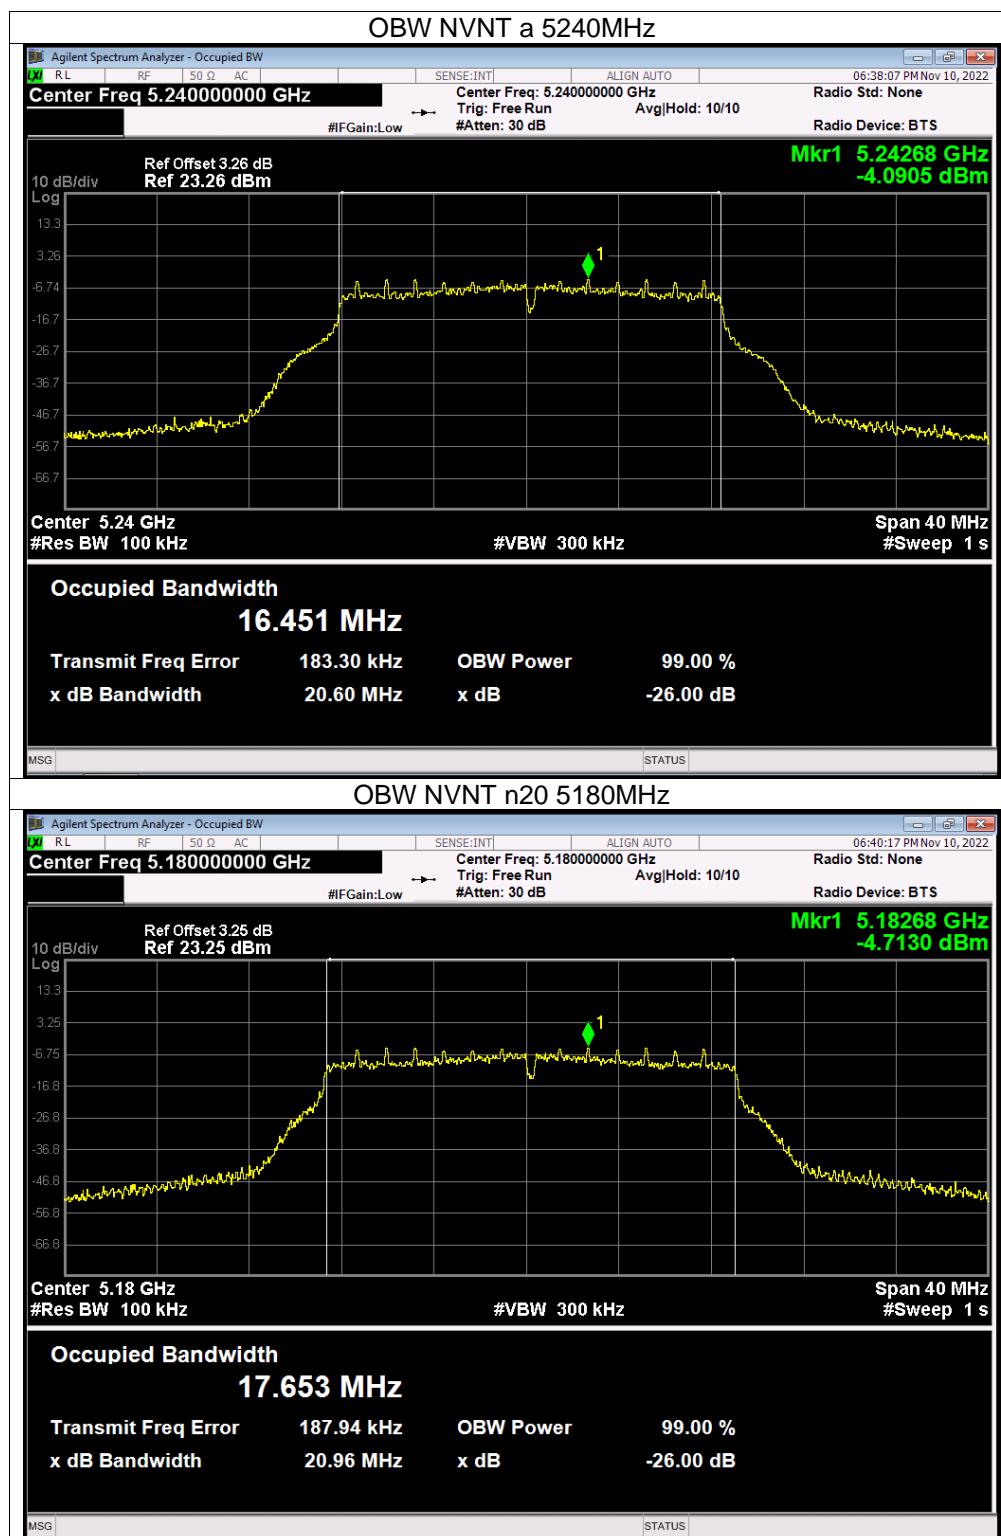


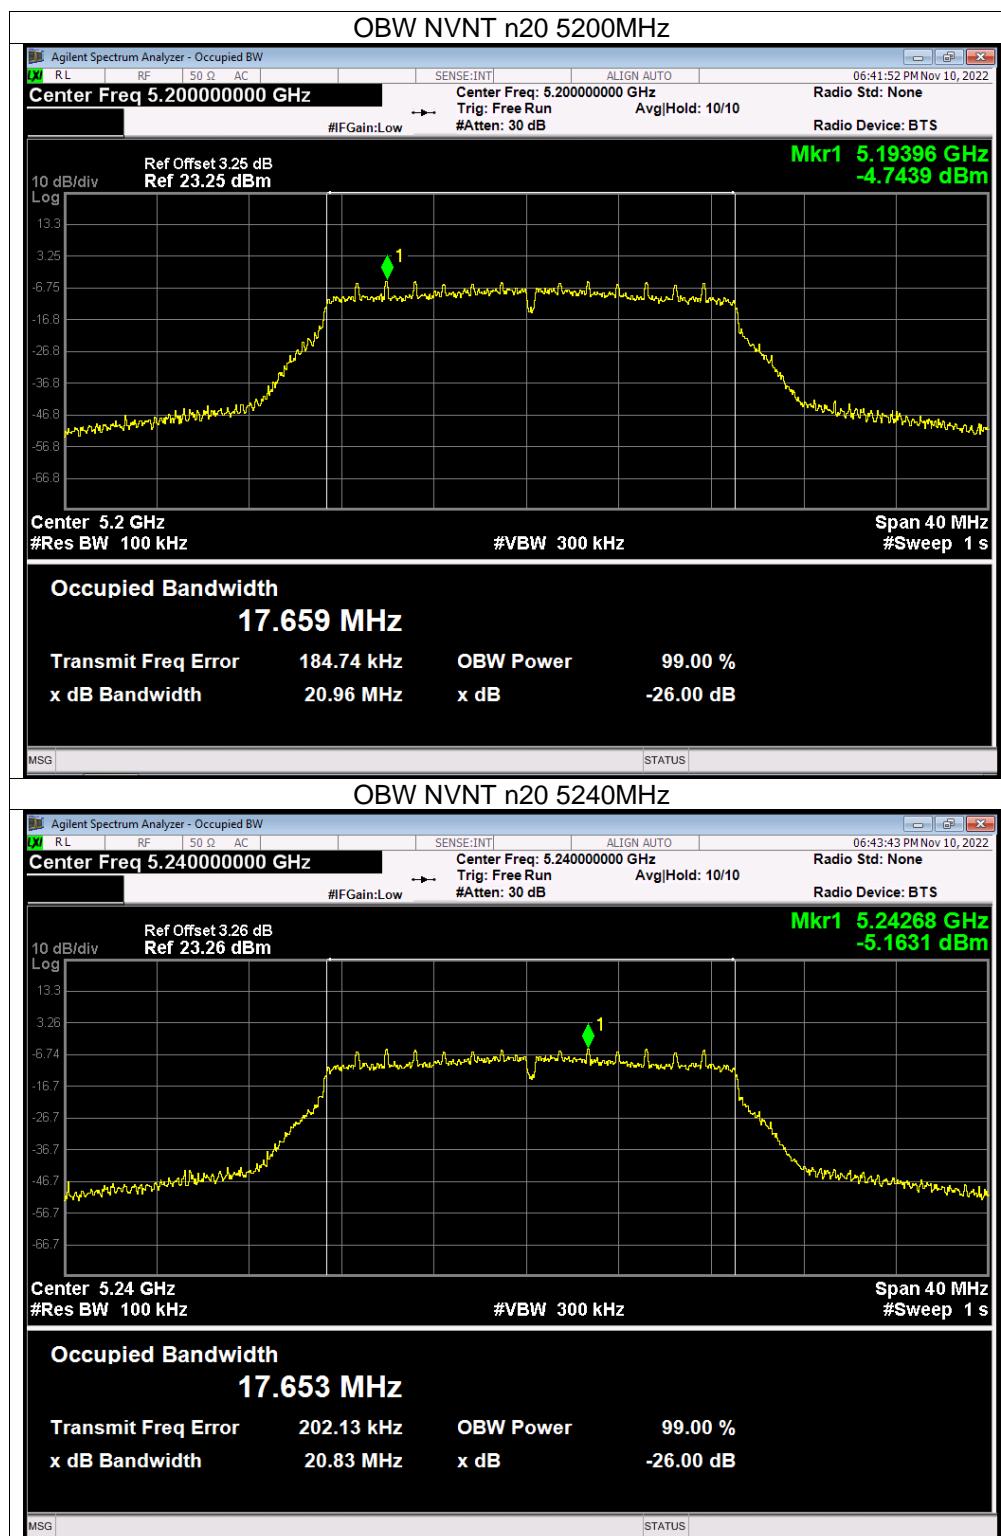

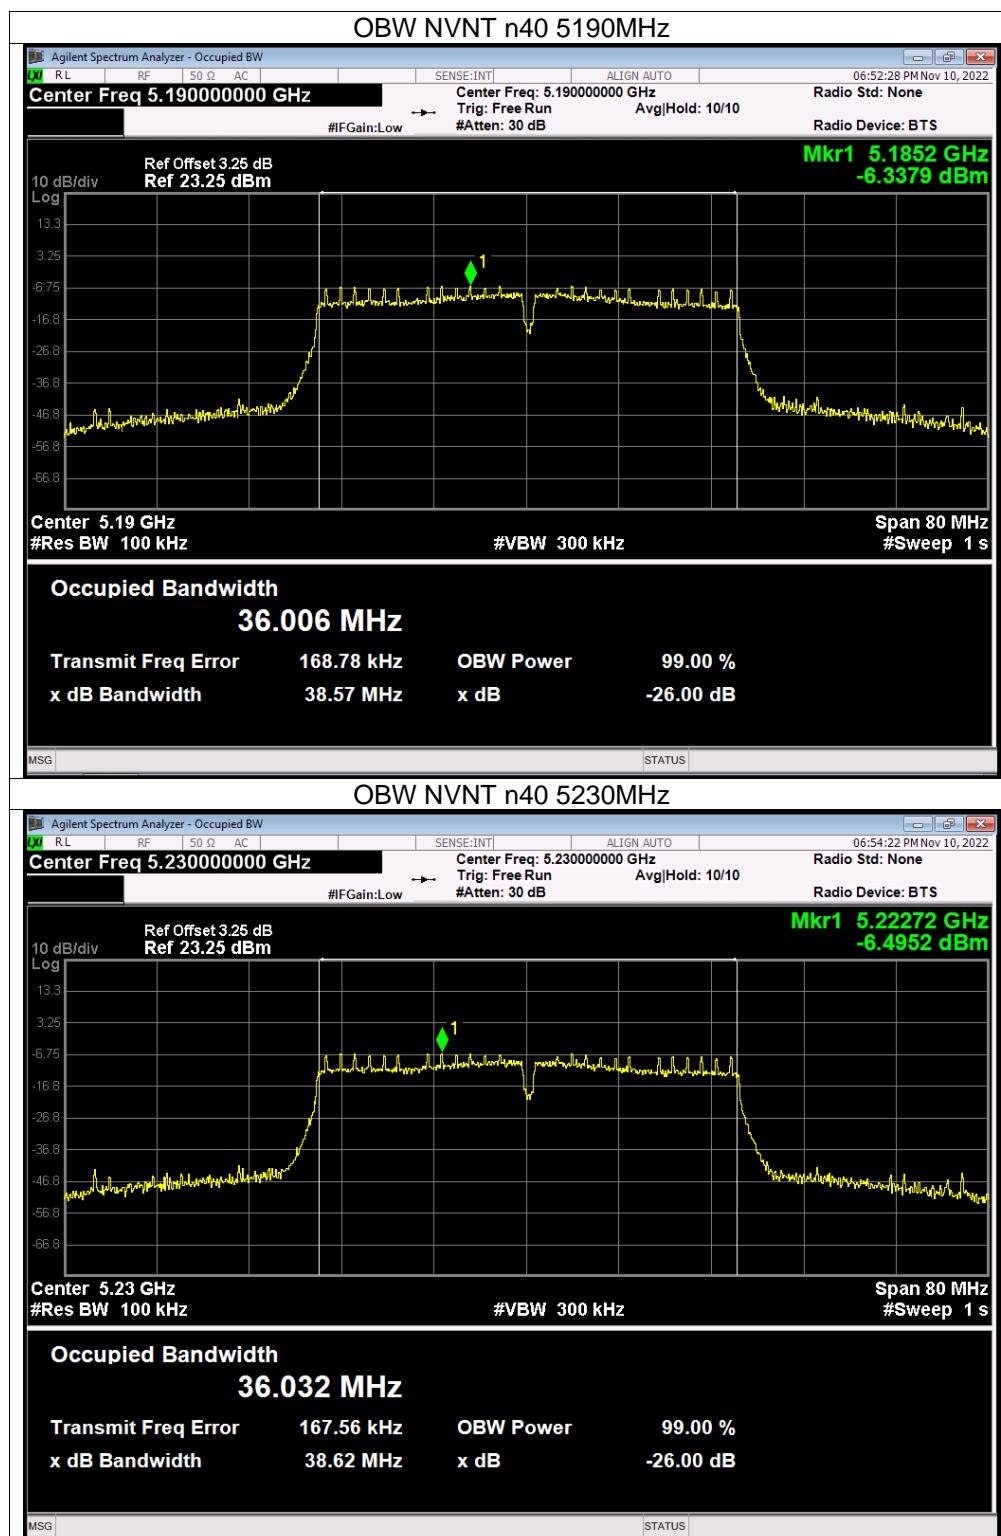

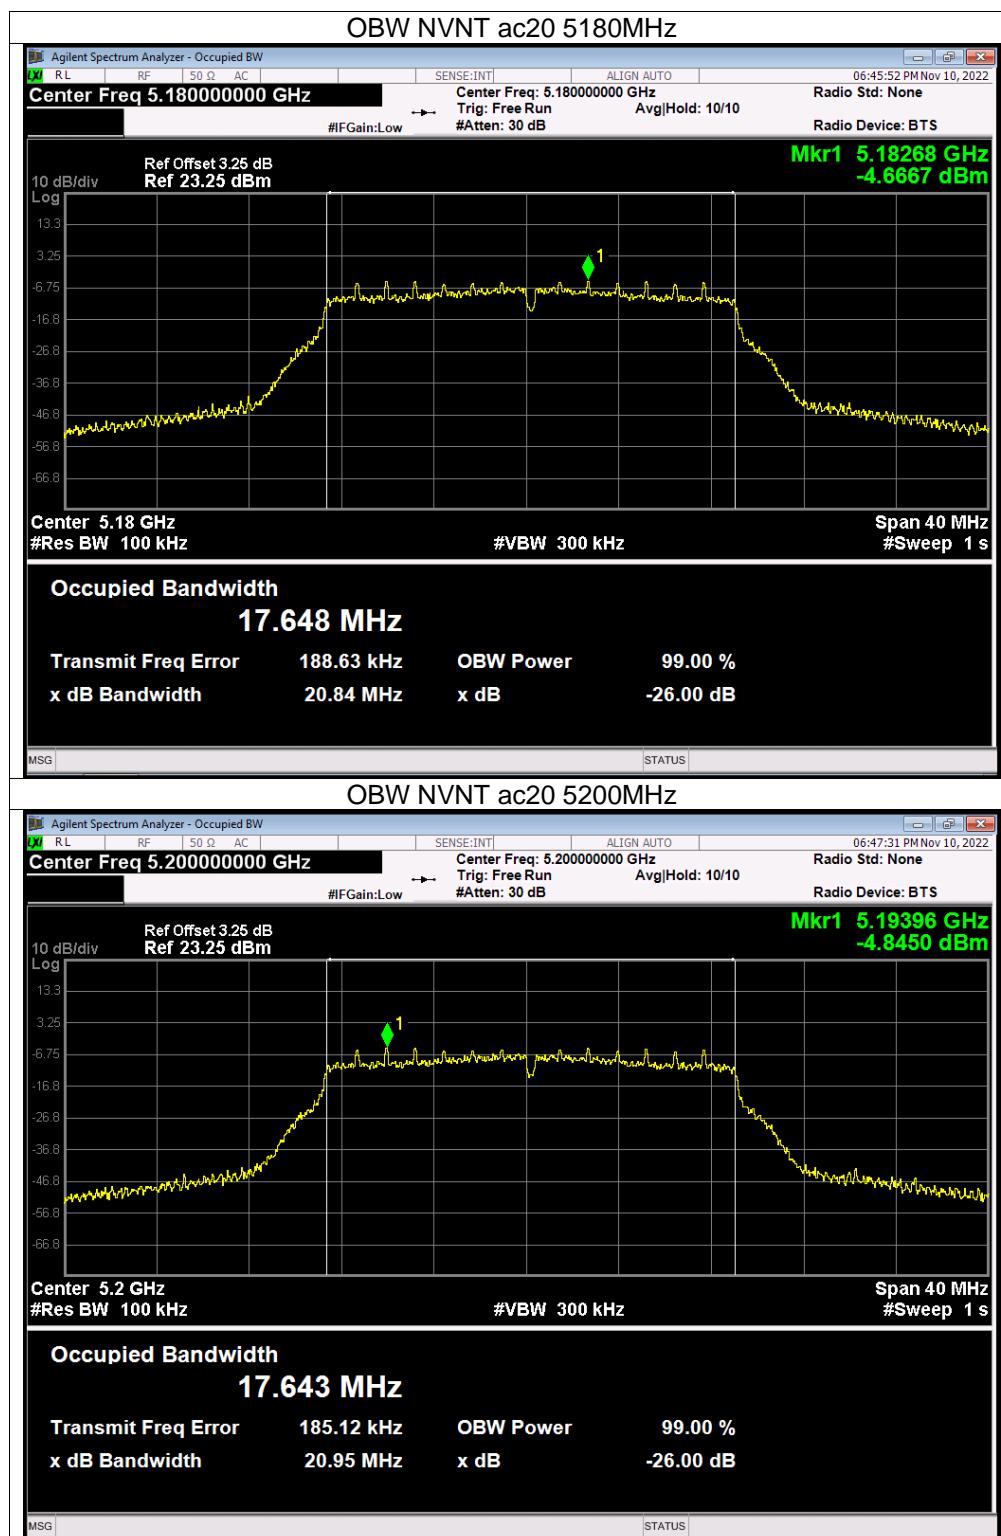


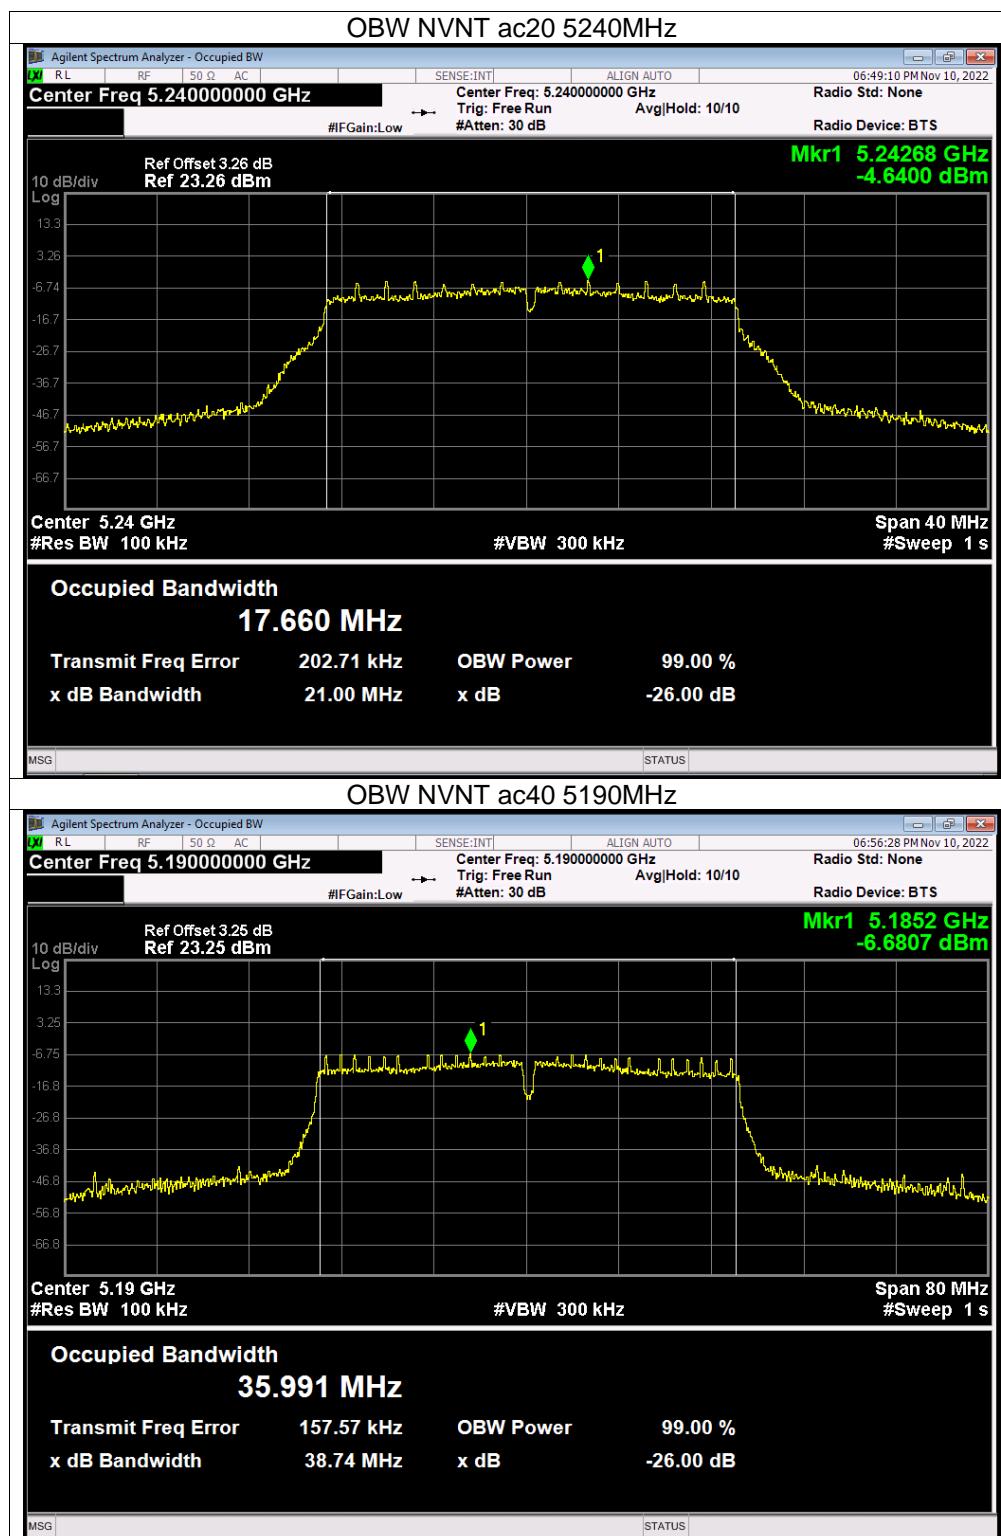

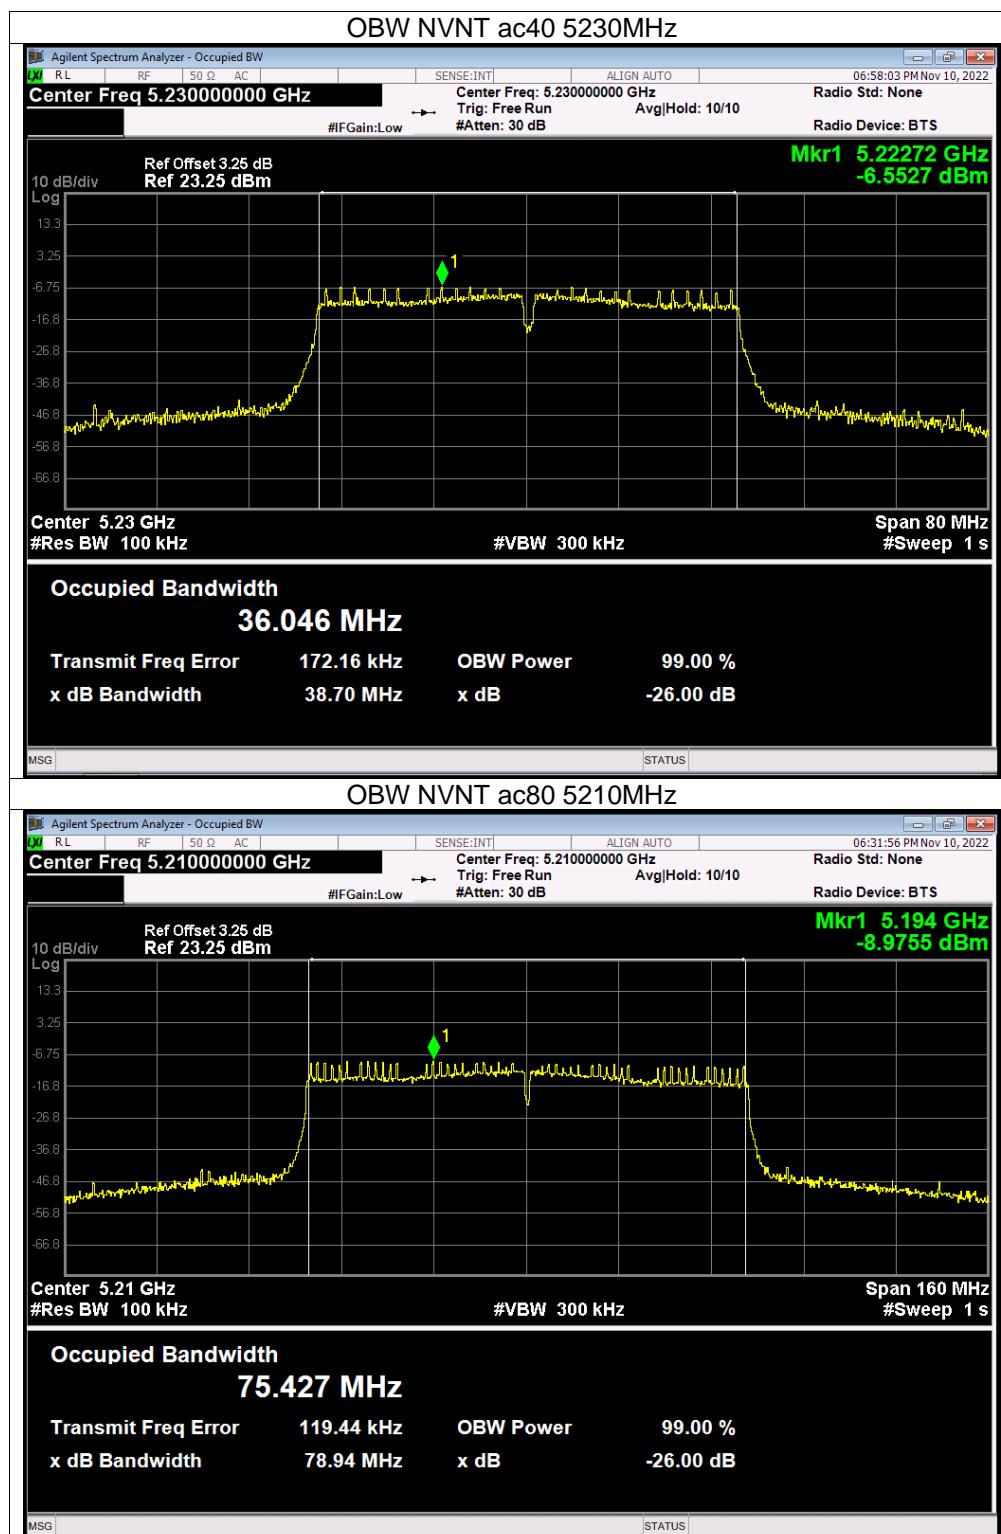

10. Unwanted Emission Intensity Measurement

10.1 Block Diagram Of Test Setup

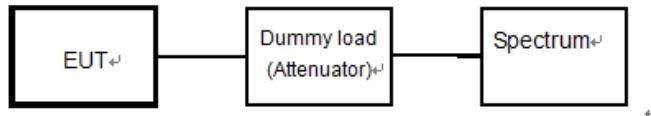

10.2 Limit

| 20MHz system | |
|---|---|
| OBW:18MHz or less | OBW:18-20MHz |
| 5,142MHz or less: 2.5μW/MHz (-26dBm/MHz) 5,142-5,150 MHz : 15μW/MHz (-18.24dBm/MHz) 5,250-5,251MHz : 10 ^{1-(f-9)} mW/MHz (0~ -10dBm/MHz) 5,251 - 5,260 MHz: 10 ^{1-(8/90)(f-11)} mW/MHz (-10~ -18dBm/MHz) 5,260 - 5,266.7 MHz: 10 ^{1.8-(6/50)(f-20)} mW/MHz (-18~ -26dBm/MHz) 5,266.7MHz or more: 2.5 μW/MHz (-26dBm/MHz) | 5,142MHz or less: 2.5μW/MHz (-26dBm/MHz) 5,142-5,150 MHz : 15μW/MHz (-18.24dBm/MHz) 5,250-5,250.2 MHz : 10 ^{1-(8/3)(f-9.75)} mW/MHz (-9.1~ -9.3dBm/MHz) 5,250.2 - 5,251 MHz: 10 ^{1-(f-9)} mW/MHz (-2~ -10dBm/MHz) 5,251 - 5,260 MHz: 10 ^{1-(8/90)(f-11)} mW/MHz (-10~ -18dBm/MHz) 5,260 - 5,266.7 MHz: 10 ^{1.8-(6/50)(f-20)} mW/MHz (-18~ -26dBm/MHz) 5,266.7MHz or more: 2.5 μW/MHz (-26dBm/MHz) |
| 40MHz system | |
| 5,141.6MHz or less: 2.5μW/MHz (-26dBm/MHz) 5,141.6-5,150 MHz : 15μW/MHz (-18.24dBm/MHz) 5,250-5,251MHz : 10 ^{-(f-20)+log(1/2)} mW/MHz (-3~ -13dBm/MHz) 5,251 - 5,270 MHz: 10 ^{-(8/190)(f-21)-1+log(1/2)} mW/MHz (-13~ -21dBm/MHz) 5,270 - 5,278.4 MHz: 10 ^{-(3/50)(f-40)-1.8+log(1/2)} mW/MHz (-21~ -26dBm/MHz) 5,278.4MHz or more: 2.5μW/MHz (-26dBm/MHz) | 5,123.2MHz or less: 2.5 μW/MHz (-26dBm/MHz) 5,123.2-5,150 MHz : 15μW/MHz (-18.24dBm/MHz) 5,250-5,251MHz : 10 ^{-(f-40)+log(1/4)} mW/MHz (-6~ -16dBm/MHz) 5,251 - 5,290 MHz: 10 ^{-(8/390)(f-41)-1+log(1/4)} mW/MHz (-16~ -24dBm/MHz) 5,290 - 5,296.7MHz: 10 ^{-(3/10)(f-80)-1.8+log(1/4)} mW/MHz (-24~ -26dBm/MHz) 5,296.7MHz or more: 2.5μW/MHz (-26dBm/MHz) |

10.3 Measuring Instruments And Setting


Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.


| Spectrum Parameter | Setting |
|---------------------------|--|
| Attenuation | Auto |
| RB / VB | Below 1GHz: 1 MHz Above 1Ghz: 1 MHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |


10.4 Test Procedure


- EUT have transmitted the maximum modulation signal and fixed channelize.
- Setting of SA is following as: Below 1GHz RB:100KHz / VB:100KHz
Above 1GHz RB:1MHz / VB:1MHz / AT: 20dB Ref: 10dBm / Sweep time: Auto
Sweep Mode: Continuous sweep / Detect mode: Positive peak
Trace mode: Max hold


10.5 Test Result

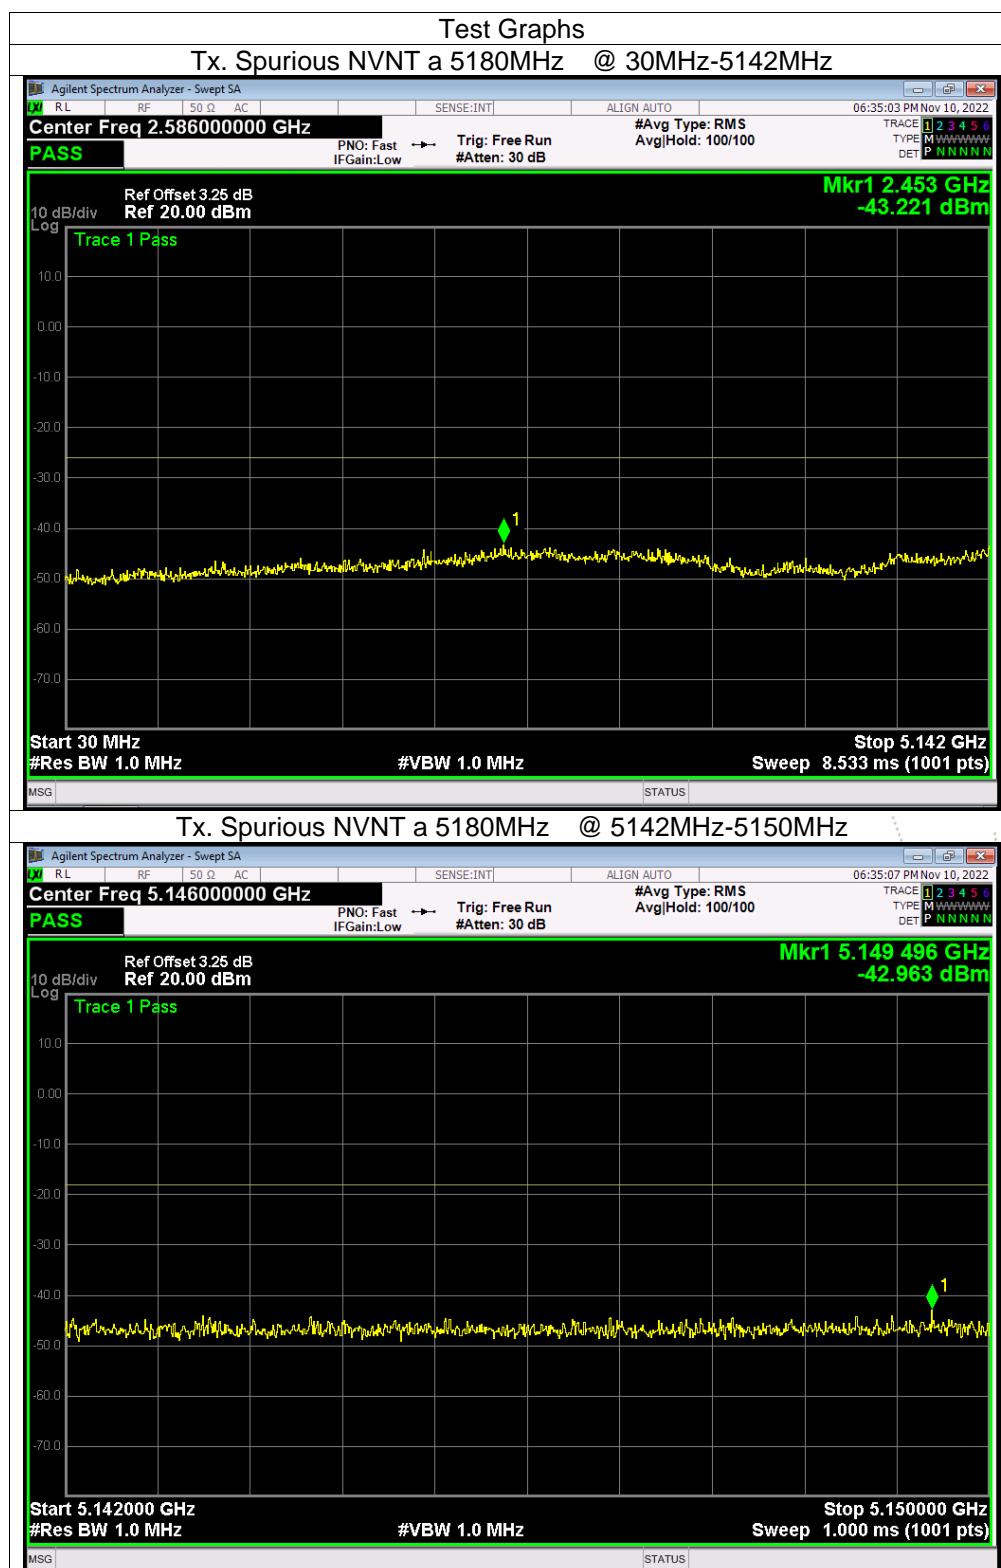


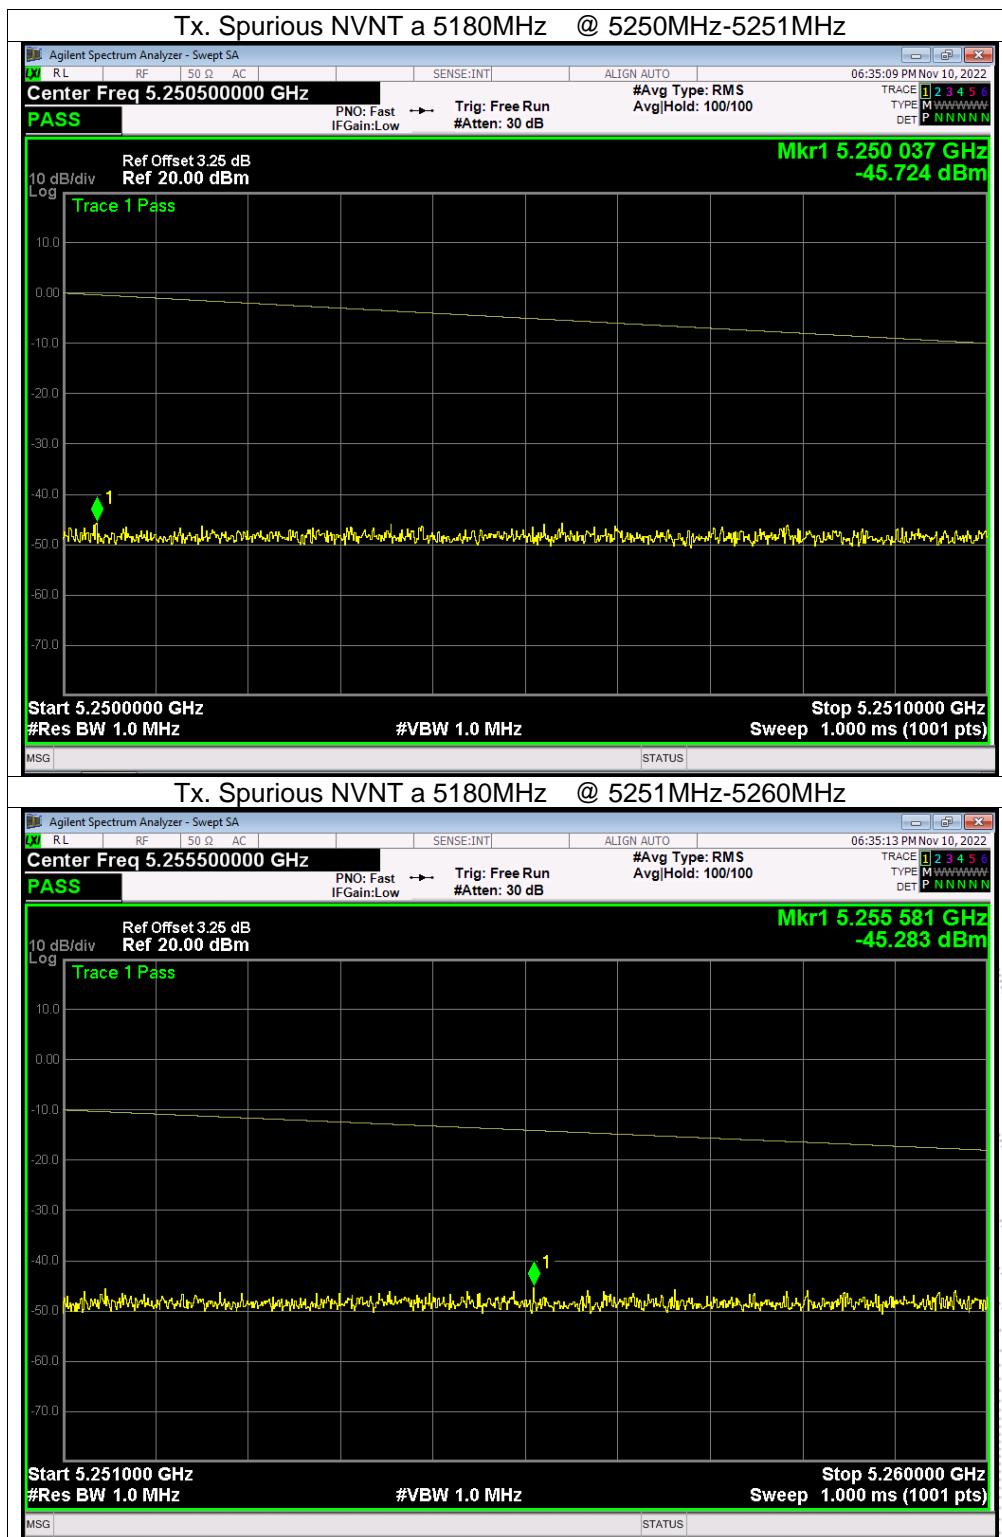


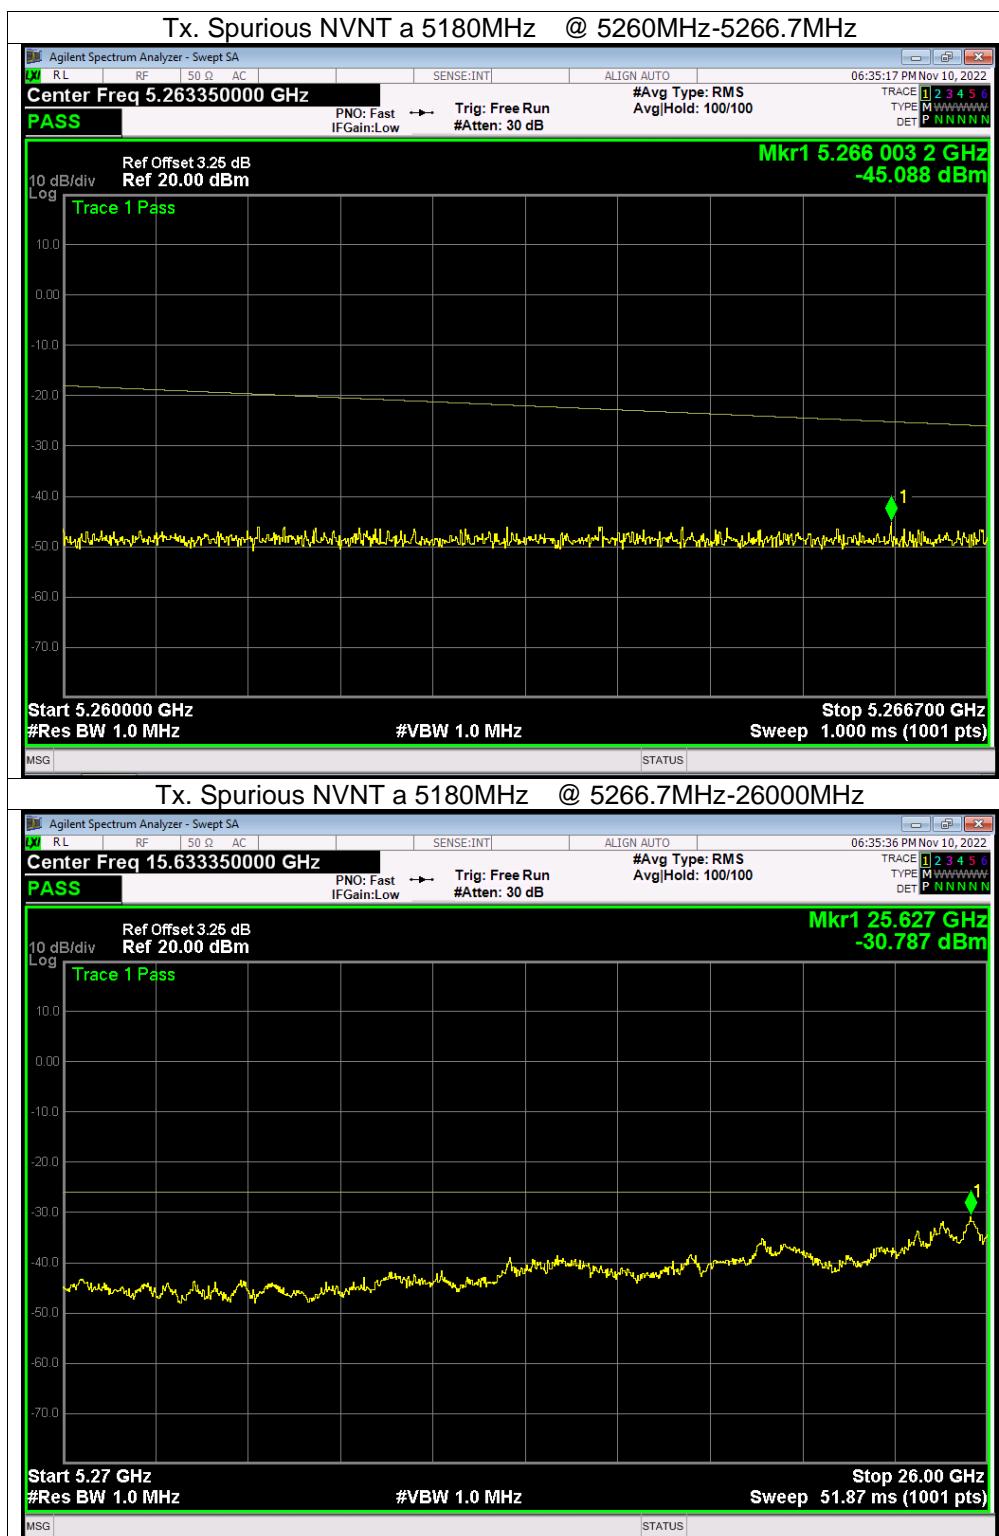


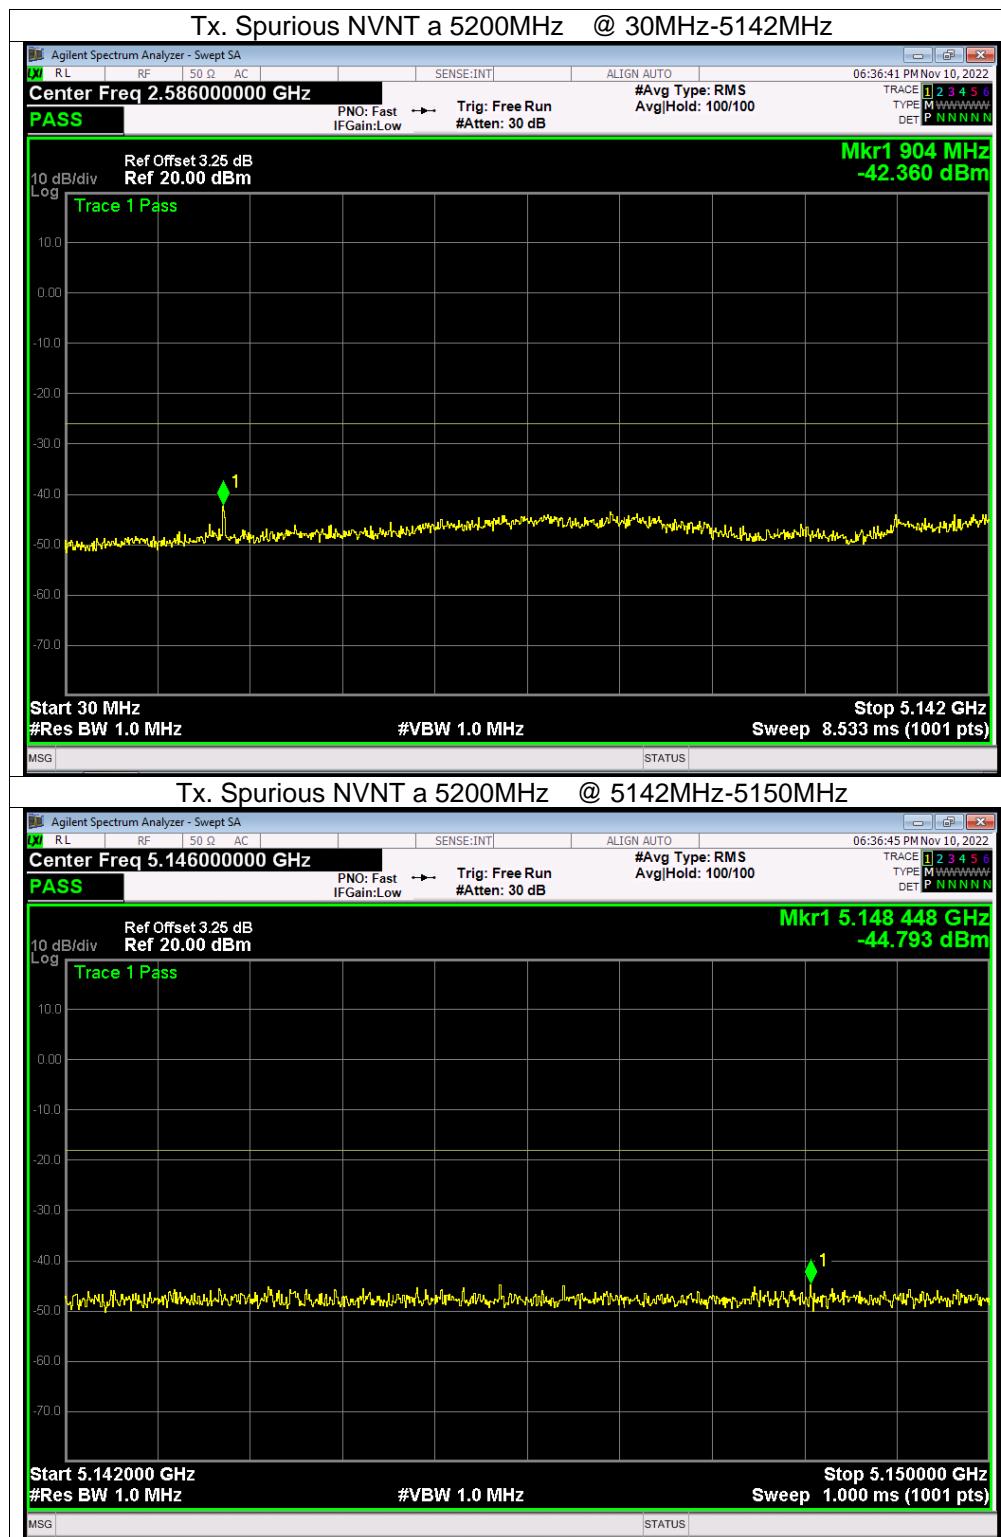


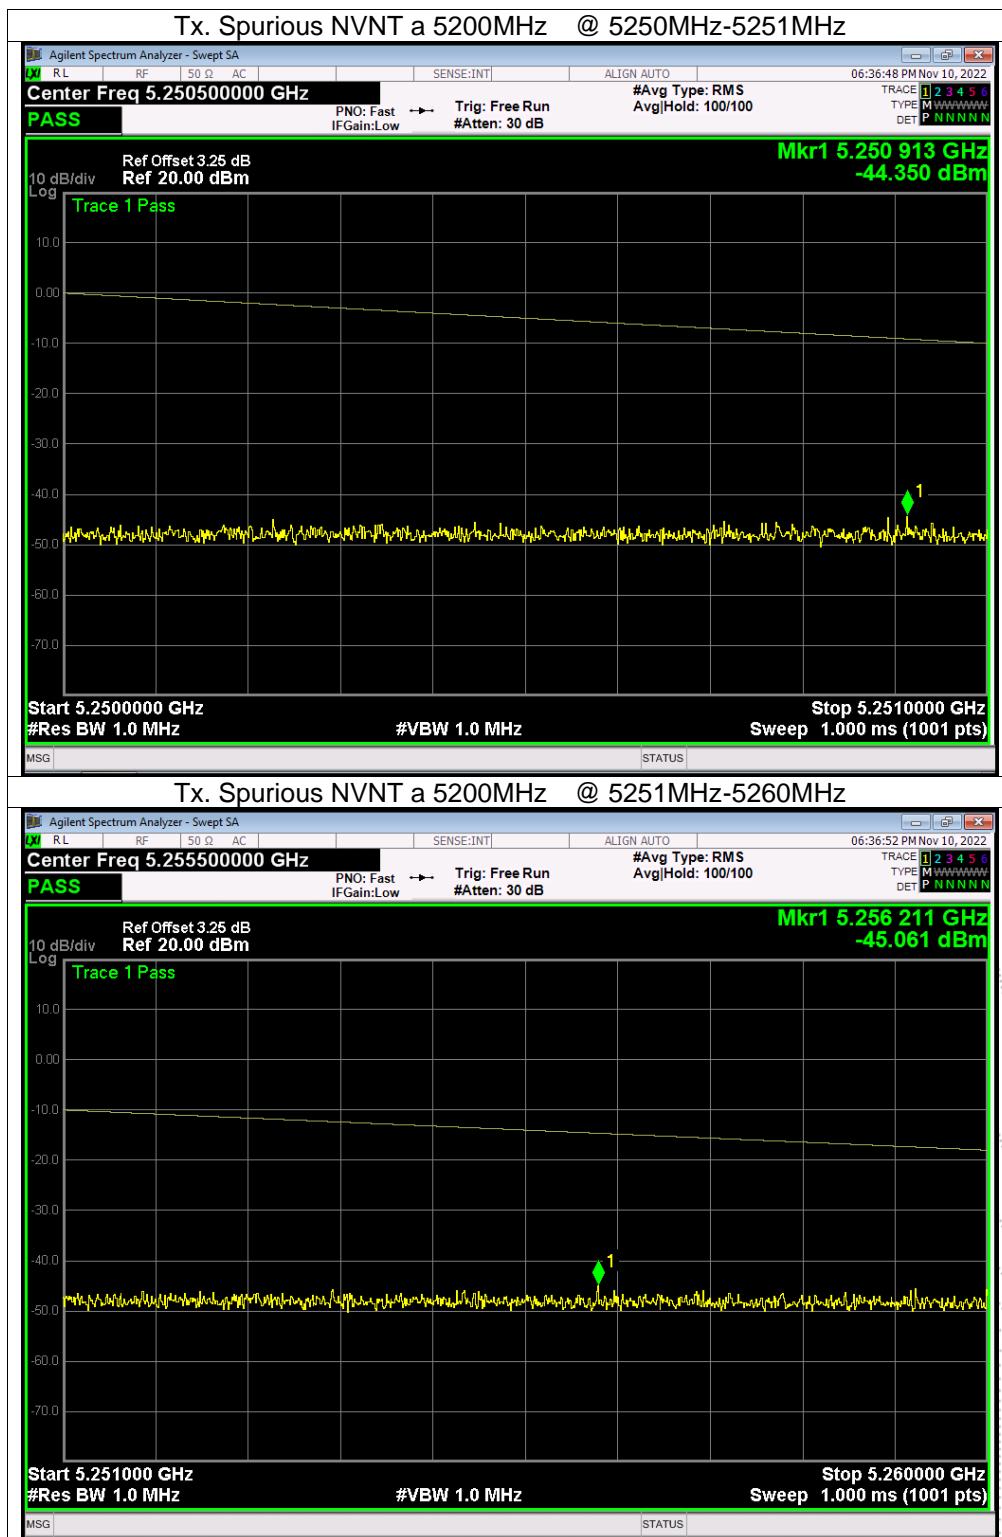


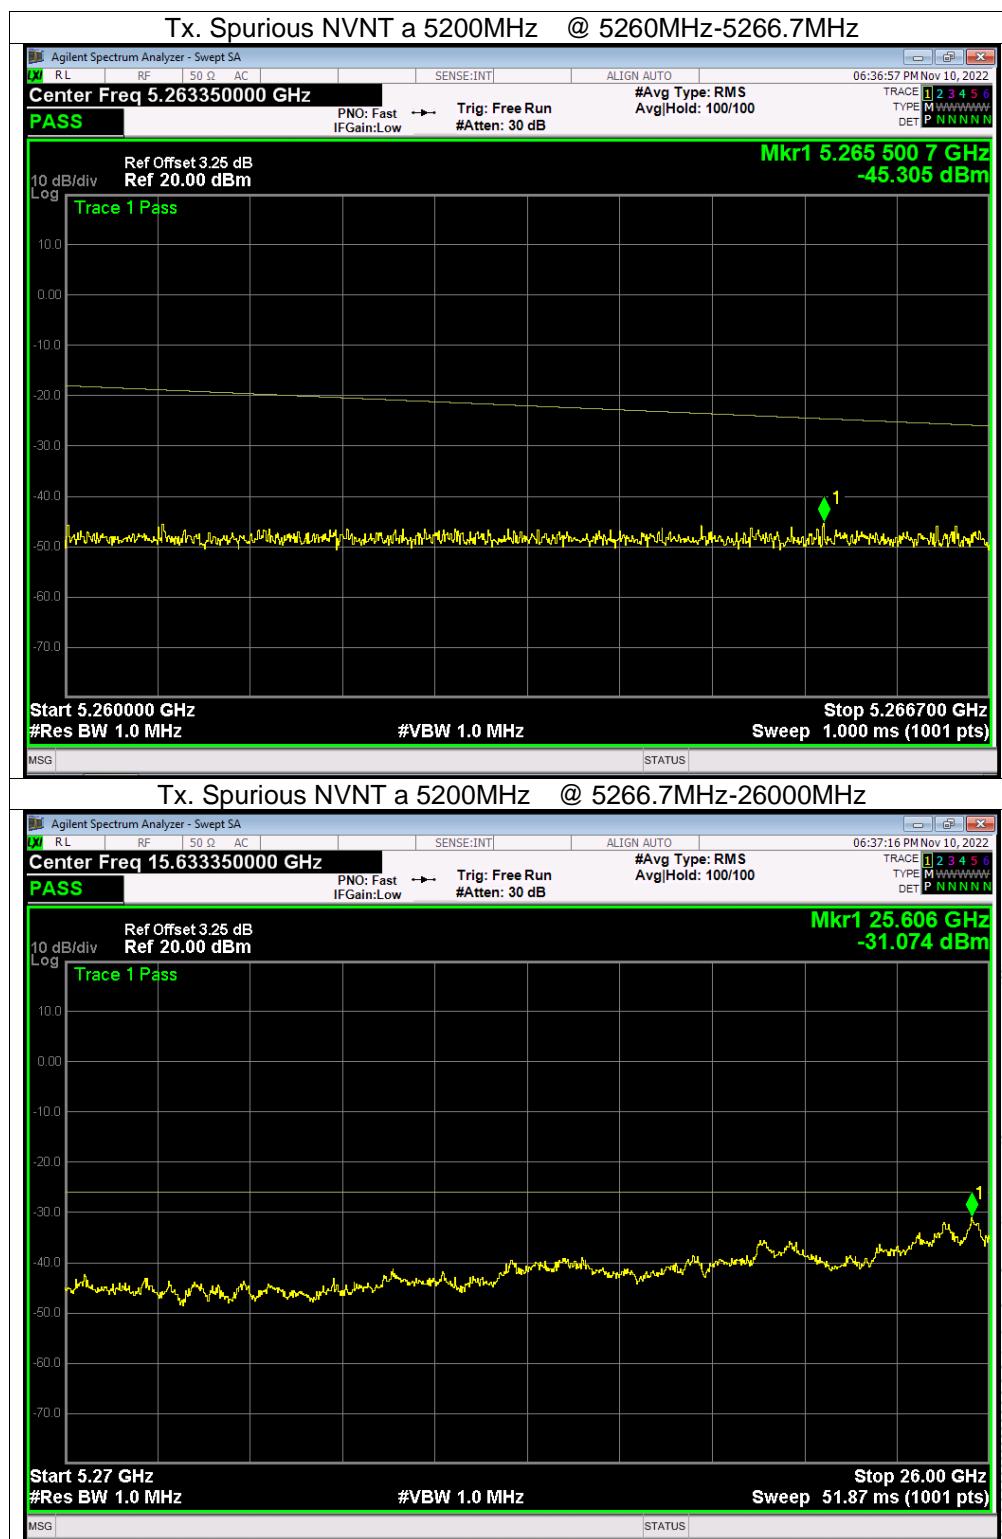


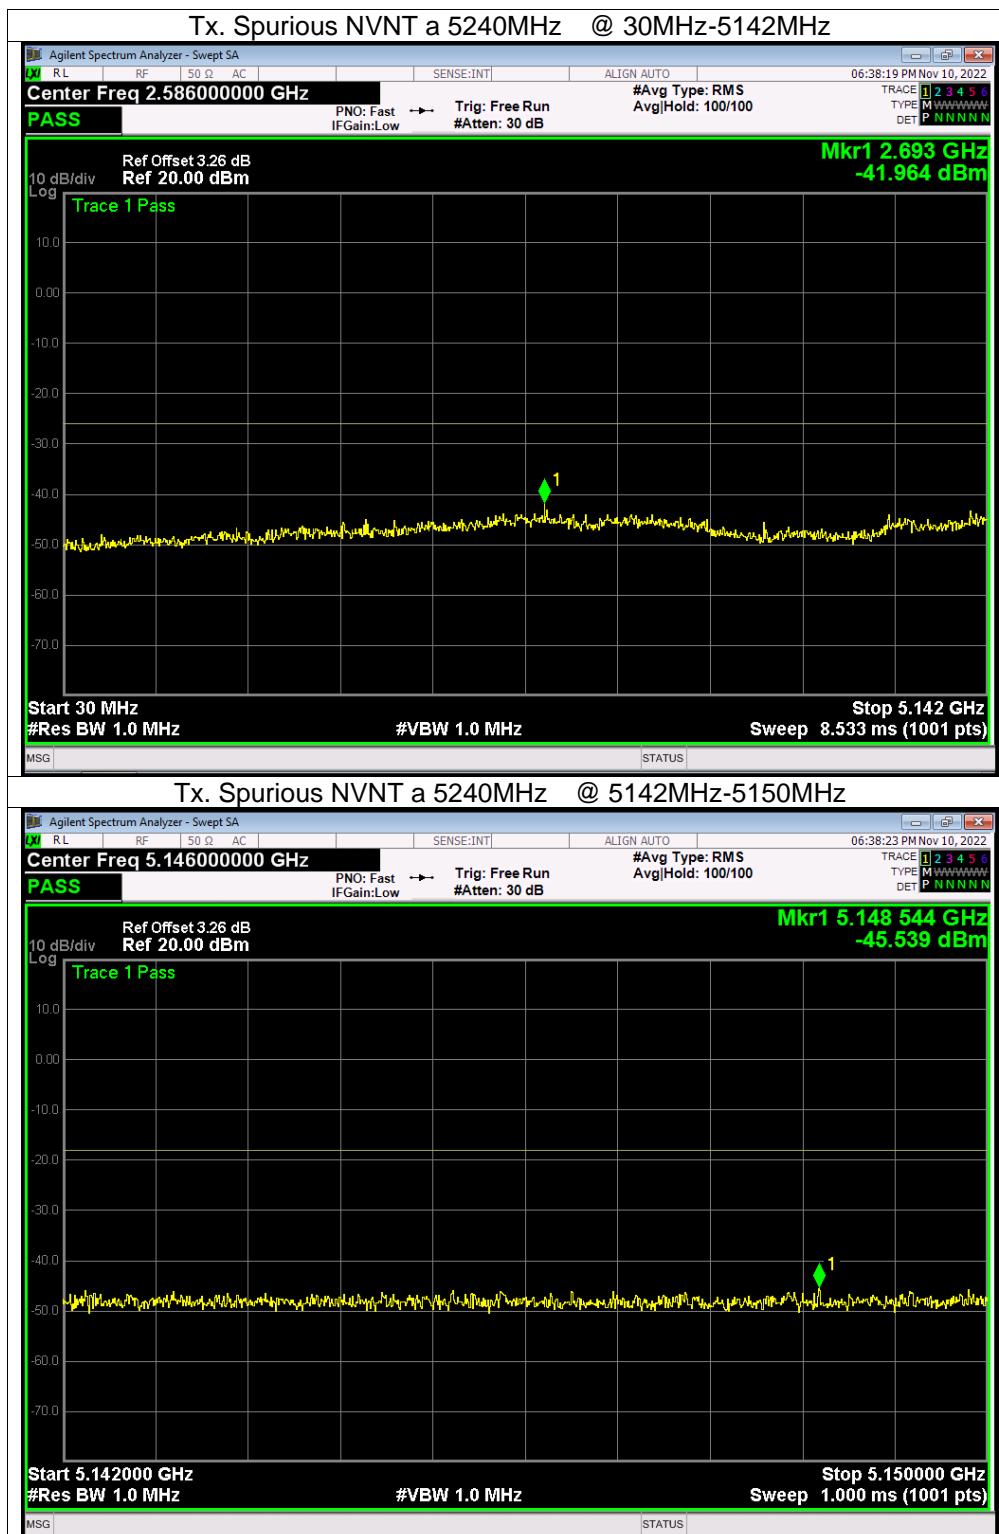


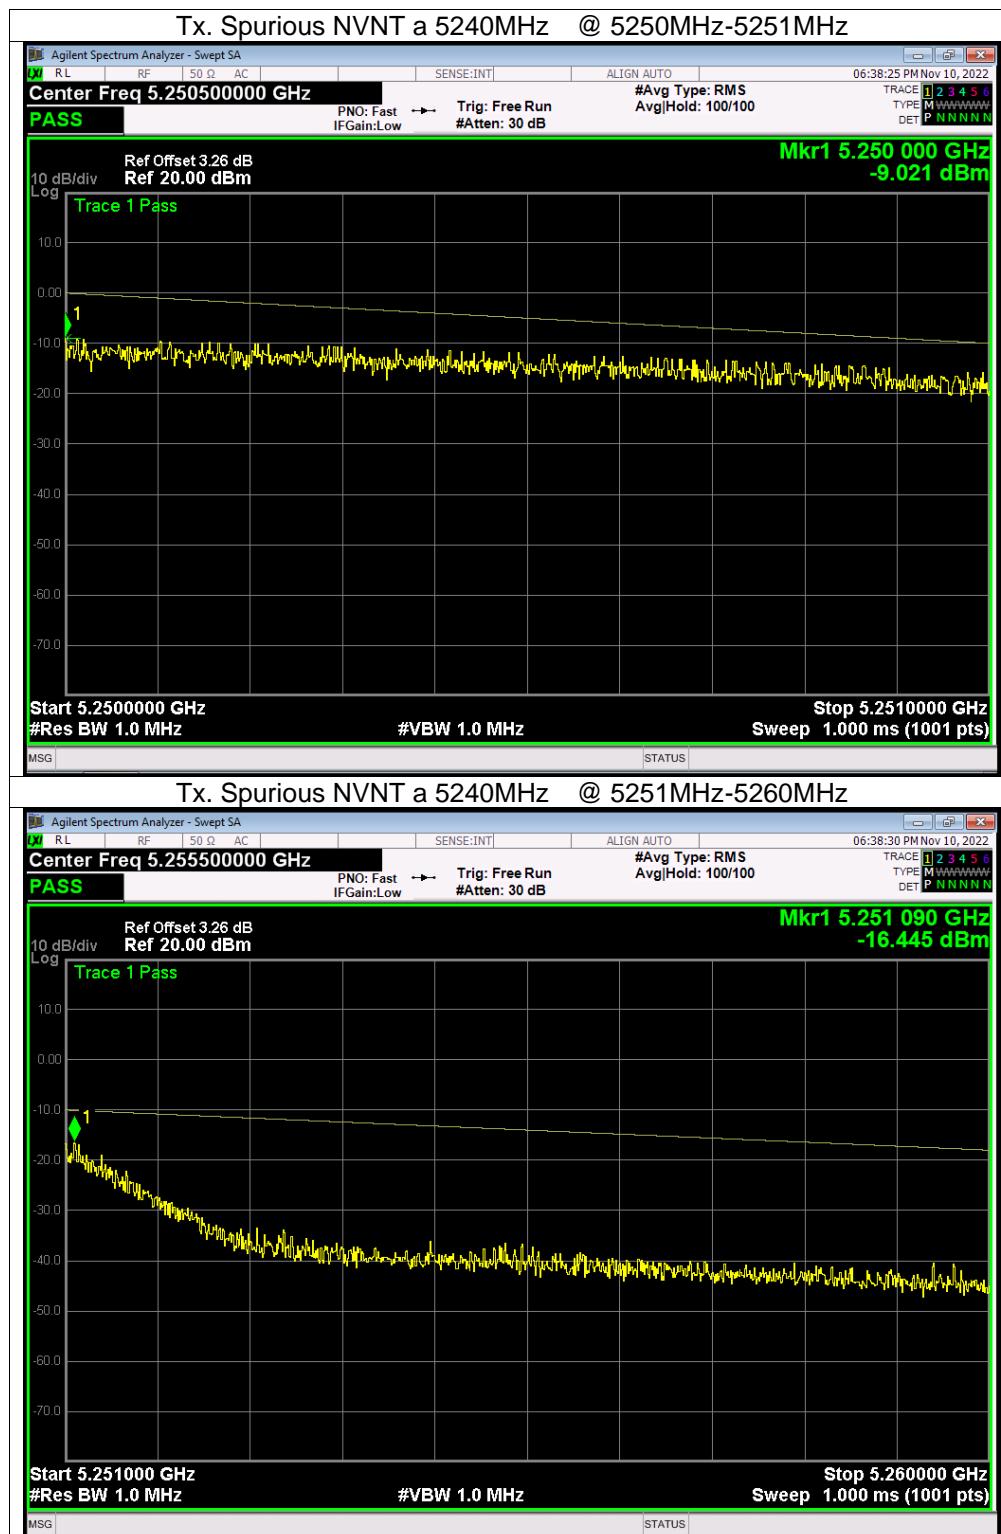


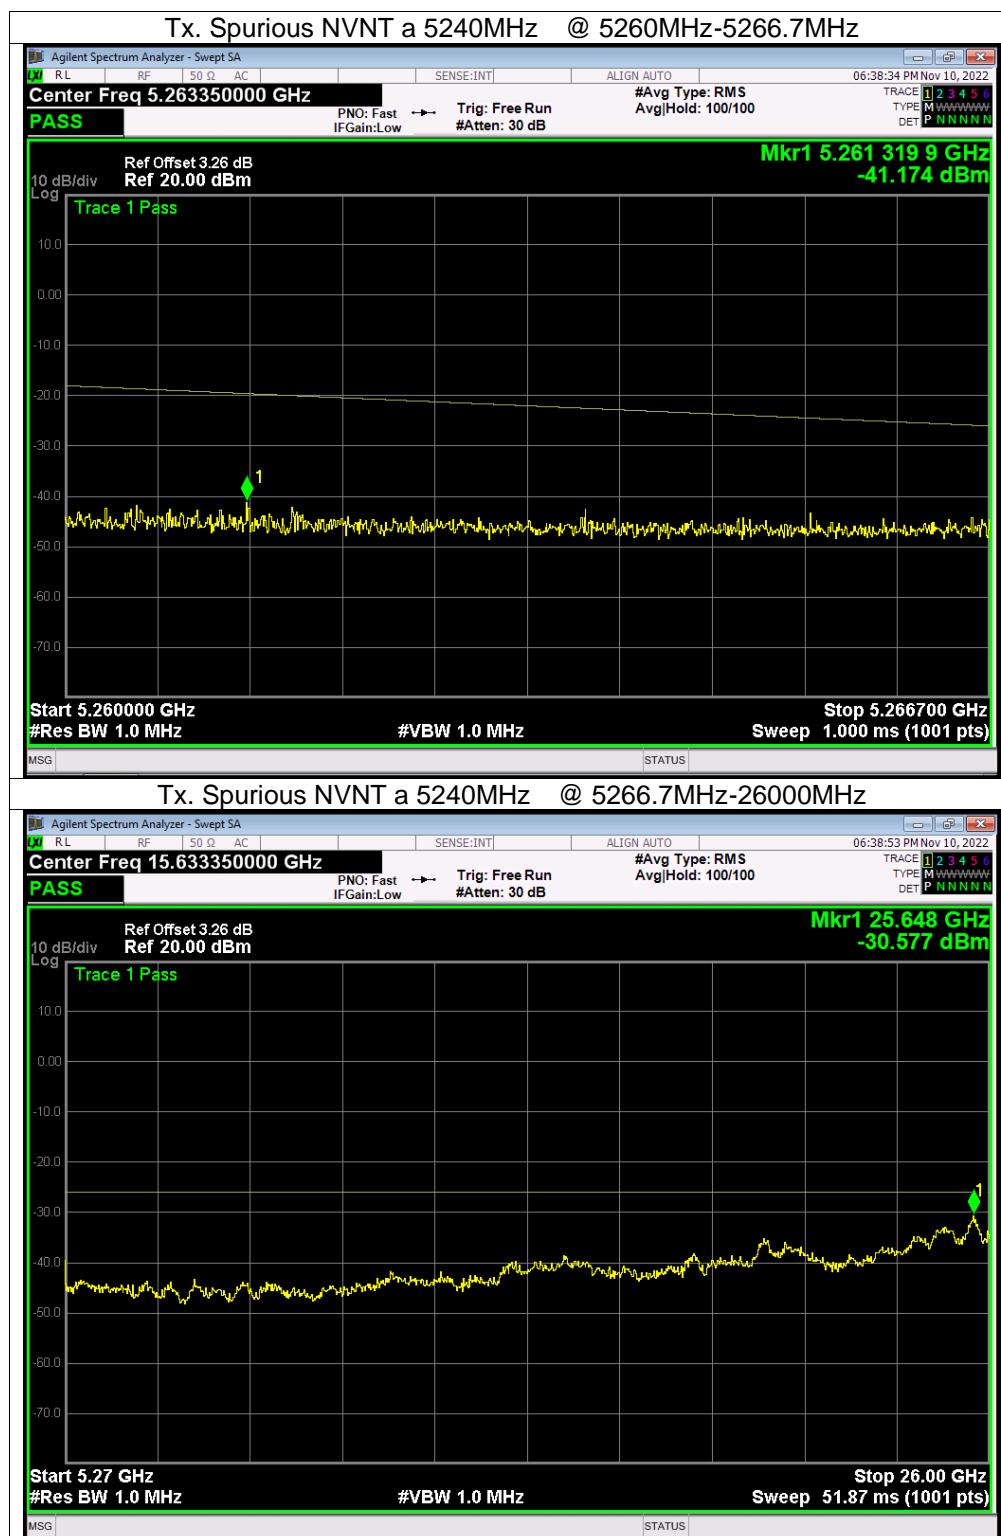


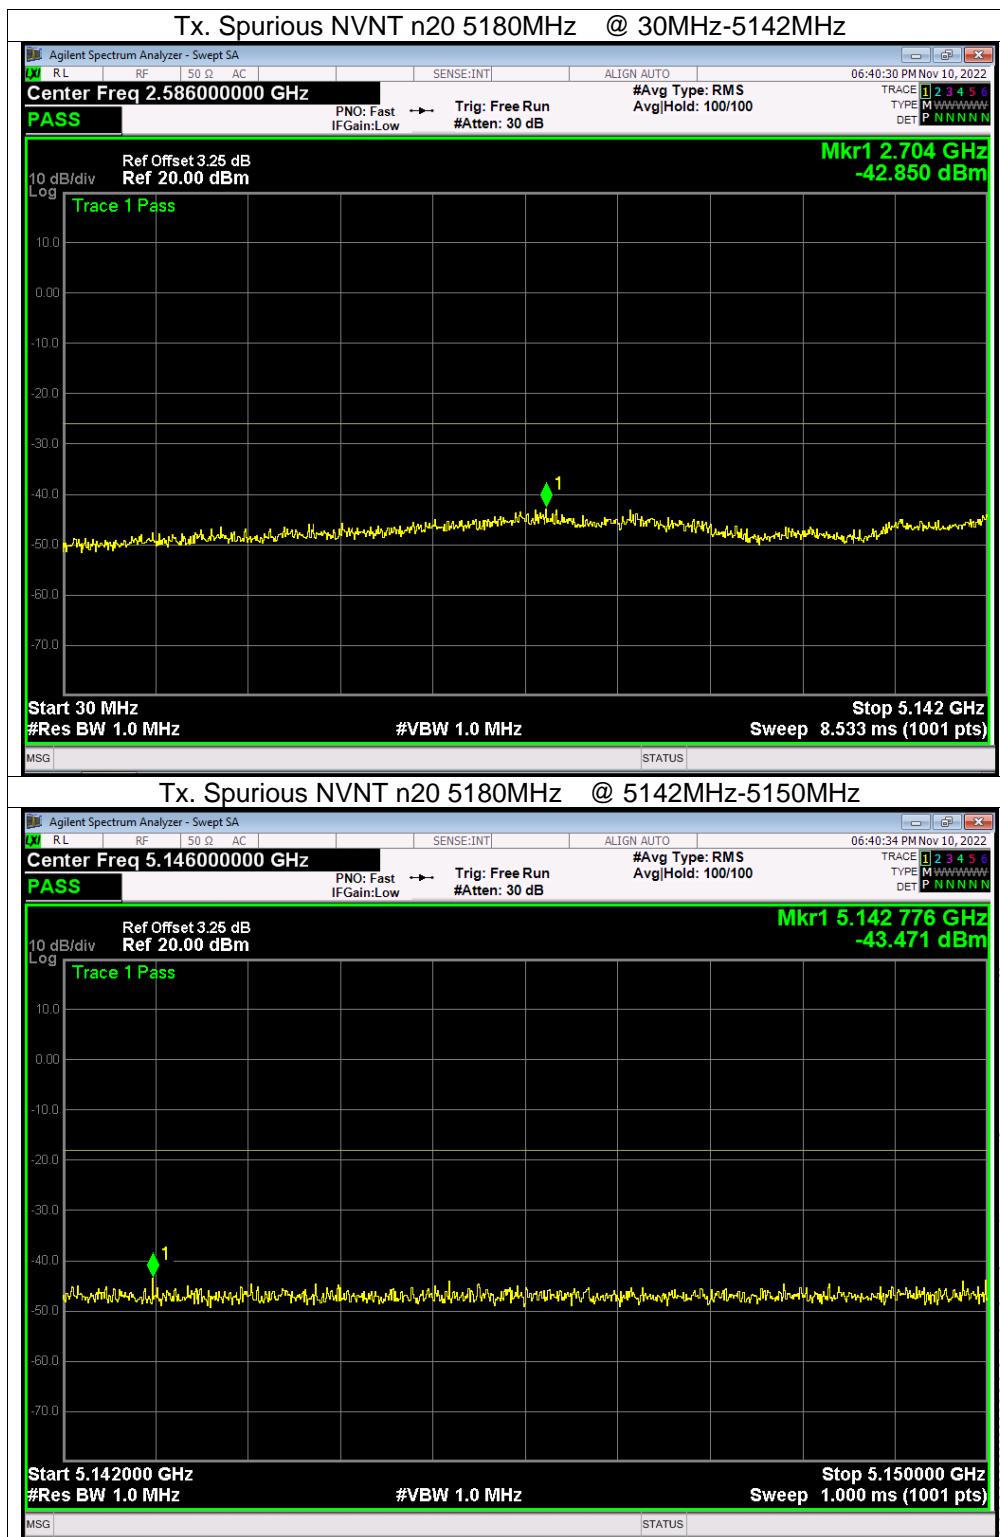


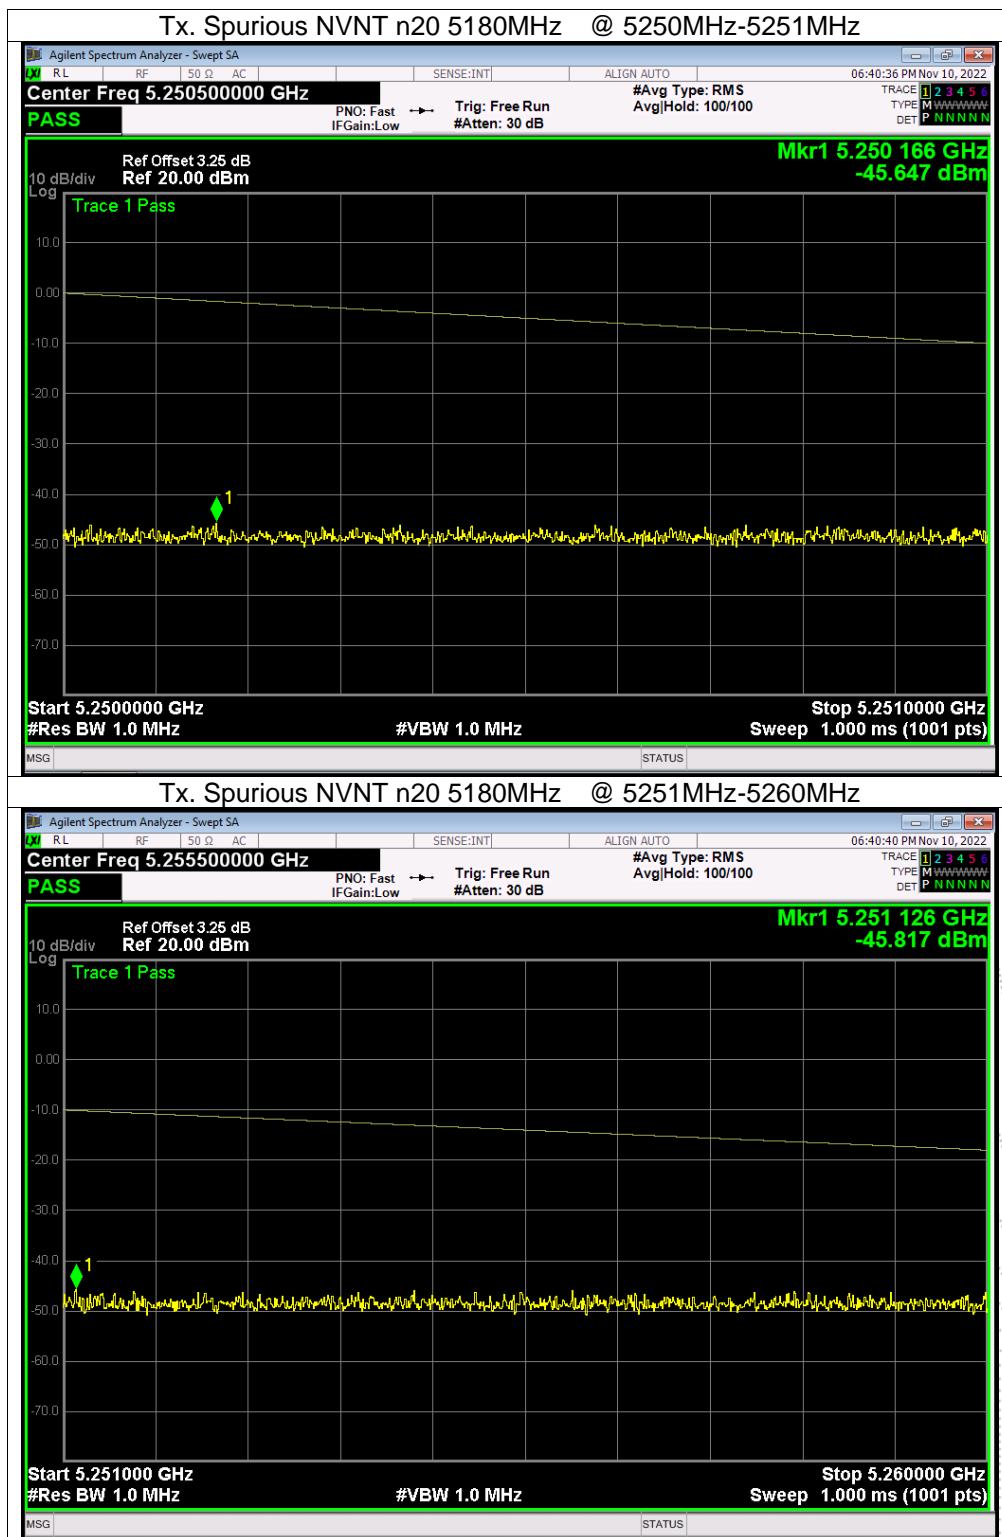

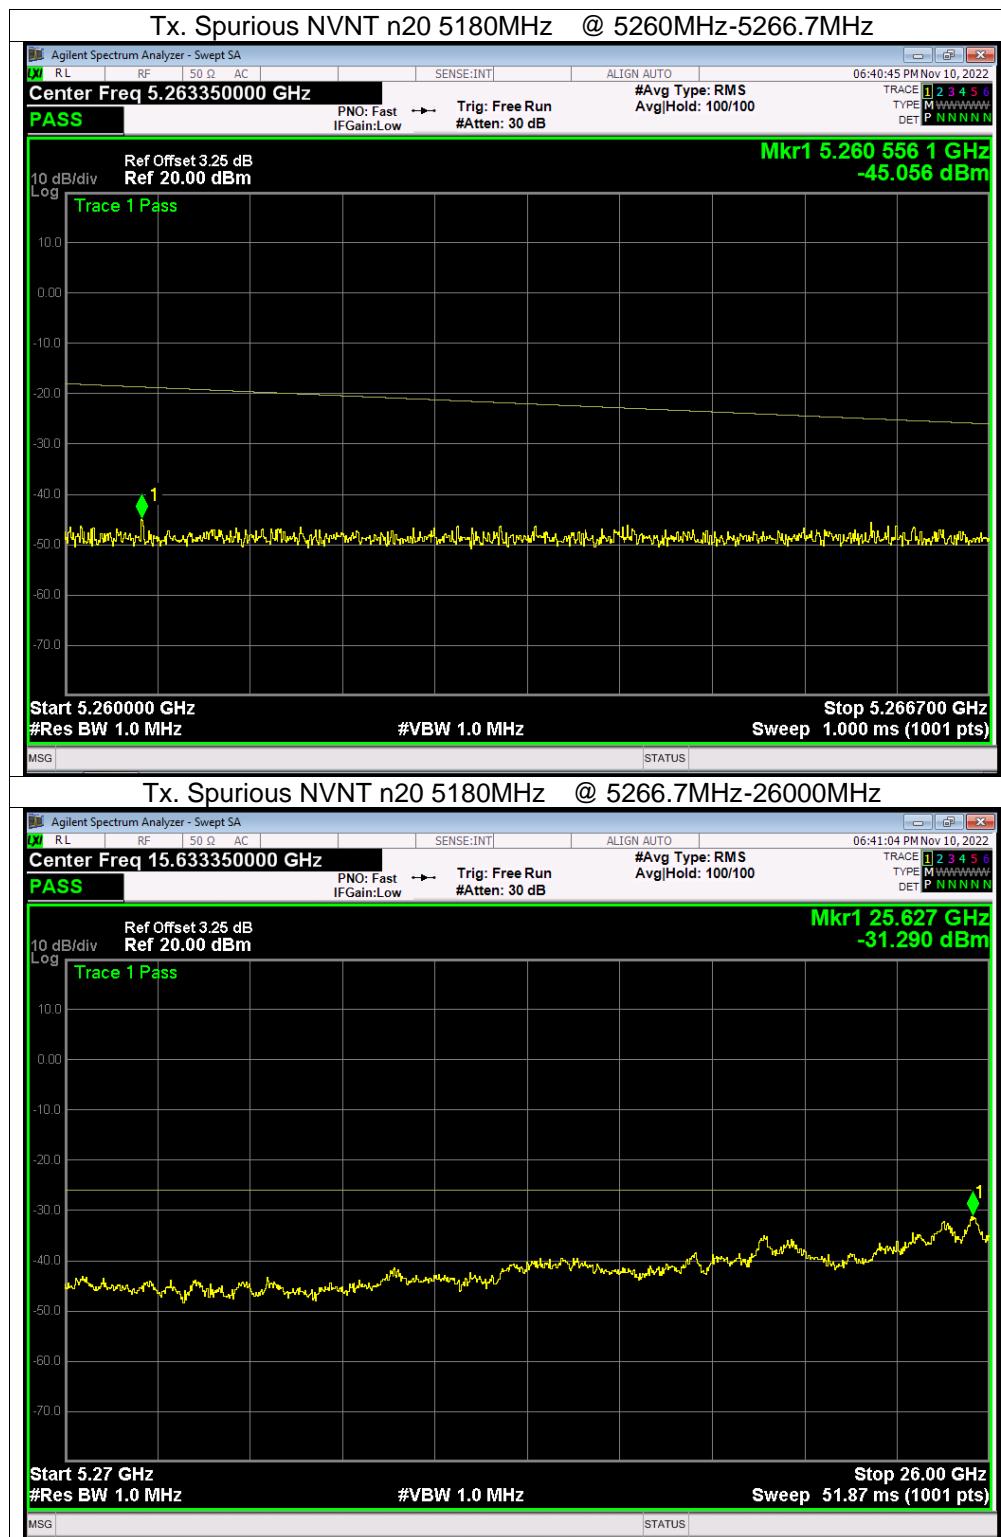


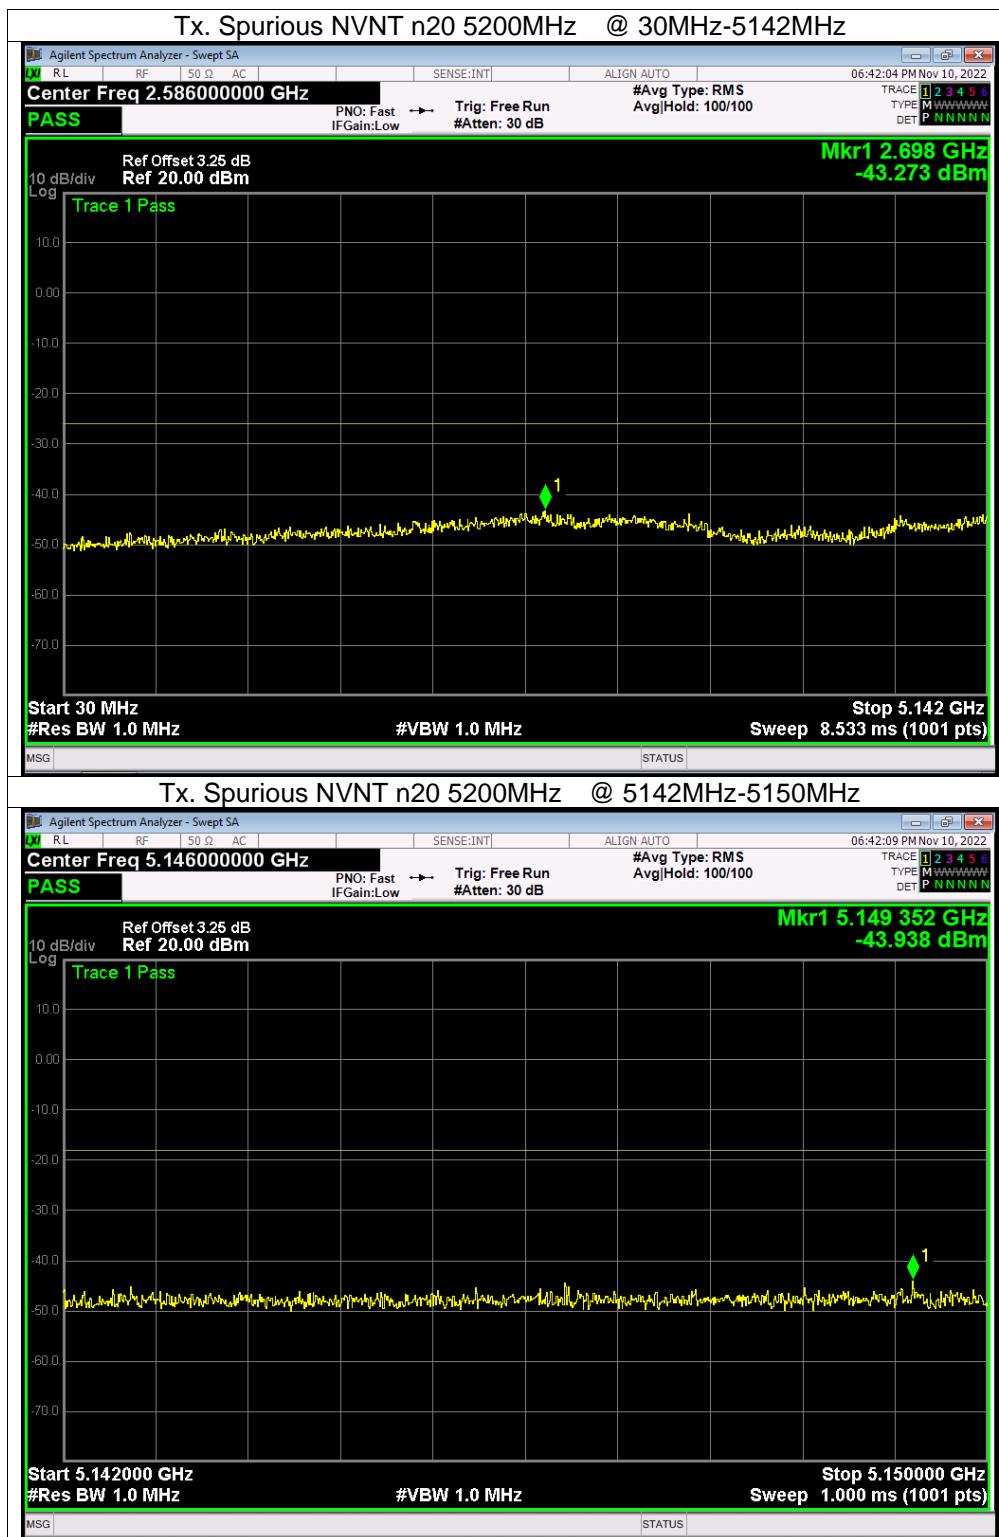


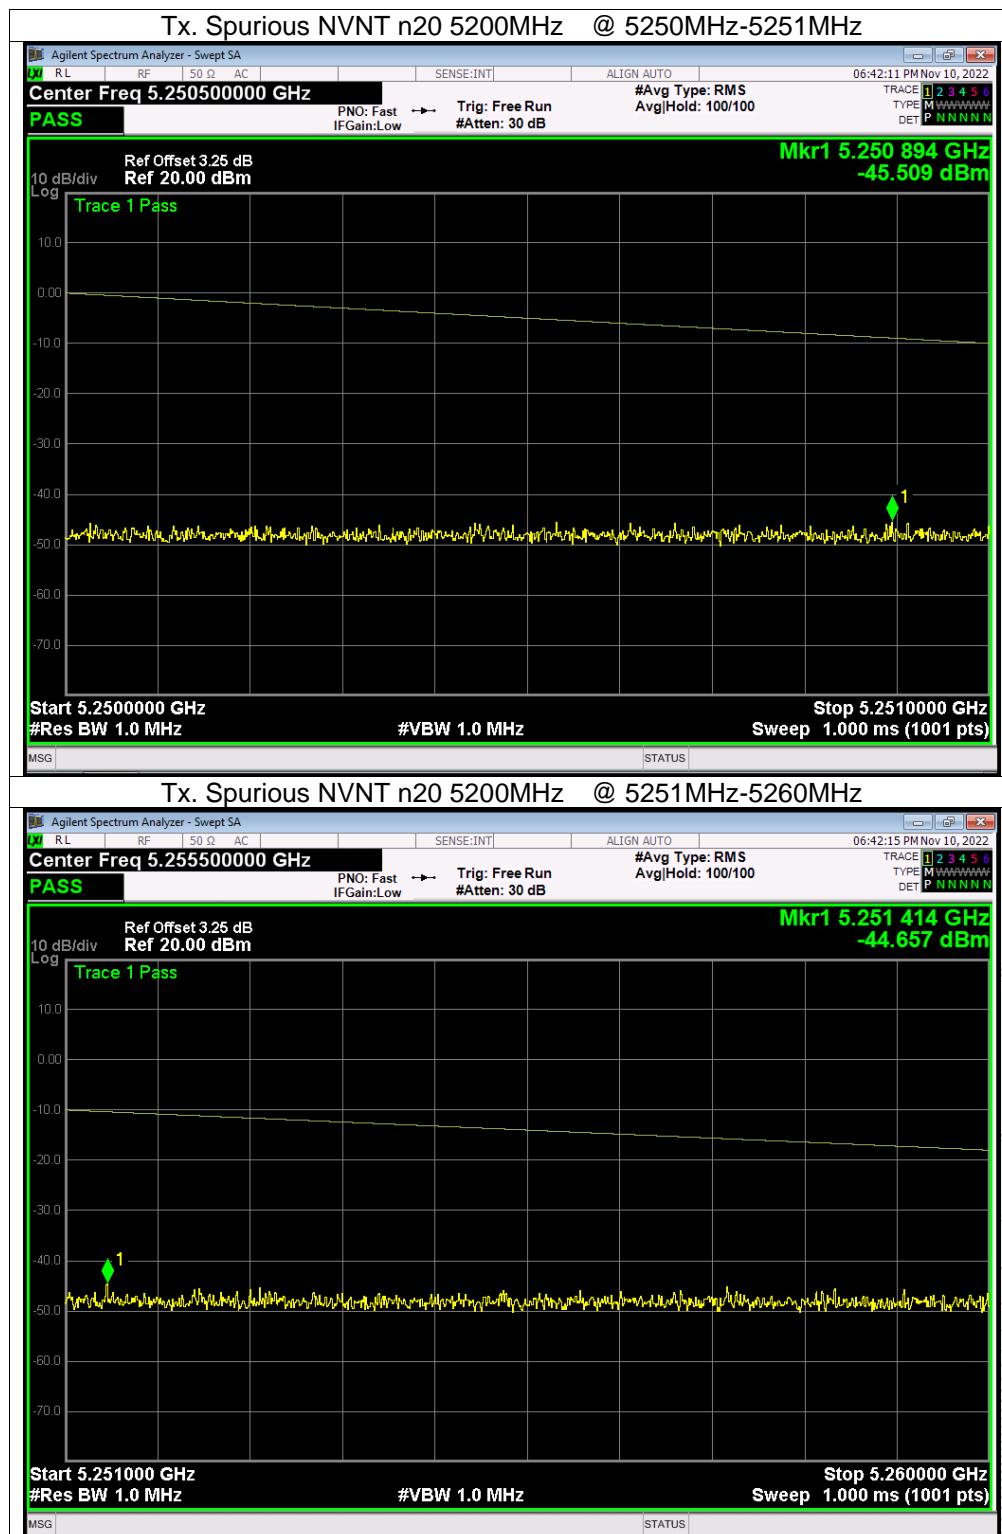


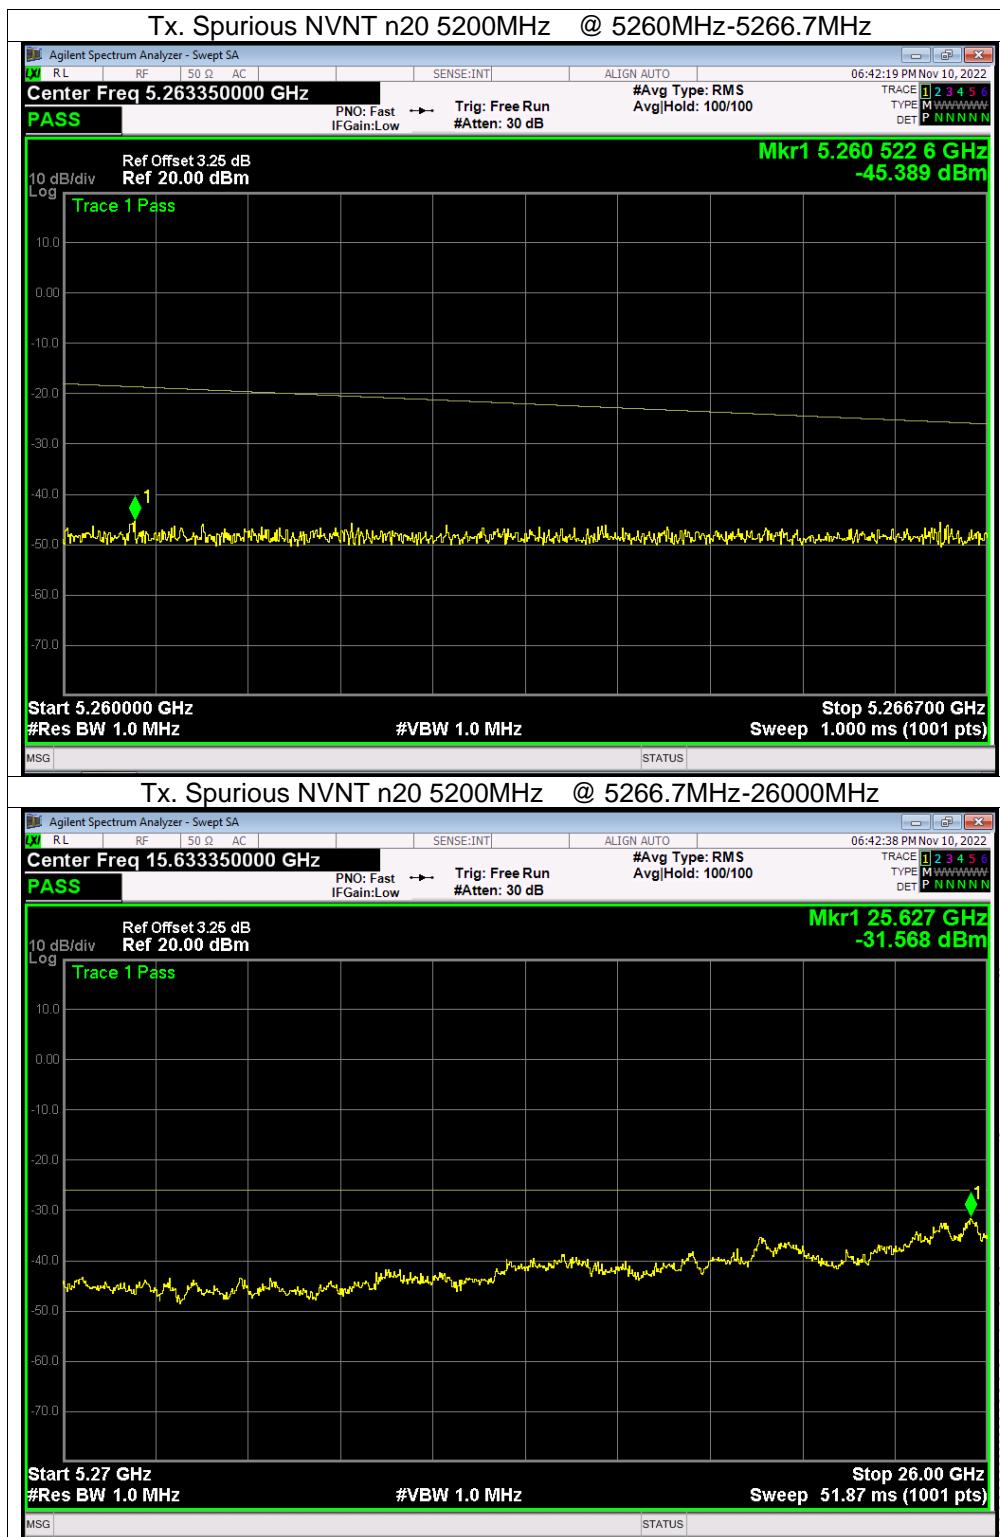




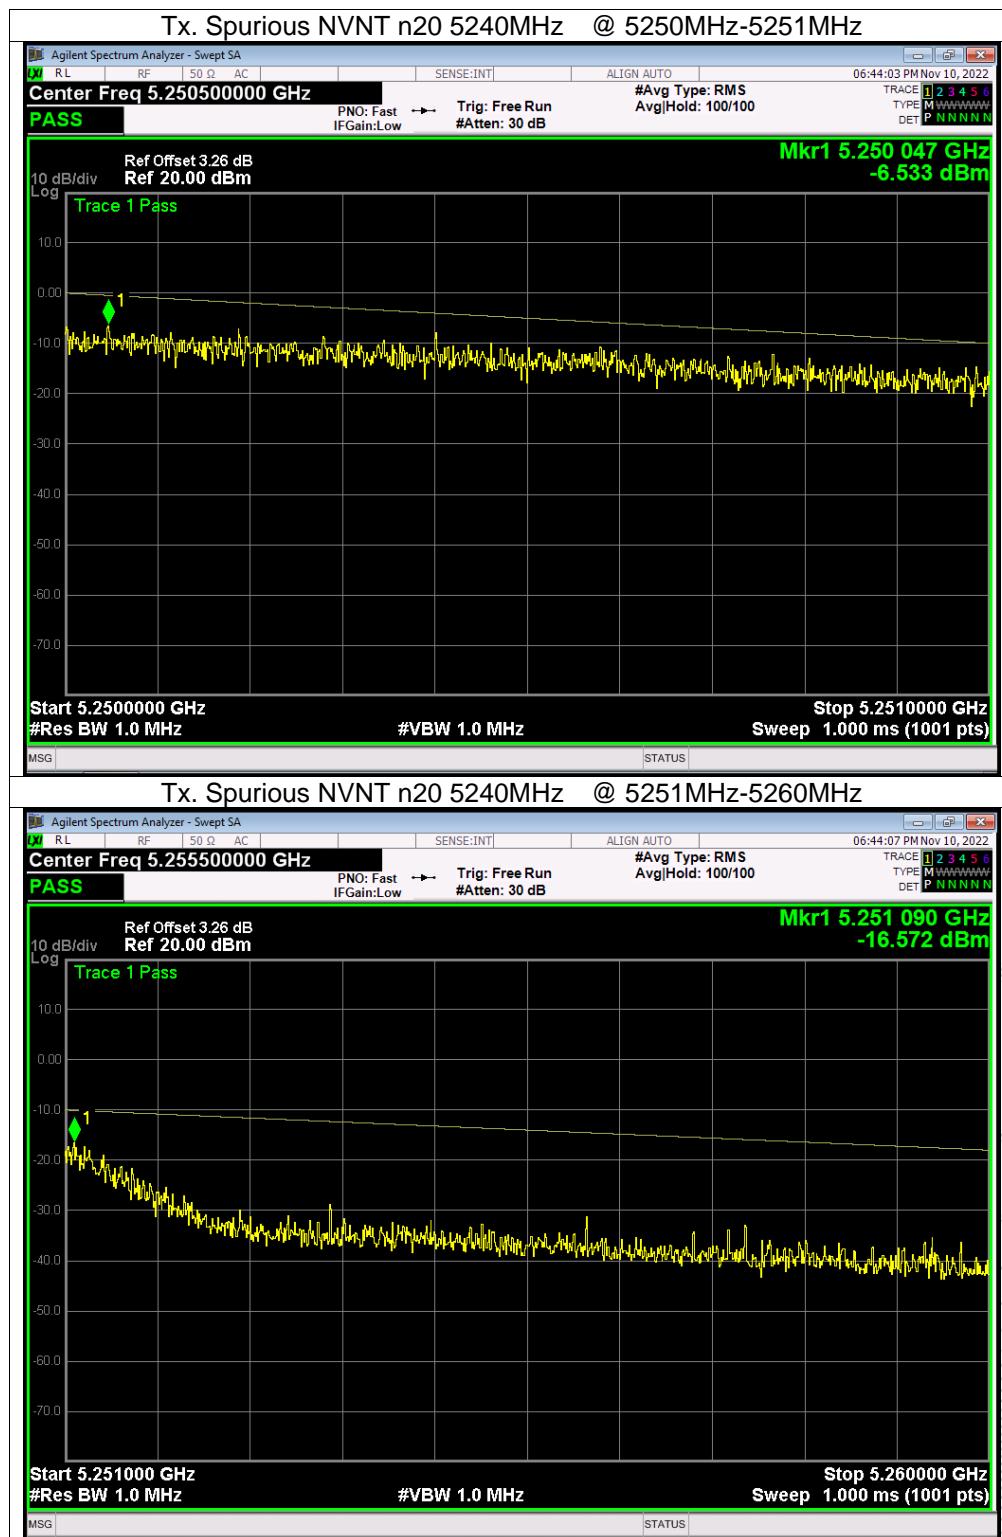


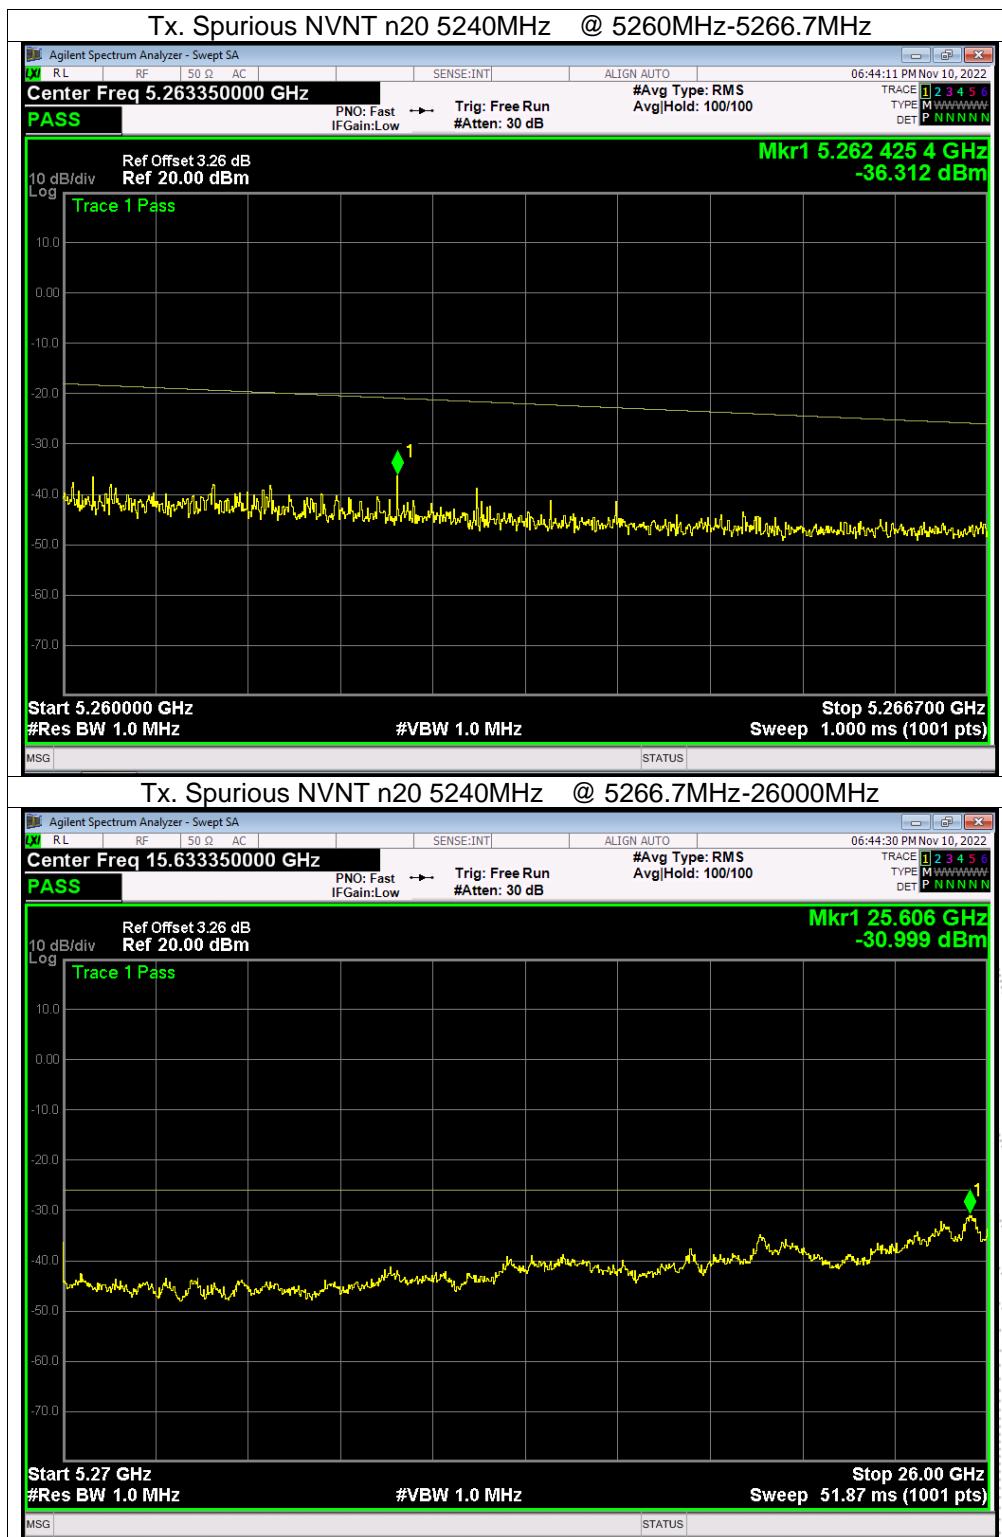


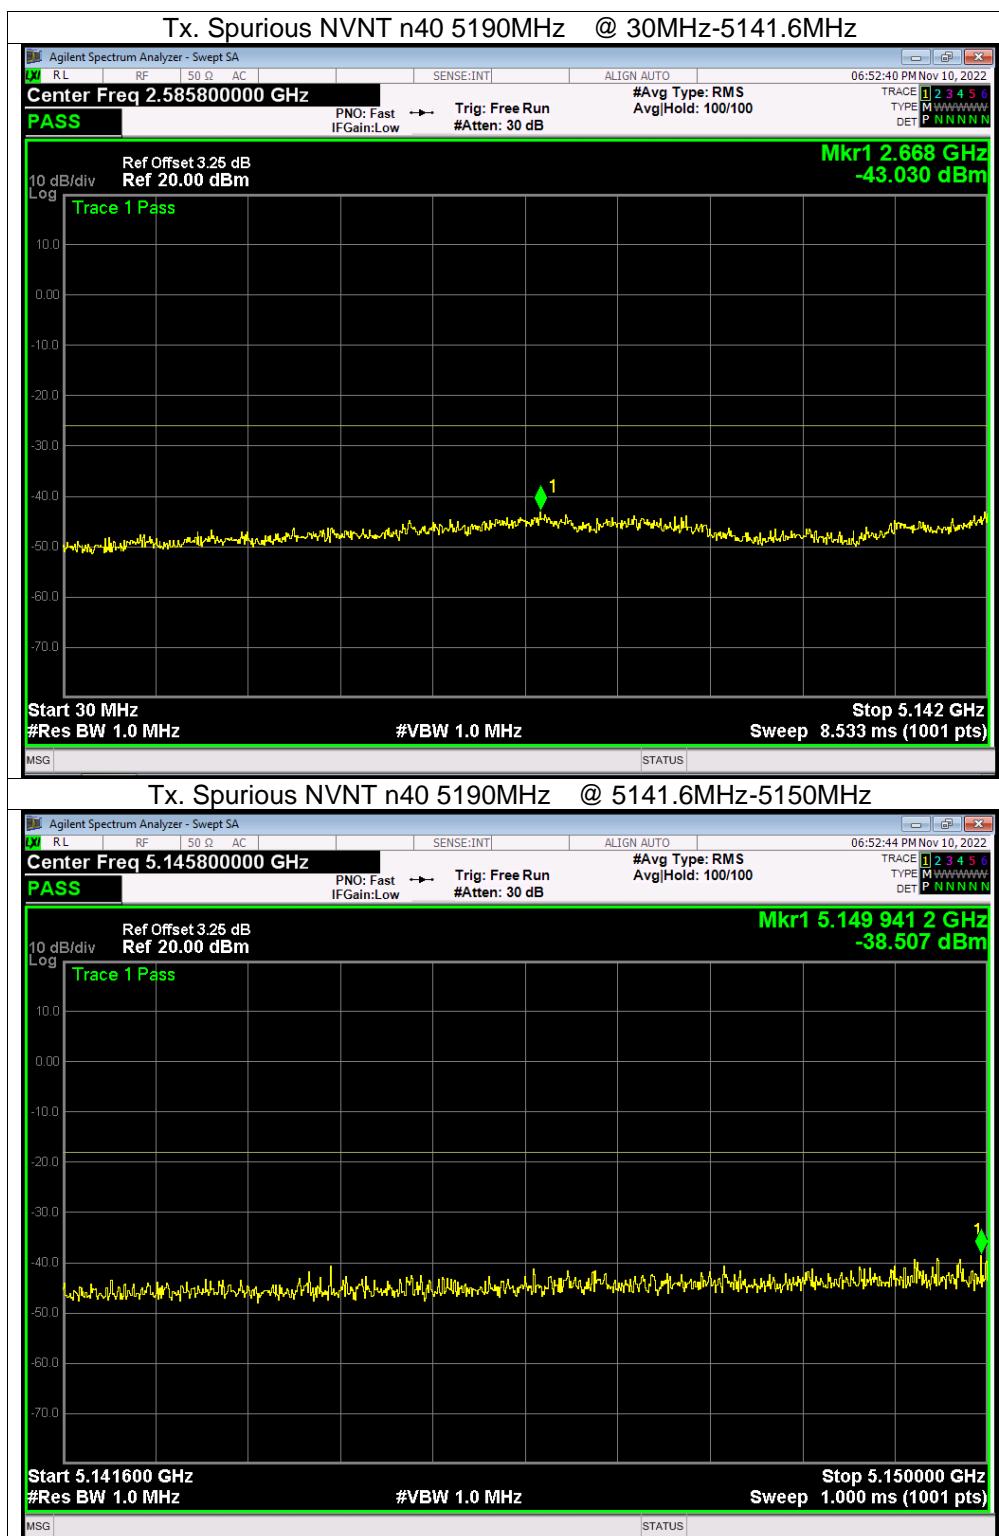


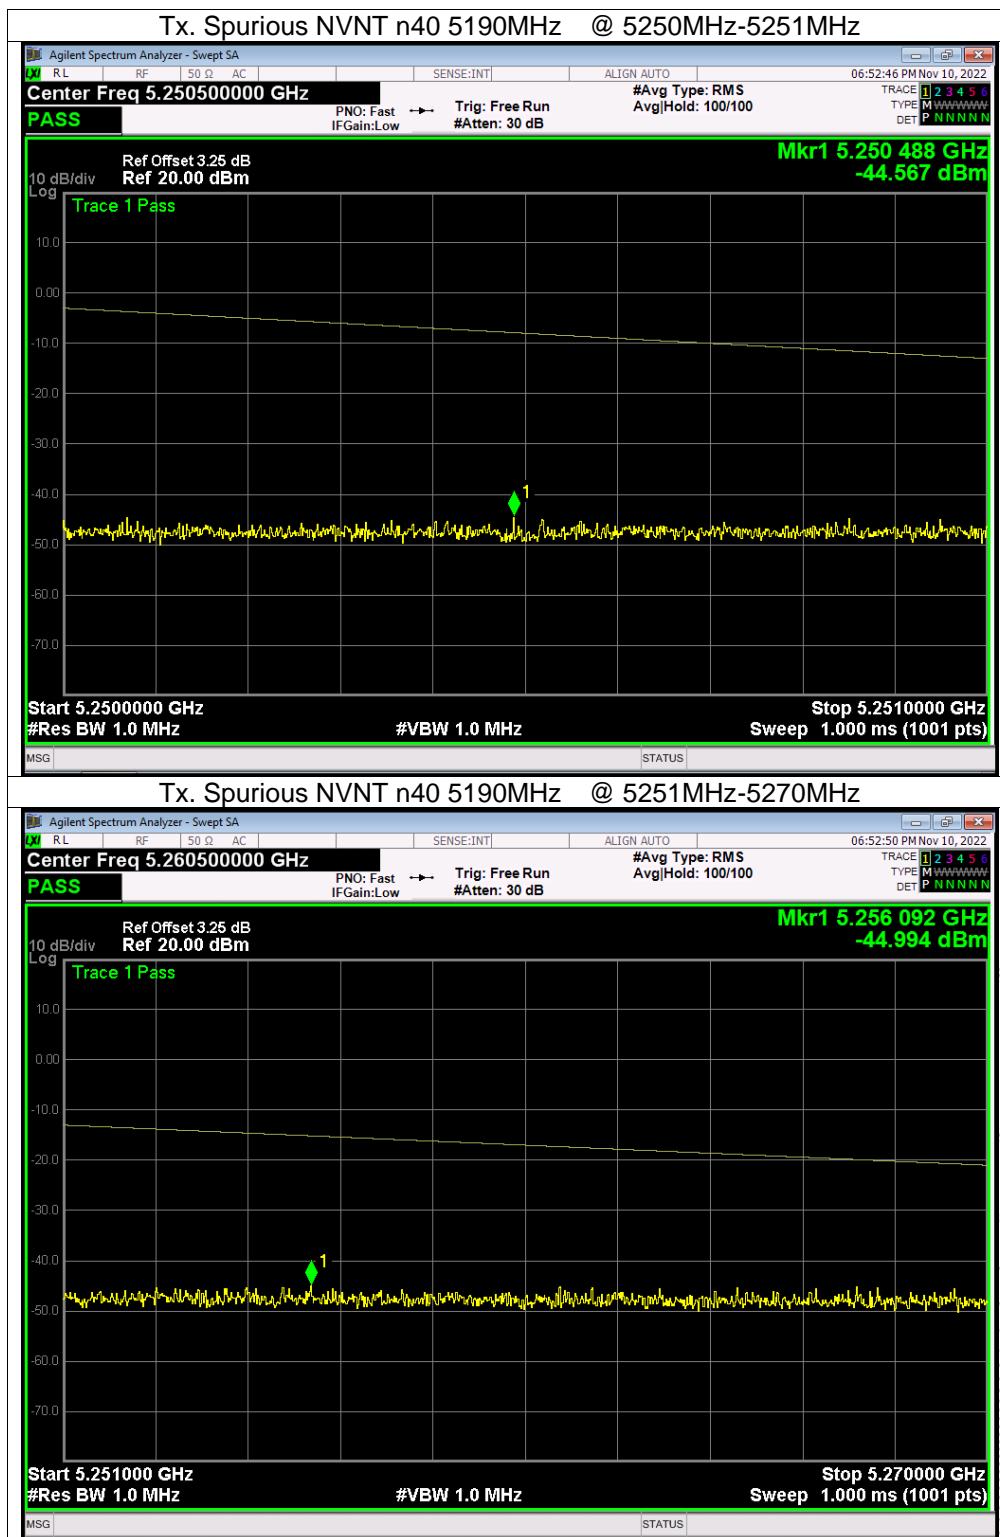





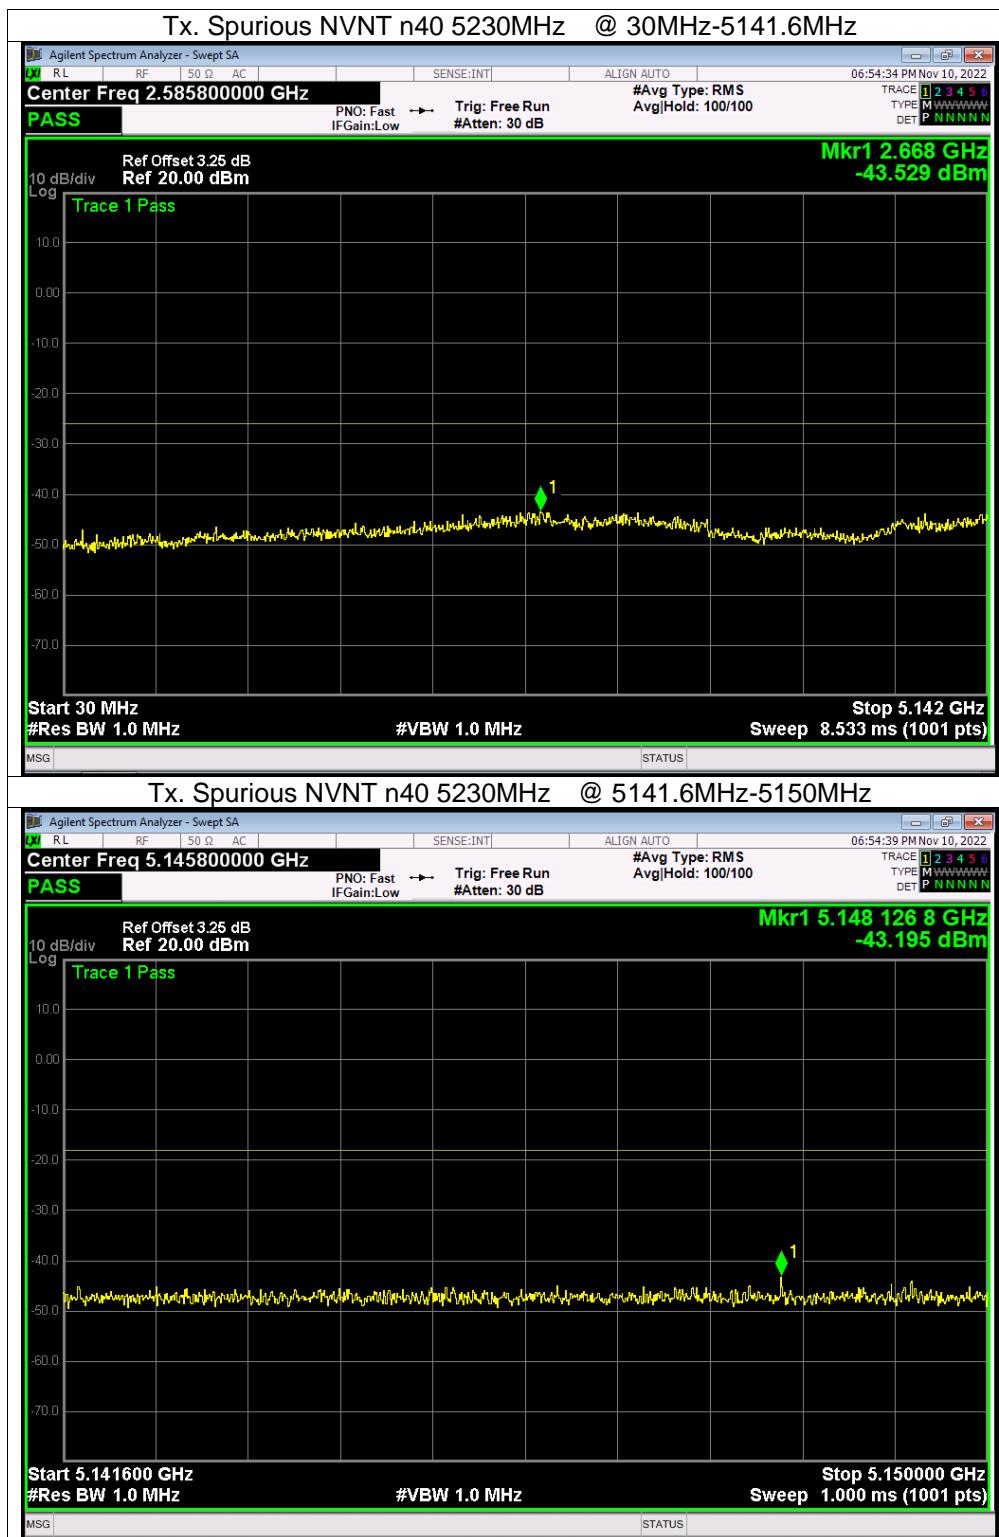


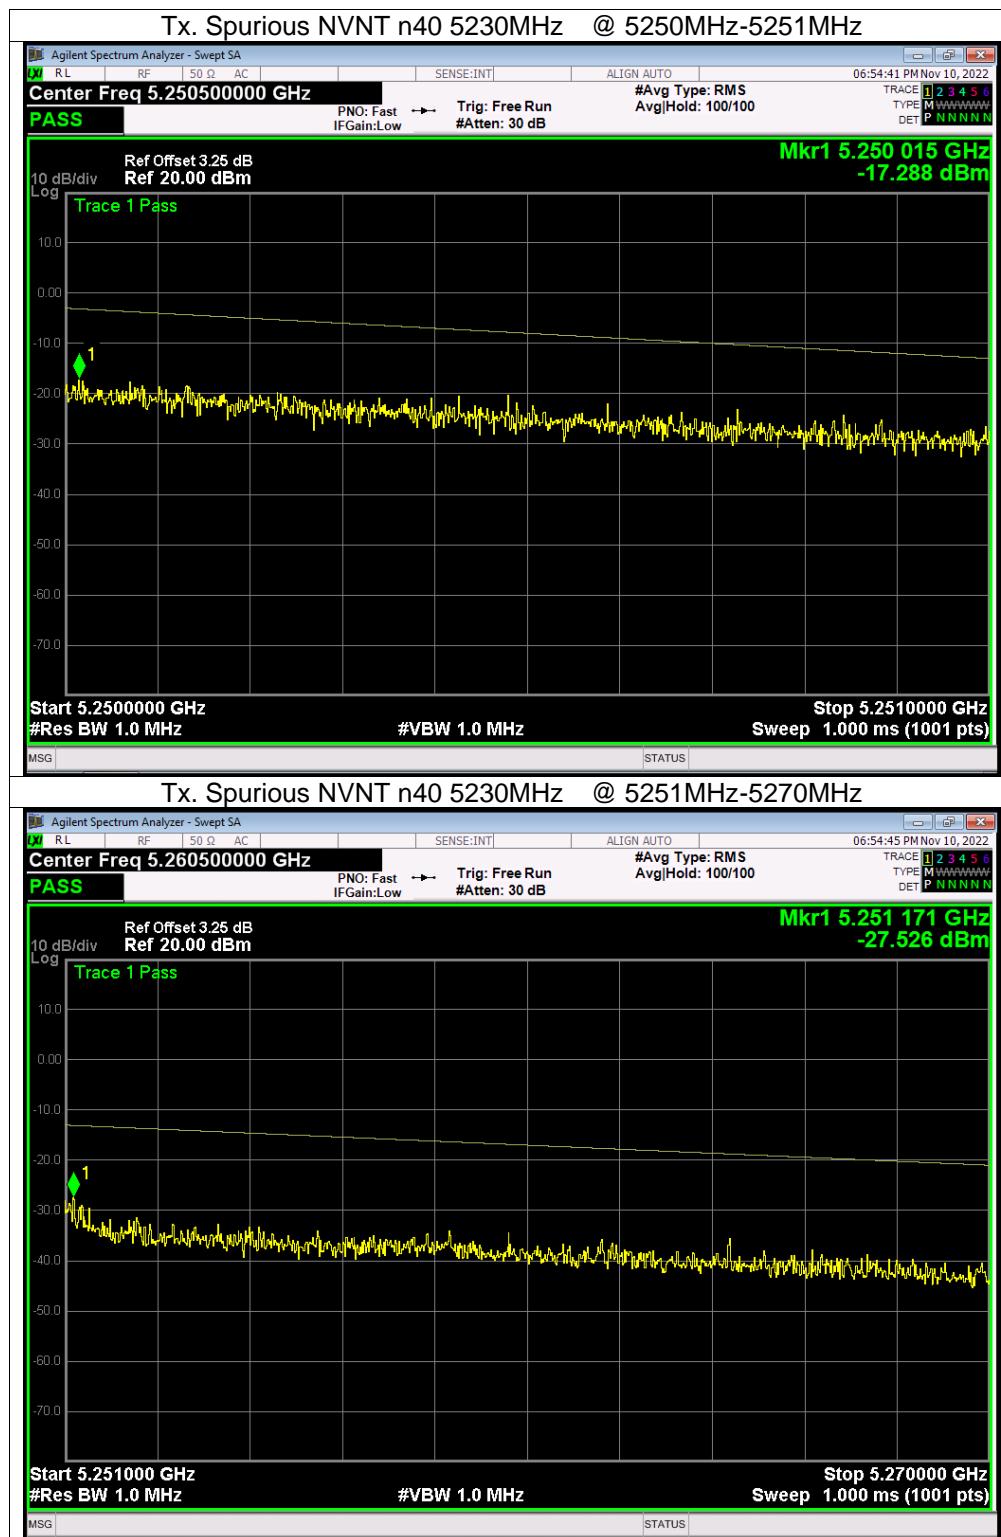


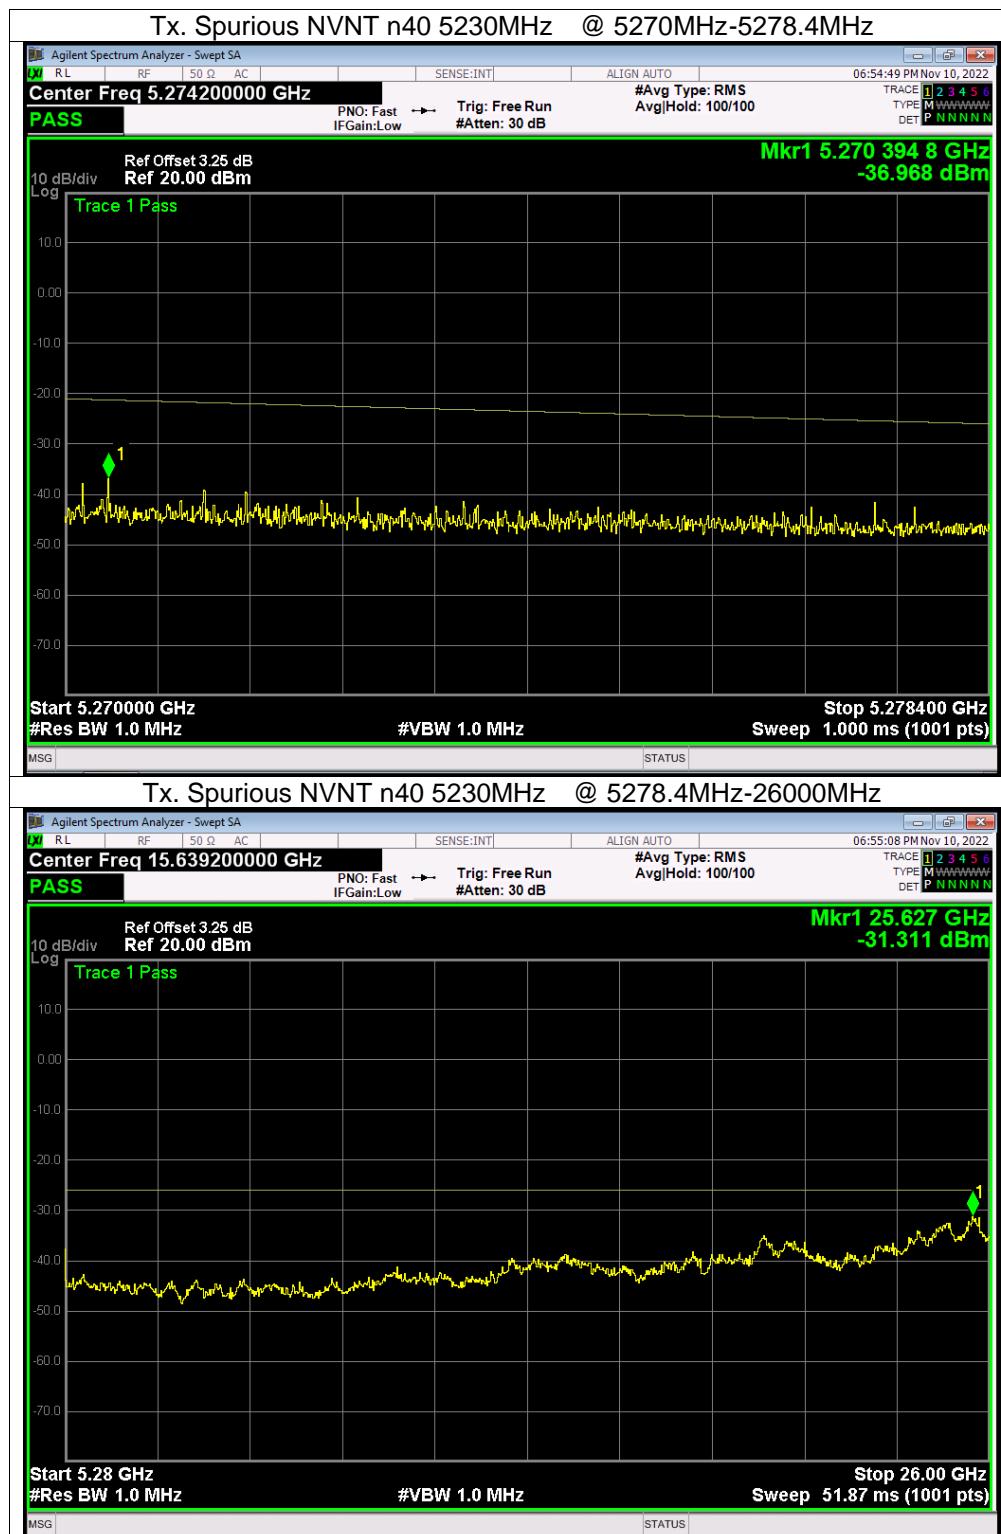


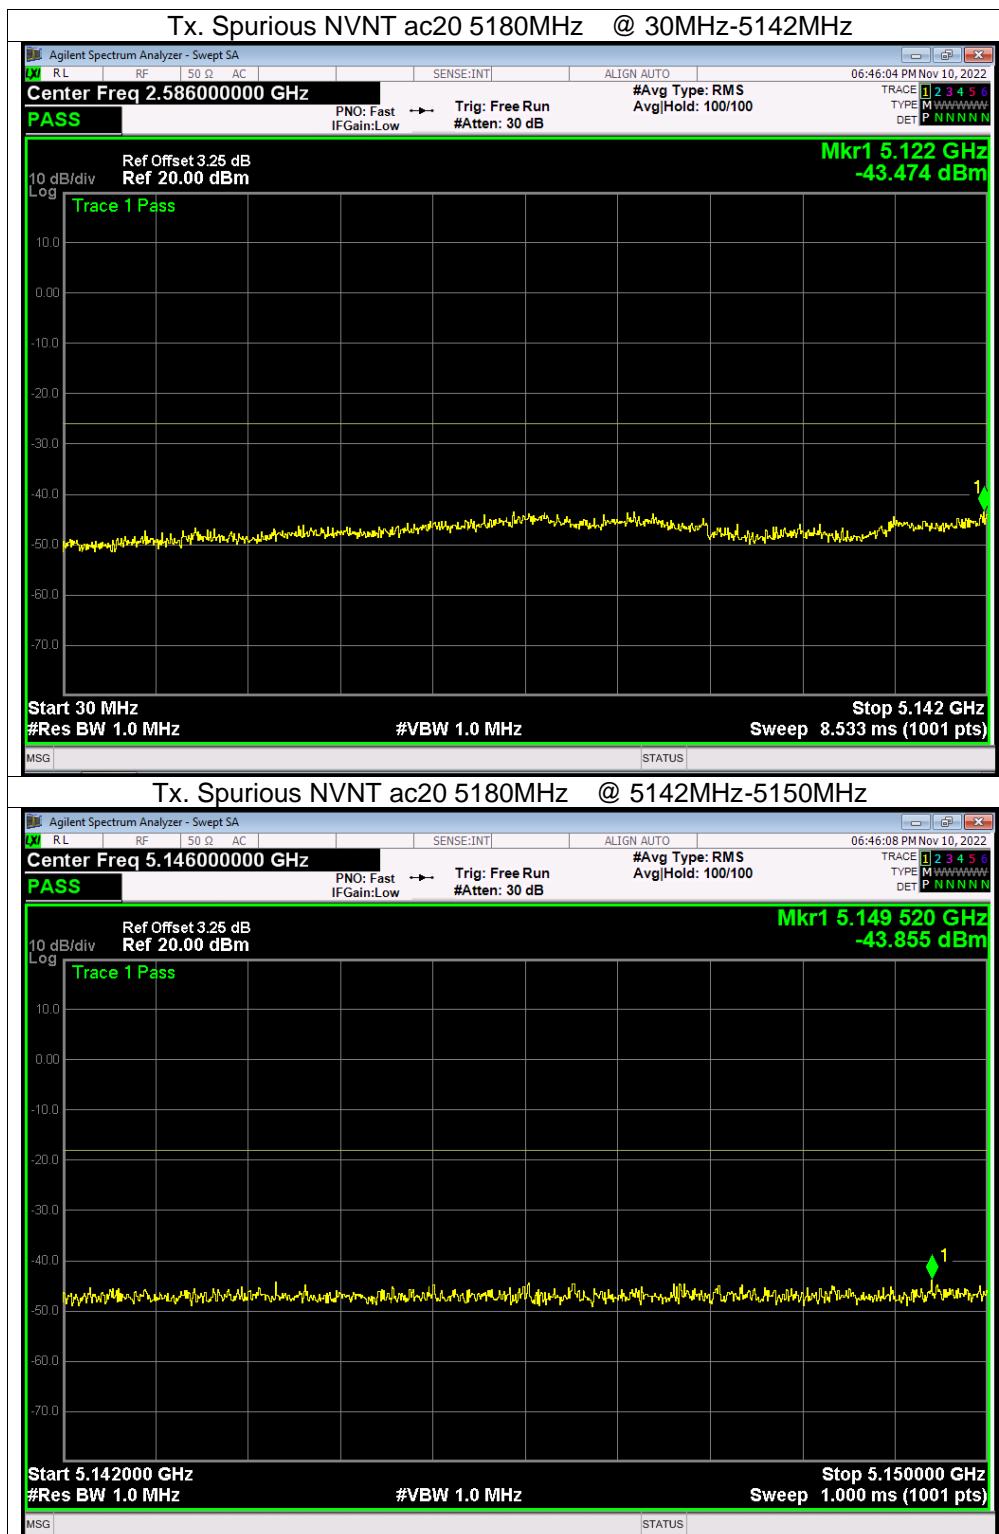


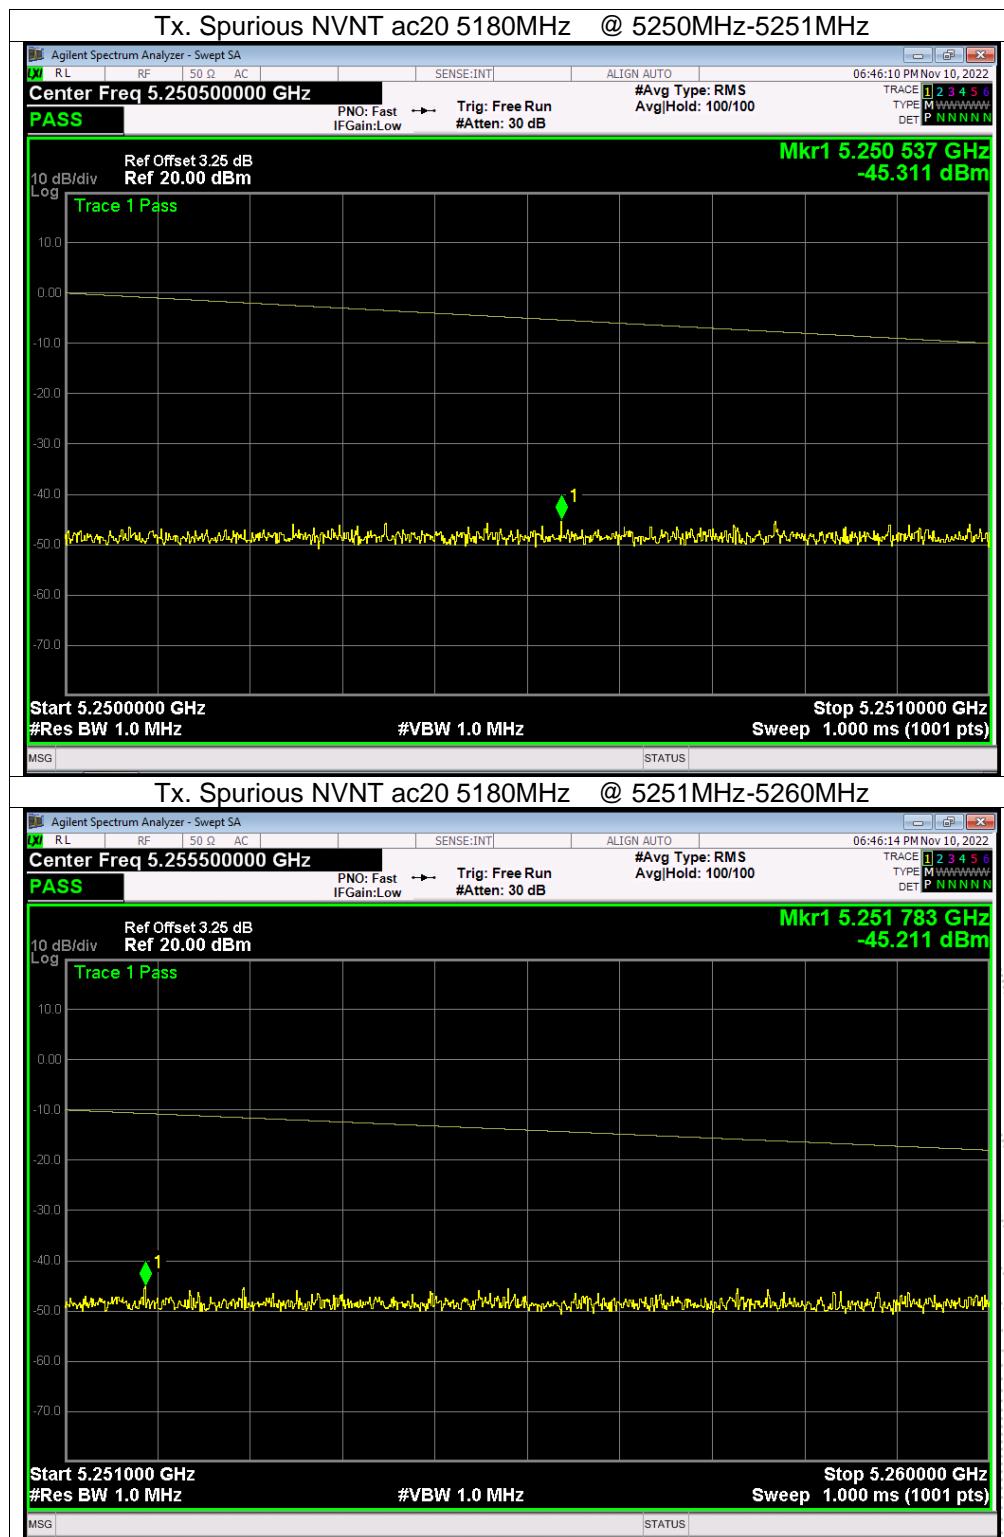

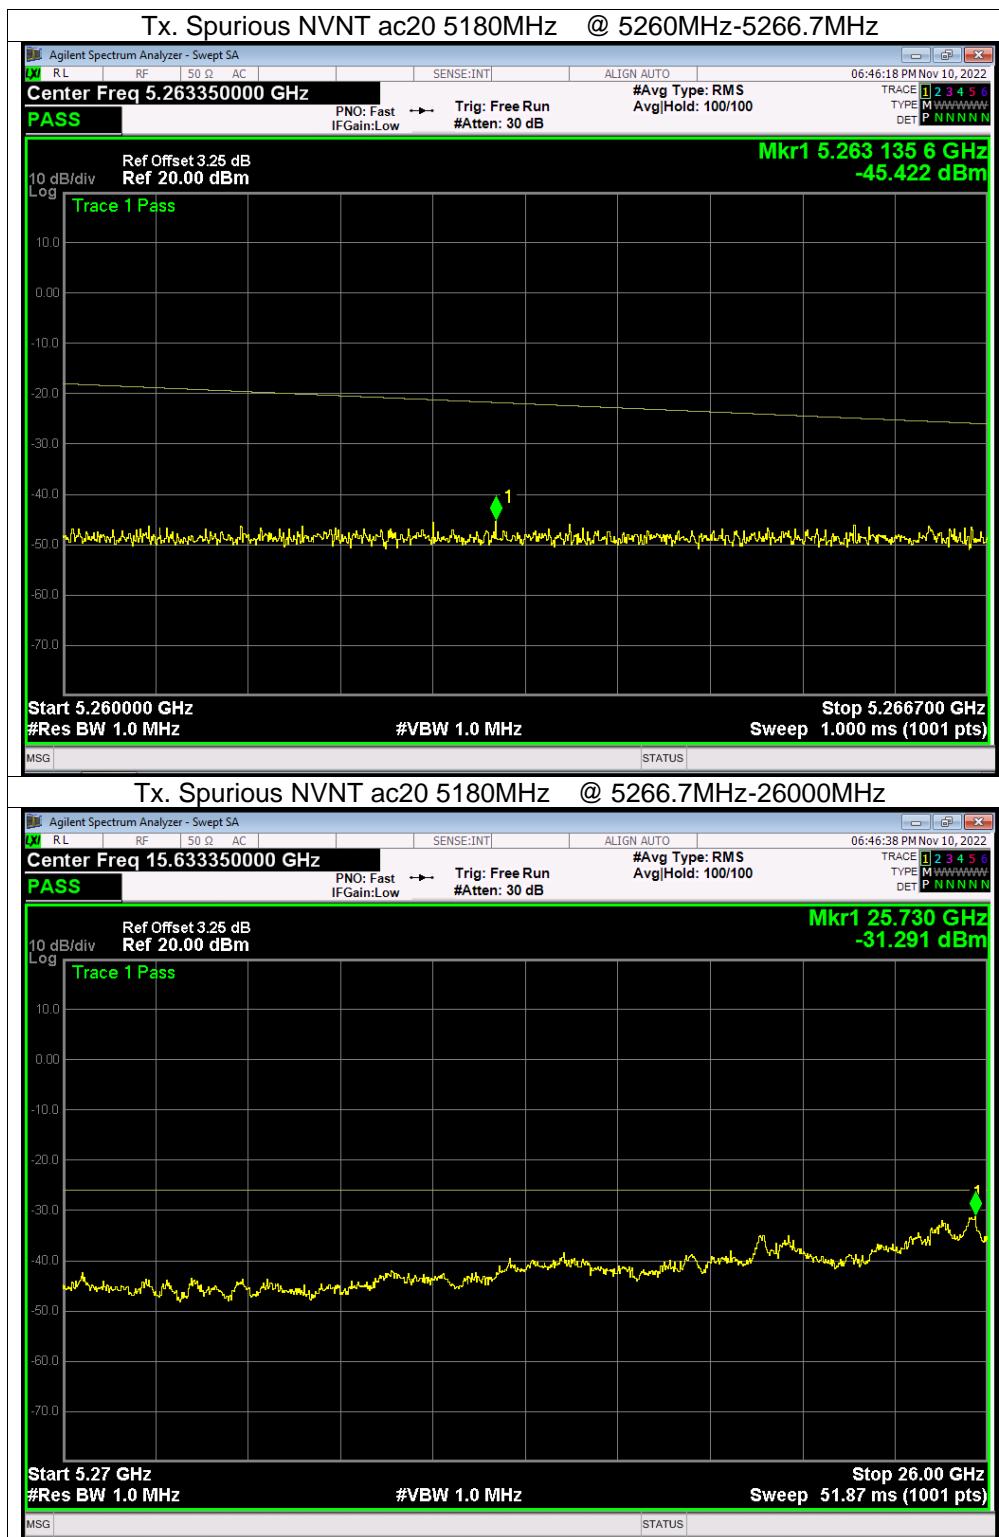


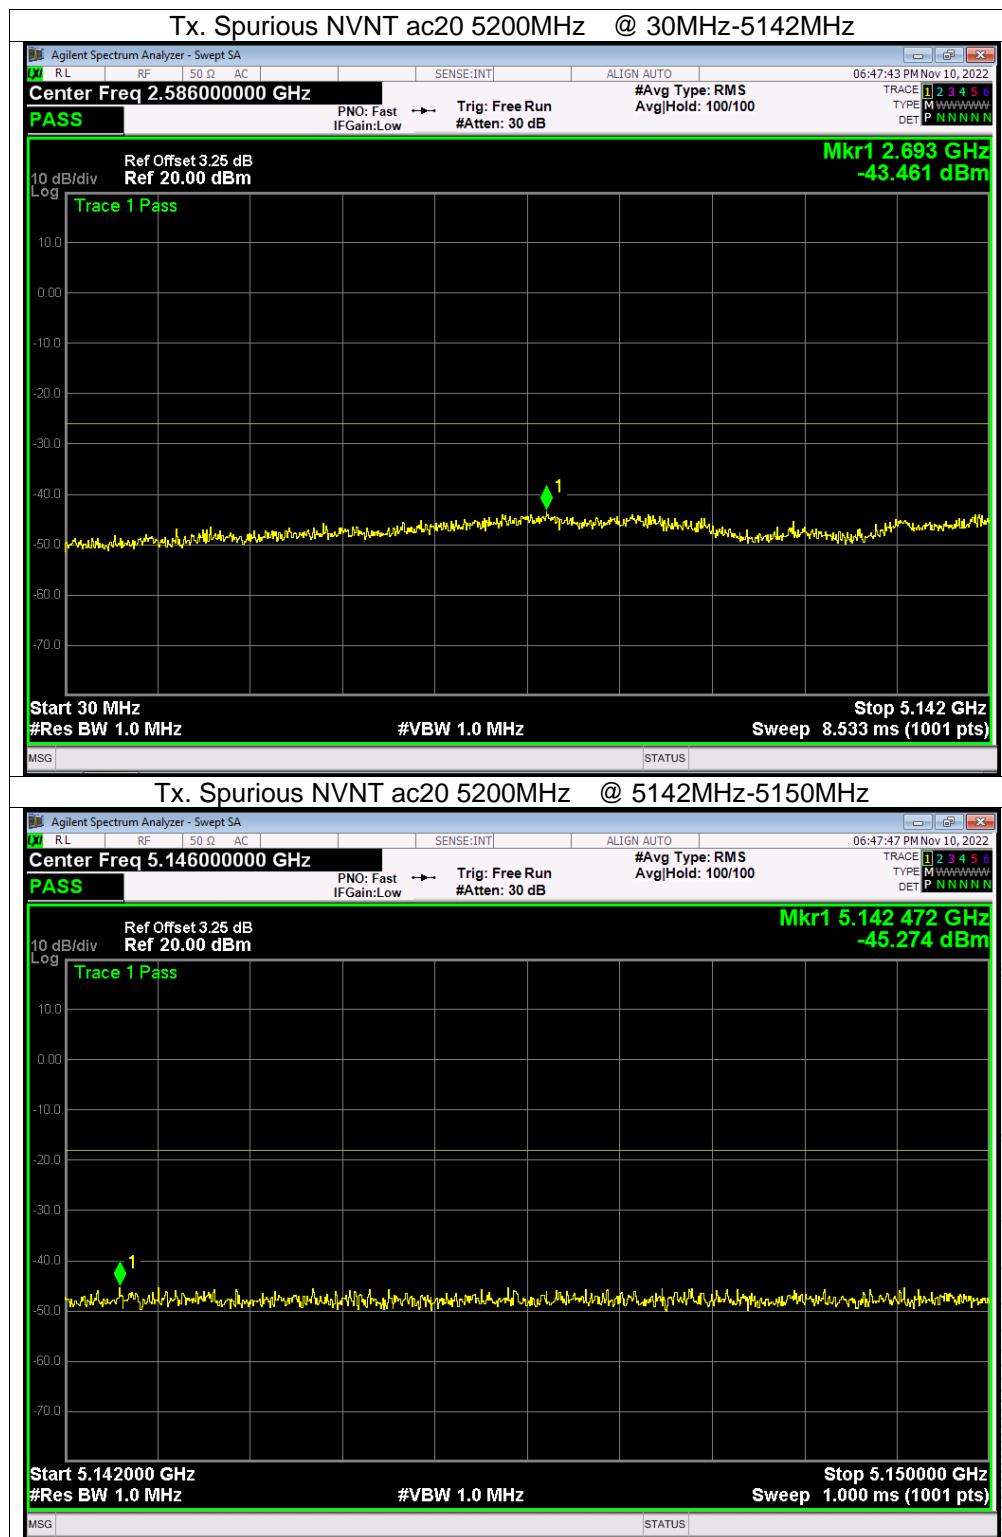


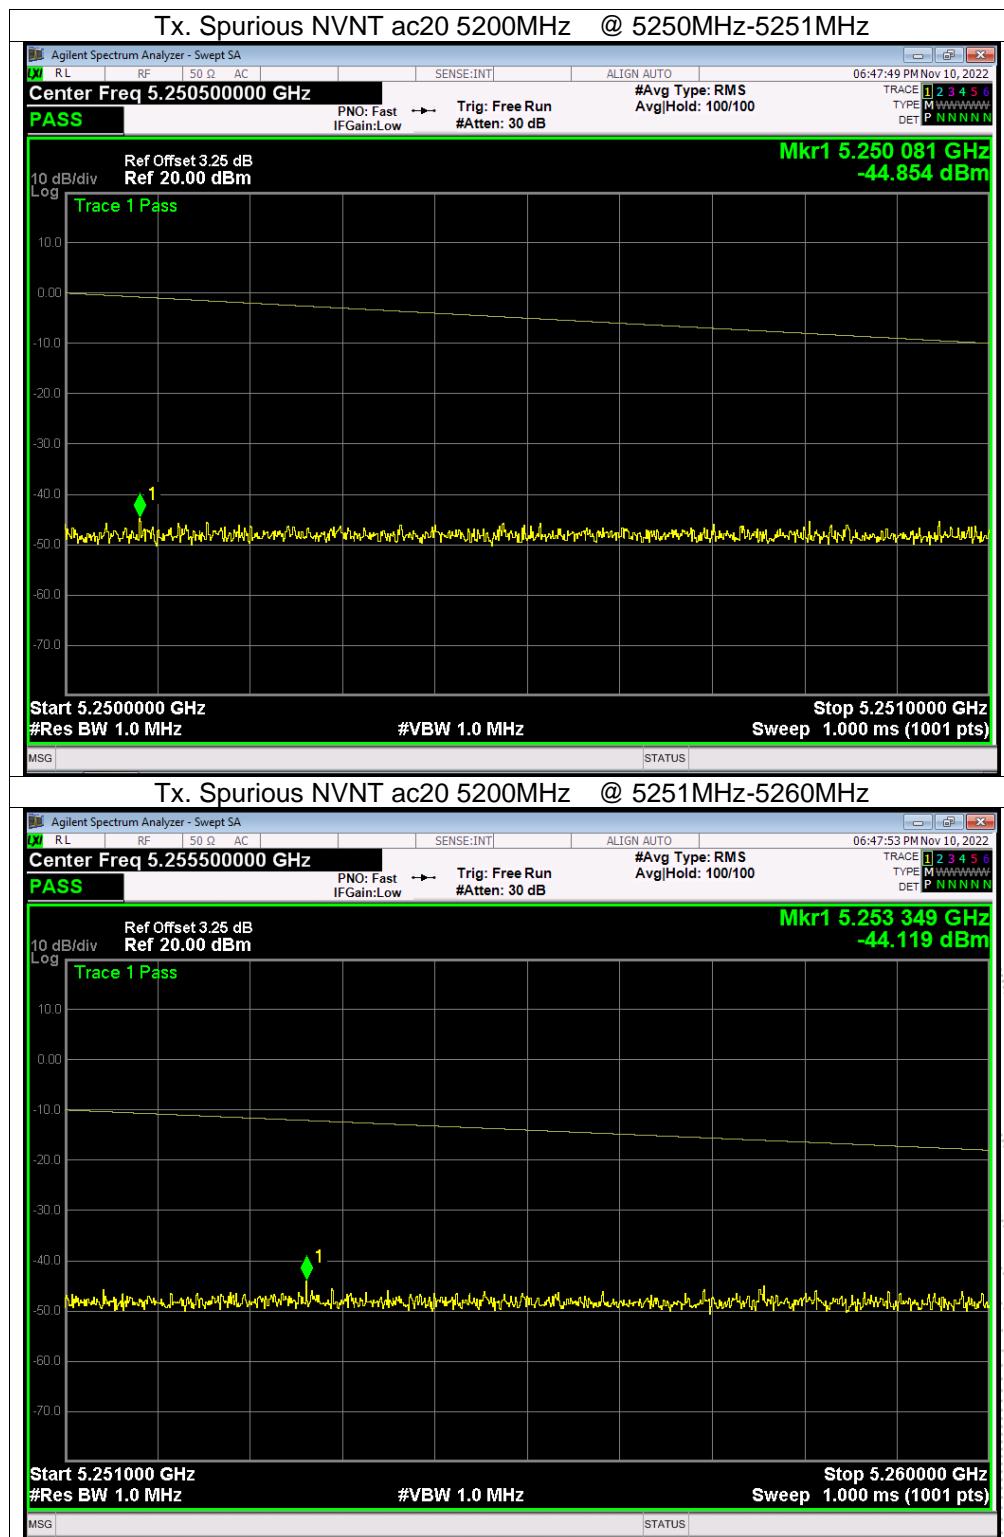


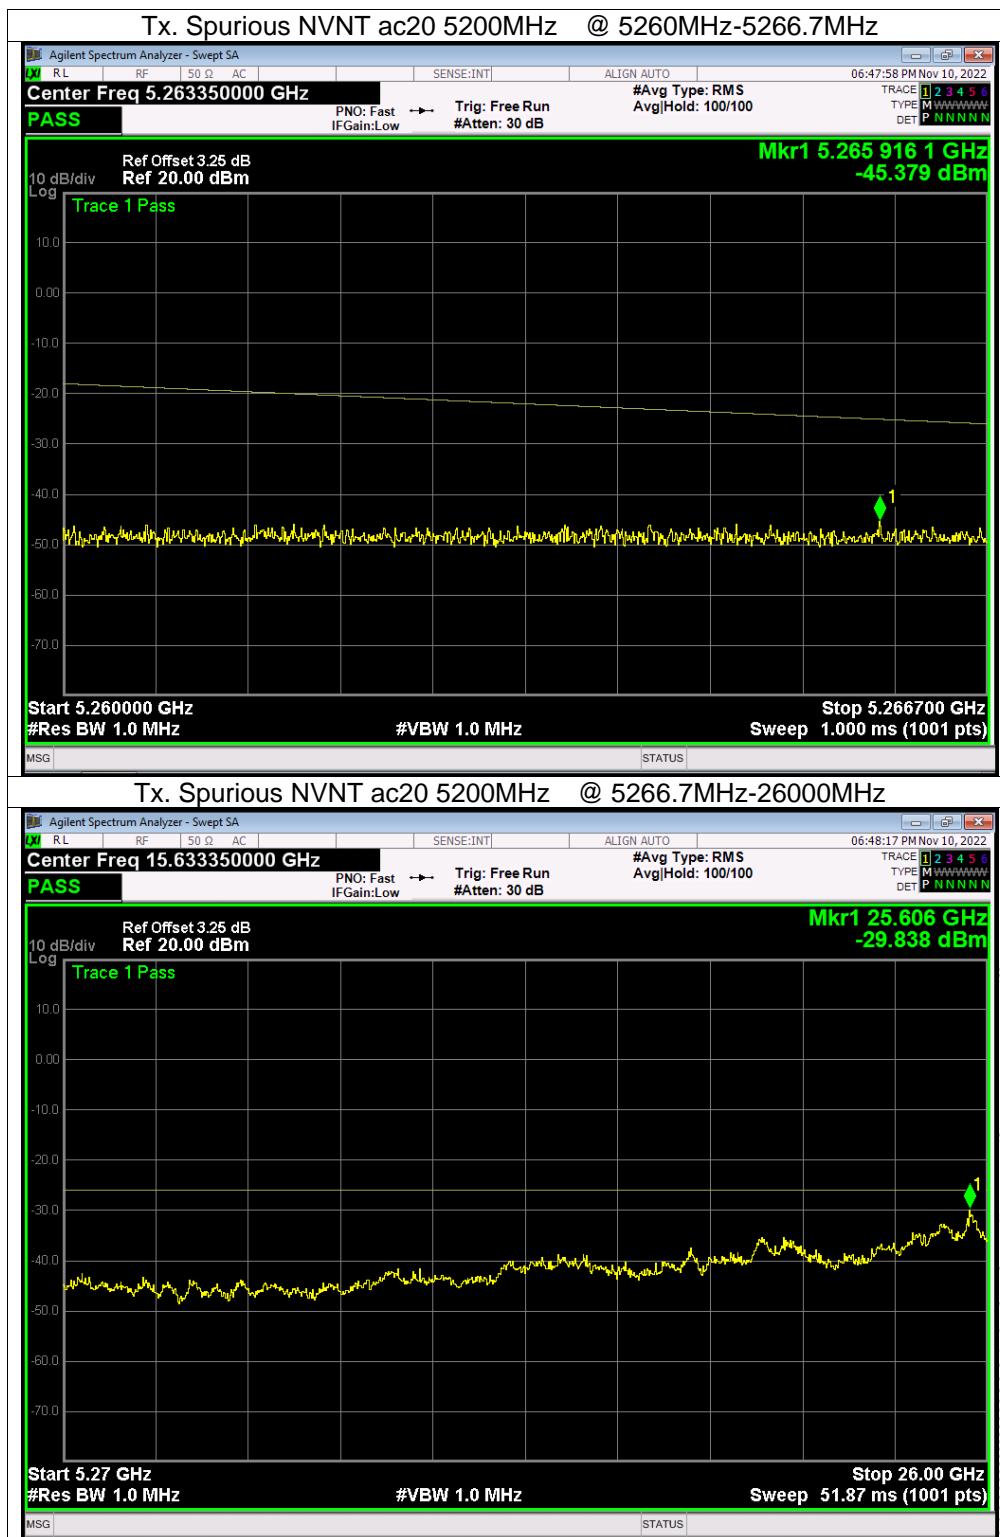





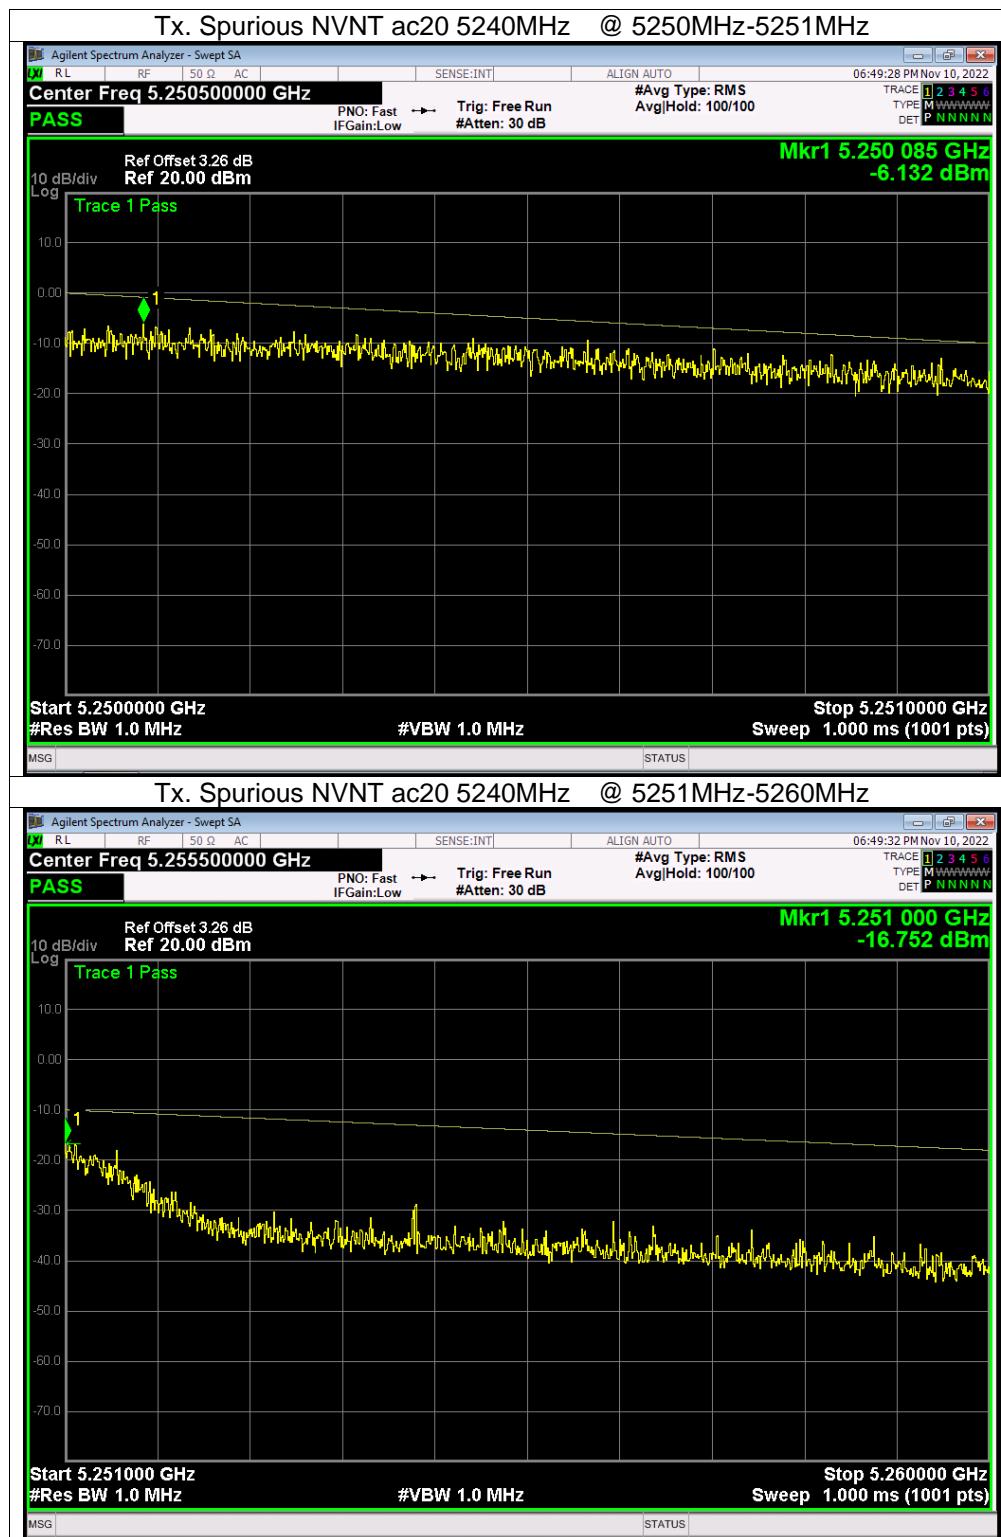


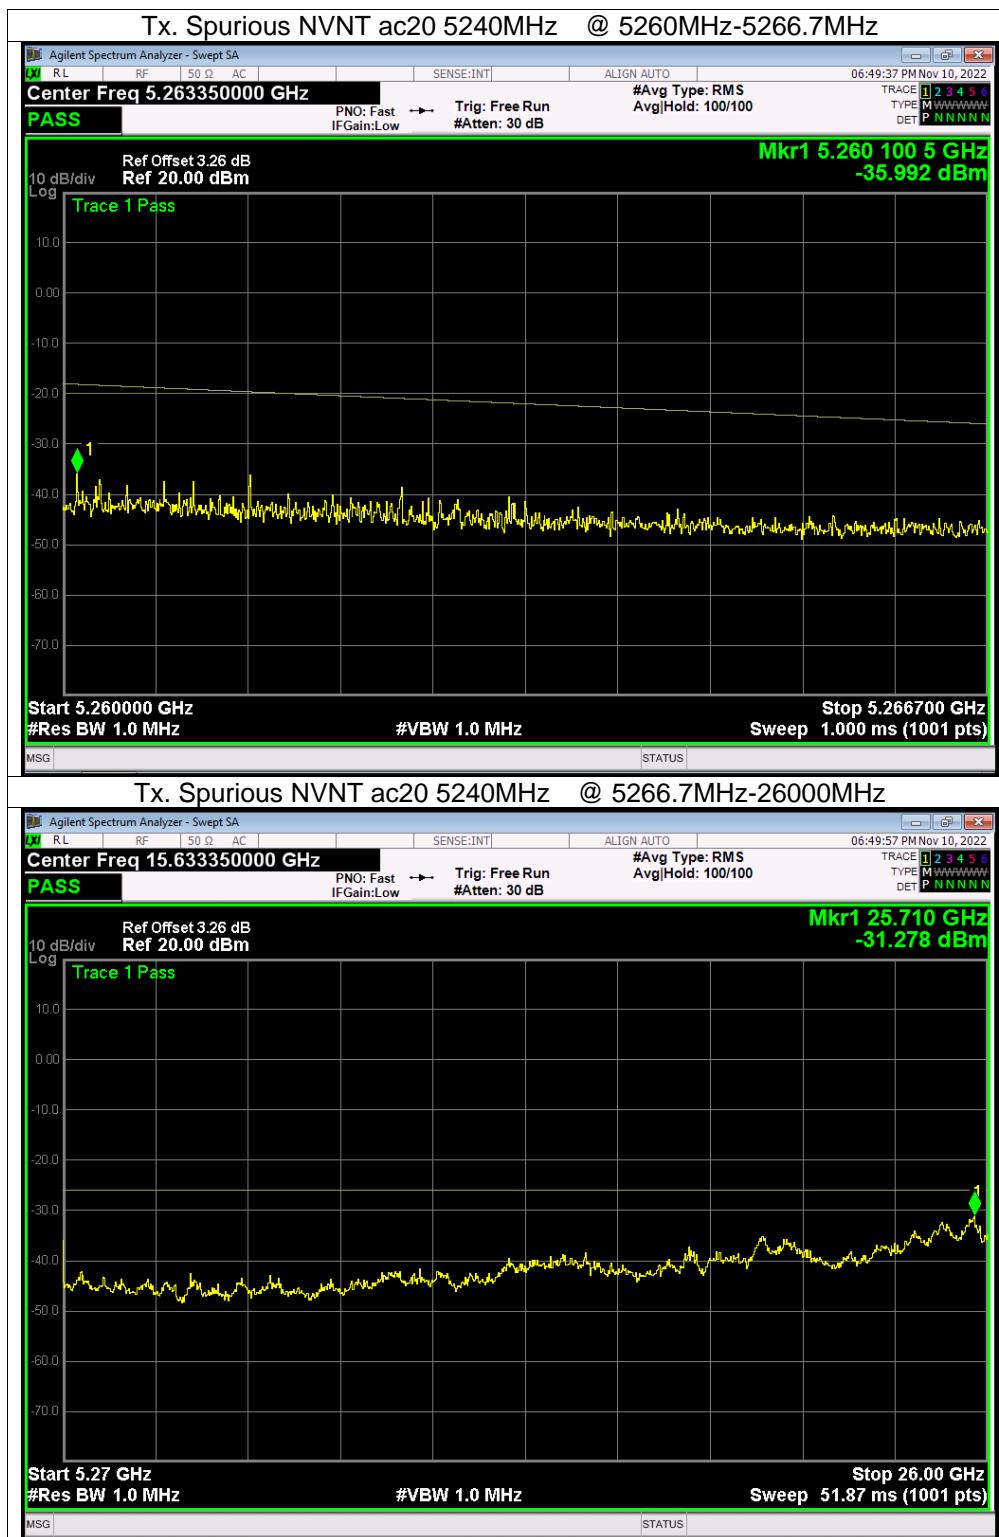


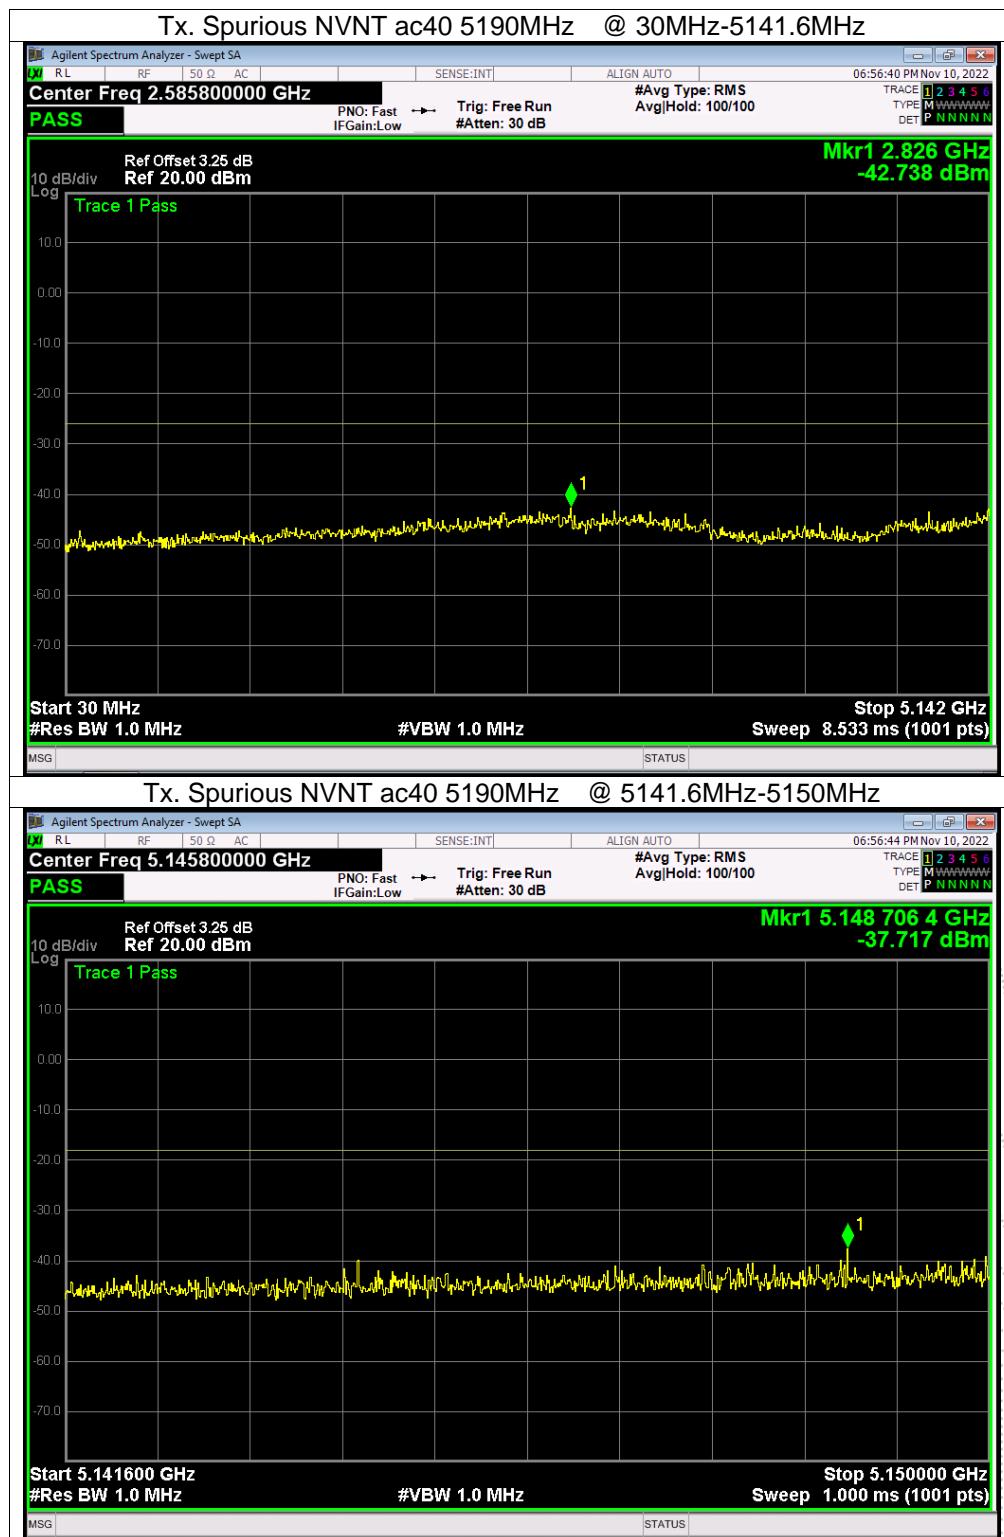


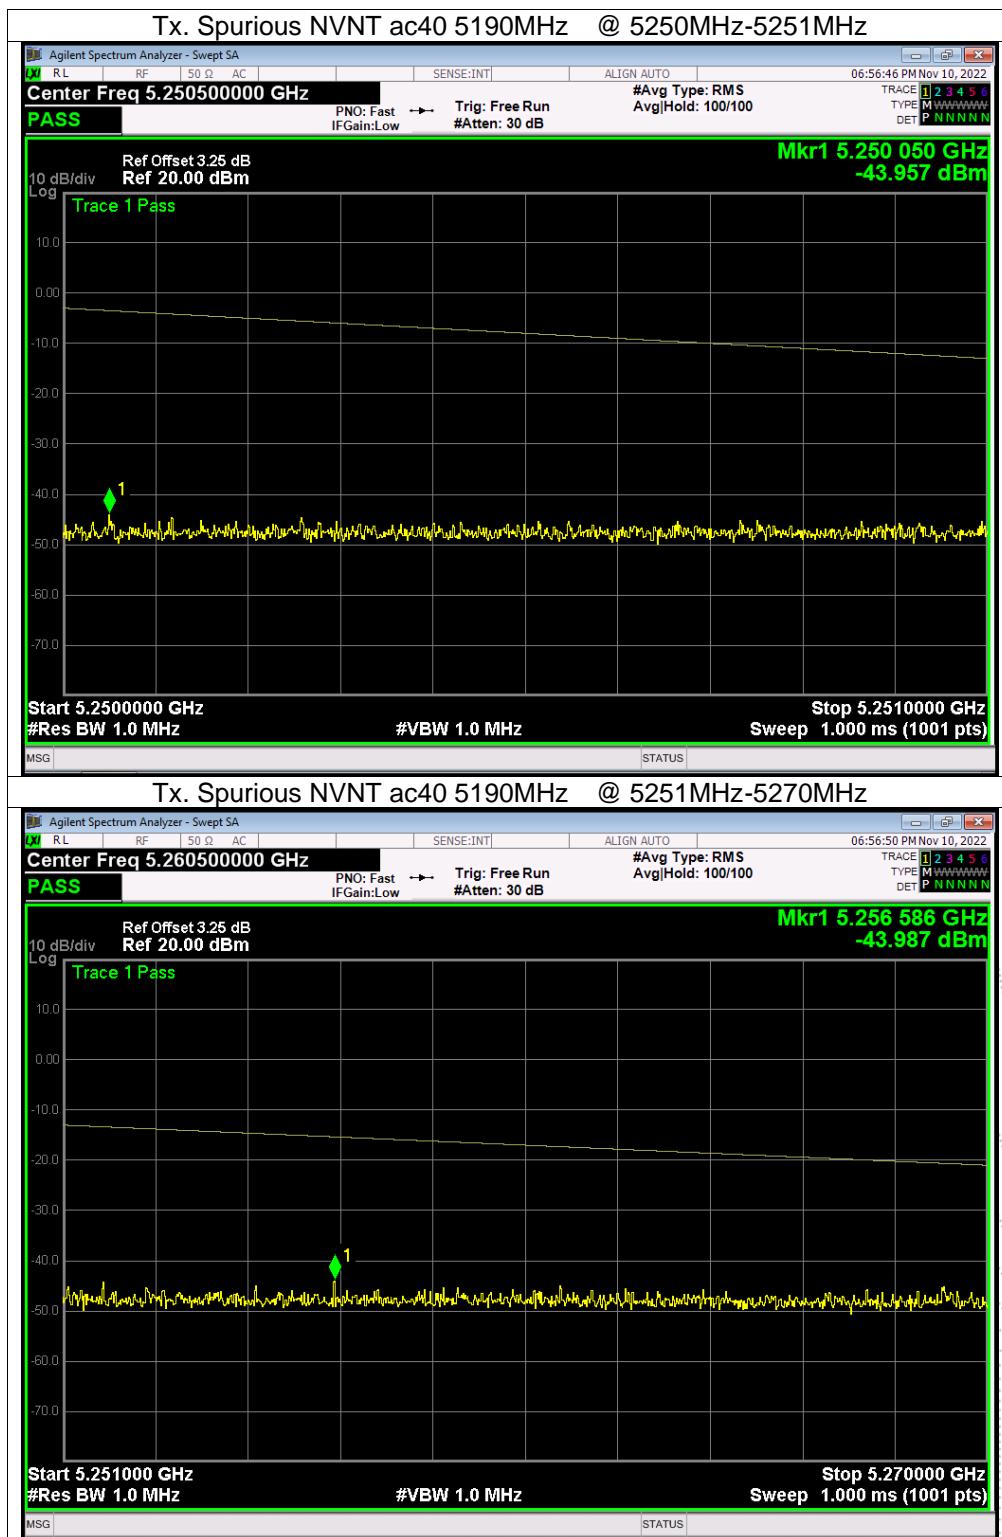


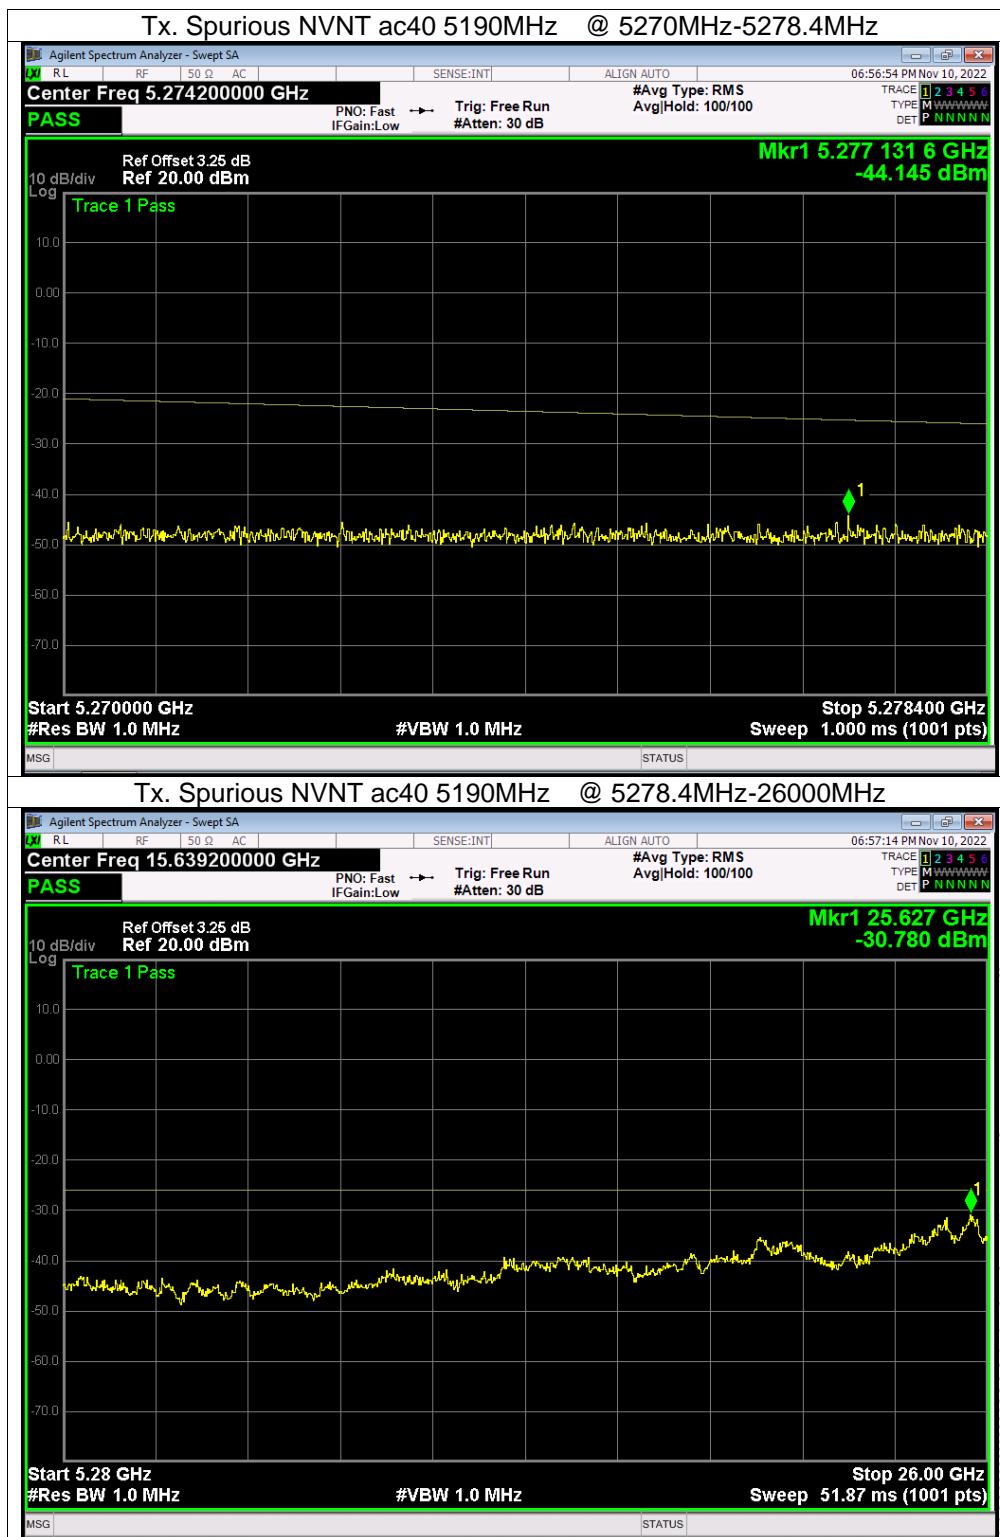


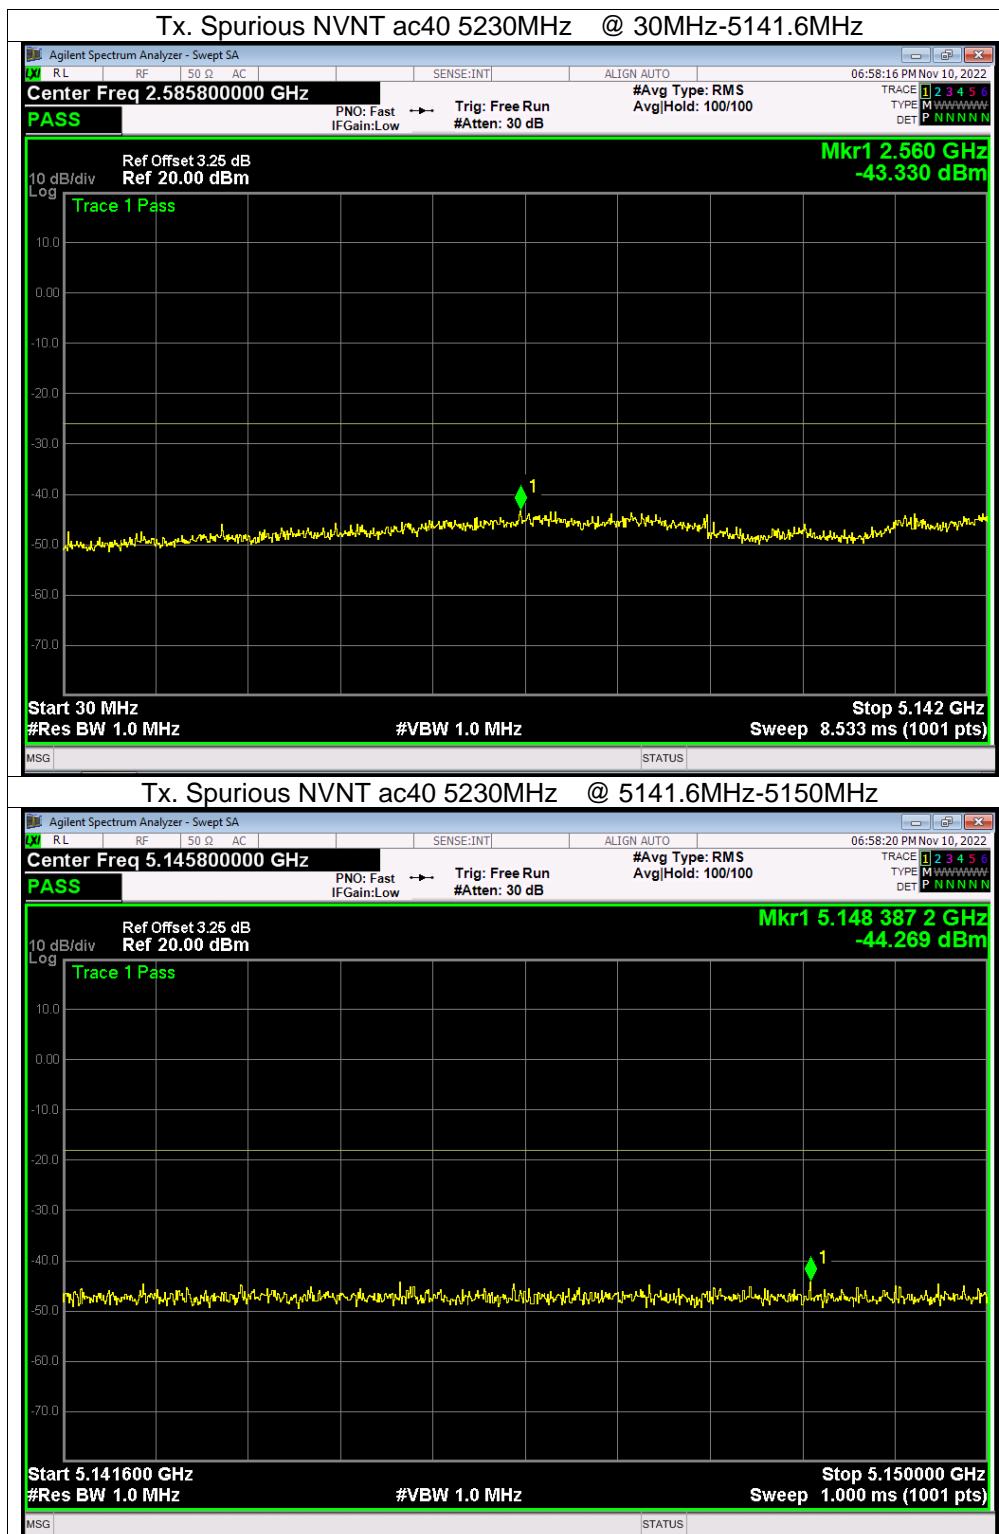


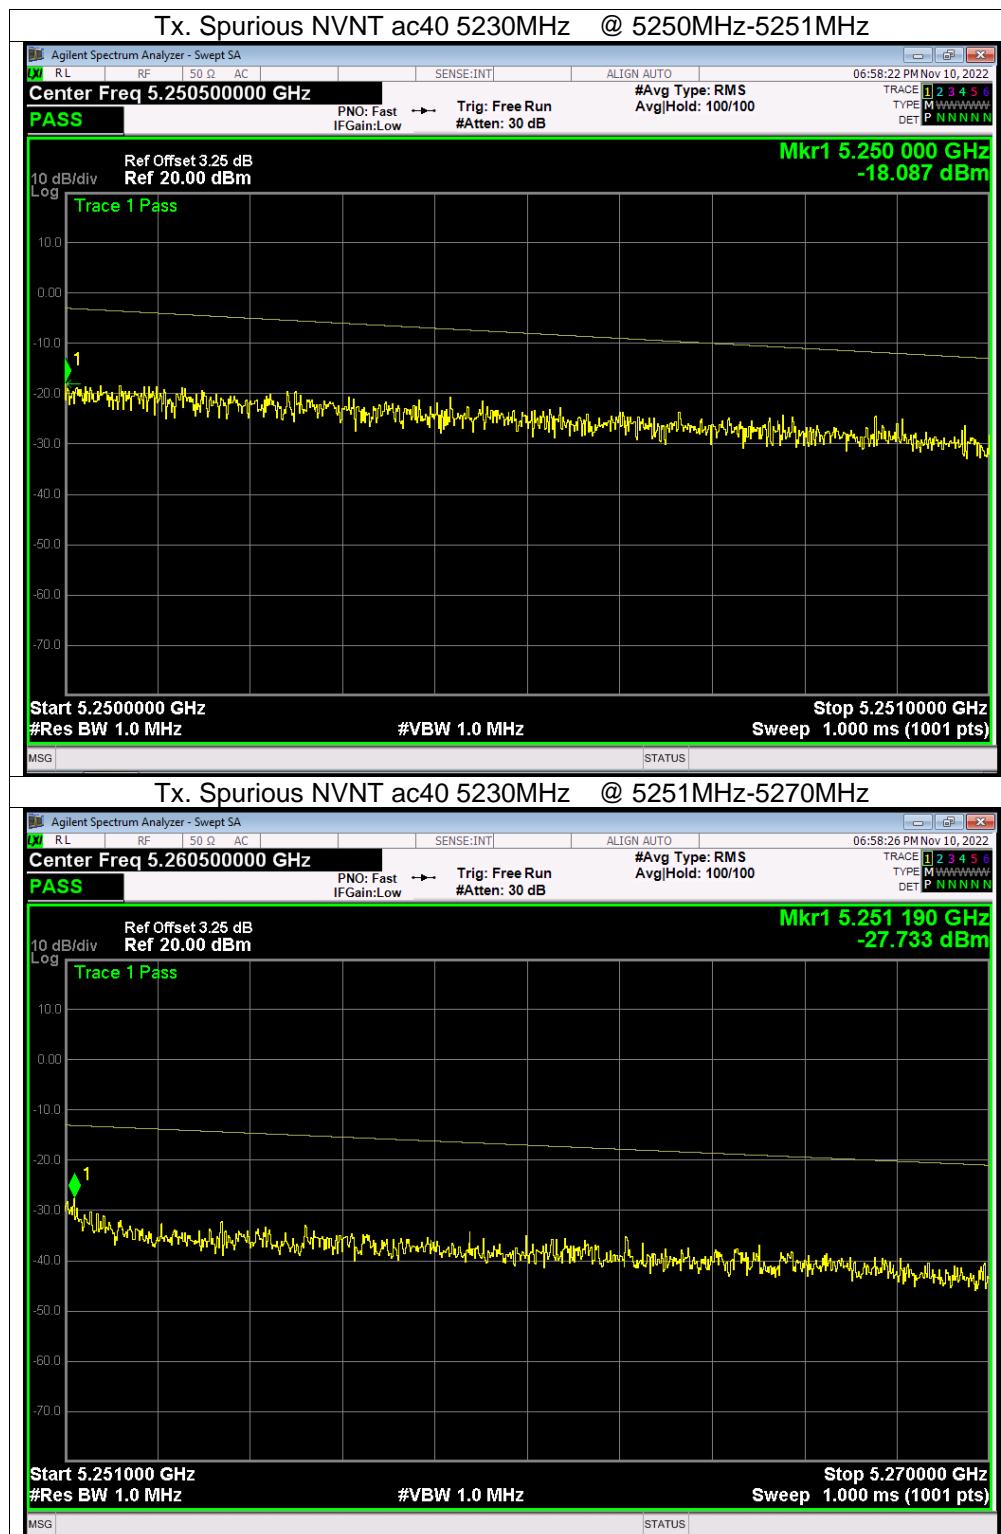

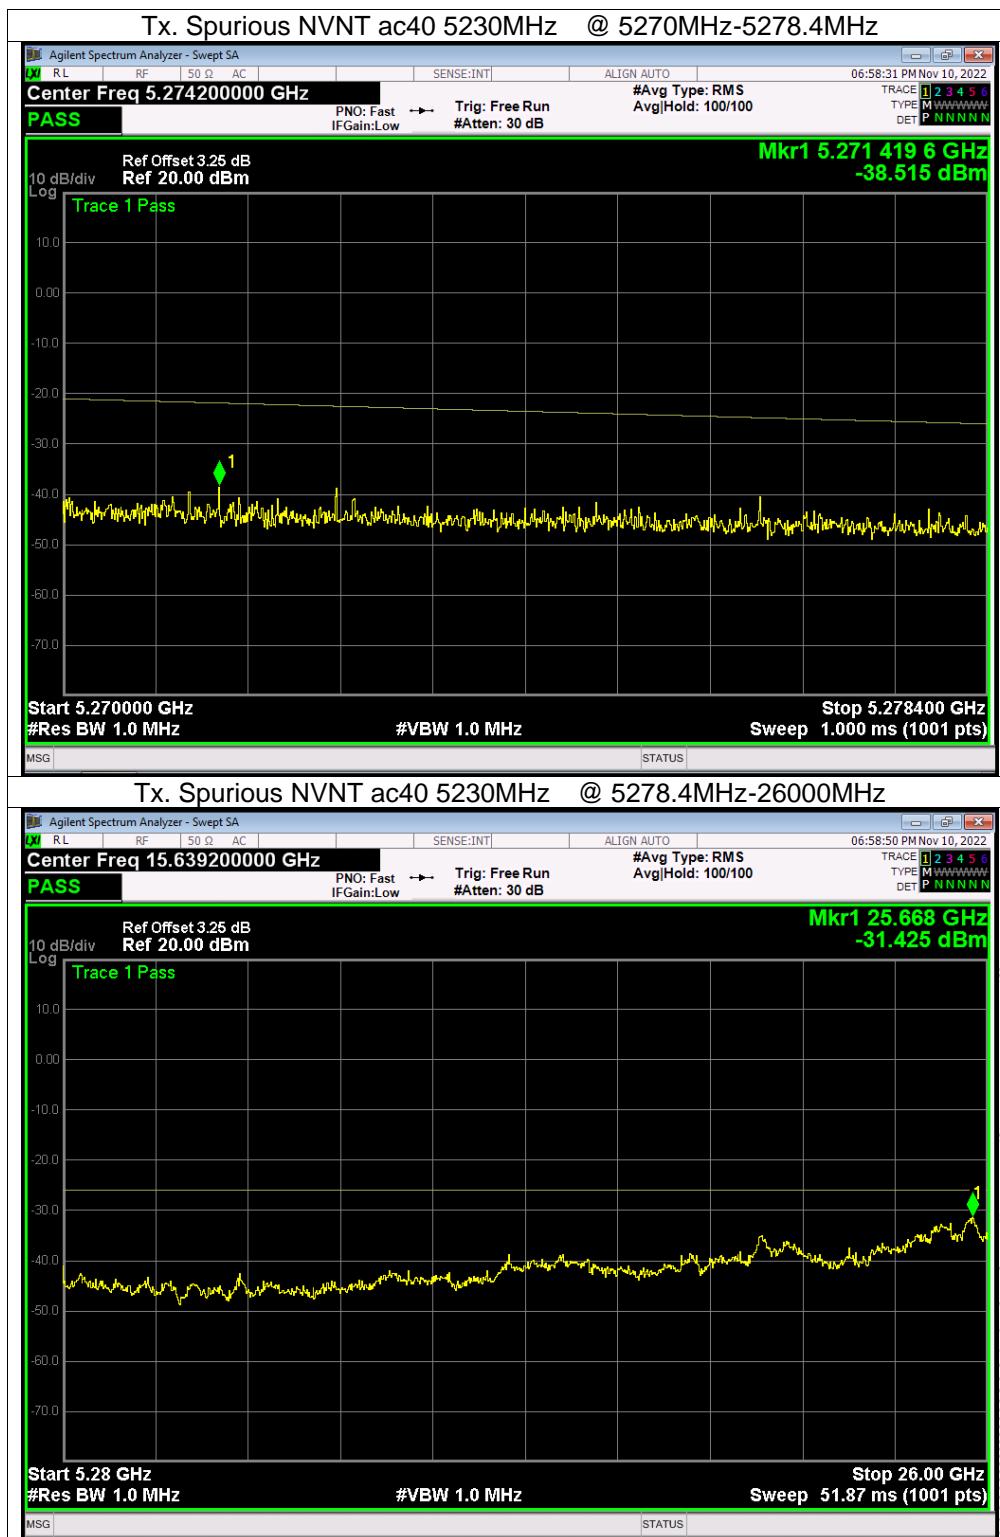

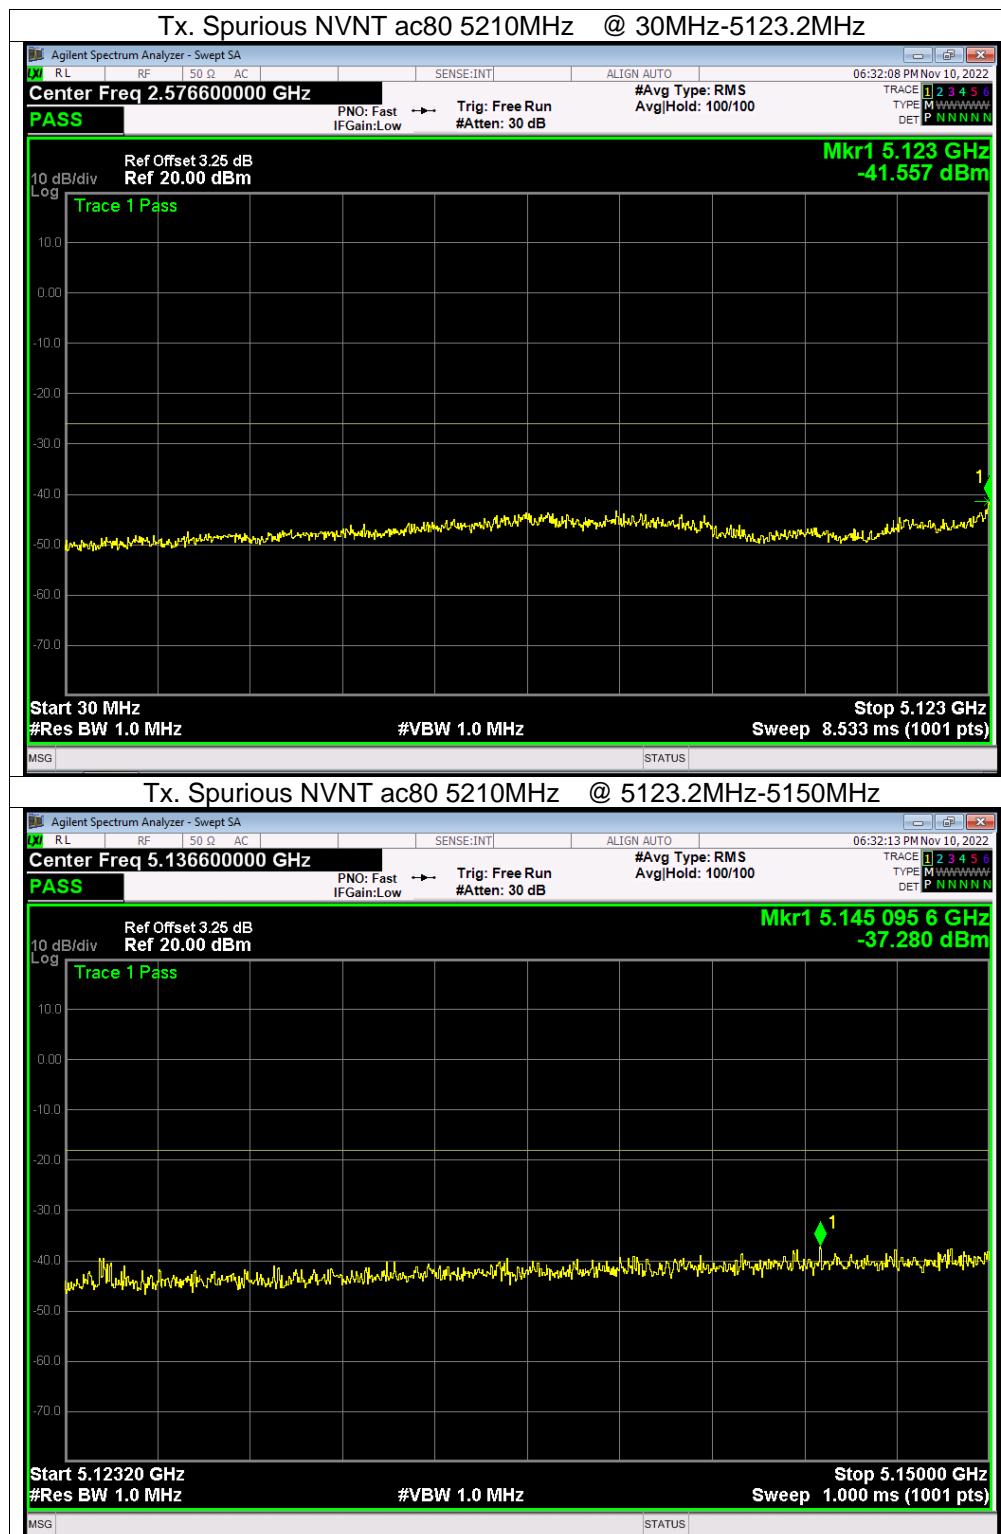


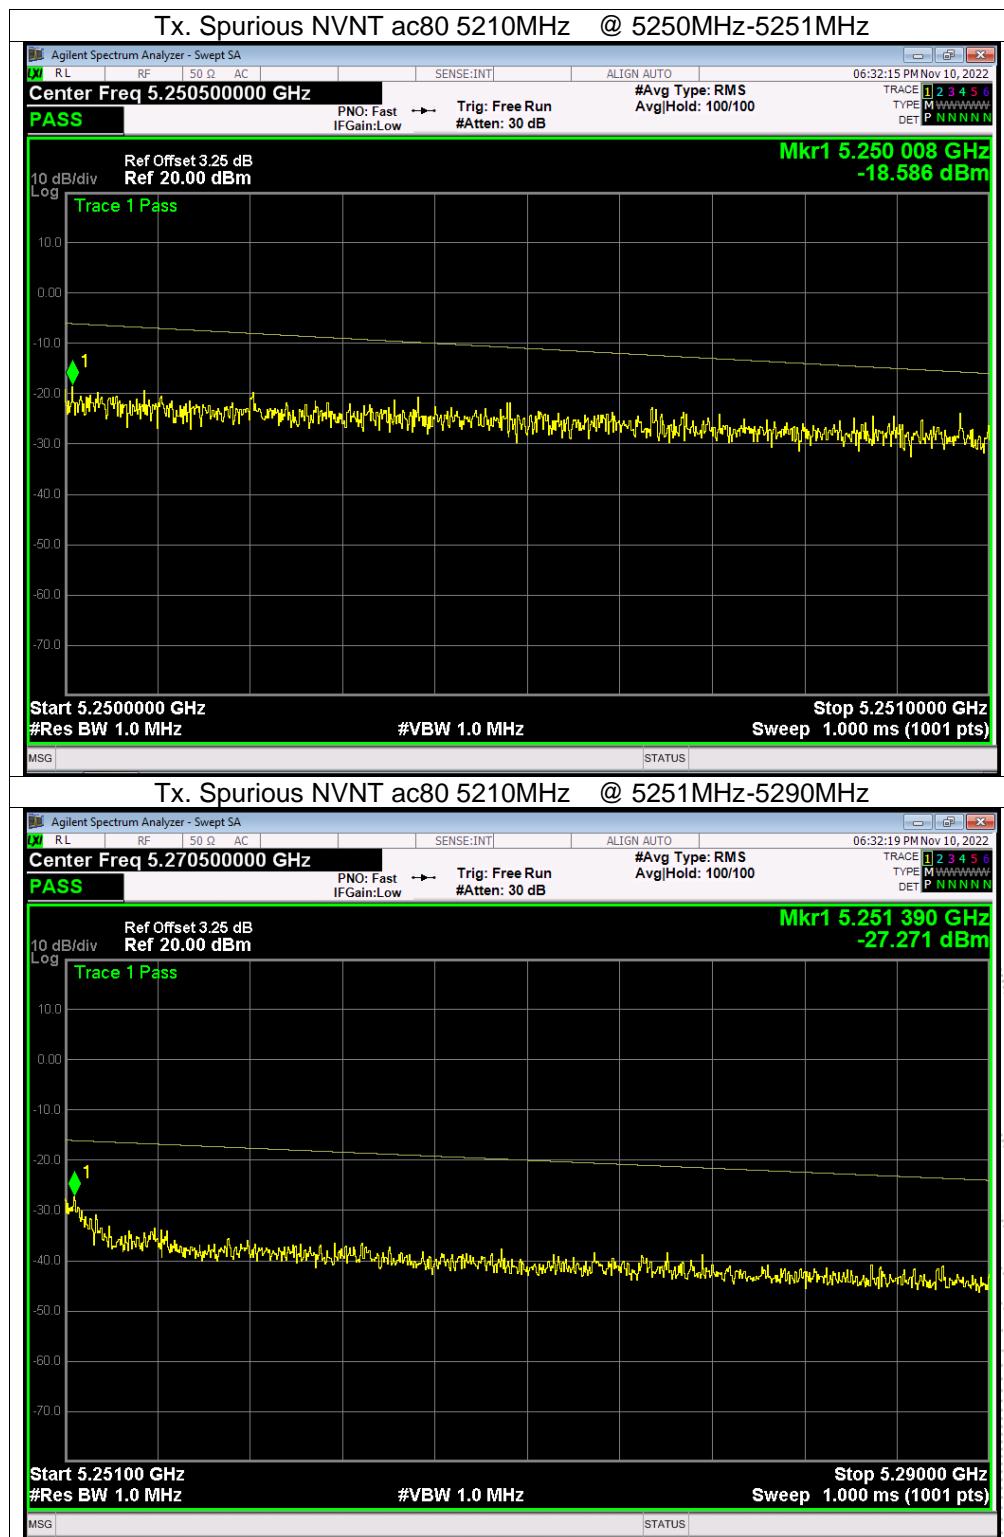

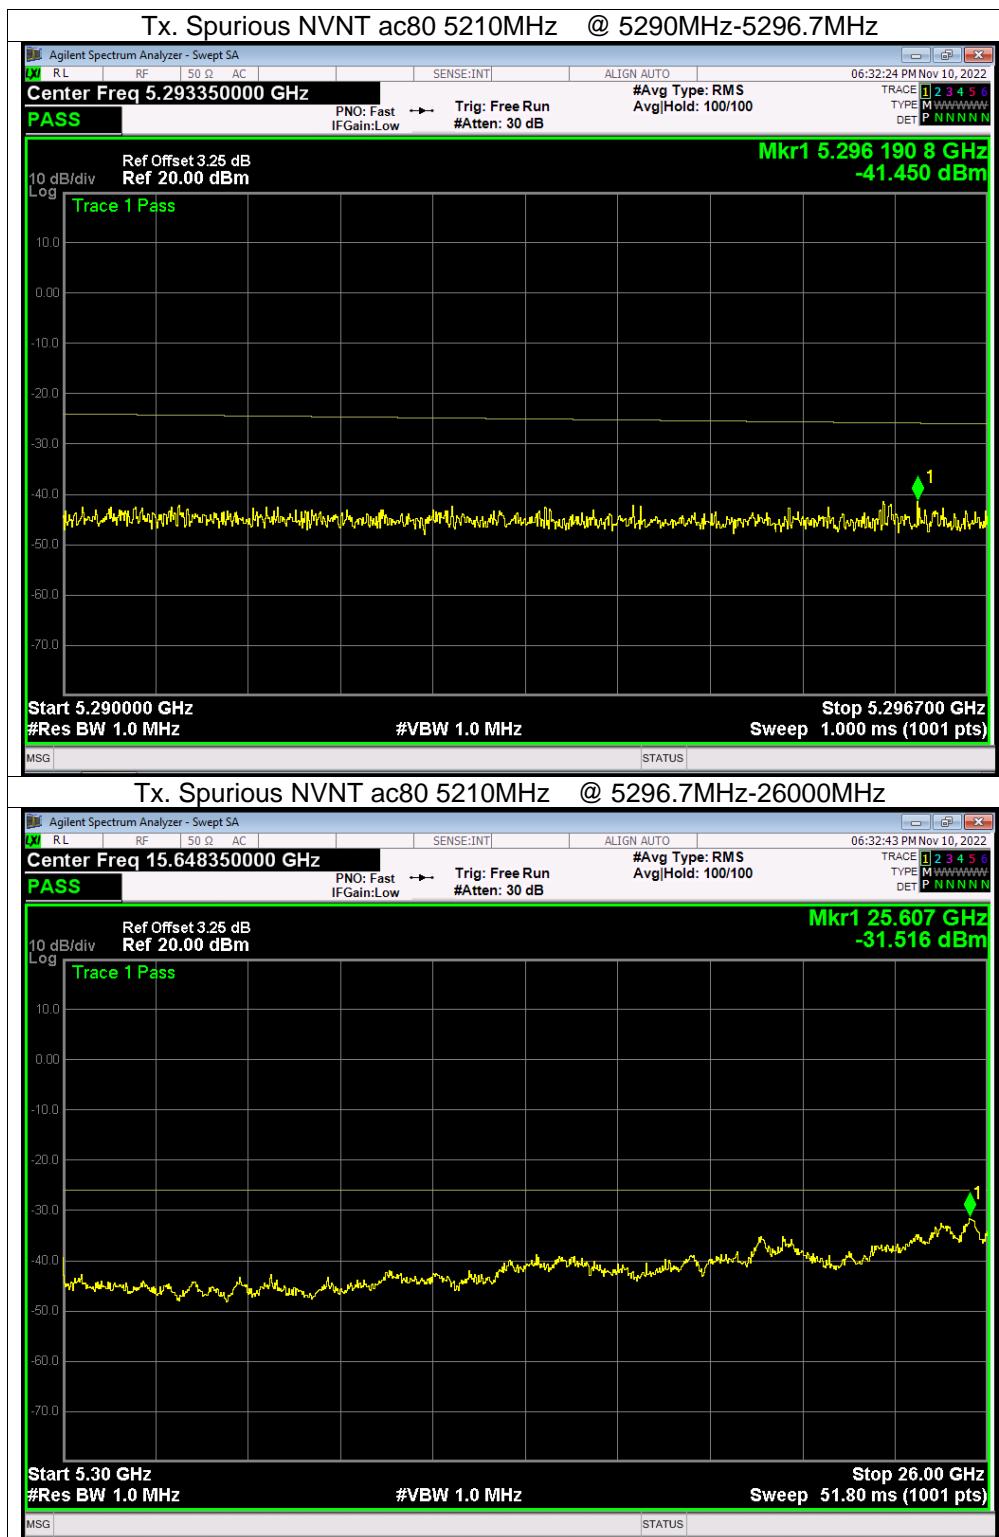

11. Secondary Radiated Emissions Measurement

11.1 Block Diagram Of Test Setup

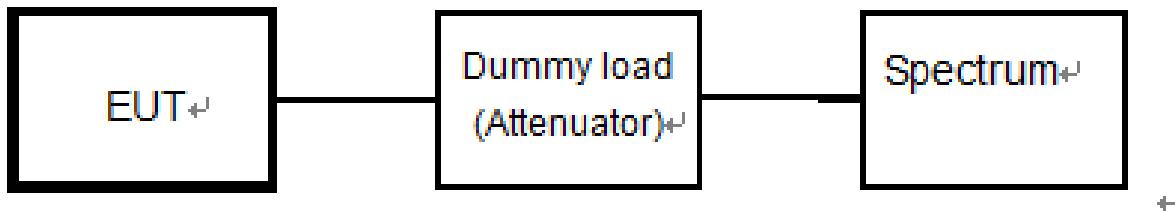

11.2 Limit

| Item | Limits |
|-----------------------|--|
| RX Spurious Emission: | $\leq 4\text{nW}$ (-54dBm) ($f < 1\text{GHz}$) |
| | $\leq 20\text{nW}$ (-47dBm) ($1\text{GHz} \leq f$) |

11.3 Measuring Instruments And Setting


Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.


| Spectrum Parameter | Setting |
|--------------------|--|
| Attenuation | Auto |
| RB | 100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions) |
| VB | 100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions) |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |


11.4 Test Procedure


1. EUT have the continuous reception mode and fixed only one channelize.
2. Setting of SA is following as RB / VB: 100 kHz (below 1GHz emissions) / 1 MHz (above 1GHz emissions) / AT: 6dB / Ref: -20dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
3. SA set RB: 100kHz and VB: 100kHz. Then adjust to start frequency 30MHz and stop frequency 1000MHz. Search to mark peak reading value + cable loss shall be less than 4nW
4. SA set RB: 1MHz and VB: 1MHz. Then adjust to start frequency 1000MHz and stop frequency 12500MHz. Search to mark peak reading value + cable loss shall be less than 20nW
5. If power level of lower emissions are more than 1/10 of limit (.0.4nW for $f < 1\text{GHz}$, 2nW for $f \geq 1\text{GHz}$), all those are to be indicated in the 2nd and 3rd lines. If others are 1/10 or less more of the limit, no necessary to be indicated.


11.5 Test Result

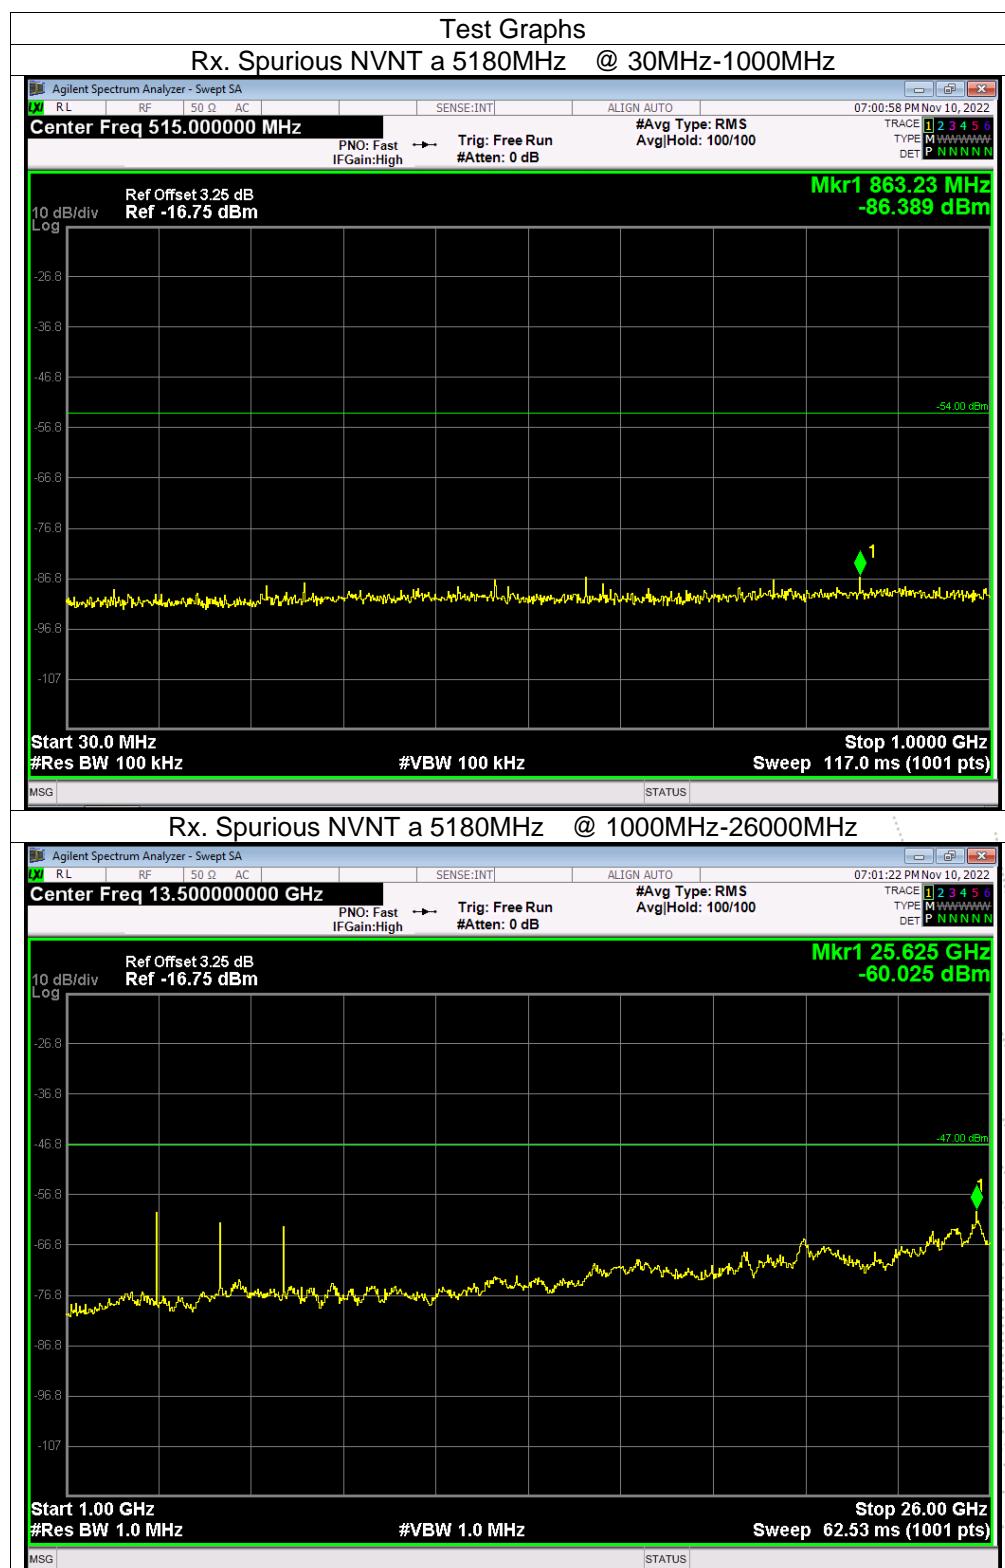


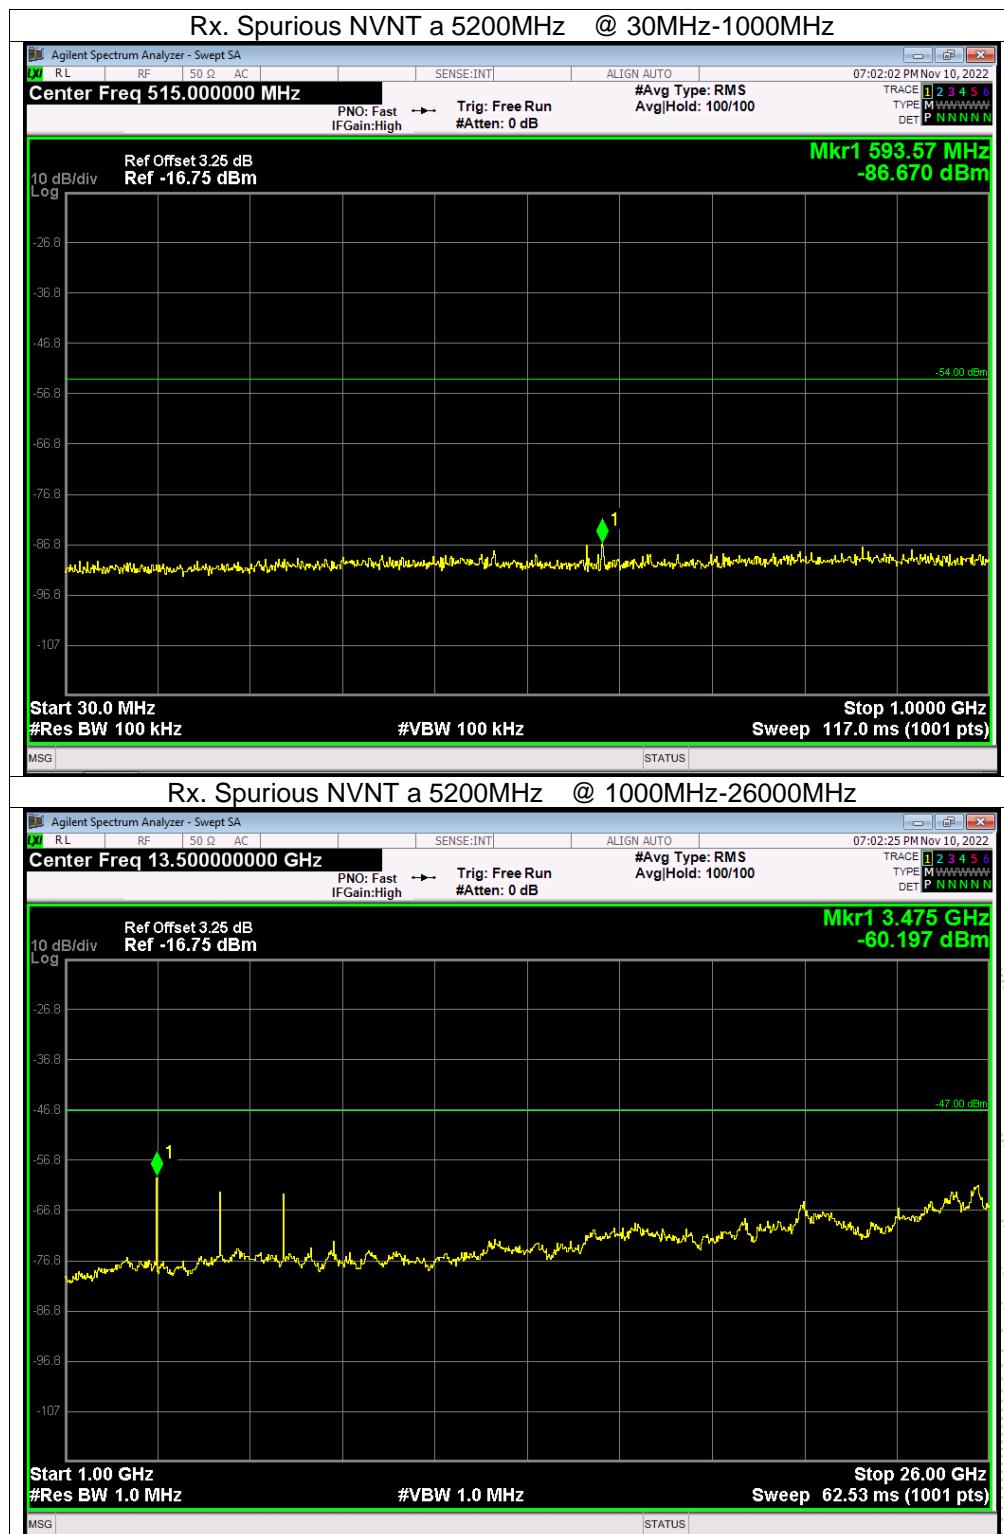

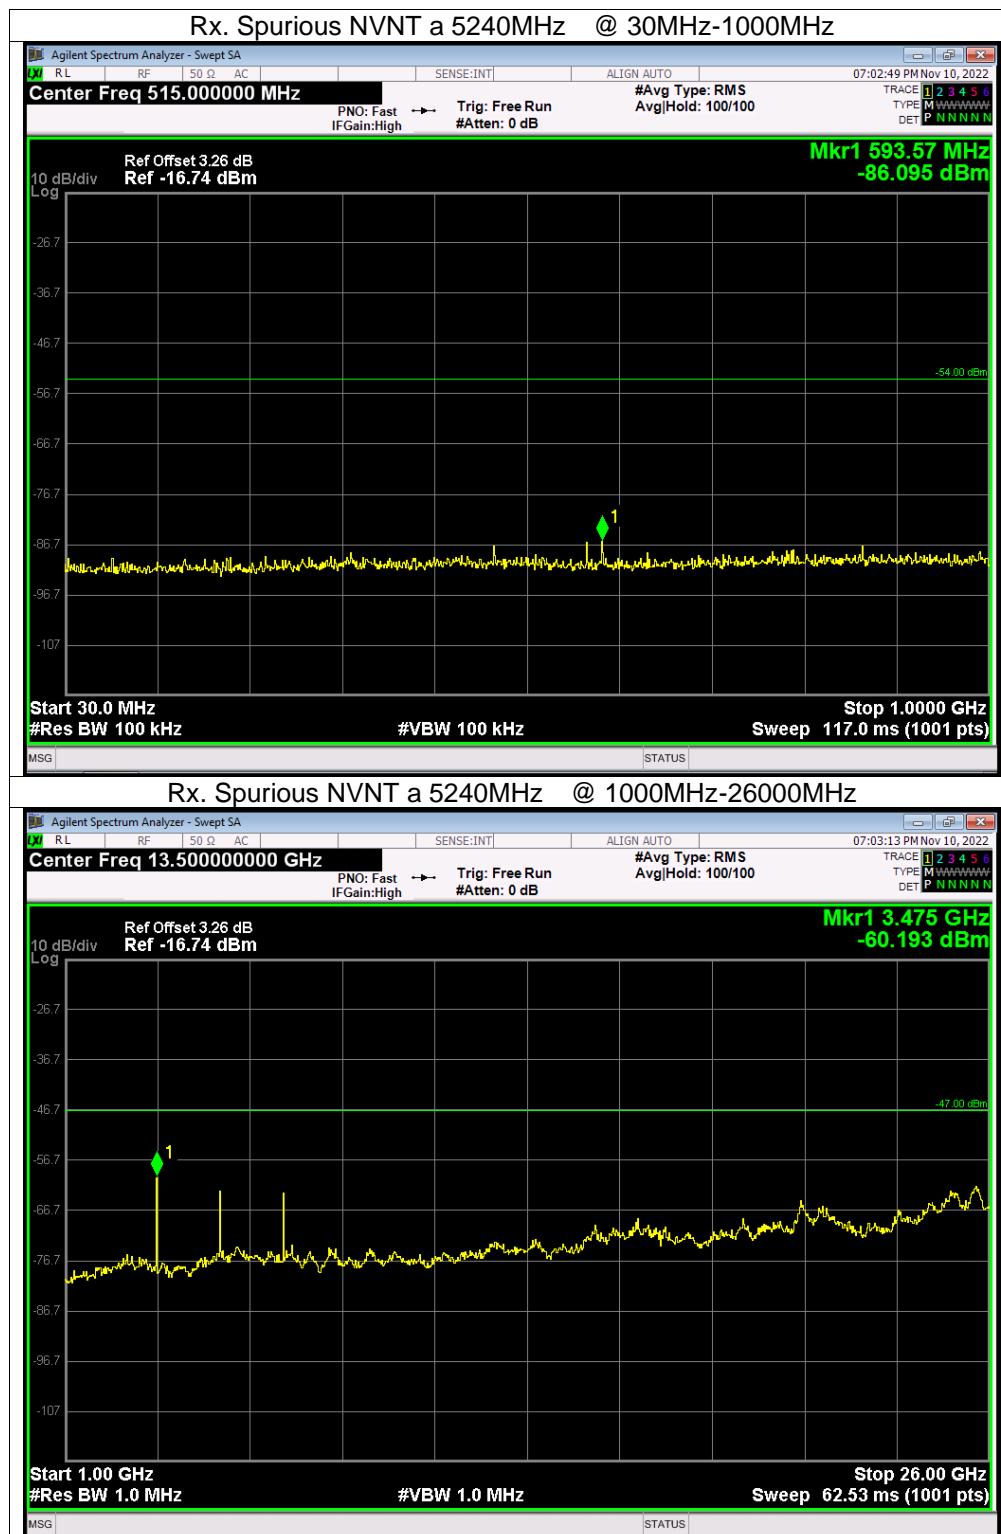

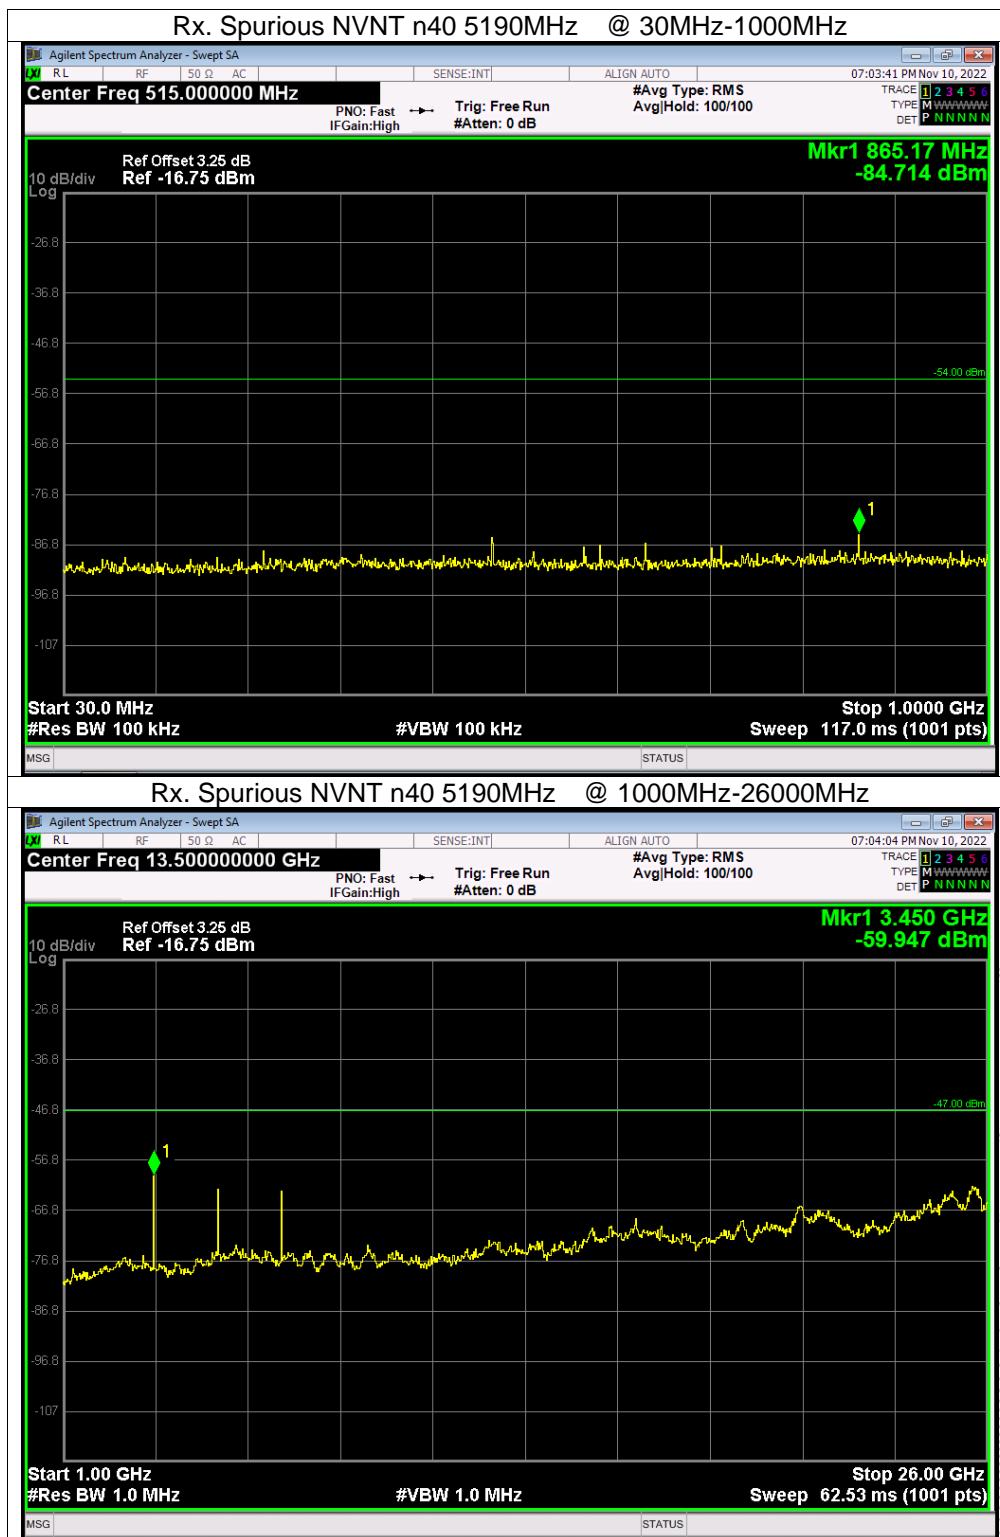


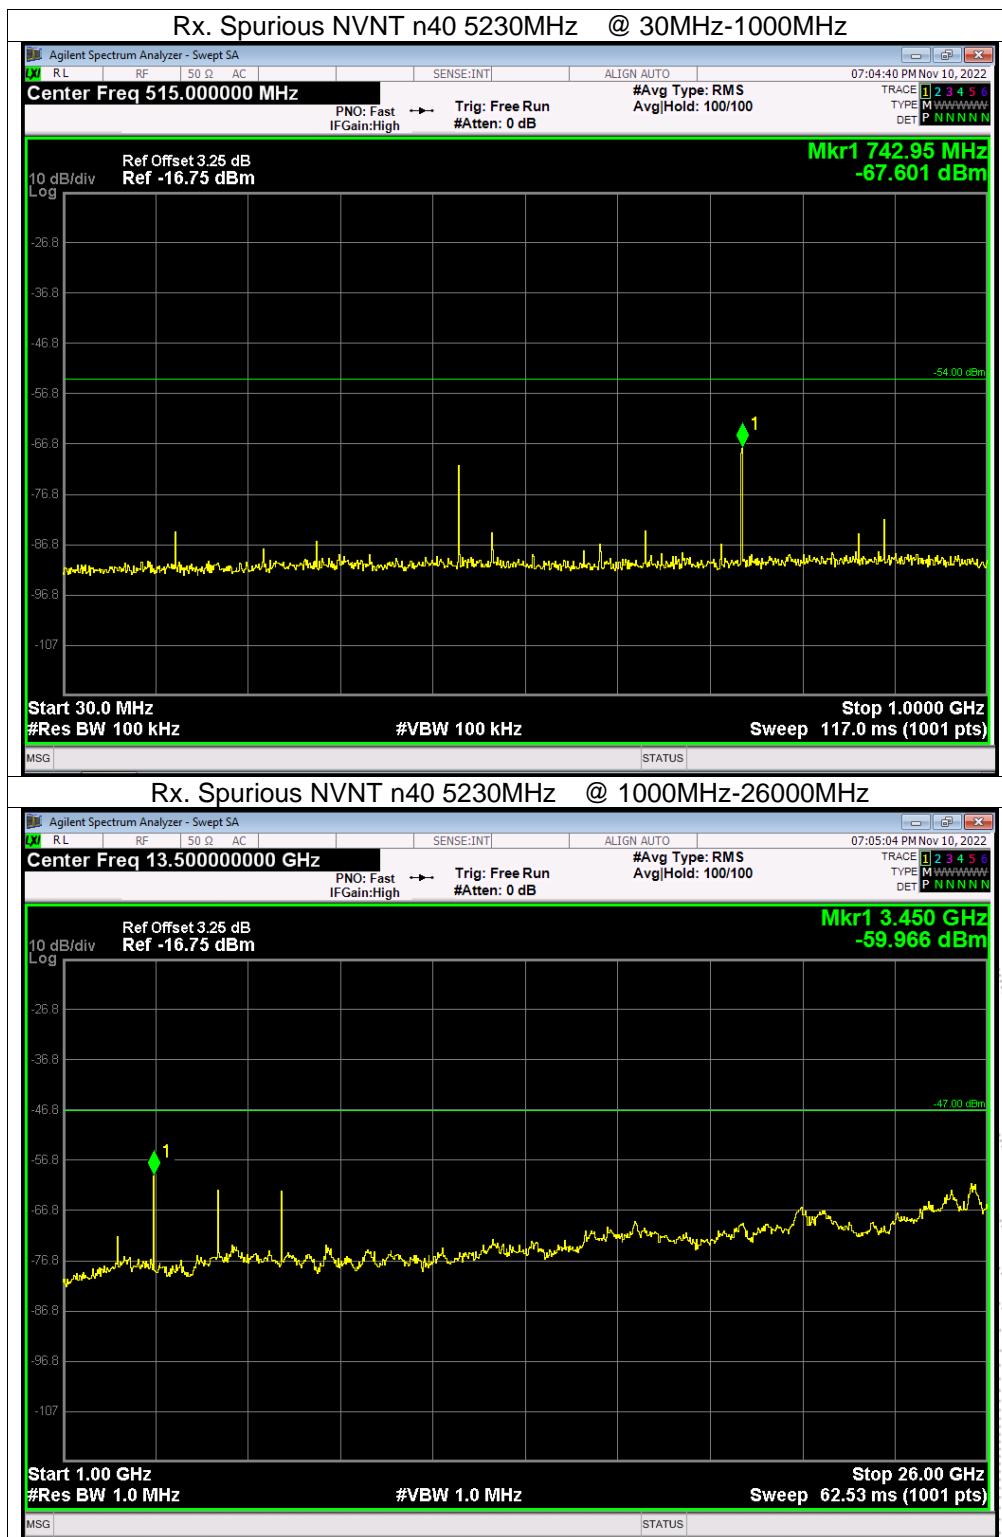

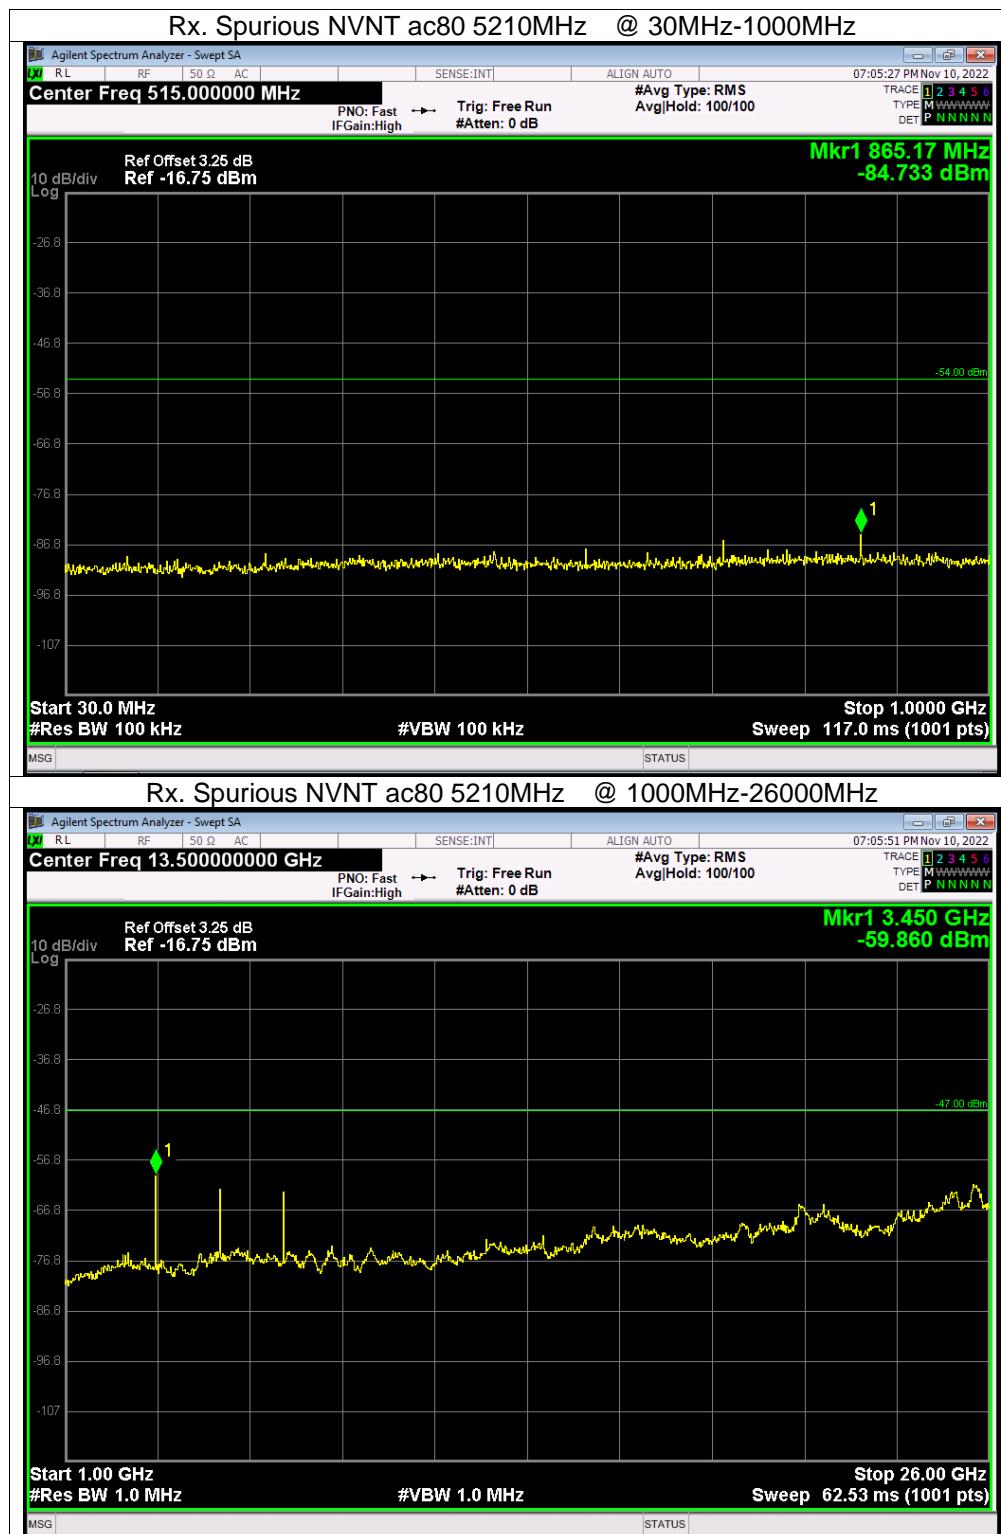

12. Transmitter Burst Length Measurement

12.1 Block Diagram Of Test Setup

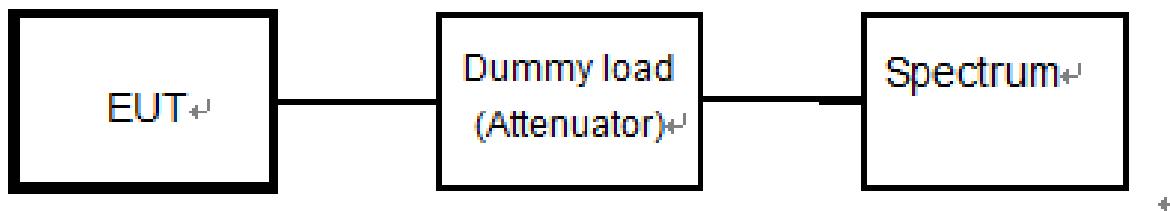

12.2 Limit

| Item | Limits |
|--------------------------|------------------------|
| Transmitter Burst Length | $\leq 8\text{msecond}$ |

12.3 Measuring Instruments And Setting


Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.


| Spectrum Parameter | Setting |
|----------------------|---|
| Center frequency | Test frequency |
| Sweep bandwidth | 0Hz |
| Resolvable bandwidth | 1MHz |
| Video bandwidth | equivalent to resolvable bandwidth |
| Sweep Time | Minimum time to assure measuring accuracy |
| Y-axis scale | 10dB/Div. |
| Detection mode | Positive peak |
| Trigger condition | Rising up of level |


12.4 Test Result


| Condition | Mode | Antenna | Burst Length (ms) | Limit (ms) | Verdict |
|-----------|------|---------|-------------------|------------|---------|
| NVNT | a | 5180 | 1.397 | 8 | Pass |
| NVNT | a | 5200 | 1.397 | 8 | Pass |
| NVNT | a | 5240 | 1.397 | 8 | Pass |
| NVNT | n20 | 5180 | 1.308 | 8 | Pass |
| NVNT | n20 | 5200 | 1.308 | 8 | Pass |
| NVNT | n20 | 5240 | 1.309 | 8 | Pass |
| NVNT | n40 | 5190 | 0.649 | 8 | Pass |
| NVNT | n40 | 5230 | 0.649 | 8 | Pass |
| NVNT | ac20 | 5180 | 1.317 | 8 | Pass |
| NVNT | ac20 | 5200 | 1.317 | 8 | Pass |
| NVNT | ac20 | 5240 | 1.317 | 8 | Pass |
| NVNT | ac40 | 5190 | 0.657 | 8 | Pass |
| NVNT | ac40 | 5230 | 0.657 | 8 | Pass |
| NVNT | ac80 | 5210 | 0.317 | 8 | Pass |




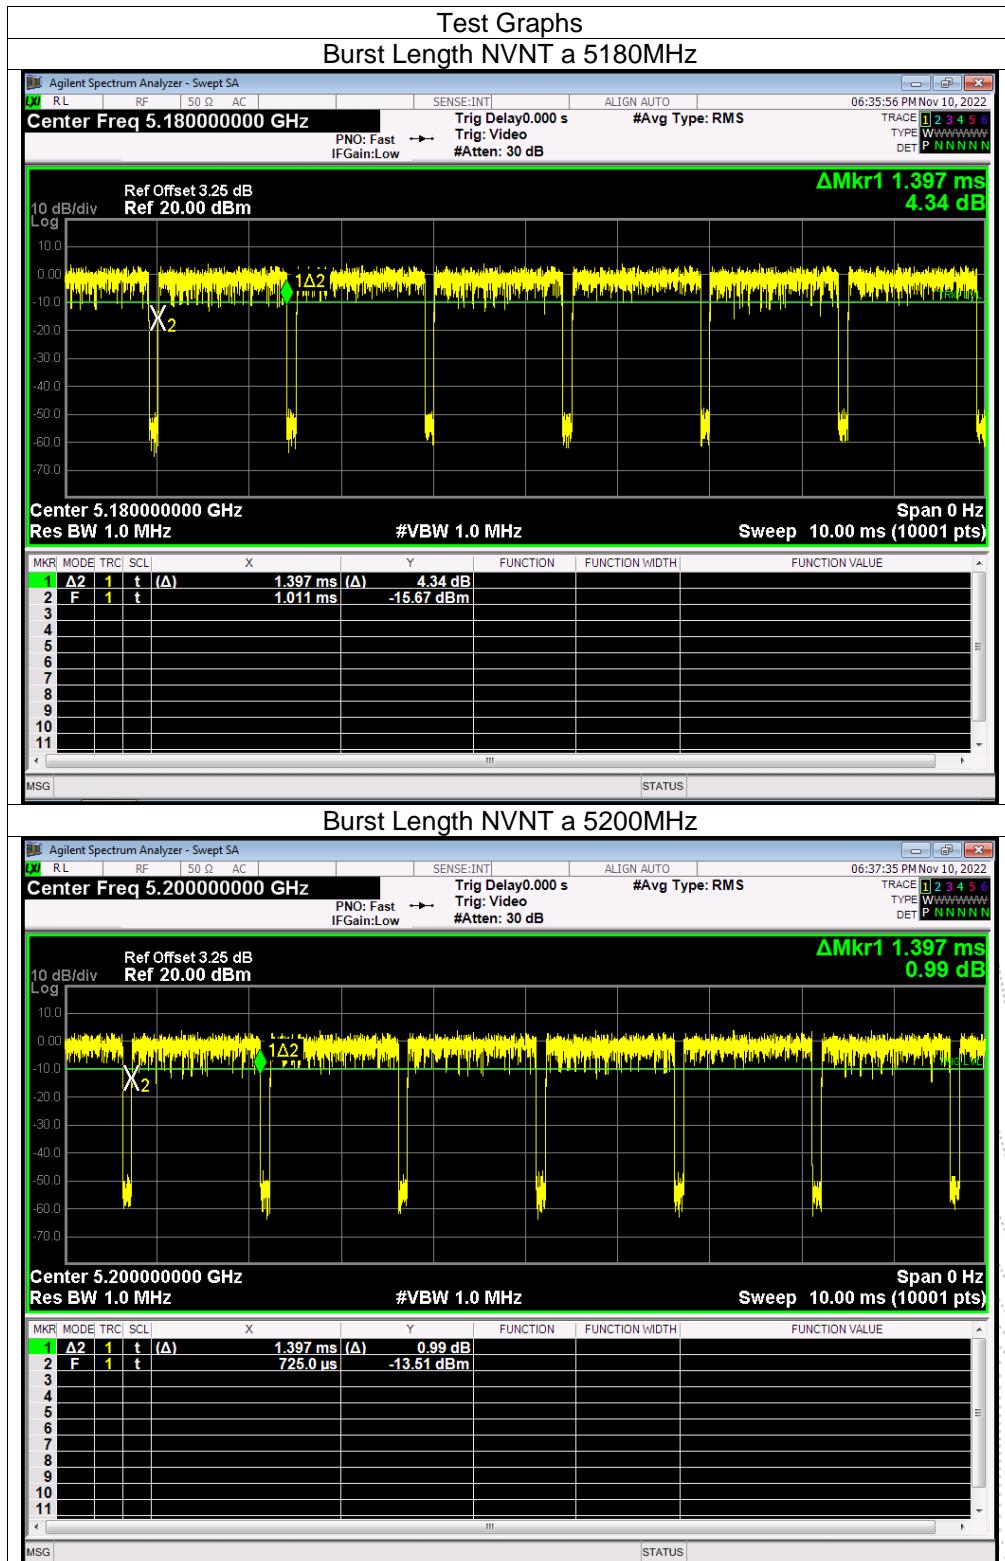


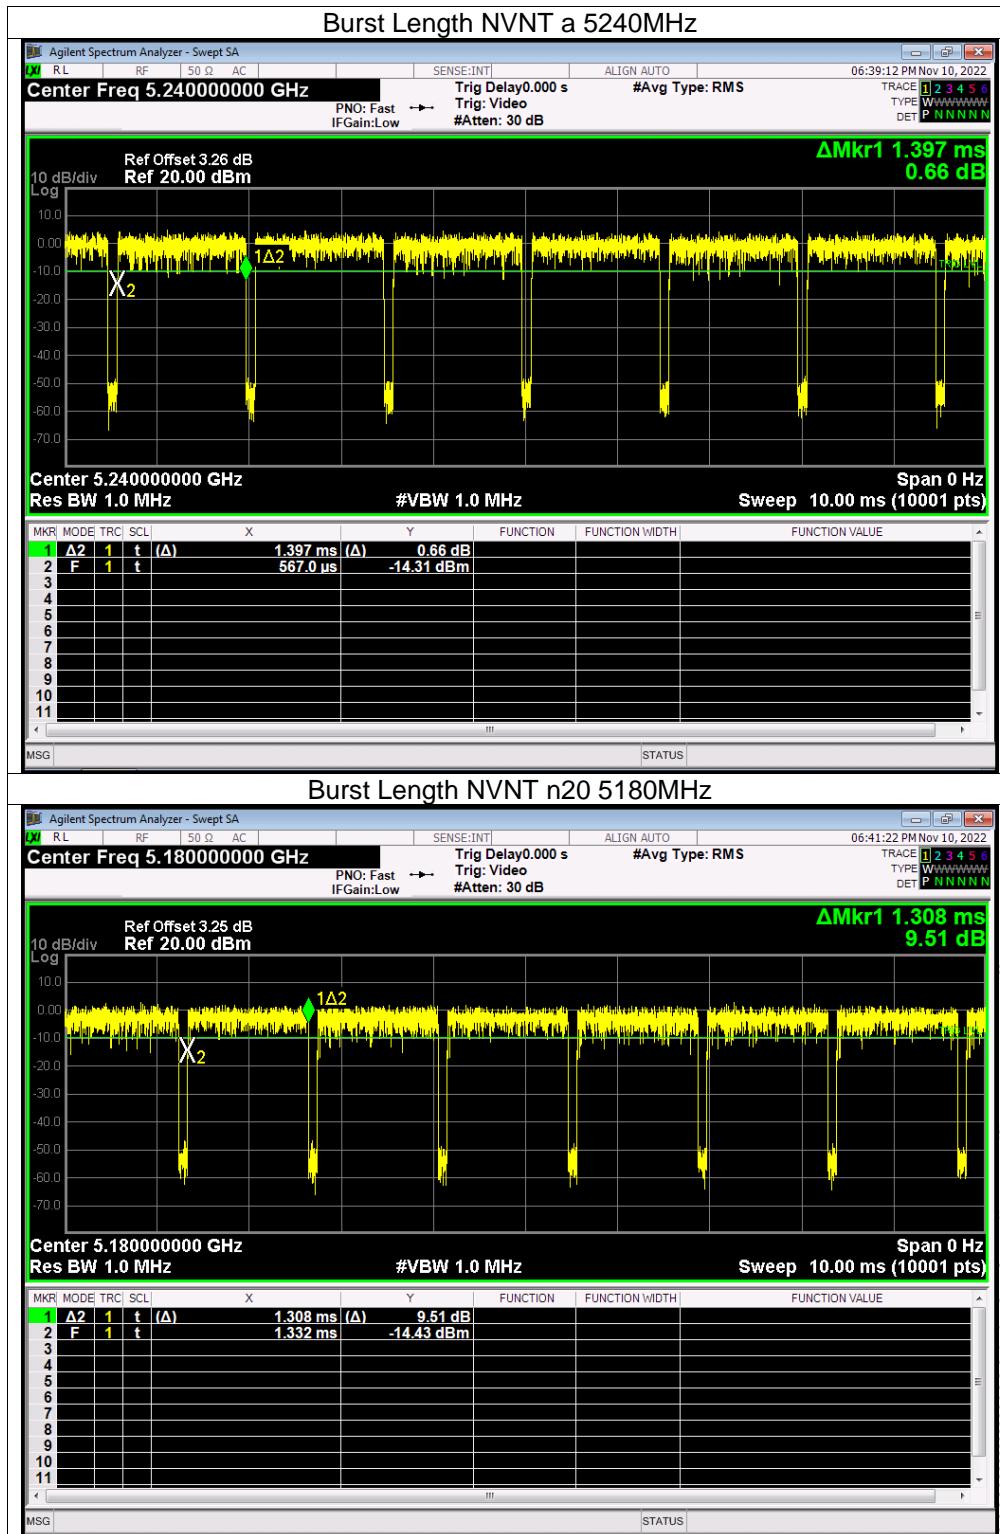


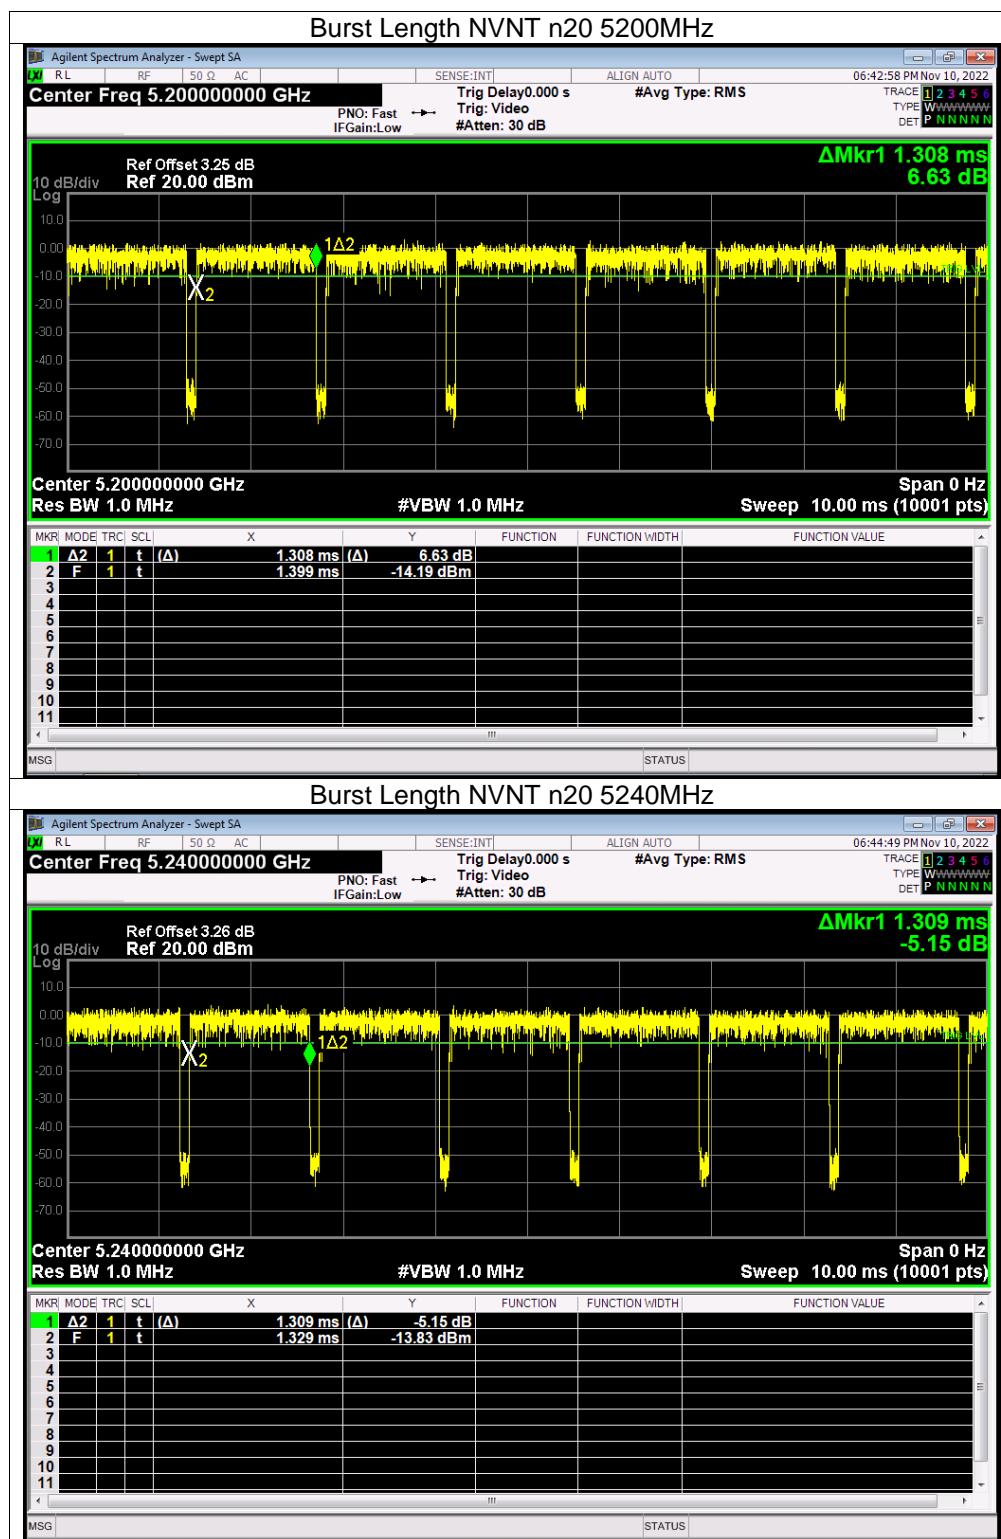

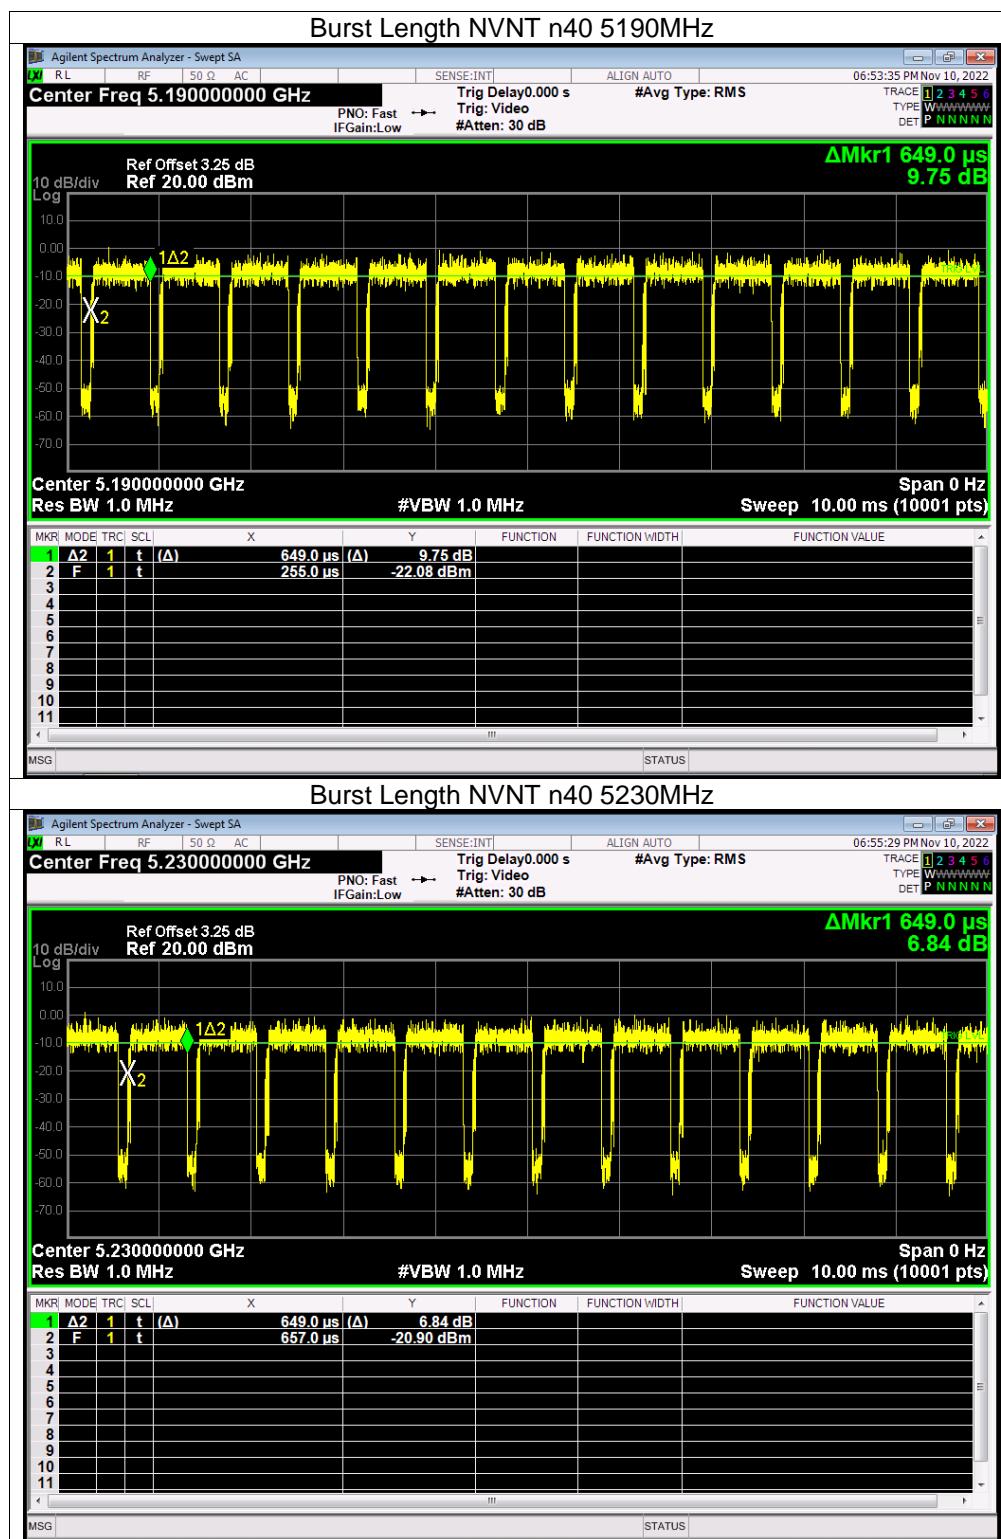


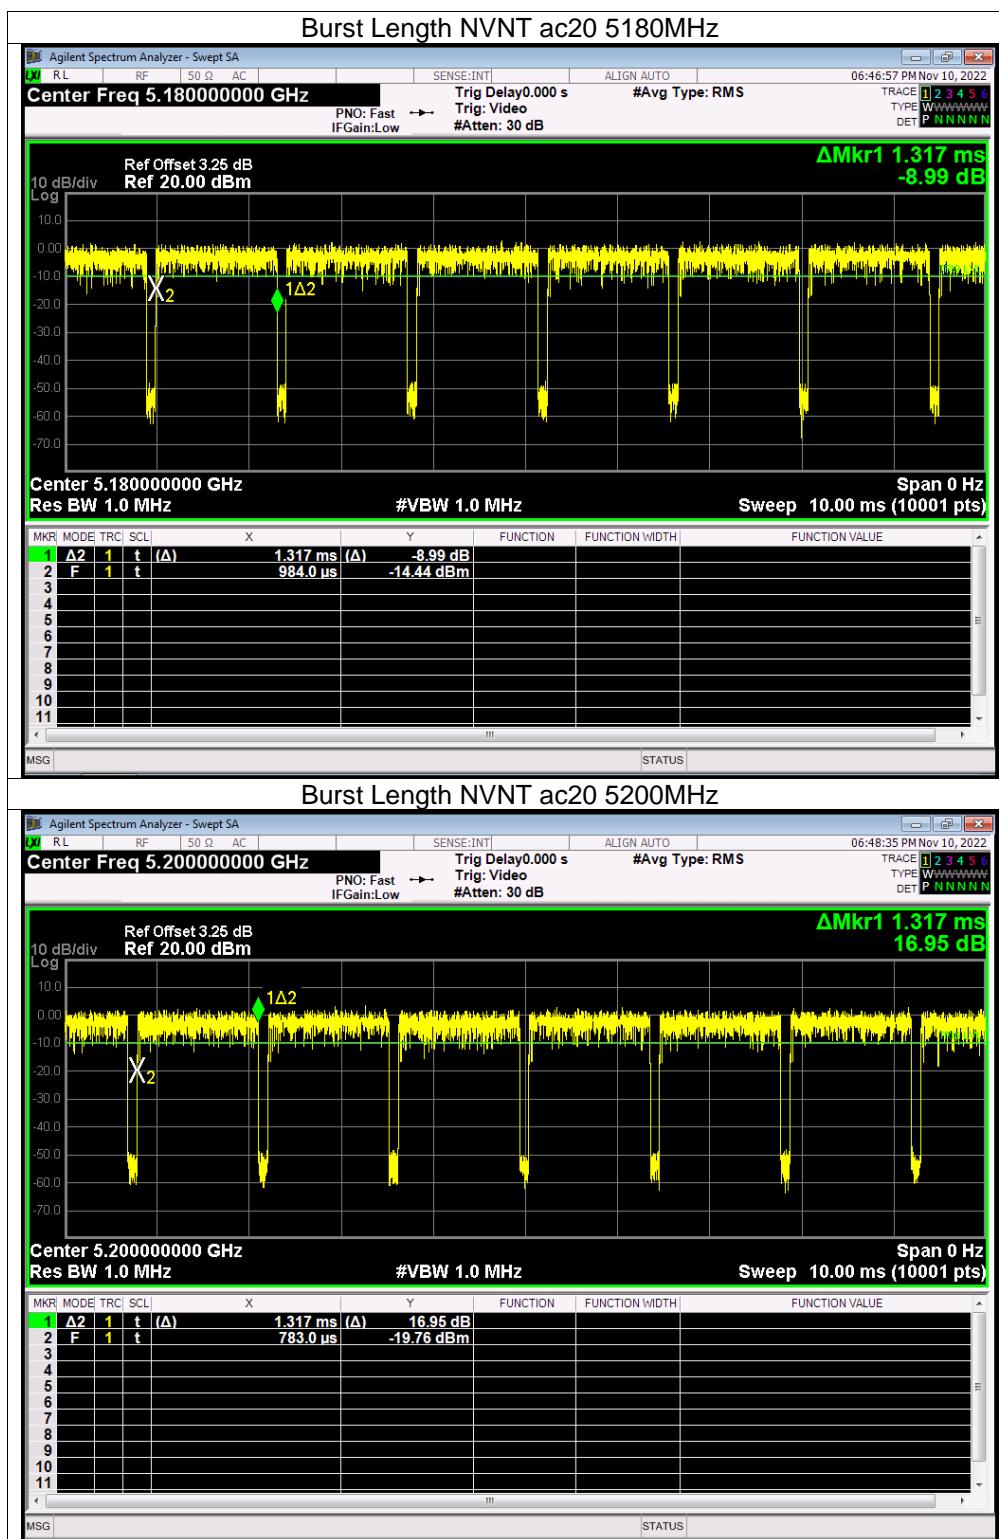

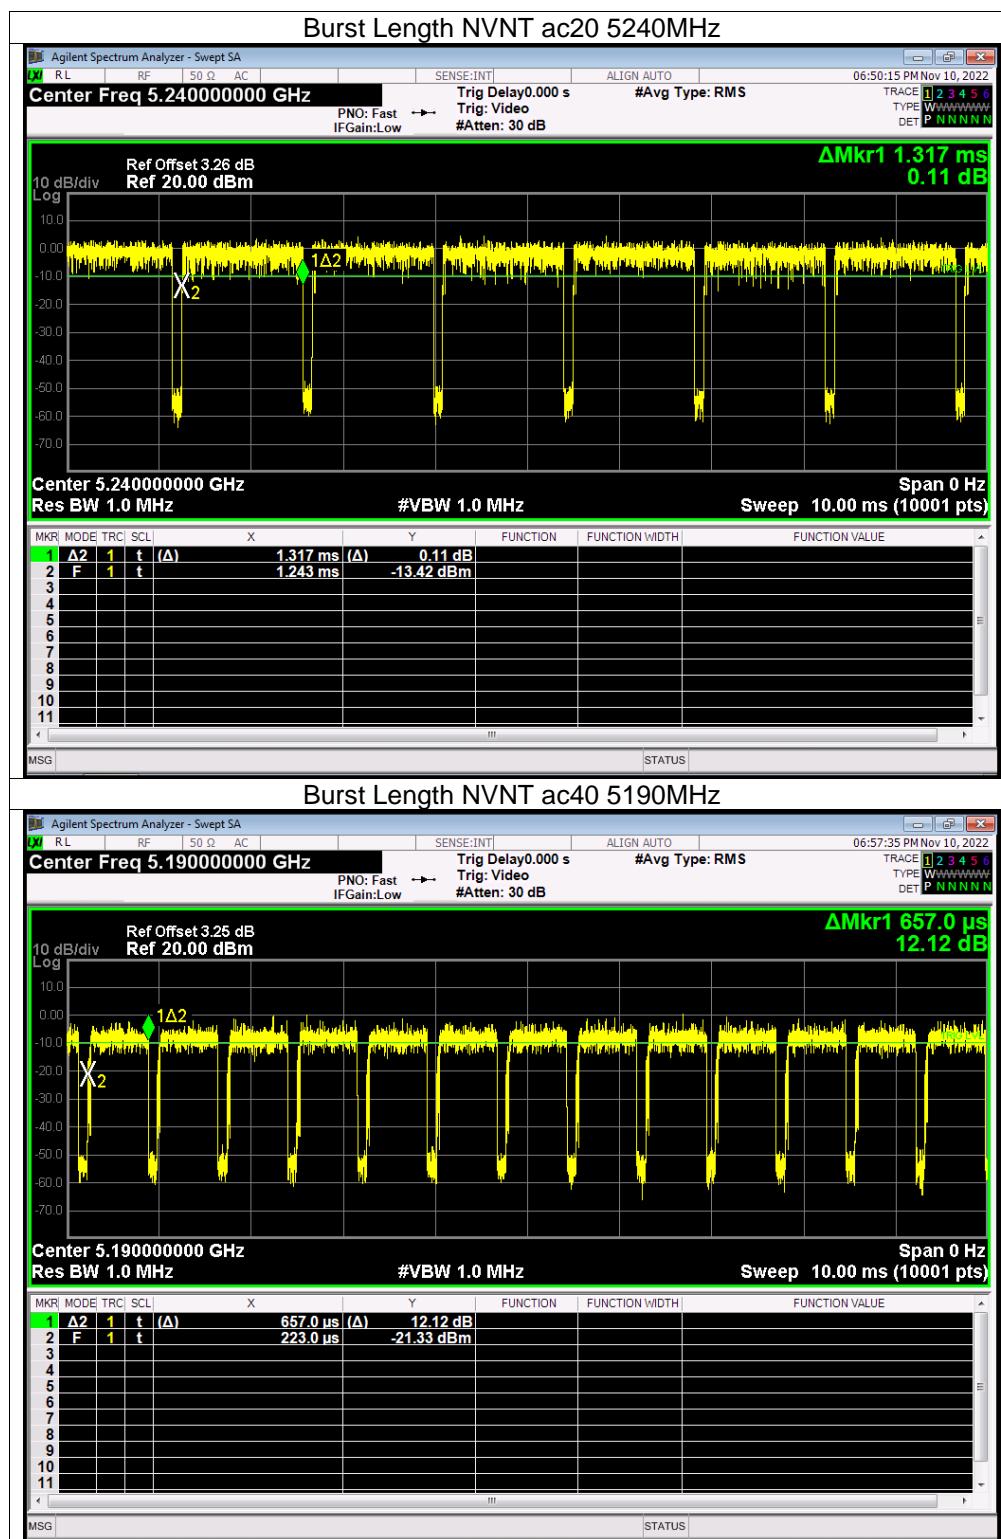

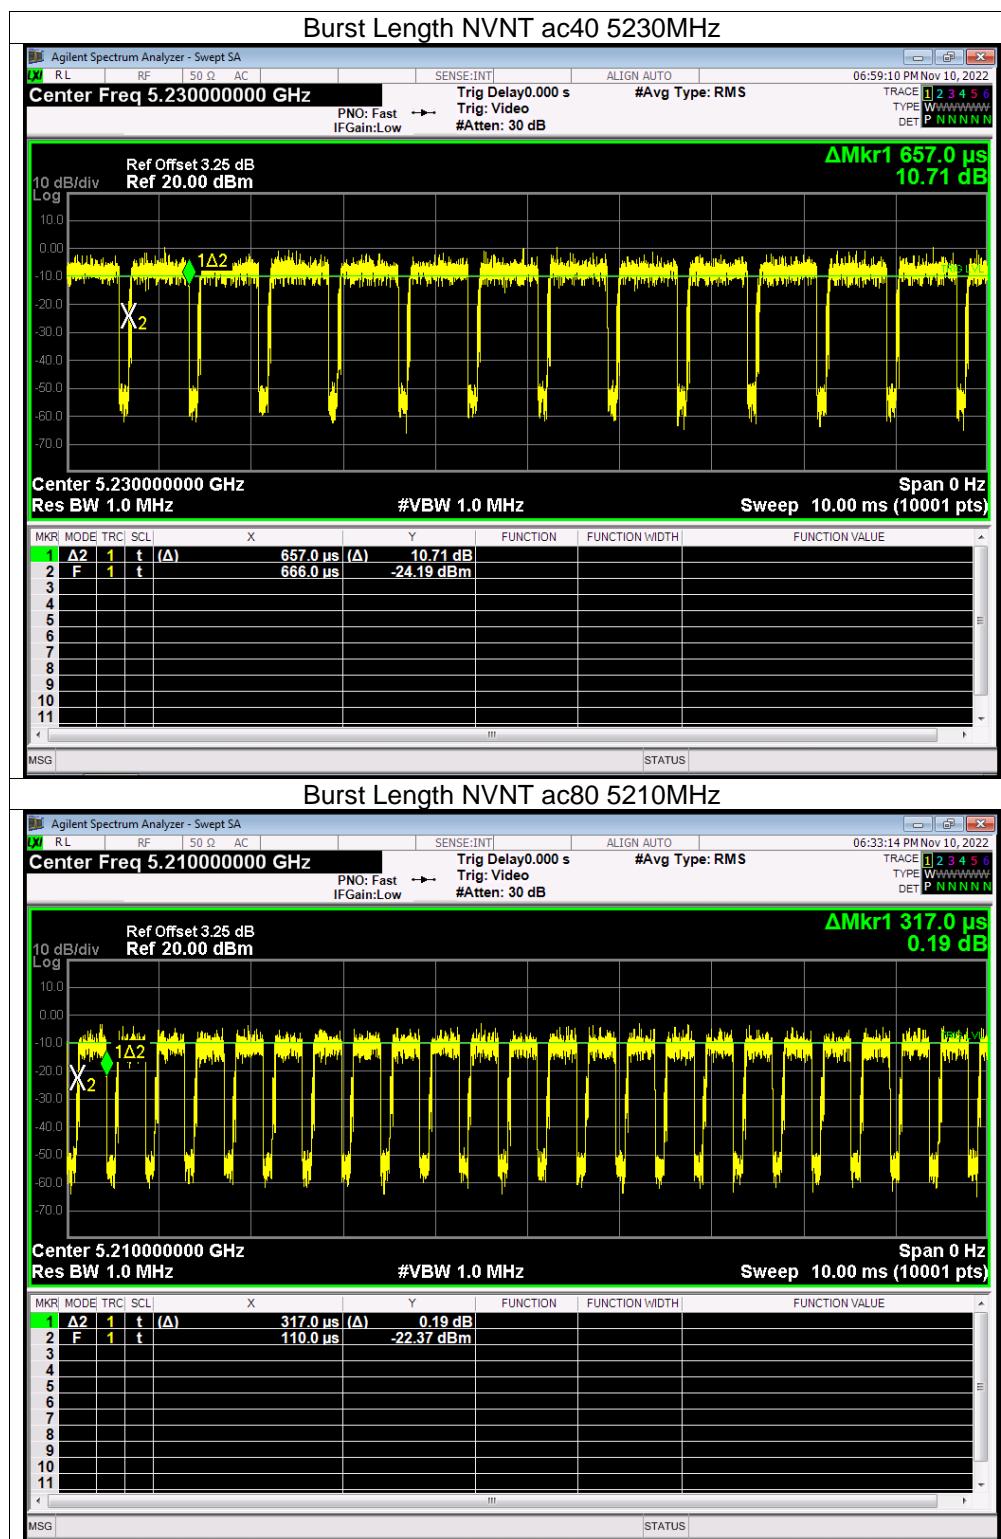


13. Interference Prevention Function Measurement
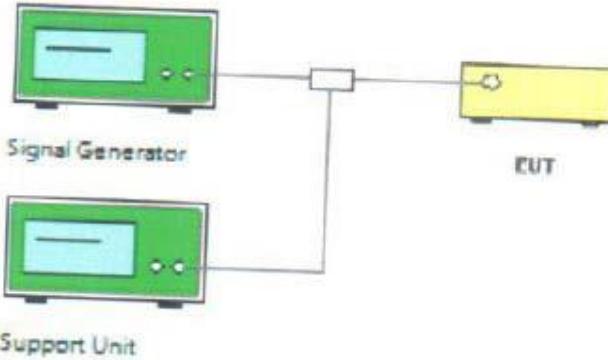
| | |
|-------------------|---|
| Test condition: | Test diffusion code and modulate with standard coding test signal |
| Test setup: |  |
| Test Procedures: | <ol style="list-style-type: none"> 1. The EUT continuous connected with support unit. 2. Signal generator transmitted interference signal to the EUT. 3. Check the EUT must be automatic cessation of transmitting |
| Test Instruments: | Refer to section 5.2 for details |
| Test results: | <p>Pass</p> <p>Transmitter: The transmitting mode (the identification code is more than 48 bits) of EUT is on normal operating, the interference prevention function is good.</p> <p>Receiver: The transmitting mode of EUT is on normal operating, the interference prevention function is good.</p> |
| Mac address: | BD:4E:E5:C8:65:27 |


14. Carrier Sense Capability Measurement

14.1 Block Diagram Of Test Setup

(1) Test performed with the radio equipment to be tested only

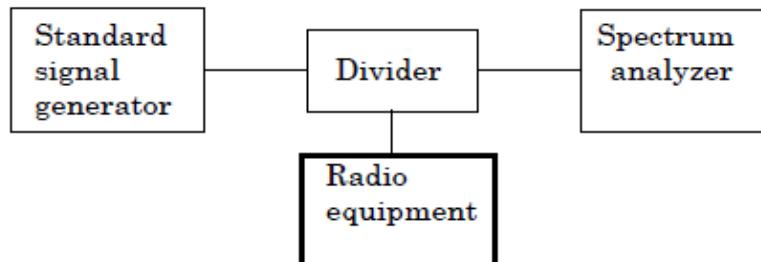

(2) Test performed using the external radio equipment

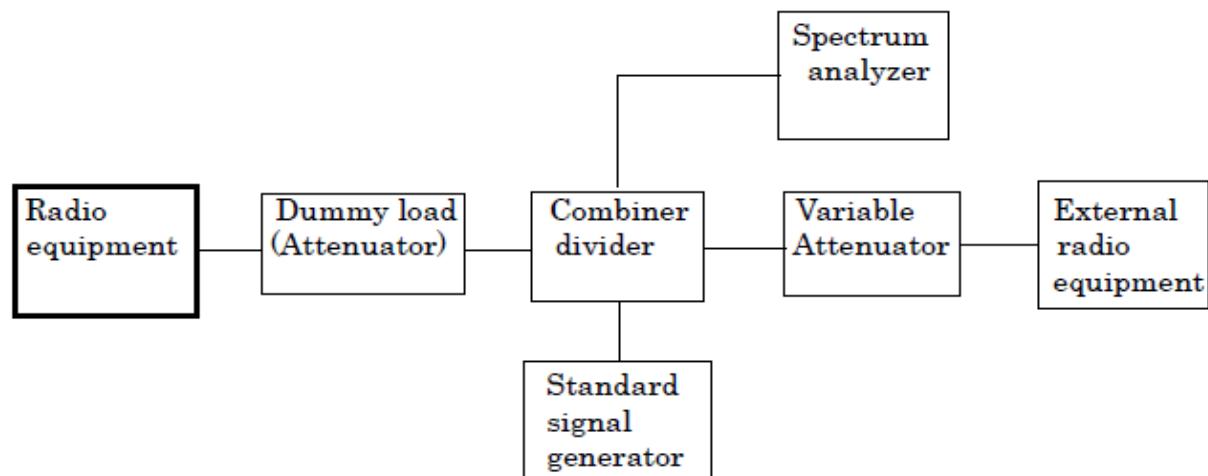

14.2 Limit

EUT stop RF transmission signal after carrier inject to EUT.

14.3 Test Procedure

(1) Test performed with the radio equipment to be tested only

- A. Set the standard signal generator in non-transmission condition and the radio equipment to be tested in transmission condition, and confirm transmission of radiowave by means of the spectrum analyzer.
- B. Set the radio equipment to be tested in receiving condition.
- C. Set the standard signal generator in transmission condition and the radio equipment to be tested in transmission condition, and confirm non-transmission of radiowave by means of the spectrum analyzer.

(2) Test performed using the external radio equipment

- A. Set the standard signal generator in non-transmission condition.
- B. Connect the radio equipment to be tested with the external equipment by means of the line and confirm transmission of radiowave of test frequency by means of the spectrum analyzer.
- C. Set the radio equipment to be tested in receiving condition.
- D. Set the standard signal generator in transmission condition and the radio equipment to be tested in transmission condition, and confirm non-transmission of radiowave by means of the spectrum analyzer.

Note: SG adjusted the frequency as same as the EUT transmitted signal and emitted the absence of modulation from SG and power level is (on $22.79+G-20\log(f)\text{dBm}$) (G is the antenna gain, f is the test frequency).

14.5 Test Result


(1) RESULT

| Mode | Channel | Result | | |
|-------------|---------|----------------|--------------|-------------|
| | | Normal Voltage | High Voltage | Low Voltage |
| 802.11a | CH36 | Pass | Pass | Pass |
| | CH40 | Pass | Pass | Pass |
| | CH48 | Pass | Pass | Pass |
| 802.11n20 | CH36 | Pass | Pass | Pass |
| | CH40 | Pass | Pass | Pass |
| | CH48 | Pass | Pass | Pass |
| 802.11n40 | CH38 | Pass | Pass | Pass |
| | CH46 | Pass | Pass | Pass |
| 802.11ac20 | CH36 | Pass | Pass | Pass |
| | CH40 | Pass | Pass | Pass |
| | CH48 | Pass | Pass | Pass |
| 802.11nac40 | CH38 | Pass | Pass | Pass |
| | CH46 | Pass | Pass | Pass |
| 802.11ac80 | CH42 | Pass | Pass | Pass |

Result:OK

15. Adjacent Channel Emitted Power Measurement

15.1 Block Diagram Of Test Setup

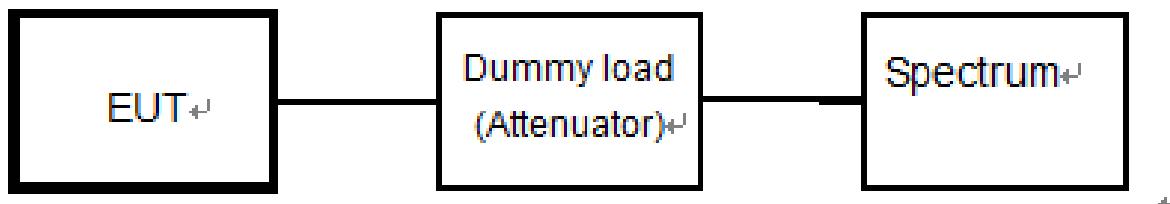

15.2 Limit


| 802.11a | 802.11n20/ac20 |
|--|--|
| Fc ± 20MHz ±9MHz BW : -25dBc Fc ± 40MHz ±9MHz BW : -40dBc | Fc ± 20MHz ±9.5MHz BW : -25dBc Fc ± 40MHz ±9.5MHz BW : -40dBc |
| 802.11n40/ac40 | 802.11ac80 |
| Fc ± 40MHz ±19MHz BW : -25dBc Fc ± 80MHz ±19MHz BW : -40dBc | Fc ± 80MHz ±39MHz BW : -20dBc |


15.3 Measuring Instruments And Setting


Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.


| Spectrum Parameter | Setting |
|-----------------------|---|
| Center frequency | Frequency indicated in the test procedure |
| Sweep frequency width | 120MHz(20MHz system); 240MHz(40MHz system); 480MHz(80MHz system); |
| Resolvable bandwidth | 300kHz |
| Video bandwidth | 300kHz |
| Y-axis scale | 10dB/Div. |
| Input level | Value to be maximum dynamic range |
| Data points | More than 400 points |
| Sweep mode | Continuous sweep |
| Detection mode | Sample (Positive peak in case of burst wave) |


15.4 Test Result

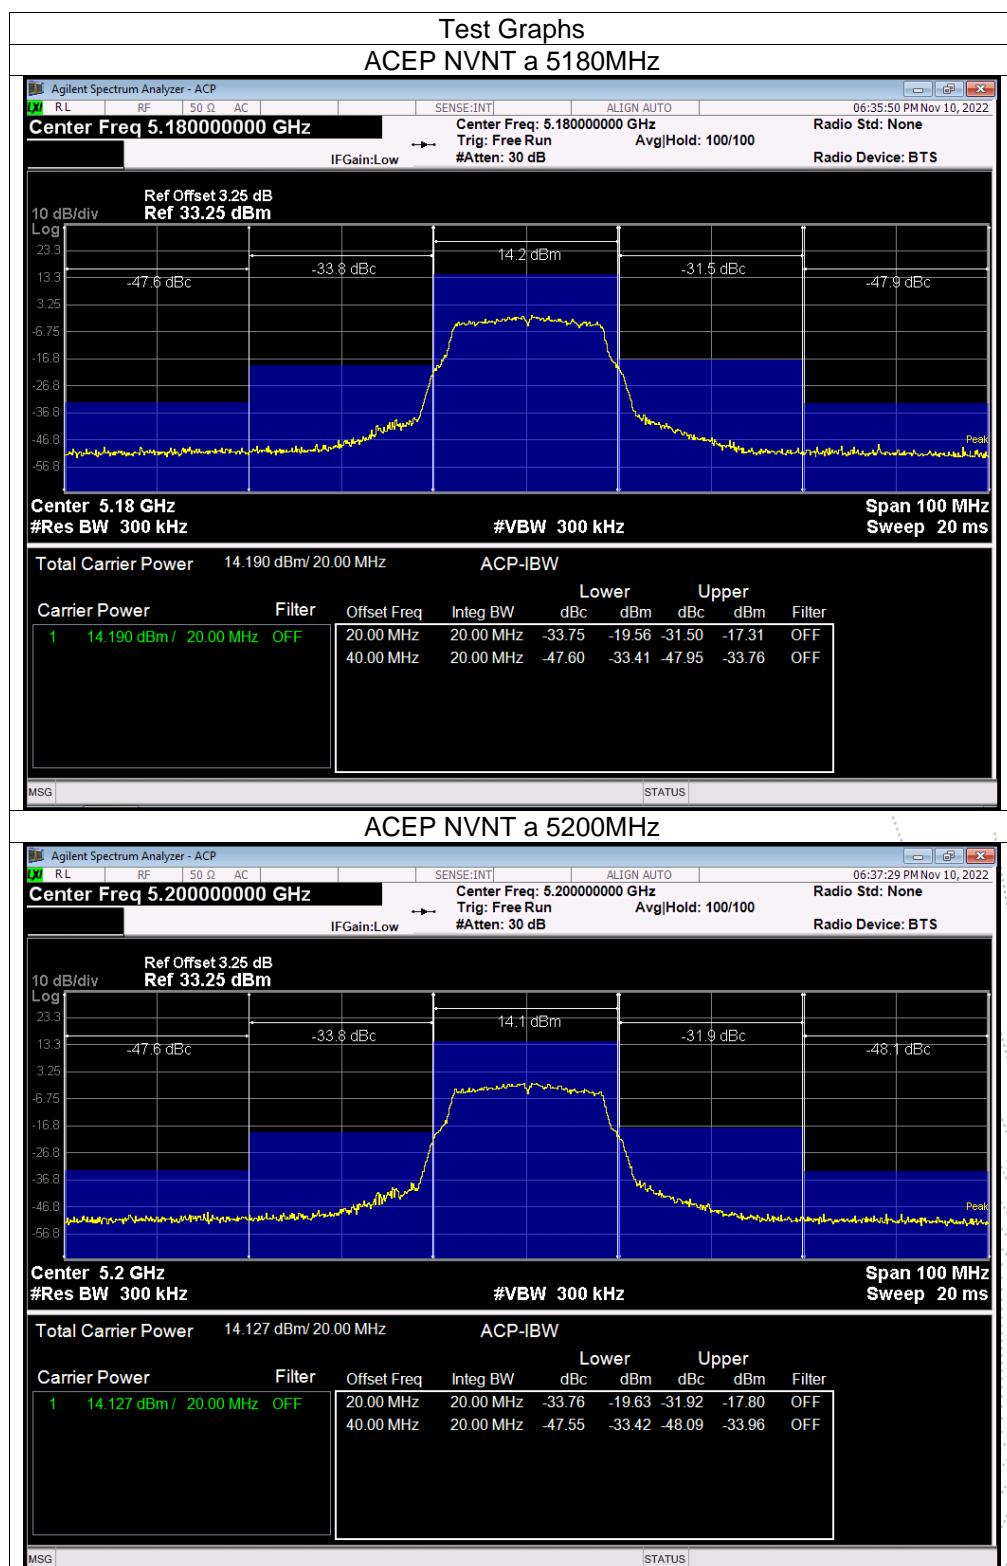


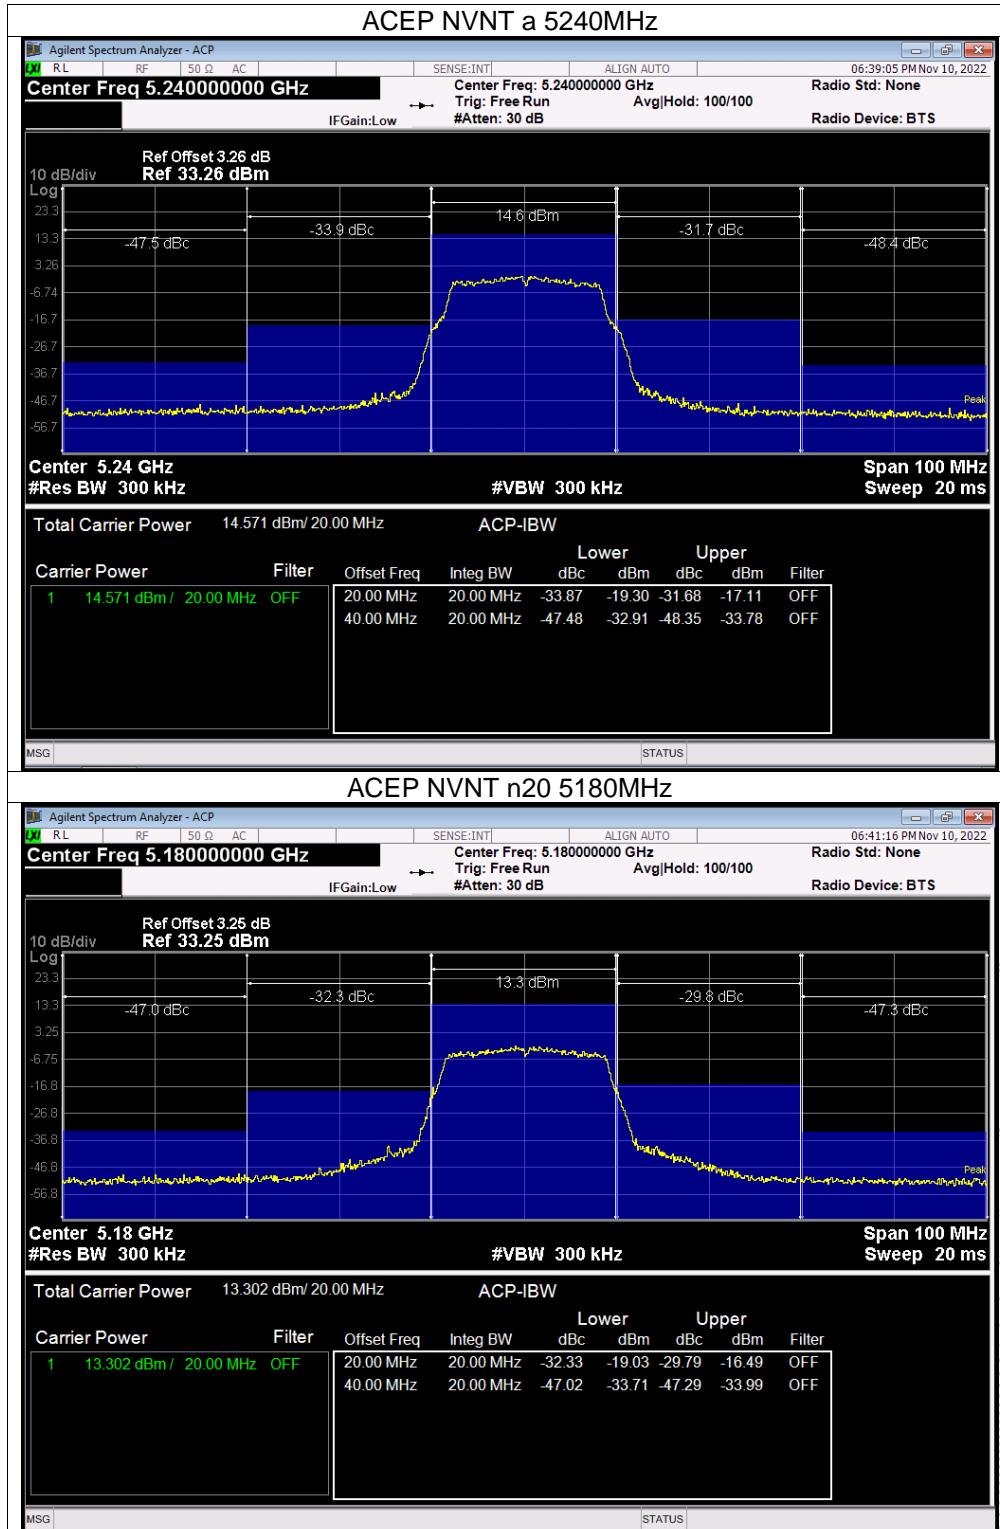


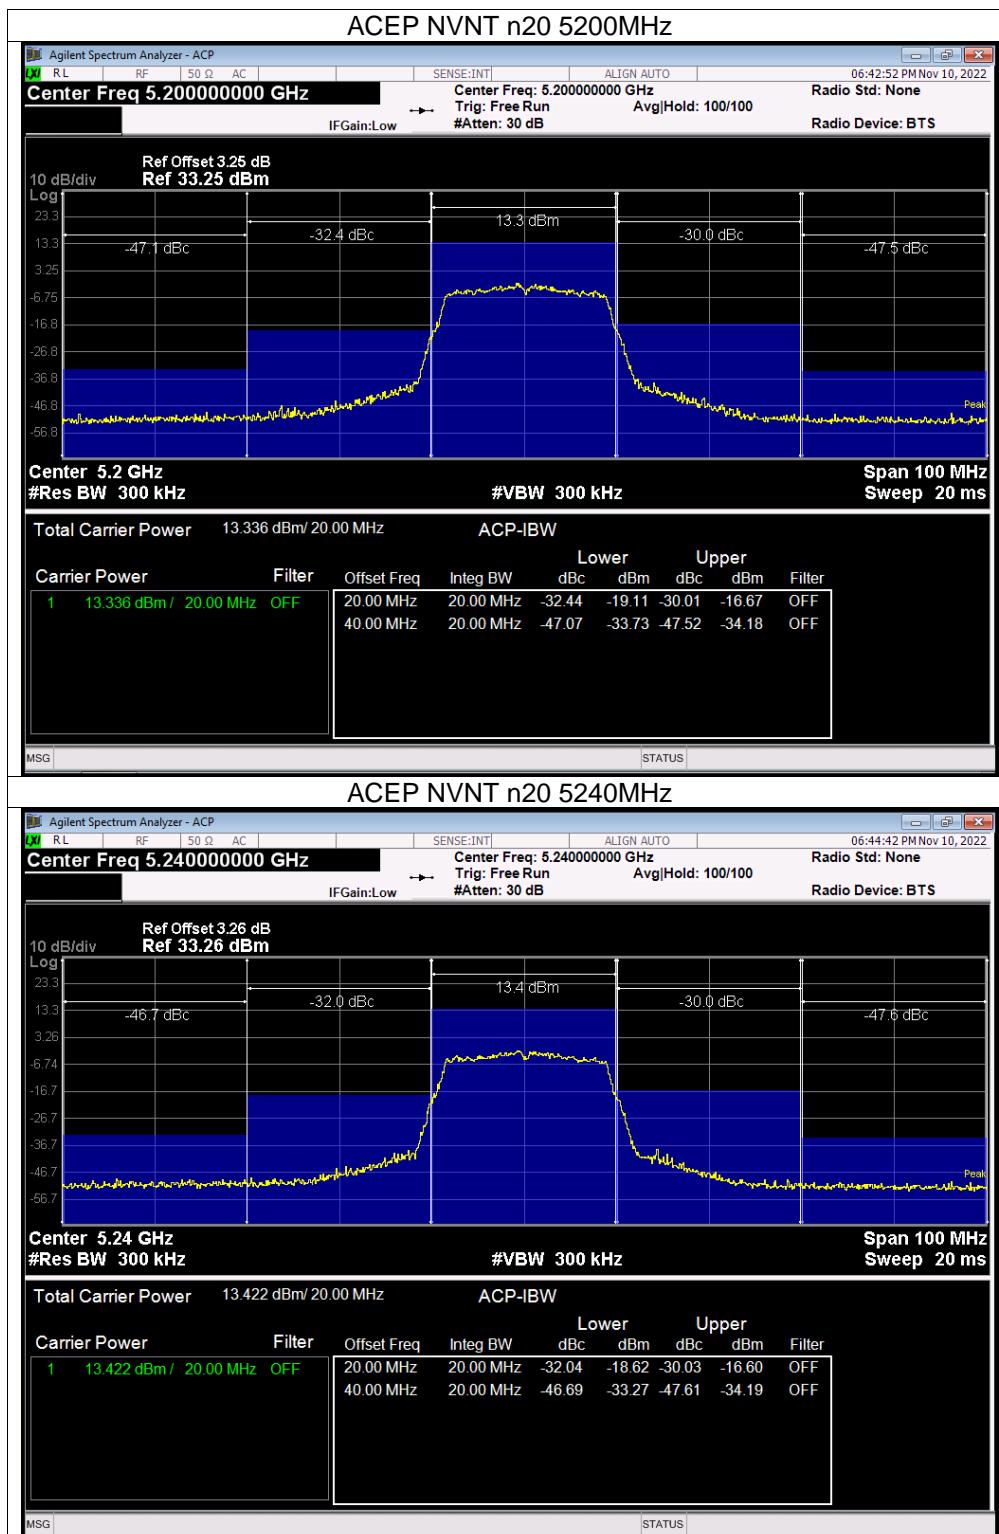

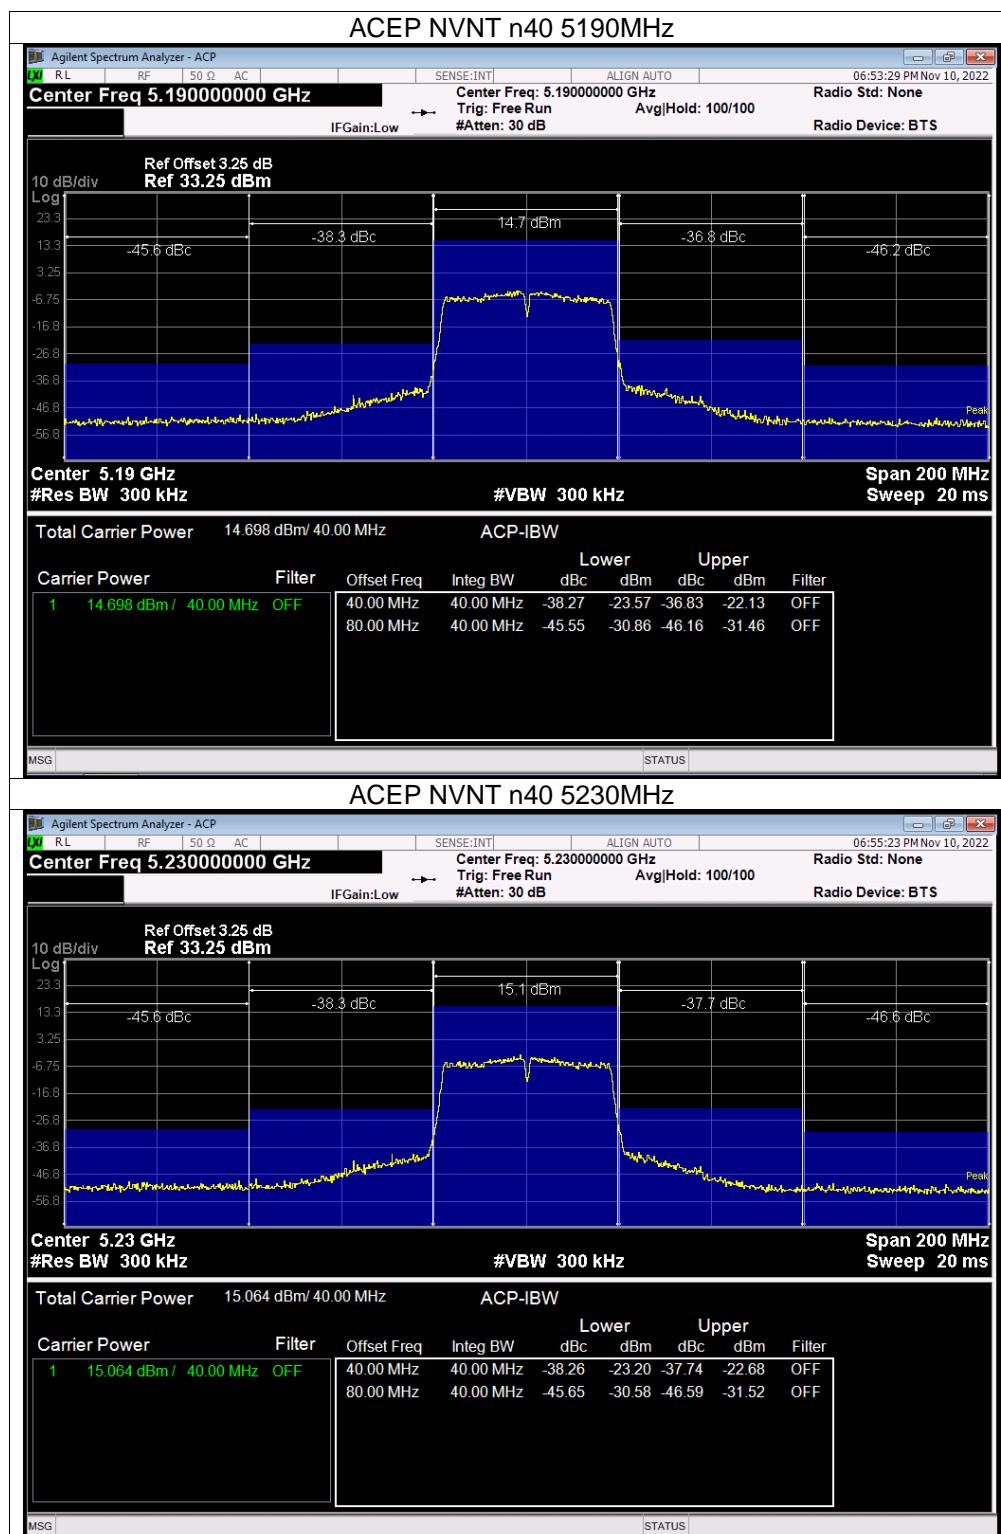

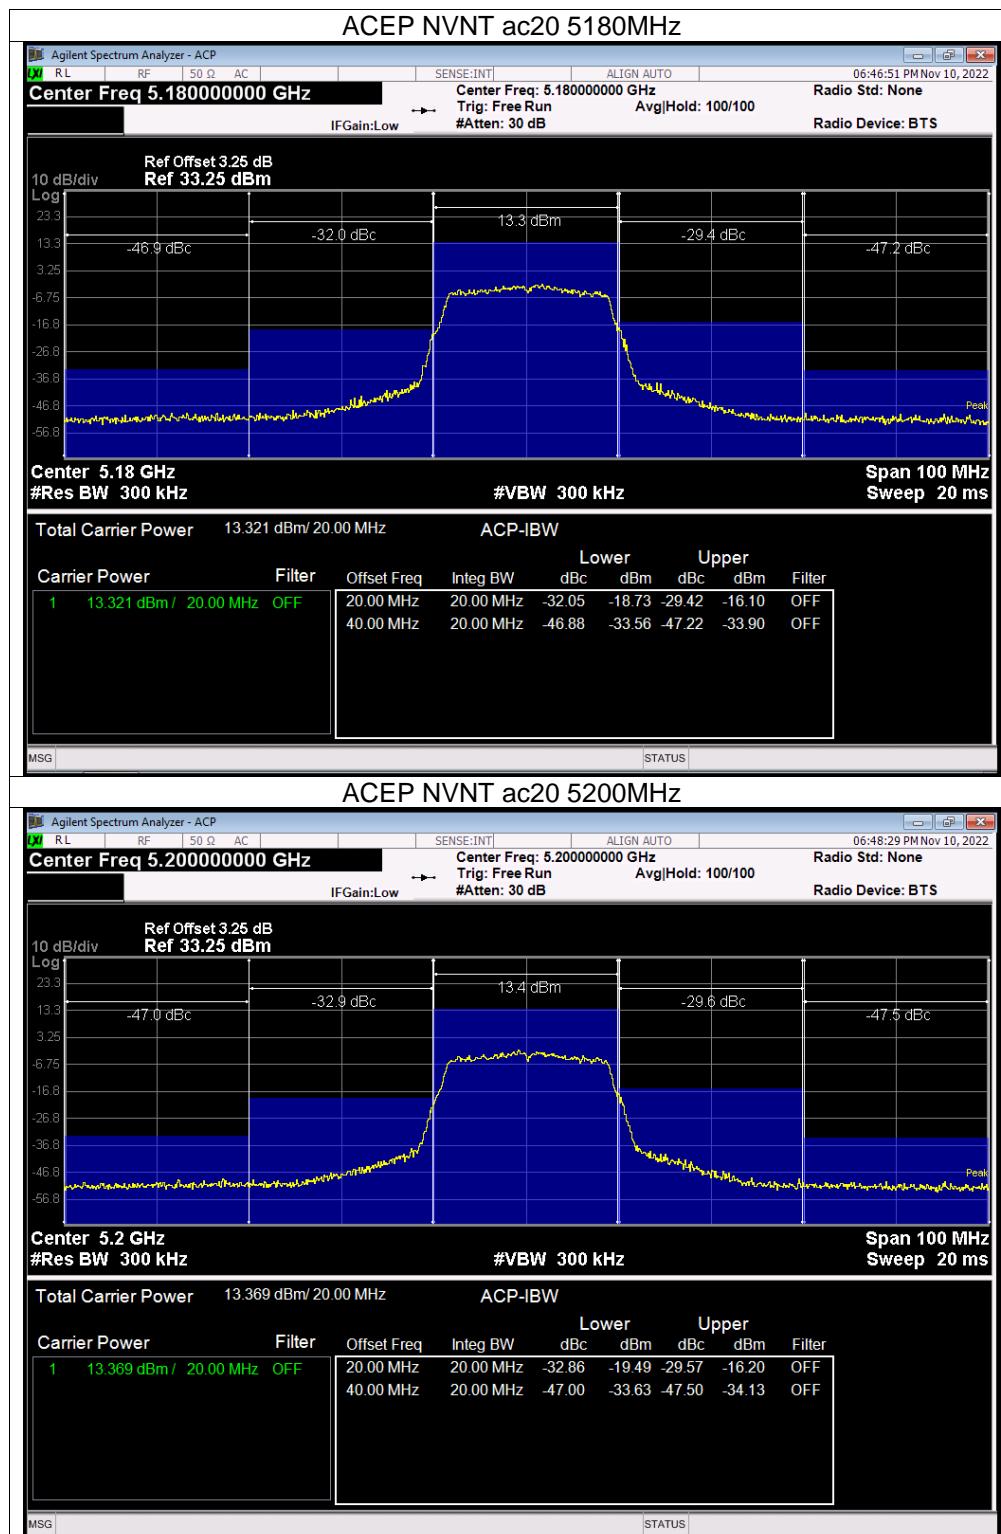


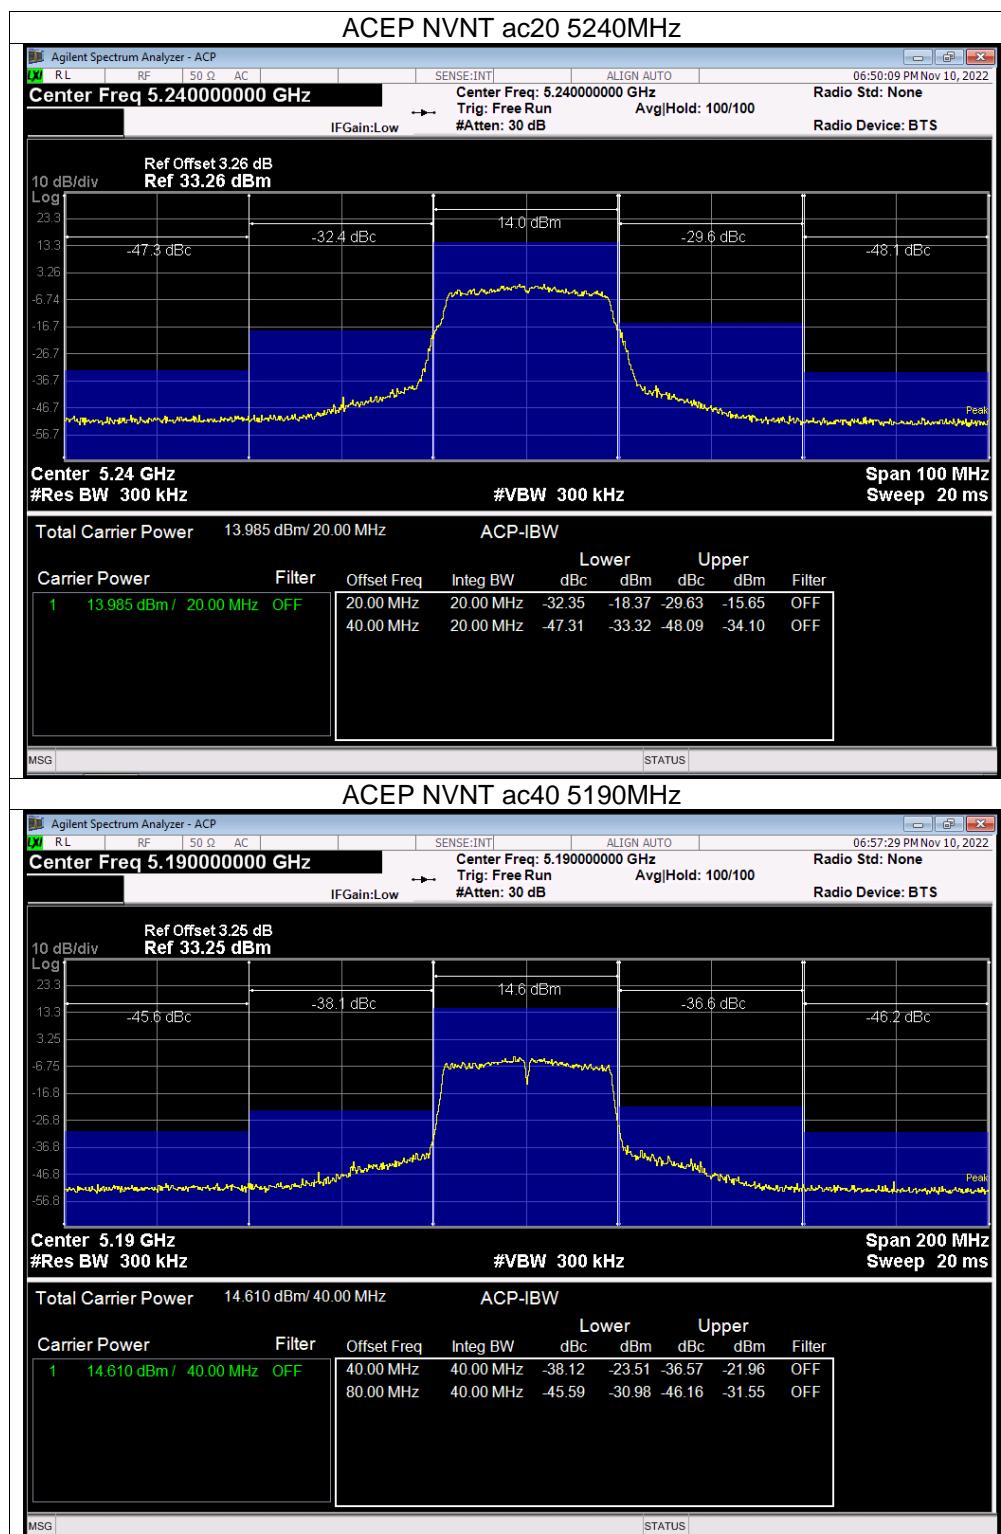

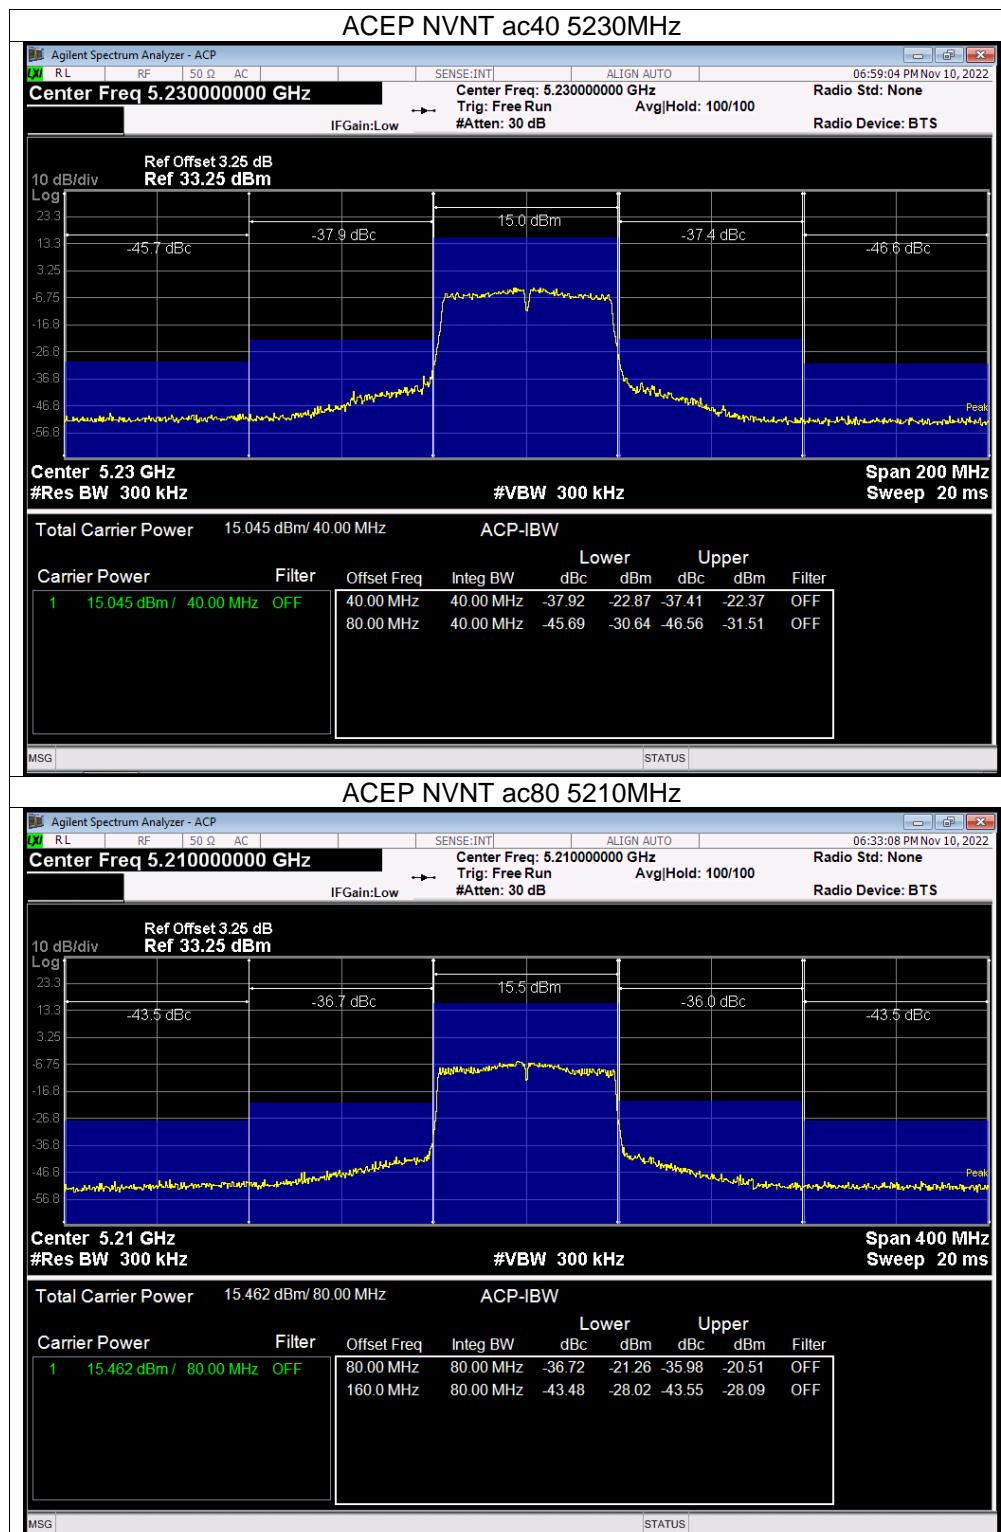

16. EUT Photographs


EUT Photo

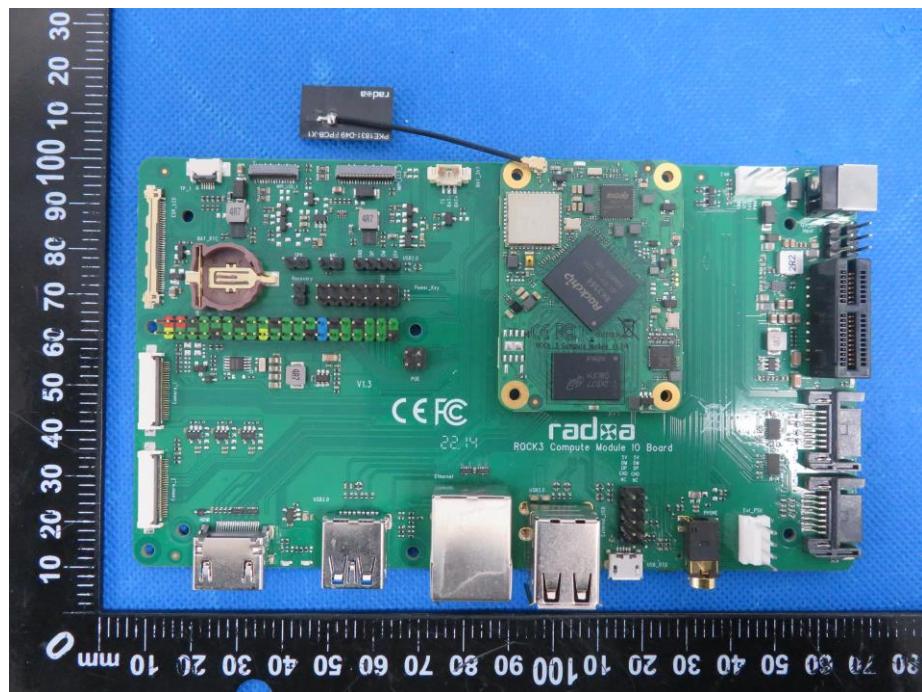

NOTE: Appendix-Photographs Of EUT Constructional Details

17. EUT Test Setup Photographs

Measurement Photos

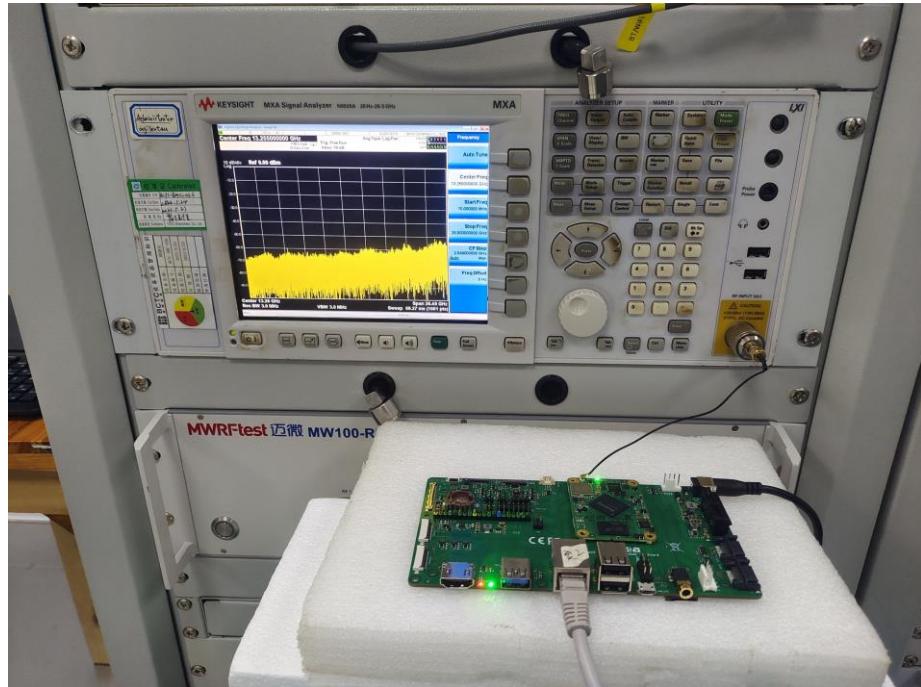

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The test report without CMA mark is only used for scientific research, teaching, enterprise product development and internal quality control purposes.
8. The quality system of our laboratory is in accordance with ISO/IEC17025.
9. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

***** END *****