

## Supplemental “Transmit Simultaneously” Test Report

**Report No.:** ICBBUI-WTW-P21040655-5

**IC:** 6317A-RTL8852BE

**Test Model:** RTL8852BE

**Received Date:** Apr. 21, 2021

**Test Date:** June 19 to July 09, 2021

**Issued Date:** Aug. 02, 2021

**Applicant:** Realtek Semiconductor Corp.

**Address:** No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**ISED# / CAB identifier:** 20331 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Modification Record .....	5
<b>3 General Information</b> .....	<b>6</b>
3.1 General Description of EUT .....	6
3.1.1 Test Mode Applicability and Tested Channel Detail .....	9
3.2 Description of Support Units .....	12
3.2.1 Configuration of System under Test .....	13
<b>4 Test Types and Results</b> .....	<b>14</b>
4.1 Radiated Emission and Bandedge Measurement .....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	14
4.1.2 Test Instruments .....	16
4.1.3 Test Procedures .....	18
4.1.4 Deviation from Test Standard .....	18
4.1.5 Test Setup .....	19
4.1.6 EUT Operating Conditions .....	20
4.1.7 Test Results (Mode 1) .....	21
4.1.8 Test Results (Mode 2) .....	27
4.1.9 Test Results (Mode 3) .....	33
4.2 Conducted Emission Measurement .....	39
4.2.1 Limits of Conducted Emission Measurement .....	39
4.2.2 Test Instruments .....	39
4.2.3 Test Procedures .....	40
4.2.4 Deviation from Test Standard .....	40
4.2.5 Test Setup .....	40
4.2.6 EUT Operating Conditions .....	40
4.2.7 Test Results (Mode 1) .....	41
4.2.8 Test Results (Mode 2) .....	43
4.2.9 Test Results (Mode 3) .....	45
4.3 Conducted Out of Band Emission Measurement .....	47
4.3.1 Limits of Conducted Out of Band Emission Measurement .....	47
4.3.2 Test Setup .....	47
4.3.3 Test Instruments .....	47
4.3.4 Test Procedures .....	47
4.3.5 Deviation from Test Standard .....	47
4.3.6 EUT Operating Conditions .....	47
4.3.7 Test Results .....	47
<b>5 Pictures of Test Arrangements</b> .....	<b>49</b>
<b>Appendix – Information of the Testing Laboratories</b> .....	<b>50</b>

### Release Control Record

Issue No.	Description	Date Issued
ICBBUI-WTW-P21040655-5	Original release.	Aug. 02, 2021

## 1 Certificate of Conformity

**Product:** 11ax RTL8852BE Combo module

**Brand:** REALTEK

**Test Model:** RTL8852BE

**Sample Status:** Engineering sample

**Applicant:** Realtek Semiconductor Corp.

**Test Date:** June 19 to July 09, 2021

**Standards:** Canada RSS-247 Issue 2, February 2017  
Canada RSS-Gen Issue 5, Amendment 2, February 2021  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Vivian Huang , **Date:** Aug. 02, 2021  
Vivian Huang / Specialist

**Approved by :** Clark Lin , **Date:** Aug. 02, 2021  
Clark Lin / Technical Manager

## 2 Summary of Test Results

RSS-247 ; RSS-Gen			
Standard Section	Test Item	Result	Remarks
RSS-Gen 8.8	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.42dB at 25.875MHz.
RSS-247 5.5 RSS-247 6.2.1.2 6.2.2.2 6.2.3.2 6.2.4.2	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -5.2dB at 119.71MHz.

### Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.1 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.1 dB
	18GHz ~ 40GHz	5.3 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product (PMN)	11ax RTL8852BE Combo module
Brand	REALTEK
Test Model (HVIN)	RTL8852BE
Status of EUT	Engineering sample
FW Version (FVIN)	v1.0.19-2
Power Supply Rating	3.3Vdc from host equipment
Modulation Type	<b>WLAN:</b> CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz 1024QAM for OFDMA in 11ax HE mode <b>BT-EDR:</b> GFSK, $\pi/4$ -DQPSK, 8DPSK <b>BT-LE:</b> GFSK
Modulation Technology	<b>WLAN:</b> DSSS, OFDM, OFDMA <b>BT-EDR:</b> FHSS <b>BT-LE:</b> DTS
Operating Frequency	<b>WLAN:</b> <b>2.4GHz:</b> 2.412 ~ 2.472GHz <b>5GHz:</b> 5.18 ~ 5.24 GHz, 5.26 ~ 5.32 GHz, 5.50 ~ 5.58 GHz & 5.66 ~ 5.72 GHz, 5.745 ~ 5.825 GHz <b>BT-EDR:</b> 2.402 ~ 2.480 GHz <b>BT-LE:</b> 2.402 ~ 2.480 GHz
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. The EUT has below HW SKU configuration, as below table:

SKU No.	Interface	Description
1	PCIe + USB	Single antenna port
2	PCIe + USB	Dual antenna port
3	PCIe + UART	Dual antenna port

Note: From the above HW SKUs, for conducted emission & radiated below 1GHz the worse case was found in **SKU No.: 3** and other test items the worse case was found in **SKU No.: 2**. Therefore only the test data of the SKU was recorded in this report.

2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN 5GHz	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The antennas provided to the EUT, please refer to the following table:

Ant. Set	RF Chain No.	Brand	Model	Ant. Net Gain (dBi)	Frequency Range (GHz)	Ant. Type	Connector Type	Cable Length (mm)
1	Chain 0	ARISTOTLE	RFA-27-JP326-MHF4300	3.5	2.4~2.4835	PIFA	i-pex(MHF)	300
				5	5.15~5.85			
				5	5.875~7.125			
	Chain 1	ARISTOTLE	RFA-27-JP326-MHF4300	3.5	2.4~2.4835	PIFA	i-pex(MHF)	300
				5	5.15~5.85			
				5	5.875~7.125			
2	Chain 0	ARISTOTLE	RFA-27-C38H1-MHF4300	3	2.4~2.4835	Dipole	i-pex(MHF)	300
				5	5.15~5.85			
				5	5.875~7.125			
	Chain 1	ARISTOTLE	RFA-27-C38H1-MHF4300	3	2.4~2.4835	Dipole	i-pex(MHF)	300
				5	5.15~5.85			
				5	5.875~7.125			

Note:

1. From the above transmission chains, the worse case was found in transmission on Chain 0 for 1TX mode. Therefore only the test data of the mode was recorded in this report.
2. The Bluetooth technology will fix transmission on Chain 1.
3. Max. gain was selected for the final test, except for the radiated emissions test.

4. The EUT incorporates a MIMO function.

<b>2.4GHz Band</b>		
<b>MODULATION MODE</b>	<b>TX &amp; RX CONFIGURATION</b>	
<b>802.11b</b>	2TX/1TX Diversity	2RX
<b>802.11g</b>	2TX/1TX Diversity	2RX
<b>802.11n (HT20)</b>	2TX/1TX Diversity	2RX
<b>802.11n (HT40)</b>	2TX/1TX Diversity	2RX
<b>VHT20</b>	2TX/1TX Diversity	2RX
<b>VHT40</b>	2TX/1TX Diversity	2RX
<b>802.11ax (HE20)</b>	2TX/1TX Diversity	2RX
<b>802.11ax (HE40)</b>	2TX/1TX Diversity	2RX
<b>802.11ax (RU26/52/106/242/484)</b>	2TX/1TX Diversity	2RX
<b>5GHz Band</b>		
<b>MODULATION MODE</b>	<b>TX &amp; RX CONFIGURATION</b>	
<b>802.11a</b>	2TX/1TX Diversity	2RX
<b>802.11n (HT20)</b>	2TX/1TX Diversity	2RX
<b>802.11n (HT40)</b>	2TX/1TX Diversity	2RX
<b>802.11ac (VHT20)</b>	2TX/1TX Diversity	2RX
<b>802.11ac (VHT40)</b>	2TX/1TX Diversity	2RX
<b>802.11ac (VHT80)</b>	2TX/1TX Diversity	2RX
<b>802.11ax (HE20)</b>	2TX/1TX Diversity	2RX
<b>802.11ax (HE40)</b>	2TX/1TX Diversity	2RX
<b>802.11ax (HE80)</b>	2TX/1TX Diversity	2RX
<b>802.11ax (RU26/52/106/242/484/996)</b>	2TX/1TX Diversity	2RX

Note: All of modulation mode support beamforming function except 802.11a/b/g modulation mode.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
6. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.



### 3.1.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	OB	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz

**RE<1G**: Radiated Emission below 1GHz

**PLC**: Power Line Conducted Emission

**OB**: Conducted Out-Band Emission Measurement

Note: 1. The EUT's PIFA antenna had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

#### **Radiated Emission Test (Above 1GHz):**

The tested configurations represent the worst-case mode from all possible combinations by the maximum power.

Following channel(s) was (were) selected for the final test as listed below.

Configure Mode	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	802.11a (S1, 1TX) + BT-LE (S1, TX)	36 to 64 100 to 144 149 to 165	157	OFDM	BPSK
		1 to 38	1	DTS	GFSK
2	802.11a (S0, 1TX) + BT-LE (S1, TX)	36 to 64 100 to 144 149 to 165	157	OFDM	BPSK
		1 to 38	1	DTS	GFSK
3	802.11a (S0&1, 2TX) + BT-LE (S1, TX)	36 to 64 100 to 144 149 to 165	157	OFDM	BPSK
		1 to 38	1	DTS	GFSK

**Radiated Emission Test (Below 1GHz):**

The tested configurations represent the worst-case mode from all possible combinations by the maximum power.

Following channel(s) was (were) selected for the final test as listed below.

Configure Mode	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	802.11a (S1, 1TX) + BT-LE (S1, TX)	36 to 64 100 to 144 149 to 165	157	OFDM	BPSK
		1 to 38	1	DTS	GFSK
2	802.11a (S0, 1TX) + BT-LE (S1, TX)	36 to 64 100 to 144 149 to 165	157	OFDM	BPSK
		1 to 38	1	DTS	GFSK
3	802.11a (S0&1, 2TX) + BT-LE (S1, TX)	36 to 64 100 to 144 149 to 165	157	OFDM	BPSK
		1 to 38	1	DTS	GFSK

**Power Line Conducted Emission Test:**

The tested configurations represent the worst-case mode from all possible combinations by the maximum power.

Following channel(s) was (were) selected for the final test as listed below.

Configure Mode	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	802.11a (S1, 1TX) + BT-LE (S1, TX)	36 to 64 100 to 144 149 to 165	157	OFDM	BPSK
		1 to 38	1	DTS	GFSK
2	802.11a (S0, 1TX) + BT-LE (S1, TX)	36 to 64 100 to 144 149 to 165	157	OFDM	BPSK
		1 to 38	1	DTS	GFSK
3	802.11a (S0&1, 2TX) + BT-LE (S1, TX)	36 to 64 100 to 144 149 to 165	157	OFDM	BPSK
		1 to 38	1	DTS	GFSK

**Conducted Out-Band Emission Measurement:**

The tested configurations represent the worst-case mode from all possible combinations by the maximum power.

Following channel(s) was (were) selected for the final test as listed below.

Configure Mode	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	802.11a (S1, 1TX) + BT-LE (S1, TX)	36 to 64 100 to 144 149 to 165	157	OFDM	BPSK
		1 to 38	1	DTS	GFSK
3	802.11a (S0&1, 2TX) + BT-LE (S1, TX)	36 to 64 100 to 144 149 to 165	157	OFDM	BPSK
		1 to 38	1	DTS	GFSK

**Test Condition:**

Applicable To	Environmental Conditions	Input Power (system)	Tested By
RE $\geq$ 1G	25deg. C, 67%RH	120Vac, 60Hz	Sampson Chen
RE $<$ 1G	25deg. C, 71%RH	120Vac, 60Hz	Sampson Chen
PLC	25deg. C, 65%RH	120Vac, 60Hz	Sampson Chen
OB	25deg. C, 60%RH	120Vac, 60Hz	Kevin Ko

### 3.2 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
B.	Test Tool	Realtek	NA	NA	NA	Supplied by client
C.	Adapter	DELL	FA65NE0-00	NA	NA	Provided by Lab

Note:


1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.8	No	1	Provided by Lab
2.	AC Cable	1	1	No	0	Provided by Lab


Note: The core(s) is(are) originally attached to the cable(s).

### 3.2.1 Configuration of System under Test

For Conducted Emissions test:

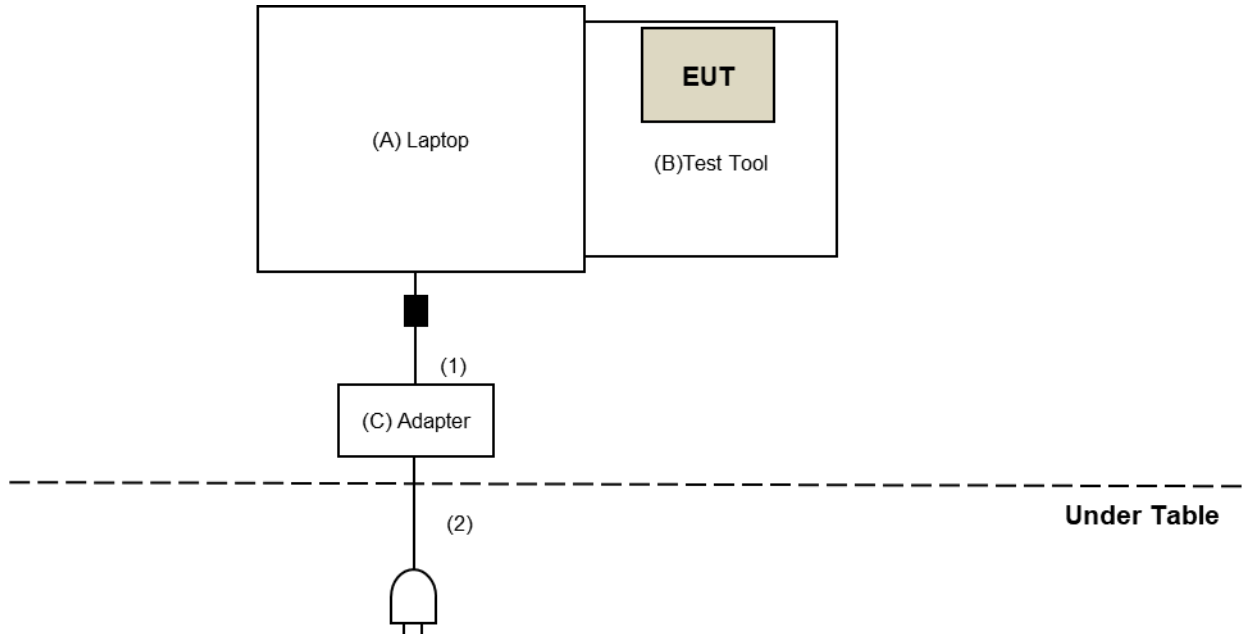

For Radiated Emissions test:

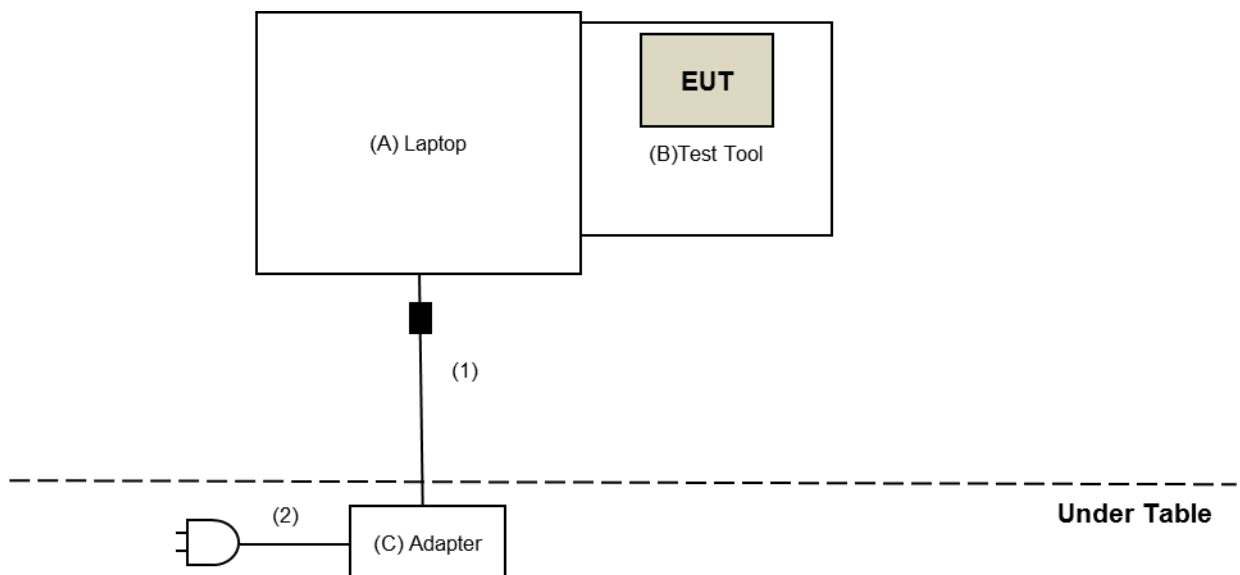

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Magnetic field strength (H-Field) ( $\mu\text{A/m}$ )	Measurement distance (meters)
0.009 ~ 0.490	6.37/F (F in kHz)	300
0.490 ~ 1.705	63.7/F (F in kHz)	30
1.705 ~ 30.0	0.08	30
Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level ( $\mu\text{V/m}$ ).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

## Limits of Unwanted Emission out of the Restricted Bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBμV/m)	AV:54 (dBμV/m)
Applicable To		Eirp Limit	Equivalent Field Strength at 3m
5150~5250 MHz	RSS-247 6.2.1.2	PK:-27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz	RSS-247 6.2.2.2		
5470~5725 MHz	RSS-247 6.2.3.2		
5725~5850 MHz	RSS-247 6.2.4.2	PK:-27 (dBm/MHz) <sup>*d</sup> PK:10 (dBm/MHz) <sup>*c</sup> PK:15.6 (dBm/MHz) <sup>*b</sup> PK:27 (dBm/MHz) <sup>*a</sup>	PK: 68.2(dBμV/m) <sup>*d</sup> PK:105.2 (dBμV/m) <sup>*c</sup> PK: 110.8(dBμV/m) <sup>*b</sup> PK:122.2 (dBμV/m) <sup>*a</sup>

- 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- 27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

**NOTE:** The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).$$

#### 4.1.2 Test Instruments

##### For Radiated Emission (above 1GHz) test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESR3	102528	Mar. 02, 2021	Mar. 01, 2022
Spectrum Analyzer Keysight	N9030B	MY57142938	Apr. 26, 2021	Apr. 25, 2022
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-1819	Nov. 22, 2020	Nov. 21, 2021
Pre-Amplifier EMCI	EMC12630SE	980509	Apr. 26, 2021	Apr. 25, 2022
RF Cable EMCI	EMC104-SM-SM-1500	180503	Apr. 26, 2021	Apr. 25, 2022
RF Cable EMCI	EMC104-SM-SM-2000	180501	Apr. 26, 2021	Apr. 25, 2022
RF Cable EMCI	EMC104-SM-SM-6000	180506	Apr. 26, 2021	Apr. 25, 2022
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 11, 2021	Jan. 10, 2022
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 22, 2020	Nov. 21, 2021
RF Cable	EMC102-KM-KM-1200	160924	Jan. 11, 2021	Jan. 10, 2022
RF Cable	EMC-KM-KM-4000	200214	Mar. 10, 2021	Mar. 09, 2022
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 5.
3. Tested Date: July 09, 2021



**For Radiated Emission (below 1GHz) test:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESR3	102528	Mar. 02, 2021	Mar. 01, 2022
Spectrum Analyzer Keysight	N9030B	MY57142938	Apr. 26, 2021	Apr. 25, 2022
Pre-Amplifier EMCI	EMC001340	980142	May 24, 2021	May 23, 2022
Loop Antenna Electro-Metrics	EM-6879	264	Mar. 05, 2021	Mar. 04, 2022
RF Cable	5D-FB	LOOPCAB-001	Jan. 07, 2021	Jan. 06, 2022
RF Cable	5D-FB	LOOPCAB-002	Jan. 07, 2021	Jan. 06, 2022
Pre-Amplifier EMCI	EMC330N	980538	Apr. 26, 2021	Apr. 25, 2022
Trilog Broadband Antenna SCHWARZBECK	VULB9168	9168-0842	Nov. 03, 2020	Nov. 02, 2021
RF Cable	8D	966-5-1	Apr. 26, 2021	Apr. 25, 2022
RF Cable	8D	966-5-2	Apr. 26, 2021	Apr. 25, 2022
RF Cable	8D	966-5-3	Apr. 26, 2021	Apr. 25, 2022
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-02	Jan. 11, 2021	Jan. 10, 2022
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 5.
3. Tested Date: June 19, 2021

#### 4.1.3 Test Procedures

##### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


For Radiated emission below 30MHz

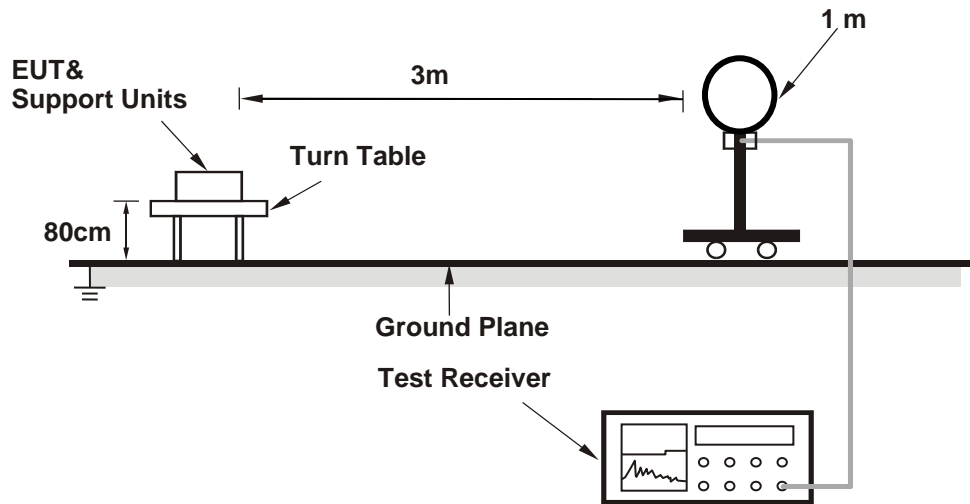

For Radiated emission 30MHz to 1GHz

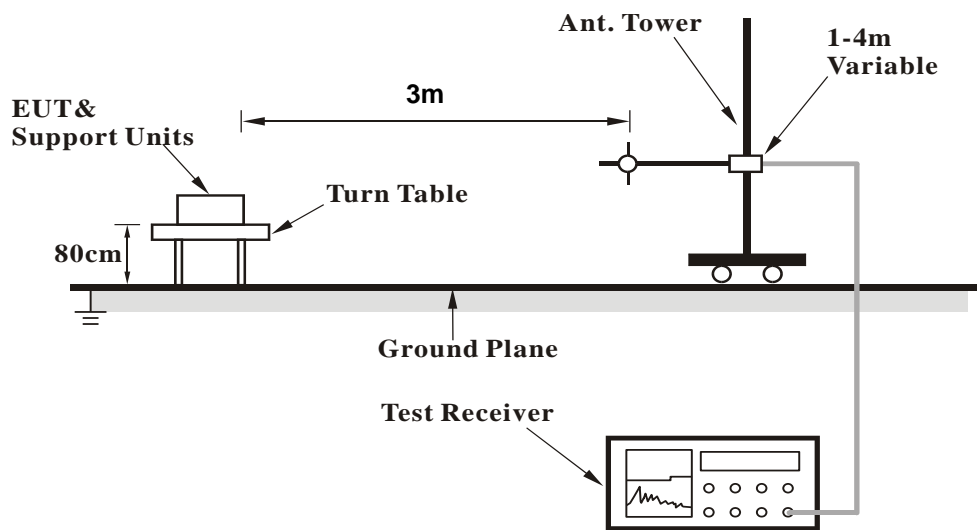

### For Radiated emission above 1GHz

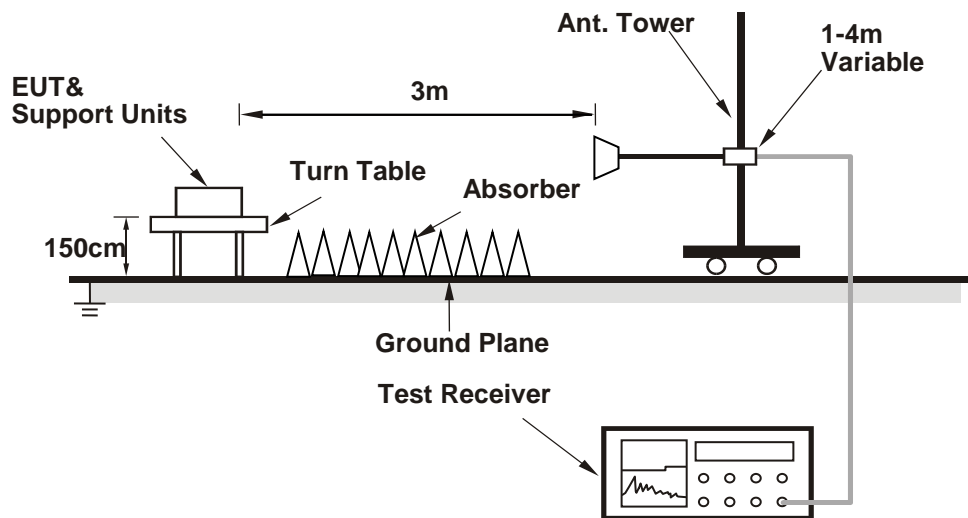

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Controlling software (WLAN: RTL8852B MP Toolkit V1.0.16, Bluetooth: Bluetooth RF test tool (5.2.3.1)) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

## 4.1.7 Test Results (Mode 1)

**Dipole Antenna**
**Above 1GHz Data:**

<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4808.00	37.7 PK	74.0	-36.3	1.47 H	160	35.9	1.8
2	4808.00	30.6 AV	54.0	-23.4	1.47 H	160	28.8	1.8
3	11570.00	45.4 PK	74.0	-28.6	1.57 H	255	32.8	12.6
4	11570.00	35.0 AV	54.0	-19.0	1.57 H	255	22.4	12.6
5	#17355.00	56.0 PK	68.2	-12.2	1.30 H	327	38.3	17.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4808.00	44.8 PK	74.0	-29.2	1.19 V	320	43.0	1.8
2	4808.00	37.3 AV	54.0	-16.7	1.19 V	320	35.5	1.8
3	11570.00	49.1 PK	74.0	-24.9	2.17 V	347	36.5	12.6
4	11570.00	37.8 AV	54.0	-16.2	2.17 V	347	25.2	12.6
5	#17355.00	56.5 PK	68.2	-11.7	1.92 V	238	38.8	17.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.


### Below 1GHz Data:

<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	119.39	38.0 QP	43.5	-5.5	3.00 H	344	53.1	-15.1
2	166.81	35.4 QP	43.5	-8.1	2.00 H	146	48.4	-13.0
3	226.68	33.5 QP	46.0	-12.5	2.00 H	109	49.4	-15.9
4	299.38	35.1 QP	46.0	-10.9	1.50 H	92	47.4	-12.3
5	337.39	34.1 QP	46.0	-11.9	1.50 H	342	45.4	-11.3
6	574.50	26.6 QP	46.0	-19.4	1.50 H	136	32.8	-6.2

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

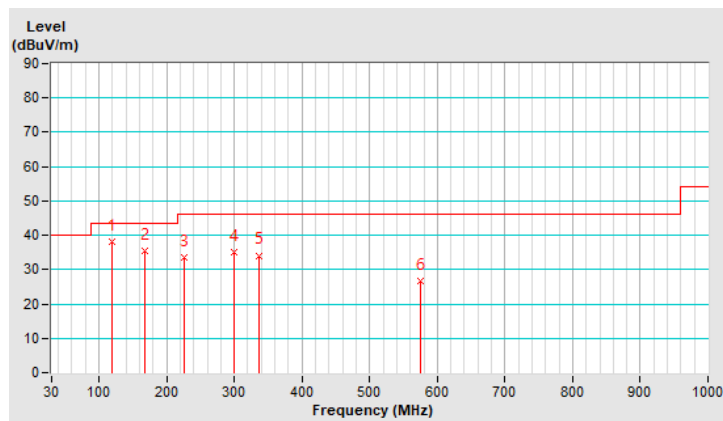


<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.72	28.7 QP	43.5	-14.8	1.00 V	25	43.1	-14.4
2	167.22	32.2 QP	43.5	-11.3	1.50 V	244	45.3	-13.1
3	224.12	31.3 QP	46.0	-14.7	1.00 V	129	47.3	-16.0
4	340.90	26.4 QP	46.0	-19.6	1.50 V	176	37.7	-11.3
5	498.94	24.9 QP	46.0	-21.1	1.50 V	51	32.5	-7.6
6	950.62	33.0 QP	46.0	-13.0	1.00 V	153	33.6	-0.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

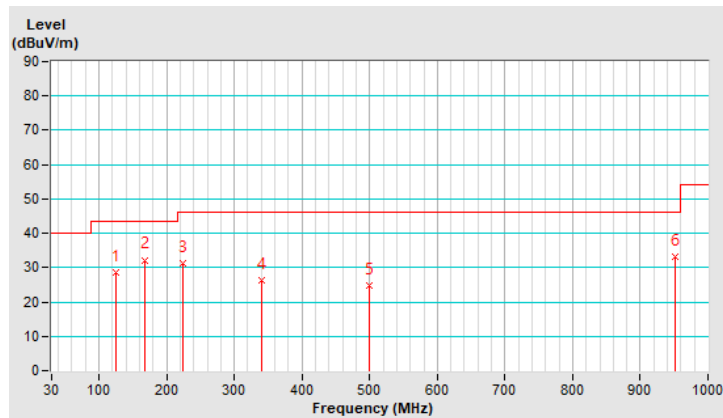

## PIFA Antenna

### Above 1GHz Data:

<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

#### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4808.00	40.4 PK	74.0	-33.6	1.28 H	175	38.6	1.8
2	4808.00	30.6 AV	54.0	-23.4	1.28 H	175	28.8	1.8
3	11570.00	49.4 PK	74.0	-24.6	3.64 H	288	36.8	12.6
4	11570.00	37.3 AV	54.0	-16.7	3.64 H	288	24.7	12.6
5	#17355.00	59.1 PK	68.2	-9.1	1.52 H	279	41.4	17.7

#### Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4808.00	41.3 PK	74.0	-32.7	1.11 V	111	39.5	1.8
2	4808.00	31.3 AV	54.0	-22.7	1.11 V	111	29.5	1.8
3	11570.00	48.4 PK	74.0	-25.6	2.44 V	309	35.8	12.6
4	11570.00	36.6 AV	54.0	-17.4	2.44 V	309	24.0	12.6
5	#17355.00	57.9 PK	68.2	-10.3	1.45 V	285	40.2	17.7

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.




Below 1GHz Data:

<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.60	38.1 QP	43.5	-5.4	3.00 H	342	53.2	-15.1
2	167.18	35.3 QP	43.5	-8.2	2.00 H	133	48.4	-13.1
3	226.37	33.6 QP	46.0	-12.4	2.00 H	129	49.5	-15.9
4	298.61	34.8 QP	46.0	-11.2	1.50 H	84	47.2	-12.4
5	337.02	33.8 QP	46.0	-12.2	1.50 H	333	45.1	-11.3
6	574.57	26.8 QP	46.0	-19.2	1.50 H	122	33.0	-6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

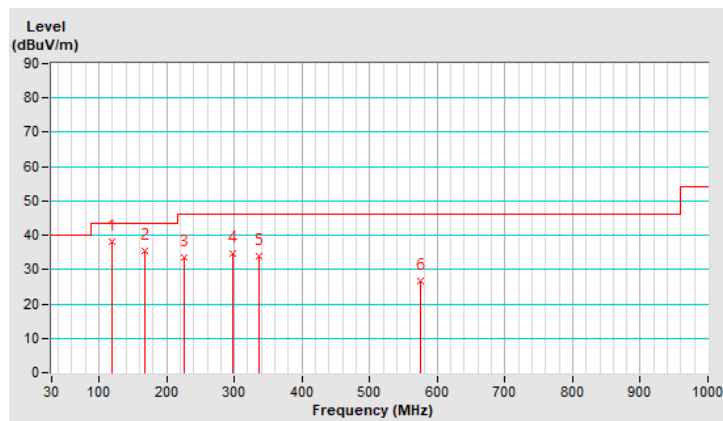


<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	125.06	28.5 QP	43.5	-15.0	1.00 V	23	43.1	-14.6
2	166.64	32.1 QP	43.5	-11.4	1.50 V	218	45.1	-13.0
3	223.52	31.4 QP	46.0	-14.6	1.00 V	146	47.4	-16.0
4	339.85	25.7 QP	46.0	-20.3	1.50 V	185	37.0	-11.3
5	498.21	24.0 QP	46.0	-22.0	1.50 V	35	31.7	-7.7
6	949.57	32.5 QP	46.0	-13.5	1.00 V	137	33.1	-0.6

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

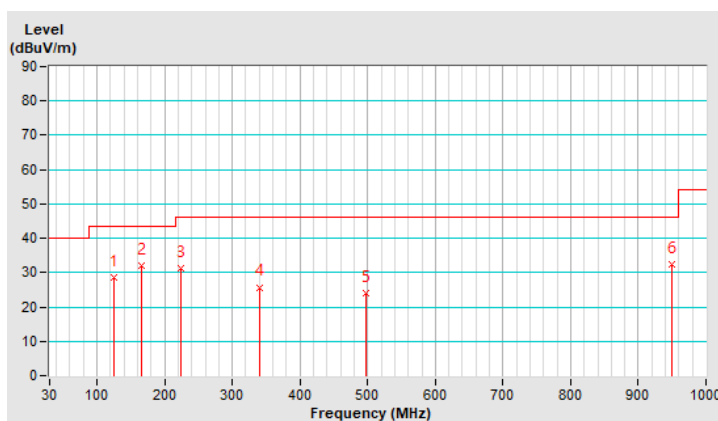

## 4.1.8 Test Results (Mode 2)

**Dipole Antenna**
**Above 1GHz Data:**

<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4808.00	37.6 PK	74.0	-36.4	1.55 H	167	35.8	1.8
2	4808.00	30.5 AV	54.0	-23.5	1.55 H	167	28.7	1.8
3	11570.00	46.4 PK	74.0	-27.6	1.65 H	250	33.8	12.6
4	11570.00	36.2 AV	54.0	-17.8	1.65 H	250	23.6	12.6
5	#17355.00	55.2 PK	68.2	-13.0	1.29 H	330	37.5	17.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4808.00	42.5 PK	74.0	-31.5	1.21 V	269	40.7	1.8
2	4808.00	36.1 AV	54.0	-17.9	1.21 V	269	34.3	1.8
3	11570.00	49.1 PK	74.0	-24.9	2.12 V	357	36.5	12.6
4	11570.00	37.6 AV	54.0	-16.4	2.12 V	357	25.0	12.6
5	#17355.00	54.9 PK	68.2	-13.3	1.96 V	237	37.2	17.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.


**Below 1GHz Data:**

<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	119.39	37.8 QP	43.5	-5.7	3.00 H	340	52.9	-15.1
2	166.33	35.0 QP	43.5	-8.5	2.00 H	135	48.1	-13.1
3	227.29	34.1 QP	46.0	-11.9	2.00 H	126	49.9	-15.8
4	299.28	34.8 QP	46.0	-11.2	1.50 H	98	47.1	-12.3
5	336.87	34.1 QP	46.0	-11.9	1.50 H	350	45.4	-11.3
6	574.64	26.2 QP	46.0	-19.8	1.50 H	107	32.4	-6.2

**Remarks:**

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

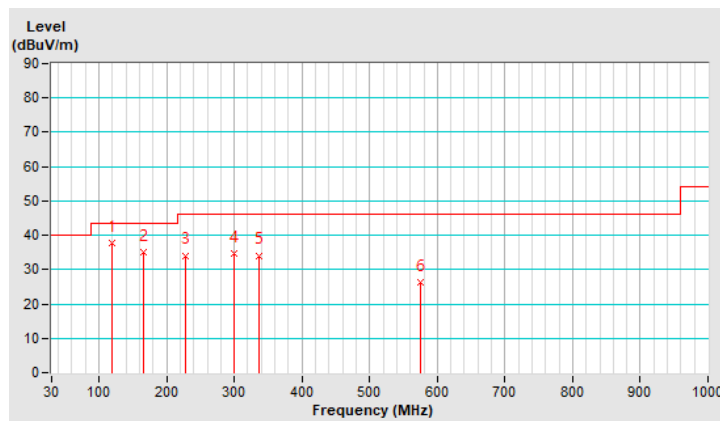


<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	126.05	29.3 QP	43.5	-14.2	1.00 V	29	43.7	-14.4
2	166.78	32.0 QP	43.5	-11.5	1.50 V	234	45.0	-13.0
3	223.62	31.4 QP	46.0	-14.6	1.00 V	149	47.4	-16.0
4	340.45	26.0 QP	46.0	-20.0	1.50 V	182	37.3	-11.3
5	499.46	24.9 QP	46.0	-21.1	1.50 V	34	32.5	-7.6
6	949.93	33.0 QP	46.0	-13.0	1.00 V	135	33.6	-0.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

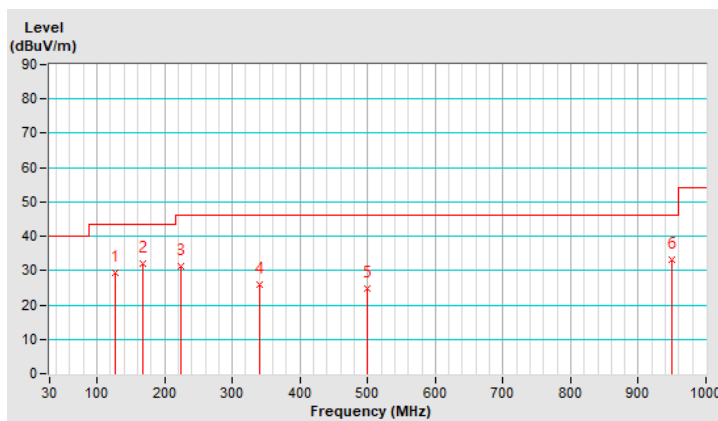

## PIFA Antenna

### Above 1GHz Data:

<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

#### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4808.00	40.5 PK	74.0	-33.5	1.39 H	179	38.7	1.8
2	4808.00	30.5 AV	54.0	-23.5	1.39 H	179	28.7	1.8
3	11570.00	49.7 PK	74.0	-24.3	3.67 H	296	37.1	12.6
4	11570.00	37.5 AV	54.0	-16.5	3.67 H	296	24.9	12.6
5	#17355.00	58.9 PK	68.2	-9.3	1.49 H	277	41.2	17.7

#### Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4808.00	41.4 PK	74.0	-32.6	1.12 V	93	39.6	1.8
2	4808.00	31.3 AV	54.0	-22.7	1.12 V	93	29.5	1.8
3	11570.00	48.8 PK	74.0	-25.2	2.45 V	304	36.2	12.6
4	11570.00	36.9 AV	54.0	-17.1	2.45 V	304	24.3	12.6
5	#17355.00	57.5 PK	68.2	-10.7	1.51 V	267	39.8	17.7

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

**Below 1GHz Data:**


<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.26	37.4 QP	43.5	-6.1	3.00 H	359	52.5	-15.1
2	167.20	35.4 QP	43.5	-8.1	2.00 H	151	48.5	-13.1
3	226.51	33.1 QP	46.0	-12.9	2.00 H	116	49.0	-15.9
4	299.29	35.0 QP	46.0	-11.0	1.50 H	71	47.3	-12.3
5	336.45	33.2 QP	46.0	-12.8	1.50 H	329	44.5	-11.3
6	575.16	26.9 QP	46.0	-19.1	1.50 H	112	33.1	-6.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

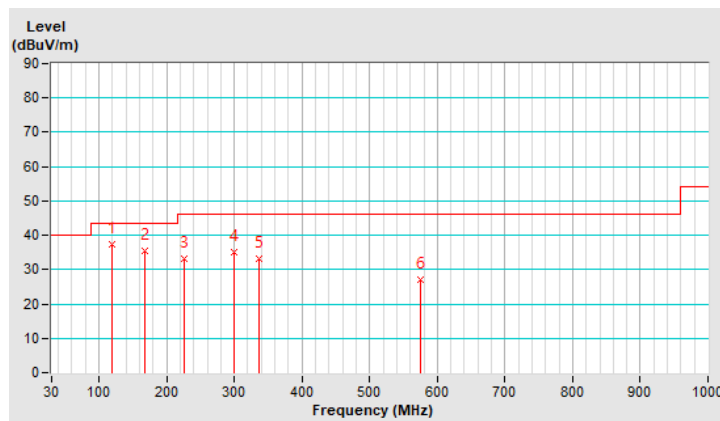


<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	125.97	29.5 QP	43.5	-14.0	1.00 V	25	43.9	-14.4
2	166.64	32.1 QP	43.5	-11.4	1.50 V	242	45.1	-13.0
3	224.13	31.5 QP	46.0	-14.5	1.00 V	135	47.5	-16.0
4	340.64	26.1 QP	46.0	-19.9	1.50 V	193	37.4	-11.3
5	498.78	24.7 QP	46.0	-21.3	1.50 V	41	32.3	-7.6
6	950.64	33.4 QP	46.0	-12.6	1.00 V	132	34.0	-0.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

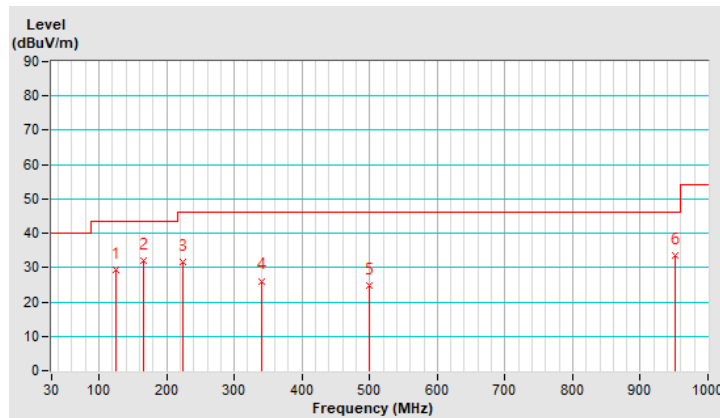



## 4.1.9 Test Results (Mode 3)

**Dipole Antenna**
**Above 1GHz Data:**

<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4808.00	38.1 PK	74.0	-35.9	1.57 H	125	36.3	1.8
2	4808.00	30.6 AV	54.0	-23.4	1.57 H	125	28.8	1.8
3	11570.00	55.0 PK	74.0	-19.0	1.33 H	319	42.4	12.6
4	11570.00	43.3 AV	54.0	-10.7	1.33 H	319	30.7	12.6
5	#17355.00	57.8 PK	68.2	-10.4	3.59 H	321	40.1	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4808.00	43.6 PK	74.0	-30.4	1.24 V	290	41.8	1.8
2	4808.00	36.3 AV	54.0	-17.7	1.24 V	290	34.5	1.8
3	11570.00	55.6 PK	74.0	-18.4	1.20 V	316	43.0	12.6
4	11570.00	43.4 AV	54.0	-10.6	1.20 V	316	30.8	12.6
5	#17355.00	58.3 PK	68.2	-9.9	1.15 V	357	40.6	17.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. "#": The radiated frequency is out of the restricted band.


Below 1GHz Data:

<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.89	37.8 QP	43.5	-5.7	3.00 H	360	52.9	-15.1
2	167.32	35.4 QP	43.5	-8.1	2.00 H	154	48.5	-13.1
3	226.05	33.3 QP	46.0	-12.7	2.00 H	112	49.2	-15.9
4	298.40	34.6 QP	46.0	-11.4	1.50 H	87	47.0	-12.4
5	336.10	33.3 QP	46.0	-12.7	1.50 H	320	44.6	-11.3
6	574.48	26.5 QP	46.0	-19.5	1.50 H	107	32.7	-6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

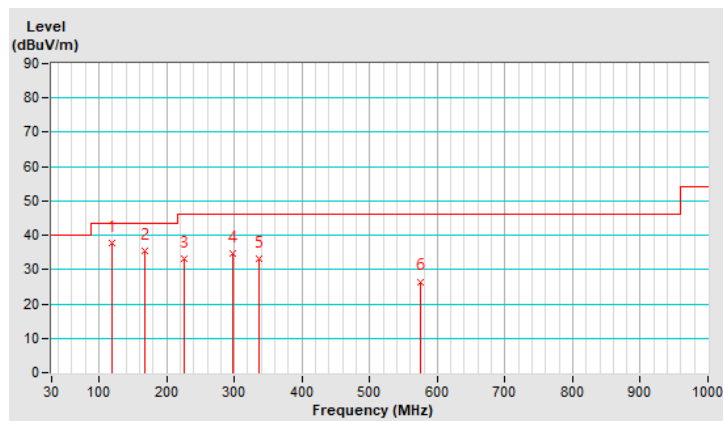


<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.96	29.7 QP	43.5	-13.8	1.00 V	29	44.1	-14.4
2	166.48	31.6 QP	43.5	-11.9	1.50 V	239	44.7	-13.1
3	223.52	31.3 QP	46.0	-14.7	1.00 V	137	47.3	-16.0
4	341.00	26.4 QP	46.0	-19.6	1.50 V	198	37.7	-11.3
5	499.23	25.0 QP	46.0	-21.0	1.50 V	46	32.6	-7.6
6	949.69	32.5 QP	46.0	-13.5	1.00 V	145	33.1	-0.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

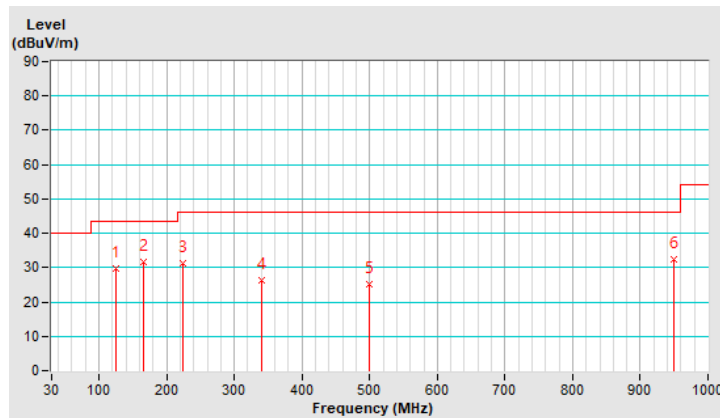

**PIFA Antenna**

**Above 1GHz Data:**

<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4808.00	40.7 PK	74.0	-33.3	1.29 H	177	38.9	1.8
2	4808.00	30.8 AV	54.0	-23.2	1.29 H	177	29.0	1.8
3	11570.00	54.1 PK	74.0	-19.9	3.66 H	302	41.5	12.6
4	11570.00	44.2 AV	54.0	-9.8	3.66 H	302	31.6	12.6
5	#17355.00	59.1 PK	68.2	-9.1	1.48 H	288	41.4	17.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4808.00	41.0 PK	74.0	-33.0	1.07 V	102	39.2	1.8
2	4808.00	31.2 AV	54.0	-22.8	1.07 V	102	29.4	1.8
3	11570.00	54.4 PK	74.0	-19.6	2.47 V	321	41.8	12.6
4	11570.00	45.4 AV	54.0	-8.6	2.47 V	321	32.8	12.6
5	#17355.00	59.3 PK	68.2	-8.9	2.56 V	341	41.6	17.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

**Below 1GHz Data:**


<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.71	38.3 QP	43.5	-5.2	3.00 H	342	53.4	-15.1
2	166.04	34.8 QP	43.5	-8.7	2.00 H	156	47.9	-13.1
3	226.50	33.8 QP	46.0	-12.2	2.00 H	137	49.7	-15.9
4	299.64	35.4 QP	46.0	-10.6	1.50 H	93	47.7	-12.3
5	337.25	34.1 QP	46.0	-11.9	1.50 H	325	45.4	-11.3
6	574.81	26.6 QP	46.0	-19.4	1.50 H	106	32.8	-6.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

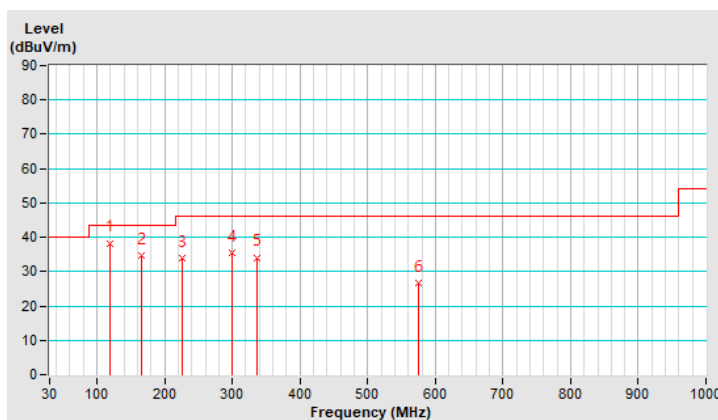


<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	126.01	29.4 QP	43.5	-14.1	1.00 V	33	43.8	-14.4
2	167.15	32.4 QP	43.5	-11.1	1.50 V	220	45.5	-13.1
3	223.87	31.7 QP	46.0	-14.3	1.00 V	148	47.7	-16.0
4	341.01	26.7 QP	46.0	-19.3	1.50 V	172	38.0	-11.3
5	498.84	24.8 QP	46.0	-21.2	1.50 V	28	32.4	-7.6
6	950.29	32.9 QP	46.0	-13.1	1.00 V	154	33.5	-0.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

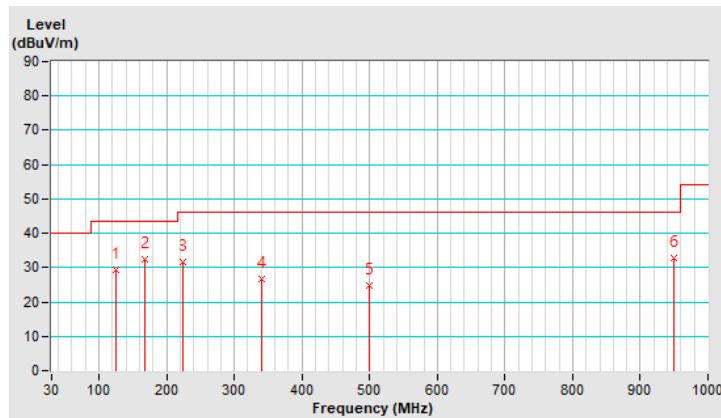

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 20, 2020	Oct. 19, 2021
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 27, 2020	Oct. 26, 2021
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 26, 2021	Mar. 25, 2022
50 ohms Terminator	50	3	Oct. 26, 2020	Oct. 25, 2021
RF Cable	5D-FB	COCCAB-001	Sep. 26, 2020	Sep. 25, 2021
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 29, 2020	Aug. 28, 2021
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: June 21, 2021

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

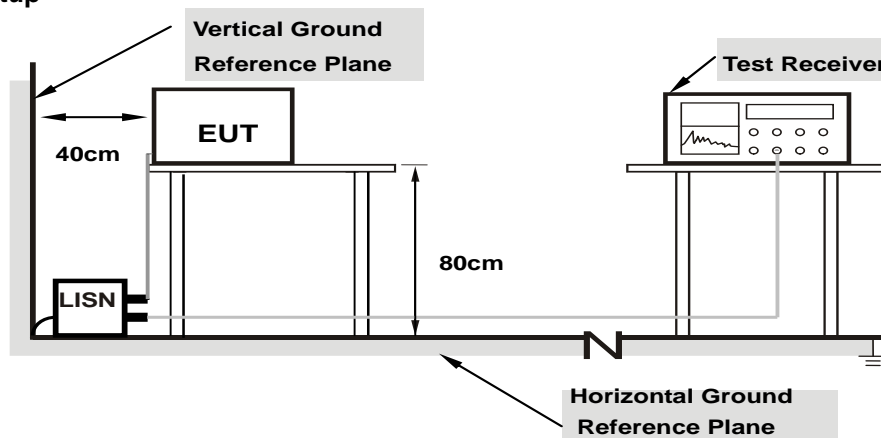

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.




#### 4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.95	38.10	19.61	48.05	29.56	65.58	55.58	-17.53	-26.02
2	0.17734	9.96	37.22	21.31	47.18	31.27	64.61	54.61	-17.43	-23.34
3	0.20469	9.97	31.90	16.29	41.87	26.26	63.42	53.42	-21.55	-27.16
4	0.23203	9.97	29.21	15.60	39.18	25.57	62.38	52.38	-23.20	-26.81
5	0.25156	9.98	25.84	10.62	35.82	20.60	61.71	51.71	-25.89	-31.11
6	25.87109	11.24	23.84	23.65	35.08	34.89	60.00	50.00	-24.92	-15.11

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

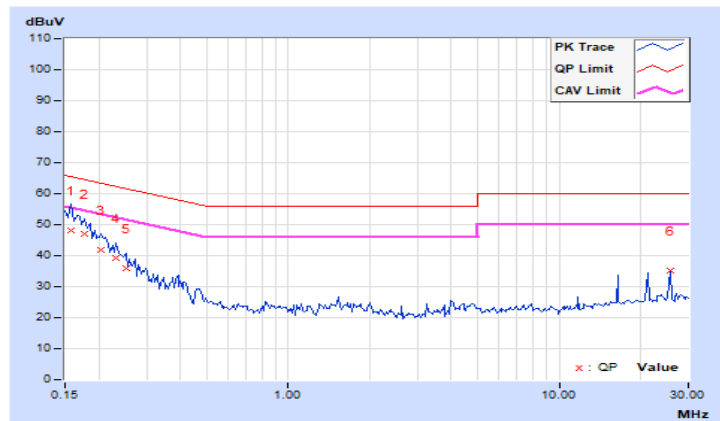


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.92	37.88	16.83	47.80	26.75	66.00	56.00	-18.20	-29.25
2	0.16953	9.93	38.95	22.79	48.88	32.72	64.98	54.98	-16.10	-22.26
3	0.17734	9.94	35.50	15.09	45.44	25.03	64.61	54.61	-19.17	-29.58
4	0.20859	9.95	32.90	15.19	42.85	25.14	63.26	53.26	-20.41	-28.12
5	0.42344	9.96	21.34	11.18	31.30	21.14	57.38	47.38	-26.08	-26.24
<b>6</b>	<b>25.87500</b>	<b>10.91</b>	<b>24.98</b>	<b>24.67</b>	<b>35.89</b>	<b>35.58</b>	<b>60.00</b>	<b>50.00</b>	<b>-24.11</b>	<b>-14.42</b>

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

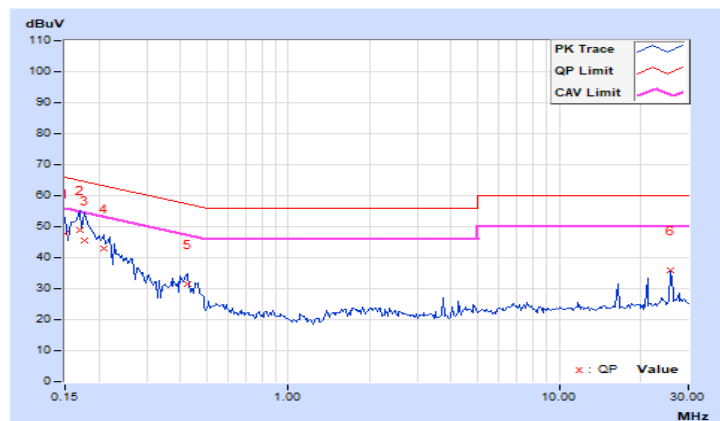


#### 4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	9.95	38.10	22.18	48.05	32.13	65.38	55.38	-17.33	-23.25
2	0.18906	9.97	32.68	15.43	42.65	25.40	64.08	54.08	-21.43	-28.68
3	0.23594	9.97	27.87	12.59	37.84	22.56	62.24	52.24	-24.40	-29.68
4	0.29453	9.98	20.02	7.84	30.00	17.82	60.40	50.40	-30.40	-32.58
5	0.39609	9.99	15.84	8.83	25.83	18.82	57.93	47.93	-32.10	-29.11
6	25.87109	11.24	24.33	24.00	35.57	35.24	60.00	50.00	-24.43	-14.76

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

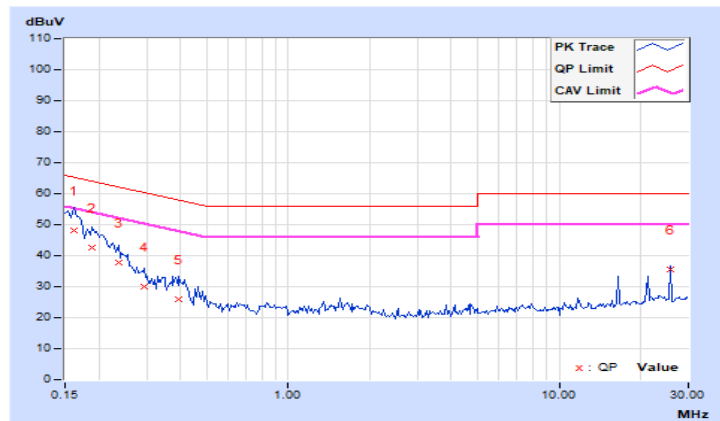


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.92	39.36	19.04	49.28	28.96	65.79	55.79	-16.51	-26.83
2	0.16953	9.93	39.24	22.71	49.17	32.64	64.98	54.98	-15.81	-22.34
3	0.20859	9.95	32.69	17.06	42.64	27.01	63.26	53.26	-20.62	-26.25
4	0.25156	9.95	26.60	10.57	36.55	20.52	61.71	51.71	-25.16	-31.19
5	0.41563	9.96	20.36	9.40	30.32	19.36	57.54	47.54	-27.22	-28.18
6	25.87109	10.91	24.86	24.55	35.77	35.46	60.00	50.00	-24.23	-14.54

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

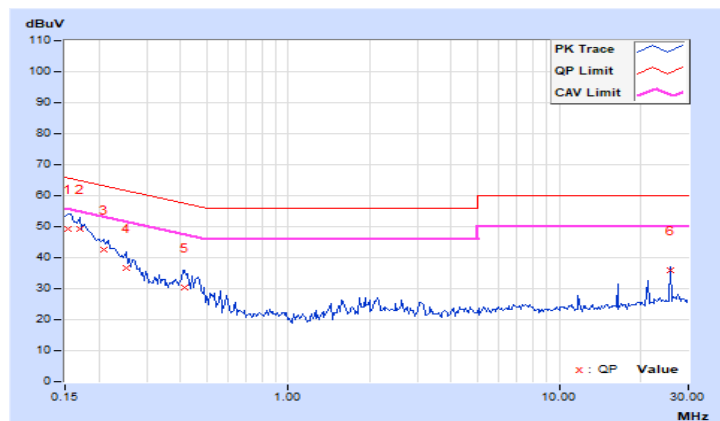


## 4.2.9 Test Results (Mode 3)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.95	40.89	20.09	50.84	30.04	65.79	55.79	-14.95	-25.75
2	0.16953	9.96	38.73	23.41	48.69	33.37	64.98	54.98	-16.29	-21.61
3	0.18125	9.96	35.74	17.96	45.70	27.92	64.43	54.43	-18.73	-26.51
4	0.22812	9.97	29.31	14.52	39.28	24.49	62.52	52.52	-23.24	-28.03
5	0.40781	9.99	16.23	8.06	26.22	18.05	57.69	47.69	-31.47	-29.64
6	25.87109	11.24	24.01	23.59	35.25	34.83	60.00	50.00	-24.75	-15.17

## Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

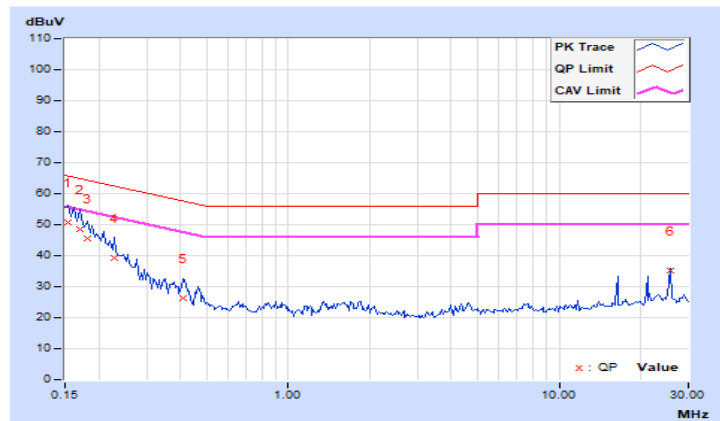


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.92	39.15	18.60	49.07	28.52	65.79	55.79	-16.72	-27.27
2	0.17344	9.93	37.18	18.94	47.11	28.87	64.79	54.79	-17.68	-25.92
3	0.20078	9.95	31.96	16.84	41.91	26.79	63.58	53.58	-21.67	-26.79
4	0.23984	9.95	25.49	10.21	35.44	20.16	62.10	52.10	-26.66	-31.94
5	0.40781	9.96	17.75	6.39	27.71	16.35	57.69	47.69	-29.98	-31.34
6	25.87500	10.91	24.30	24.00	35.21	34.91	60.00	50.00	-24.79	-15.09

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

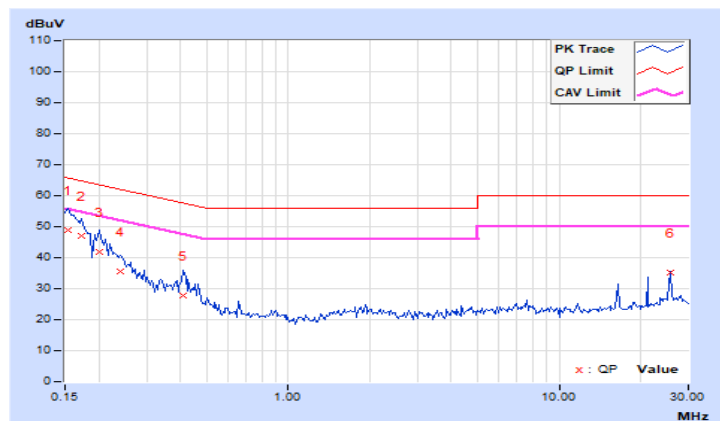


### 4.3 Conducted Out of Band Emission Measurement

#### 4.3.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedures

##### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

##### MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

#### 4.3.5 Deviation from Test Standard

No deviation.


#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.


#### 4.3.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

**For mode 1**  
**5GHz\_802.11a CH157 + BT-LE\_CH1**

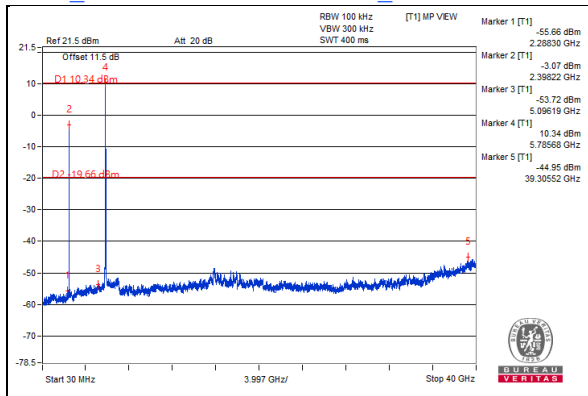

**For mode 3**  
**5GHz\_802.11a CH157 + BT-LE\_CH1**

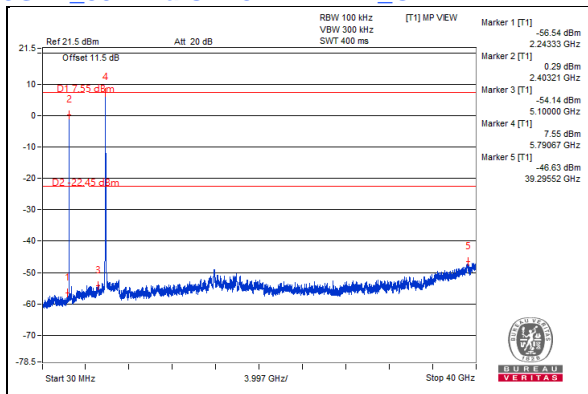



## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---