

特性: Specifications:

电器: Electrical:

1. 接触阻抗: Contact Resistance
30 milliohms MAX
2. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
3. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

机构: Mechanical:

1. 结合力: Mating Force:
4.0KG MAX 最大4kg
2. 拔出力: Unmating Force:
0.7 KG MIN 最少0.7kg

材料: Material:



1. 塑胶: Housing: Hing Temperature Ternmaplasti
U1 94V-0 耐高温塑胶
2. 端子: Contact: Copper Alloy 铜合金
3. 铁壳: Shell: Copper Alloy 铜合金


电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
接触点镀金. 脚镀锡

2. 铁壳: Shell:

Nickel Plating 镀镍

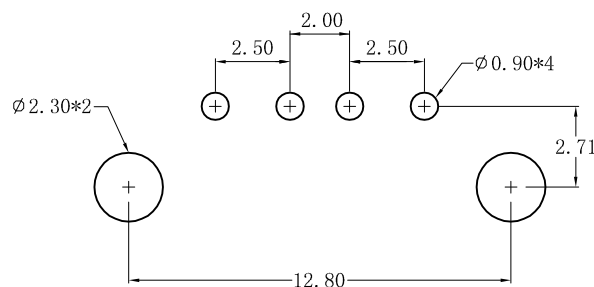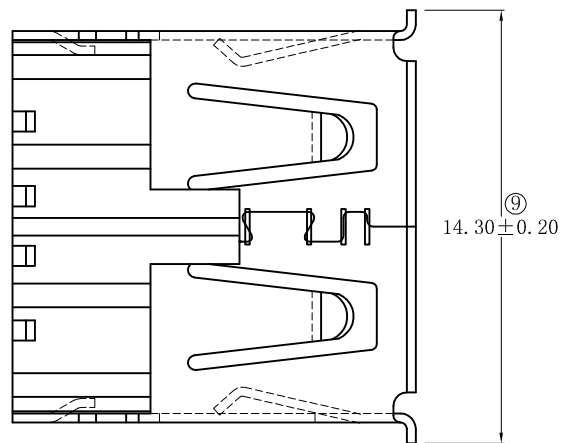

Tel: 18806665204 杜R				 成品图	
深圳市浩垣森精密电子有限公司					
品名	USB A TYPE 无后盖 直脚90度 母座	材质		单位	MM
图号	CP-UB001-4A	图纸编号		比例	1:1
制图		审核		日期	2005.11.03