


1 2 3 4 5 6 7 8

REV.	ECR NO.	DATE	SIGN	DESCRIPTION
A		20130815		NEW DRAWING

**A** Circuit No.1 16.08±0.1 TERMINAL

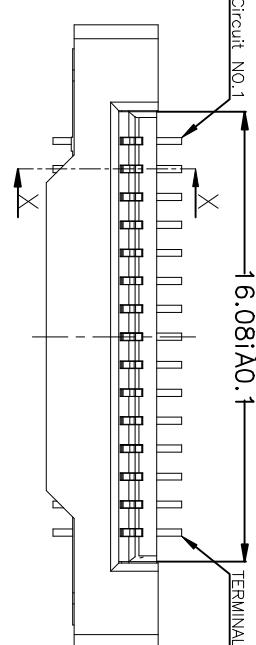

3D VIEW

NOTES:

1. MATERIAL:  
HOUSING: NYLON U194V-0; COLOR:BLACK;  
COVER: PPS U194V-0; COLOR:NATURE;  
CONTACT: COPPER ALLOY;

2. PLATING:  
CONTACT: GOLD OR TIN PLATED ON NICKEL OVERALL.

3. RATING:  
CURRENT RATING: 0.2A AC/DC  
VOLTAGE RATING: 50V AC/DC  
TEMPERATURE RANGE: -30°C~+85°C;

4. PART NO:  
FPC 10 30-XX S -TA X-X  
1=ROHS 2=Halogen free  
TA: Tape Reel Packing  
TU: Tube Packing  
G: Cold Flash  
Right Angle/Lower Contact Type  
No. of contacts  
Series name


Pitch=1.0mm  
FPC Conn

**B**

ACTUATOR

VALCON

(2x)0.8

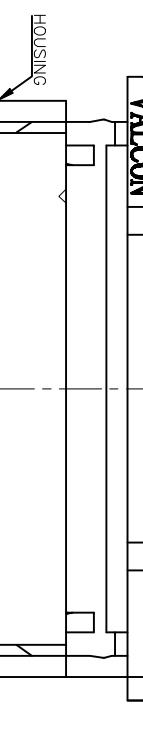

**C**

HOUSING

VALCON

0.40

4.6

3.0

5.5

7.7

**D**

0.25

14.00

2.60

4.0

3.0

SEC.X-X

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2.60

3.0

4.0

3.0

2