

# TEST REPORT

Report No.: BCTC2408319656-4E

---

Applicant: Radxa Computer (Shenzhen) Co.,Ltd.

---

Product Name: Radxa ROCK 5C

---

Test Model: Radxa ROCK 5C D16R26

---

Tested Date: 2024-08-21 to 2024-08-30

---

Issued Date: 2024-09-02

---

**Shenzhen BCTC Testing Co., Ltd.**



# FCC ID: 2BC6T-ROCK5C

Product Name: Radxa ROCK 5C

Trademark:   
Radxa ROCK 5C D16R26

Model/Type reference: Radxa ROCK 5C D1R26, Radxa ROCK 5C D2R26, Radxa ROCK 5C D4R26,  
Radxa ROCK 5C D8R26, Radxa ROCK 5C D32R26, Radxa ROCK 5C D1R27,  
Radxa ROCK 5C D2R27, Radxa ROCK 5C D4R27, Radxa ROCK 5C D8R27,  
Radxa ROCK 5C D16R27, Radxa ROCK 5C D32R27

Prepared For: Radxa Computer (Shenzhen) Co.,Ltd.

Address: 1602, Smart Valley, tiezai Road, Gongle community, Xixiang, Baoan, Shenzhen

Manufacturer: Radxa Computer (Shenzhen) Co.,Ltd.

Address: 1602, Smart Valley, tiezai Road, Gongle community, Xixiang, Baoan, Shenzhen

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng,  
Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2024-08-21

Sample tested Date: 2024-08-21 to 2024-08-30

Issue Date: 2024-09-02

Report No.: BCTC2408319656-4E

Test Standards: FCC Part15 15.407  
ANSI C63.10-2013  
KDB 662911 D01 v02r01  
KDB 789033 D02 v02r01

Test Results: PASS

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table Of Content

	Page
Test Report Declaration	
1. Version .....	5
2. Test Summary .....	6
3. Measurement Uncertainty .....	7
4. Product Information And Test Setup .....	8
4.1 Product Information.....	8
4.2 Test Setup Configuration .....	9
4.3 Support Equipment .....	9
4.4 Channel List .....	10
4.5 Test Mode .....	11
5. Test Facility And Test Instrument Used.....	12
5.1 Test Facility.....	12
5.2 Test Instrument Used.....	12
6. Conducted Emissions.....	14
6.1 Block Diagram Of Test Setup.....	14
6.2 Limit .....	14
6.3 Test Procedure .....	14
6.4 EUT Operating Conditions .....	14
6.5 Test Result.....	15
7. Radiated Emissions.....	19
7.1 Block Diagram Of Test Setup.....	19
7.2 Limit .....	20
7.3 Test Procedure .....	21
7.4 EUT Operating Conditions .....	22
7.5 Test Result.....	22
8. Power Spectral Density Test .....	45
8.1 Block Diagram Of Test Setup.....	45
8.2 Limit .....	45
8.3 Test Procedure .....	46
8.4 EUT Operating Conditions .....	46
8.5 Test Result.....	47
9. 26dB & 6dB & 99% Emission Bandwidth .....	69
9.1 Block Diagram Of Test Setup.....	69
9.2 Limit .....	69
9.3 Test Procedure .....	69
9.4 EUT Operating Conditions .....	70
9.5 Test Result.....	70
10. Maximum Conducted Output Power.....	112
10.1 Block Diagram Of Test Setup.....	112
10.2 Limit .....	112
10.3 Test Procedure .....	112
10.4 EUT Operating Conditions .....	113
10.5 Test Result.....	114
11. Out Of Band Emissions .....	136


11.1	Block Diagram Of Test Setup.....	136
11.2	Limit .....	136
11.3	Test Procedure .....	136
11.4	EUT Operating Conditions .....	136
11.5	Test Result.....	137
12.	Spurious RF Conducted Emissions.....	155
12.1	Block Diagram Of Test Setup.....	155
12.2	Limit .....	155
12.3	Test Procedure .....	155
12.4	Test Result.....	155
13.	Frequency Stability Measurement .....	176
13.1	Block Diagram Of Test Setup.....	176
13.2	Limit .....	176
13.3	Test Procedure .....	176
13.4	Test Result.....	177
14.	Duty Cycle Of Test Signal .....	183
14.1	Standard Requirement .....	183
14.2	Formula.....	183
14.3	Test Procedure .....	183
14.4	Test Result.....	183
15.	Antenna Requirement .....	193
15.1	Limit .....	193
15.2	Test Result.....	193
16.	EUT Photographs.....	194
17.	EUT Test Setup Photographs.....	195

(Note: N/A Means Not Applicable)

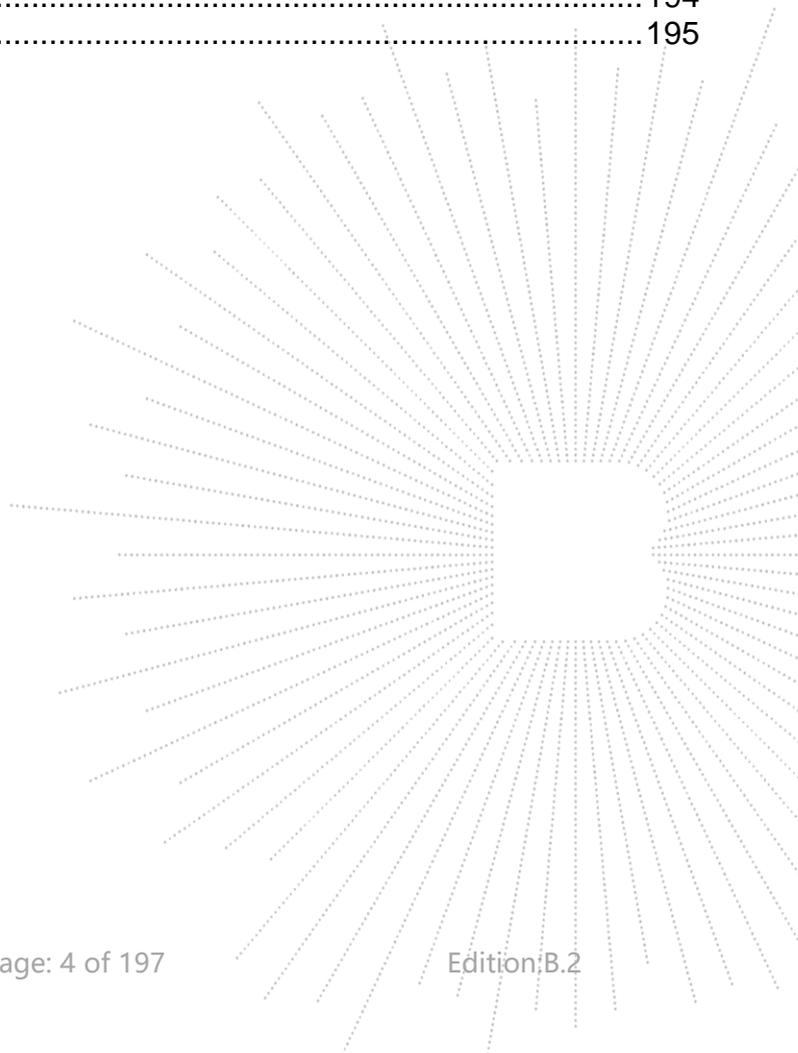

**1. Version**

<b>Report No.</b>	<b>Issue Date</b>	<b>Description</b>	<b>Approved</b>
BCTC2408319656-4E	2024-09-02	Original	Valid

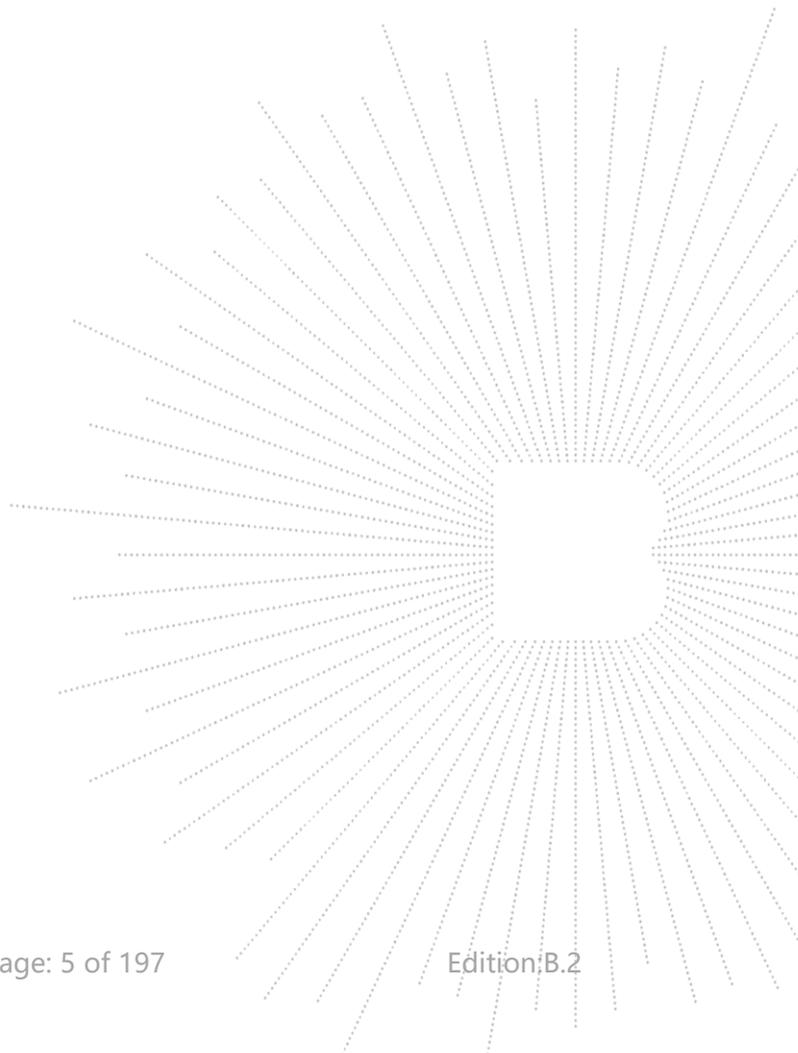


## 2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Spurious Radiated Emissions	15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(8)	PASS
2	Conducted Emission	15.207	PASS
3	26 dB and 99% Emission Bandwidth	15.407 (a)(12) 15.1049	PASS
4	Minimum 6 dB bandwidth	15.407(e)	PASS
5	Maximum Conducted Output Power	15.407 (a)(1) 15.407 (a)(3)	PASS
6	Band Edge	2.1051, 15.407(b)(1) 15.407(b)(4)	PASS
7	Power Spectral Density	15.407 (a)(1) 15.407 (a)(3)	PASS
8	Spurious Emissions at Antenna Terminals	2.1051, 15.407(b)	PASS
9	Antenna Requirement	15.203	PASS


Note: The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure.

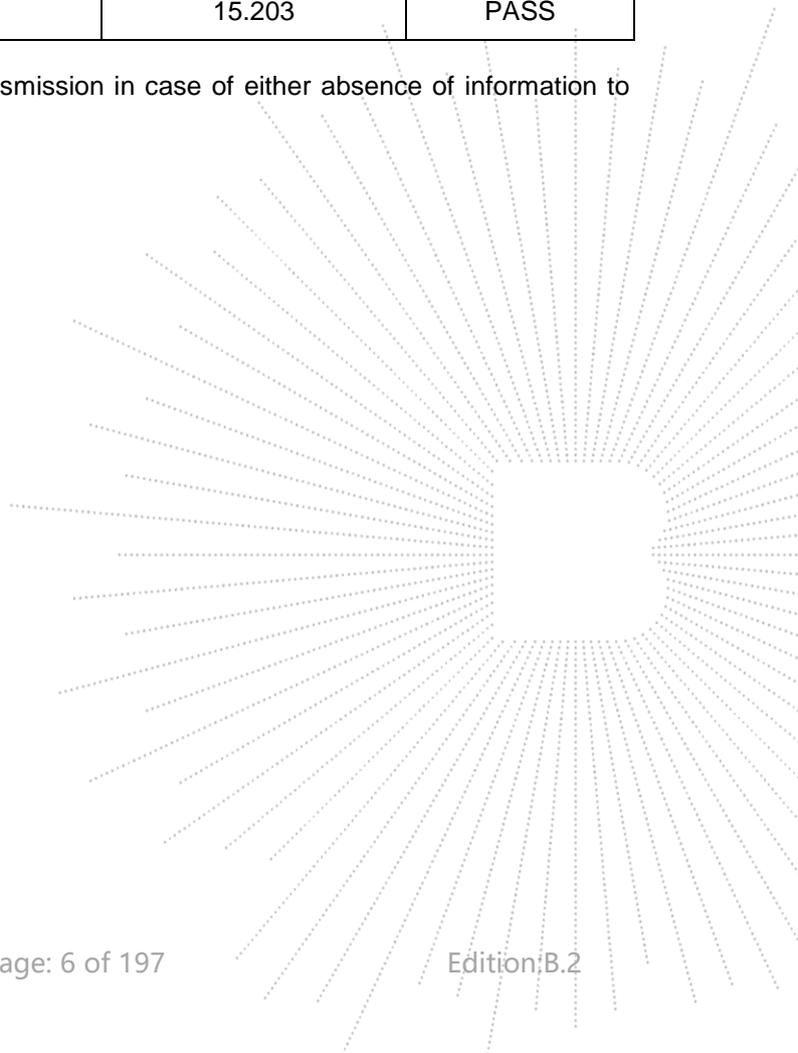

### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .


No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission(150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

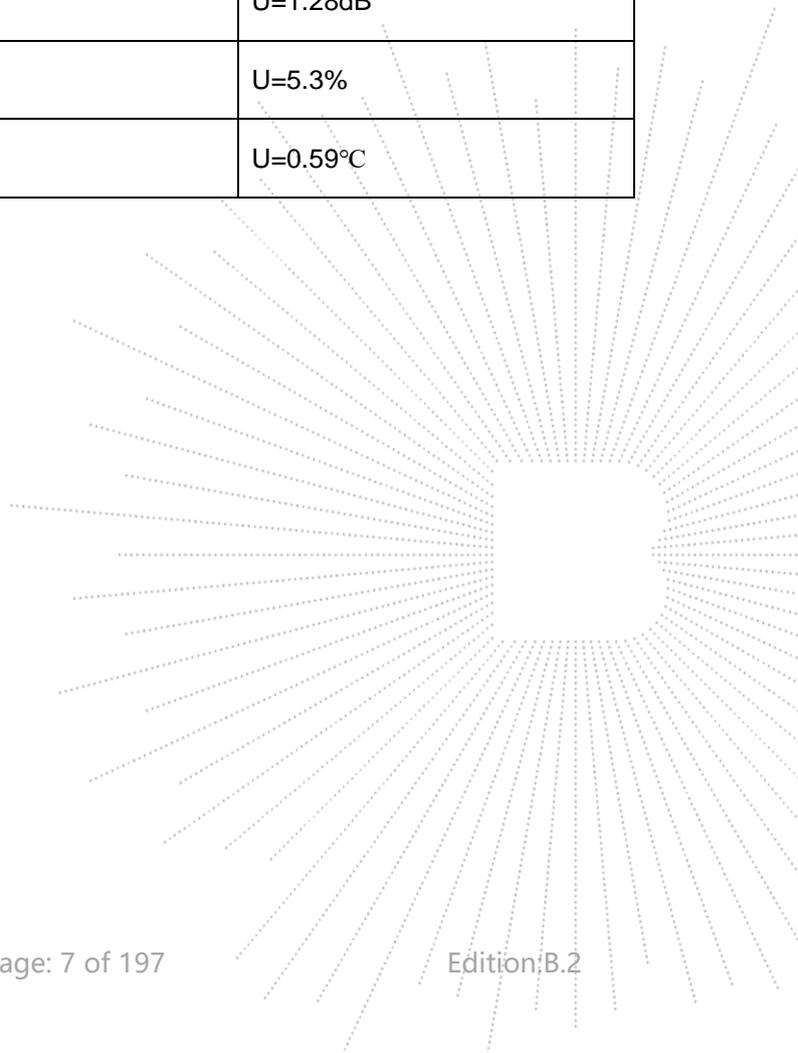

## 4. Product Information And Test Setup

### 4.1 Product Information

Model/Type reference:	Radxa ROCK 5C D16R26 Radxa ROCK 5C D1R26, Radxa ROCK 5C D2R26, Radxa ROCK 5C D4R26, Radxa ROCK 5C D8R26, Radxa ROCK 5C D32R26, Radxa ROCK 5C D1R27, Radxa ROCK 5C D2R27, Radxa ROCK 5C D4R27, Radxa ROCK 5C D8R27, Radxa ROCK 5C D16R27, Radxa ROCK 5C D32R27
Model differences:	All models are the same circuit and RF module, only the model name and memory size, and the SoC model are different.
Hardware Version:	N/A
Software Version:	N/A
IEEE 802.11 WLAN Mode Supported	802.11a/n/ac/ax(20MHz channel bandwidth) 802.11n/ac/ax(40MHz channel bandwidth) 802.11ac/ax(80MHz channel bandwidth)
Operation Frequency:	5180-5240MHz for 802.11a/n/ac/ax(HT20); 5190-5230MHz for 802.11n/ac/ax(HT40); 5210MHz for 802.11 ac/ax80; 5745-5825 MHz for 802.11a/n/ac/ax(HT20); 5755-5795 MHz for 802.11n/ac/ax(HT40); 5775MHz for 802.11 ac/ax80;
Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac/ax(VHT20): NSS1, MCS0-MCS8 802.11ac/ax(VHT40/VHT80):NSS1, MCS0-MCS
Type of Modulation:	OFDM/OFDMA;
Number Of Channel	4 channels for 802.11a/n20/ac20/ax20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40/ax40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80/ax80 in the 5210MHz band ; 5 channels for 802.11a/n20/ac20/ax20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40/ax40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80/ax80 in the 5775MHz band
Antenna installation:	FPC antenna
Antenna Gain:	1.42 dBi Remark: <input checked="" type="checkbox"/> The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. <input type="checkbox"/> The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Ratings:	DC 5V from adapter

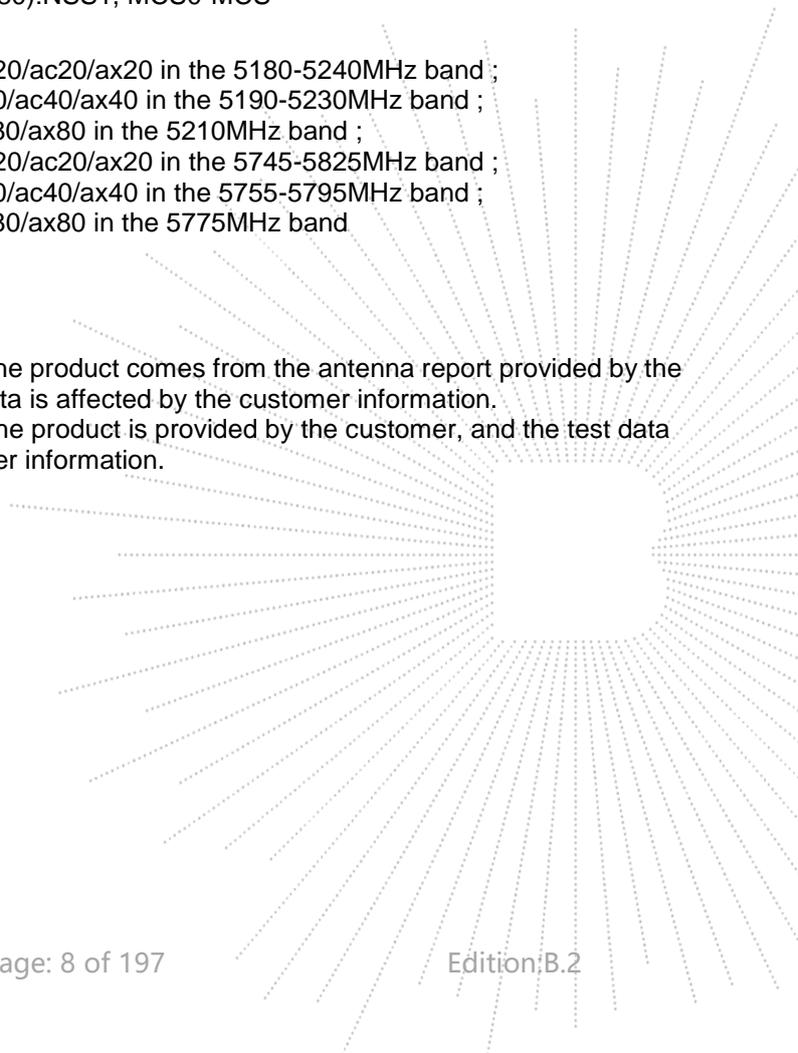

## 4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.


## 4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
1.	Adapter	HP	TPN-LA22	---	---
2.	keyboard	Logitech	1641MG01DLZ8	---	---
3.	Mouse	Logitech	M-U0026	---	---
4.	Earphone	IHIP	SBGE1	---	---
5.	U disk	SanDisk	32G	---	---
6.	Router	HUAWEI	WS318	---	---
7.	HDMI Cable	Belkin	HDMI2.0	---	---
8.	<b>Display</b>	ChangHong	55DBK	---	---

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	3M	DC cable unshielded

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

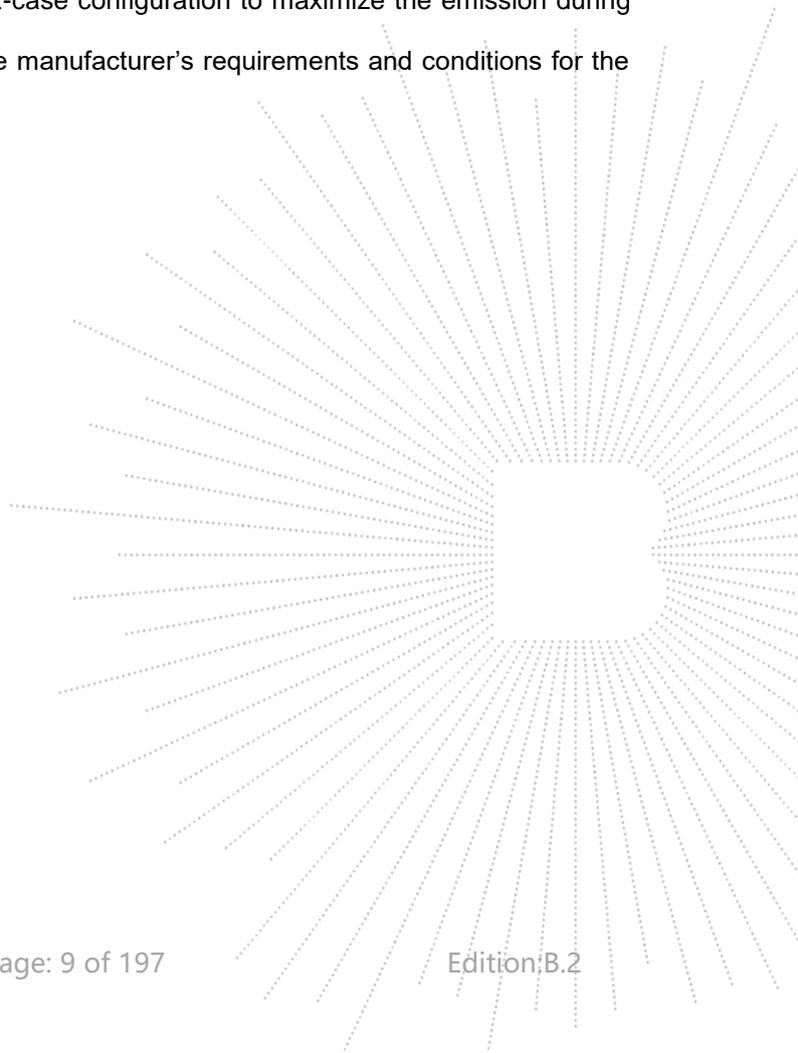

#### 4.4 Channel List

##### 5.1G

802.11a/n/ac/ax( 20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

802.11n /ac/ax(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

802.11ac/ax (80MHz) Carrier Frequency Channel	
Channel	Frequency (MHz)
42	5210


##### 5.8G

802.11a/n/ac/ax( 20 MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

802.11n/ac/ax 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

802.11 ac/ax 80MHz Carrier Frequency Channel	
Channel	Frequency (MHz)
155	5775

Note: This prototype does not support RU mode.

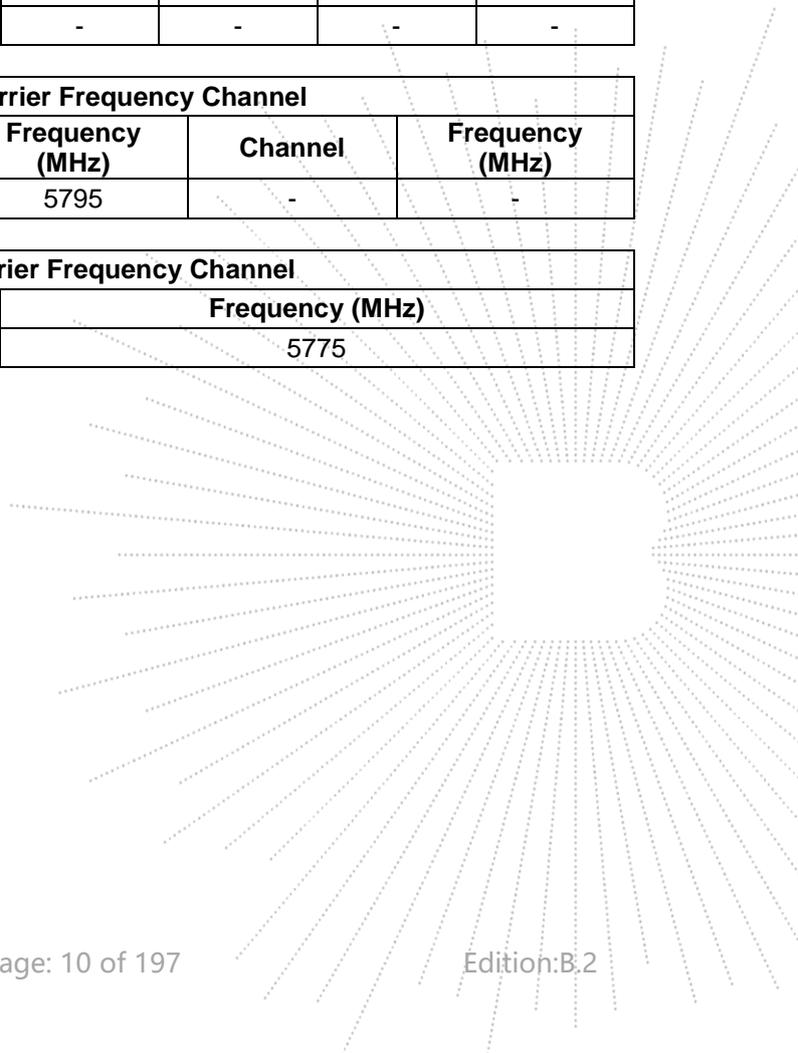

#### 4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11a / n/ ac 20/ ax 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20/ ax 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40/ ax 40 CH38/ CH 46 802.11n/ ac40/ ax 40 CH 151 / CH 159
Mode 3	802.11 ac80/ ax80 CH 42/CH 155
Mode 4	BT+WIFI+HDMI+RJ45+keyboard+Mouse+USB+Earphone


Note:

- 1.The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- 2.We're testing antenna A data.

#### 4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
Parameters	DEF	DEF	DEF

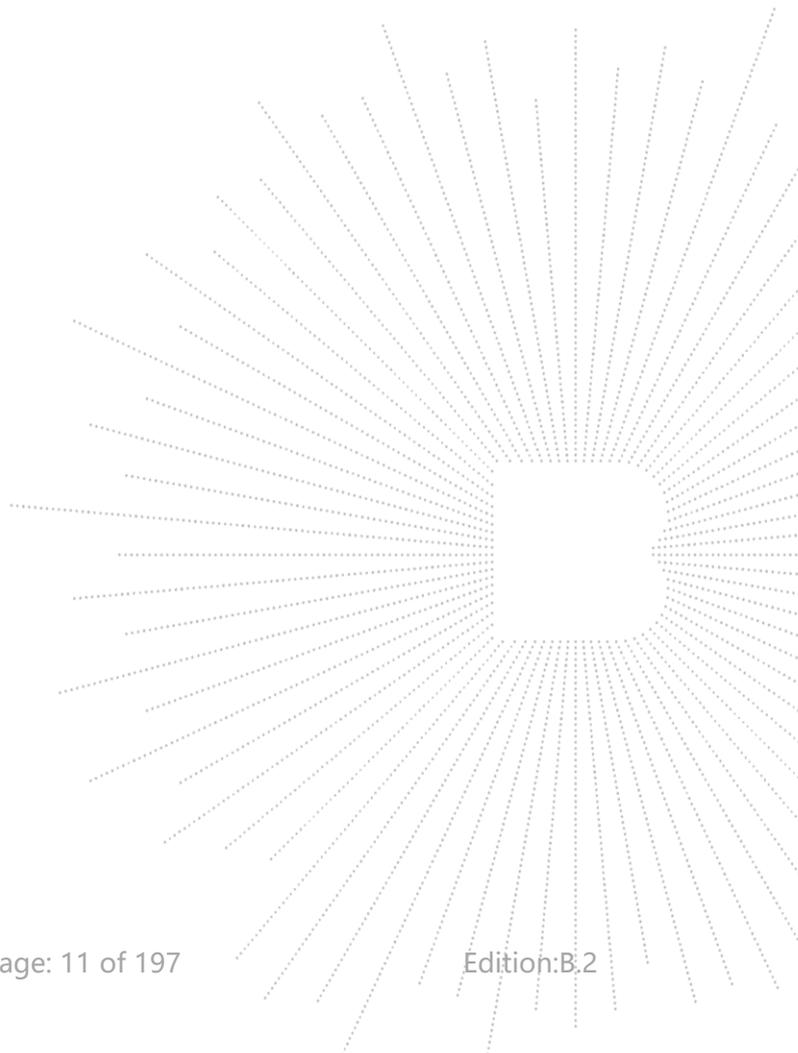

## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

### 5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD9561-F	01323	May 16, 2024	May 15, 2025


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Radio frequency control box	MAIWEI	MW100-RFC B	\	\	\
Software	MAIWEI	MTS 8310	\	\	\

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 16, 2024	May 15, 2025
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

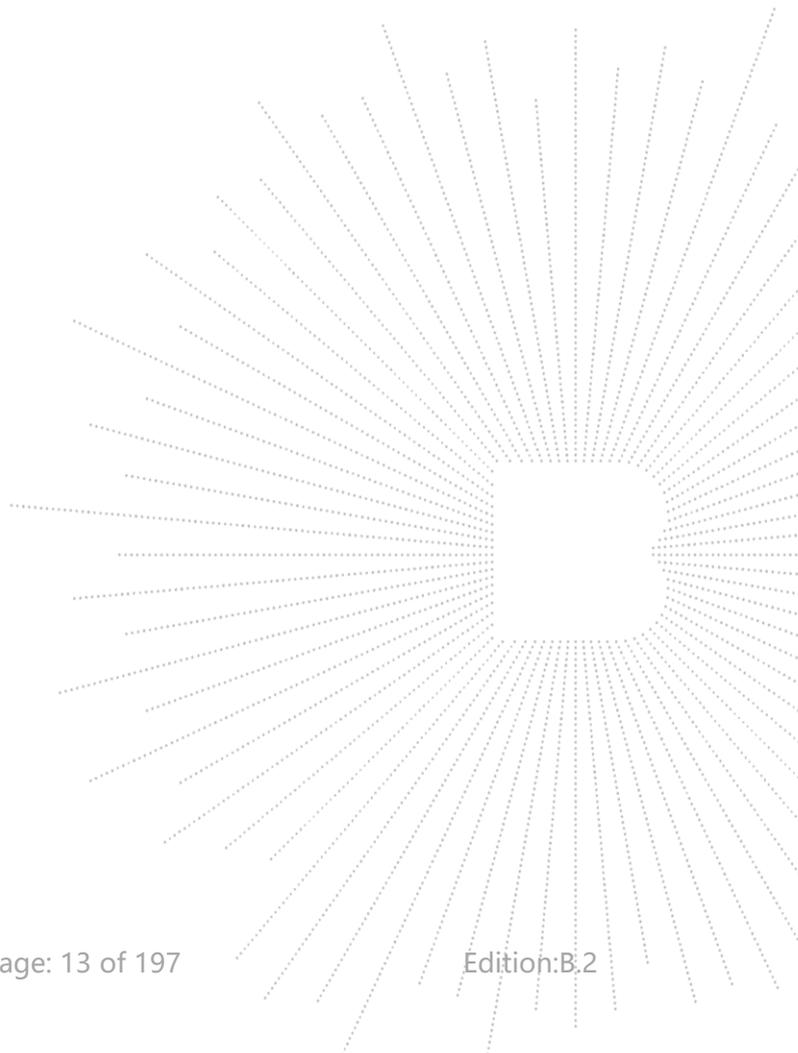

## 6. Conducted Emissions

### 6.1 Block Diagram Of Test Setup

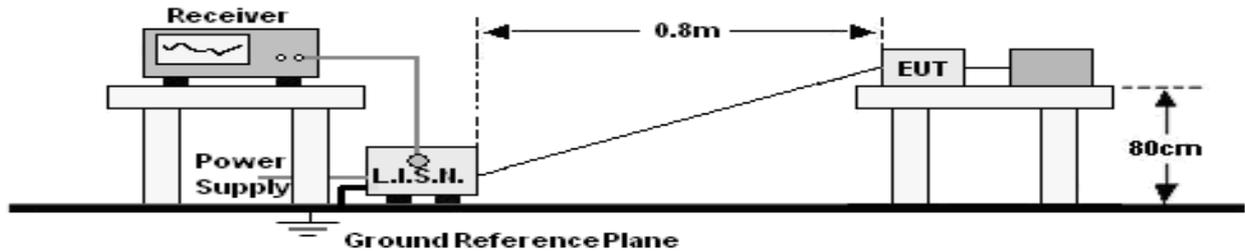

### 6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

1. The tighter limit applies at the band edges.
2. The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

### 6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- a. The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


### 6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 6.5 Test Result

### RK3582

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 4	Test Voltage :	AC 120V/60Hz

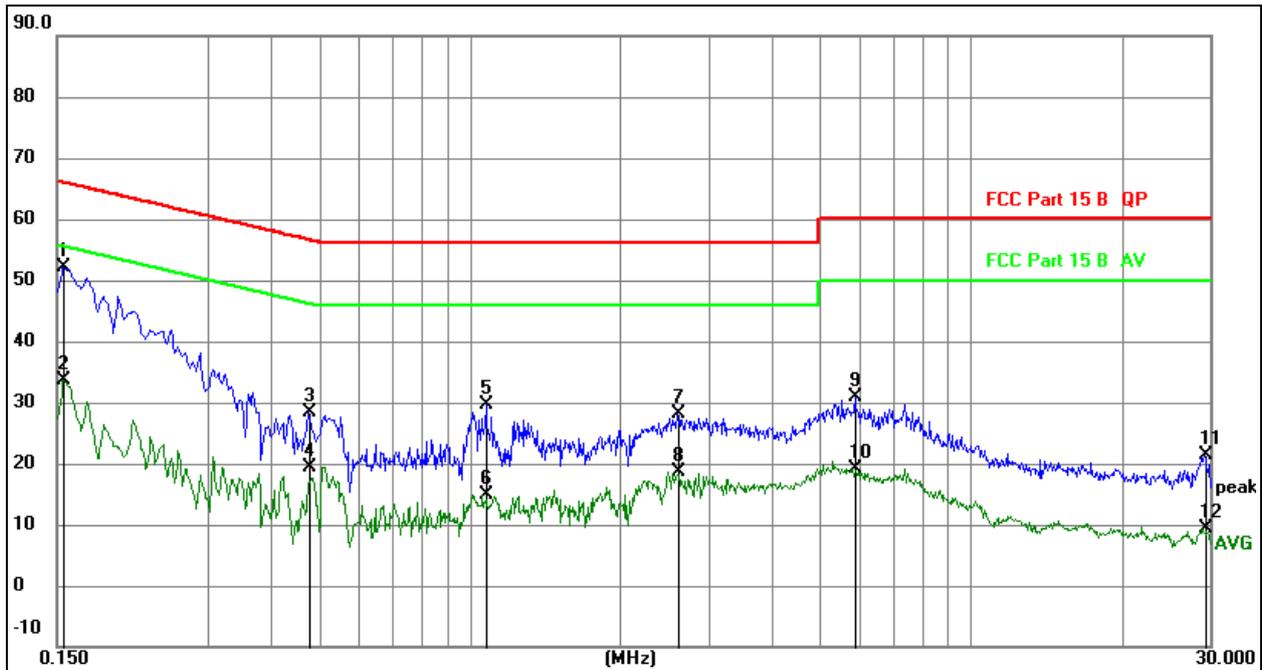


#### Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1545	31.97	20.07	52.04	65.75	-13.71	QP
2		0.1545	13.52	20.07	33.59	55.75	-22.16	AVG
3		0.4785	8.22	20.08	28.30	56.37	-28.07	QP
4		0.4785	-0.62	20.08	19.46	46.37	-26.91	AVG
5		1.0770	9.54	20.09	29.63	56.00	-26.37	QP
6		1.0770	-5.33	20.09	14.76	46.00	-31.24	AVG
7		2.6070	8.09	20.11	28.20	56.00	-27.80	QP
8		2.6070	-1.51	20.11	18.60	46.00	-27.40	AVG
9		5.8830	10.80	20.15	30.95	60.00	-29.05	QP
10		5.8830	-1.01	20.15	19.14	50.00	-30.86	AVG
11		29.3505	1.16	20.27	21.43	60.00	-38.57	QP
12		29.3505	-10.98	20.27	9.29	50.00	-40.71	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 4	Test Voltage :	AC 120V/60Hz

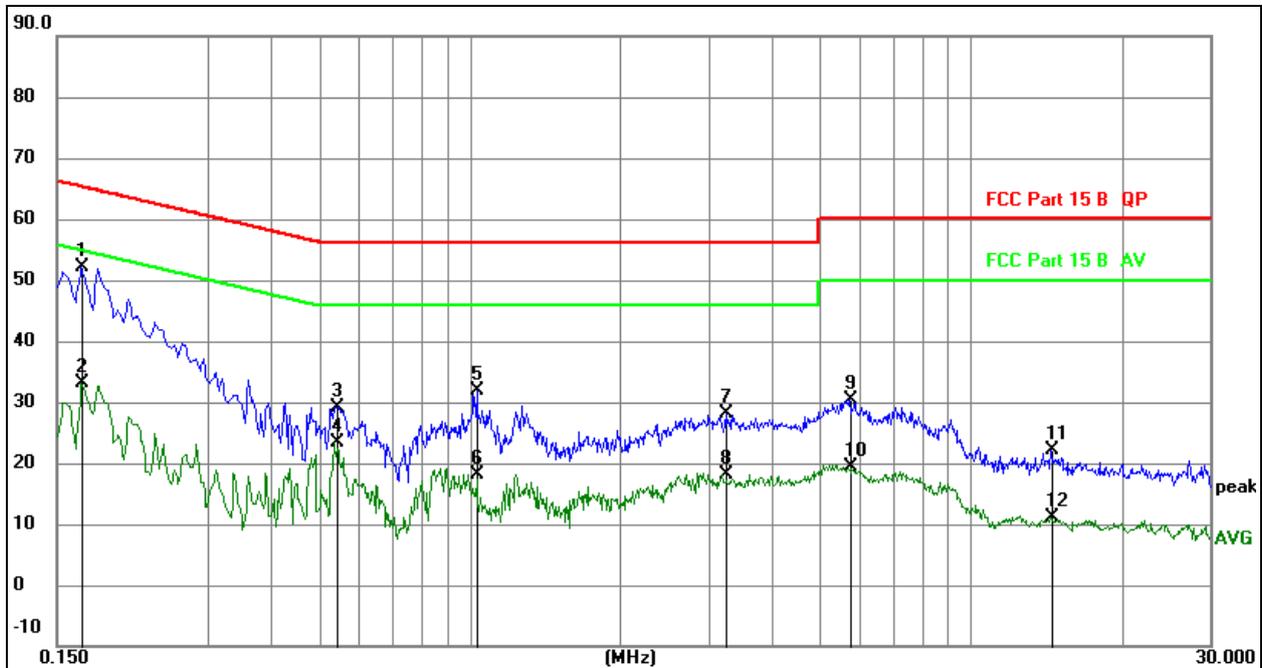

**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1680	31.95	20.07	52.02	65.06	-13.04	QP
2		0.1680	13.16	20.07	33.23	55.06	-21.83	AVG
3		0.5415	9.14	20.08	29.22	56.00	-26.78	QP
4		0.5415	3.33	20.08	23.41	46.00	-22.59	AVG
5		1.0320	11.90	20.09	31.99	56.00	-24.01	QP
6		1.0320	-1.86	20.09	18.23	46.00	-27.77	AVG
7		3.2505	7.90	20.13	28.03	56.00	-27.97	QP
8		3.2505	-2.10	20.13	18.03	46.00	-27.97	AVG
9		5.7390	10.31	20.15	30.46	60.00	-29.54	QP
10		5.7390	-0.88	20.15	19.27	50.00	-30.73	AVG
11		14.4645	1.79	20.29	22.08	60.00	-37.92	QP
12		14.4645	-9.27	20.29	11.02	50.00	-38.98	AVG

**RK3588S2**


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 4	Test Voltage :	AC 120V/60Hz

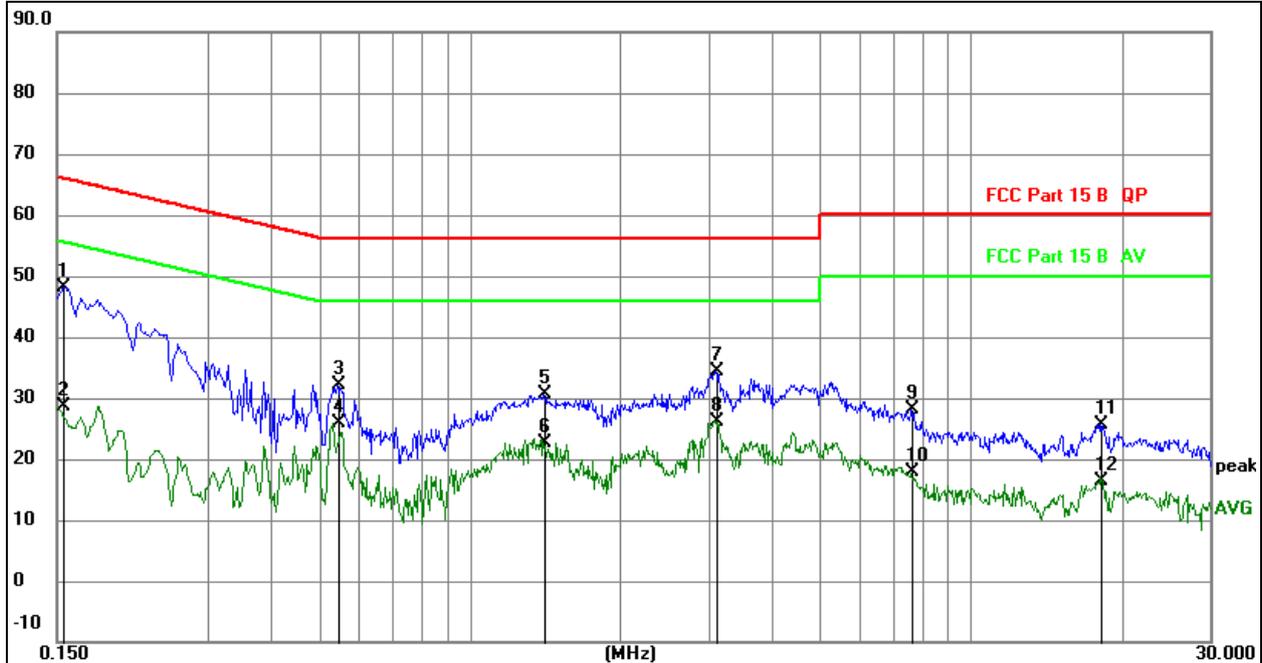
**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over= Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1544	28.16	20.07	48.23	65.76	-17.53	QP
2		0.1544	8.52	20.07	28.59	55.76	-27.17	AVG
3		0.5459	12.06	20.08	32.14	56.00	-23.86	QP
4		0.5459	5.81	20.08	25.89	46.00	-20.11	AVG
5		1.4100	10.50	20.09	30.59	56.00	-25.41	QP
6		1.4100	2.55	20.09	22.64	46.00	-23.36	AVG
7		3.1065	14.33	20.12	34.45	56.00	-21.55	QP
8		3.1065	6.13	20.12	26.25	46.00	-19.75	AVG
9		7.6333	7.91	20.16	28.07	60.00	-31.93	QP
10		7.6333	-2.26	20.16	17.90	50.00	-32.10	AVG
11		18.1453	5.28	20.32	25.60	60.00	-34.40	QP
12		18.1453	-3.96	20.32	16.36	50.00	-33.64	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 4	Test Voltage :	AC 120V/60Hz

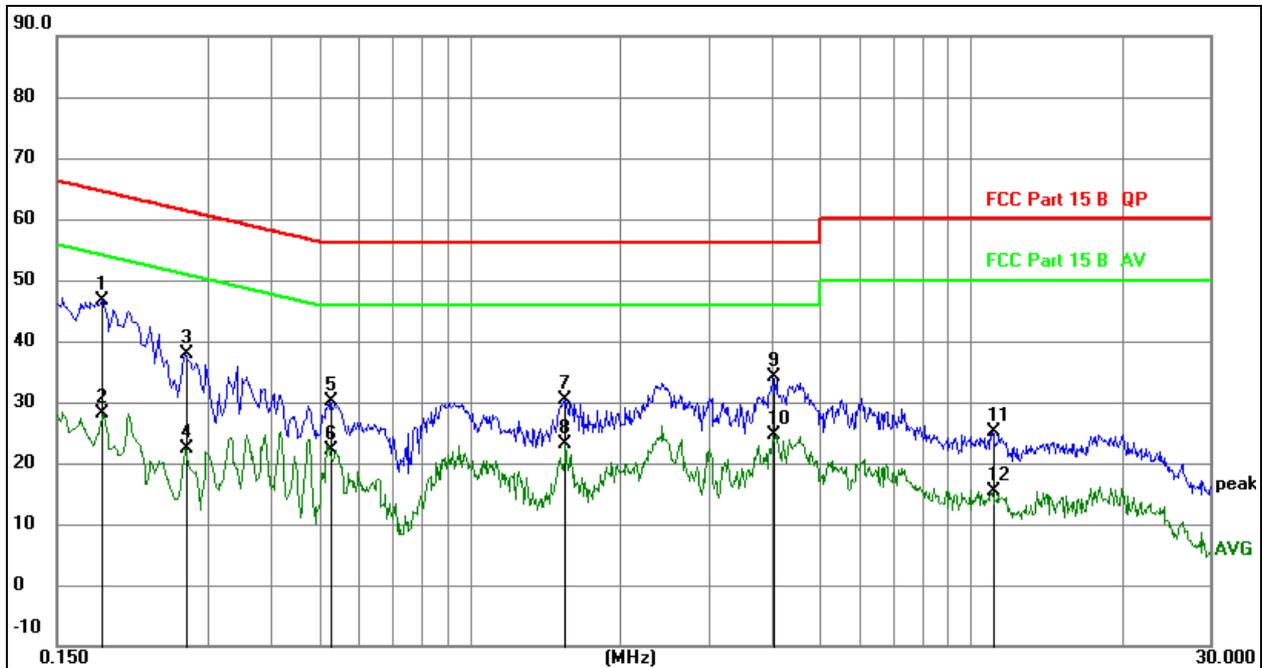
**Remark:**


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over= Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1844	26.60	20.07	46.67	64.29	-17.62	QP
2		0.1844	8.15	20.07	28.22	54.29	-26.07	AVG
3		0.2714	17.73	20.07	37.80	61.07	-23.27	QP
4		0.2714	2.19	20.07	22.26	51.07	-28.81	AVG
5		0.5279	10.04	20.08	30.12	56.00	-25.88	QP
6		0.5279	2.15	20.08	22.23	46.00	-23.77	AVG
7		1.5494	10.27	20.10	30.37	56.00	-25.63	QP
8		1.5494	2.92	20.10	23.02	46.00	-22.98	AVG
9		4.0425	13.87	20.14	34.01	56.00	-21.99	QP
10		4.0425	4.58	20.14	24.72	46.00	-21.28	AVG
11		11.0265	4.85	20.20	25.05	60.00	-34.95	QP
12		11.0265	-4.70	20.20	15.50	50.00	-34.50	AVG


## 7. Radiated Emissions

### 7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

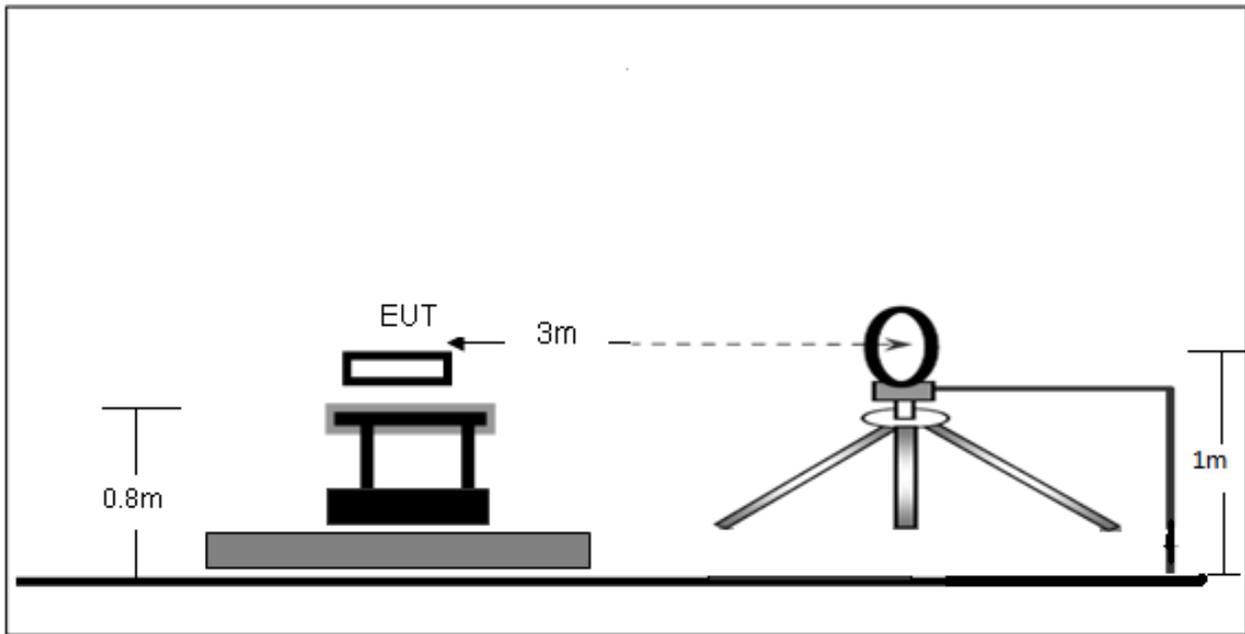

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

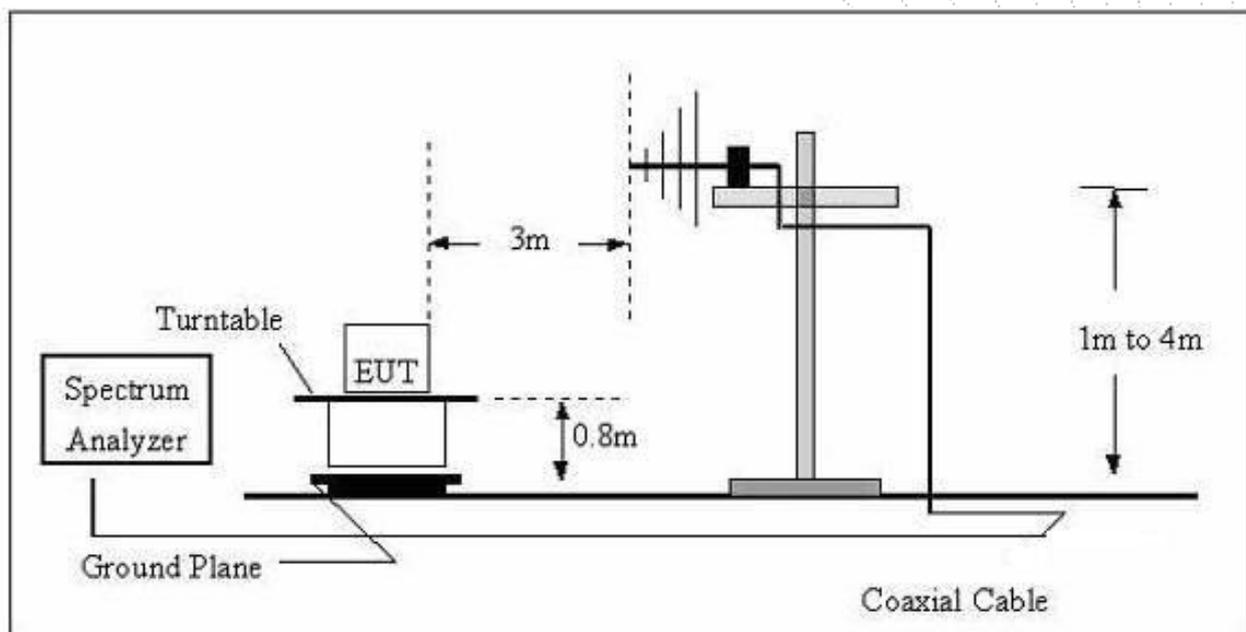

## (C) Radiated Emission Test-Up Frequency Above 1GHz

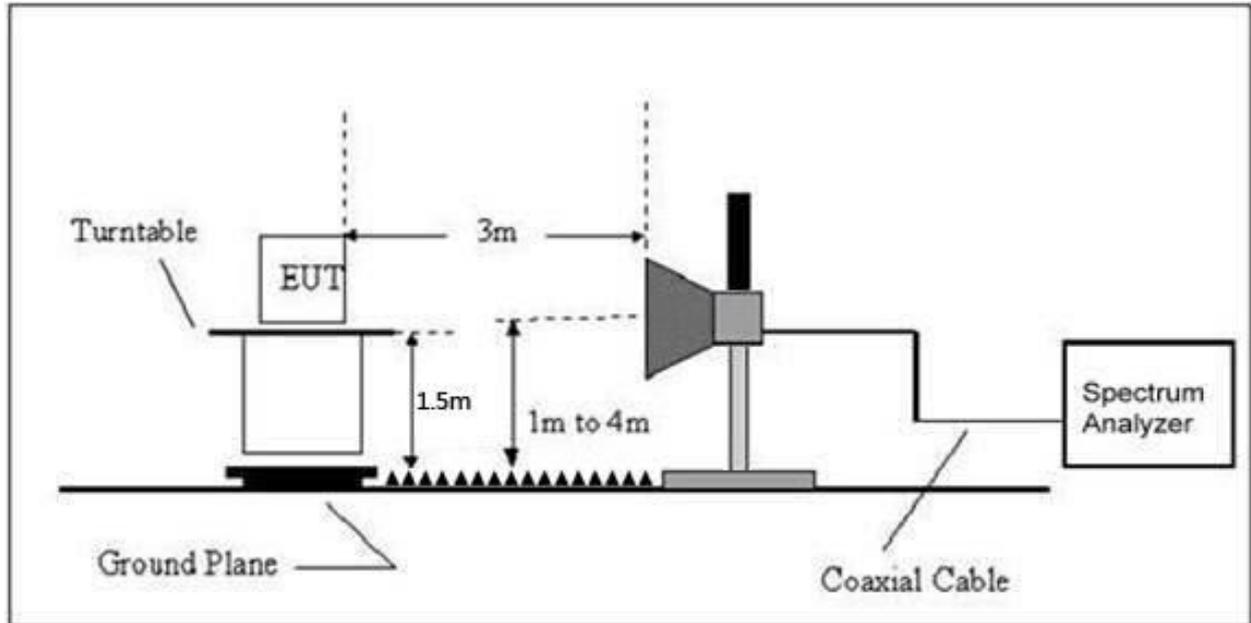

## 7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log <sup>(2400/F(kHz))</sup> + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log <sup>(24000/F(kHz))</sup> + 40
1.705 ~ 30	30	30	100 * 30	20log <sup>(30)</sup> + 40
30 ~ 88	100	3	100	20log <sup>(100)</sup>
88 ~ 216	150	3	150	20log <sup>(150)</sup>
216 ~ 960	200	3	200	20log <sup>(200)</sup>
Above 960	500	3	500	20log <sup>(500)</sup>

## Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

## Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### 7.3 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

## 7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 7.5 Test Result

Below 30MHz

Temperature:	26°C	Relative Humidity:	24%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 4	Polarization :	--


Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance/test distance})(\text{dB})$ ;


Limit line = specific limits(dBuv) + distance extrapolation factor.

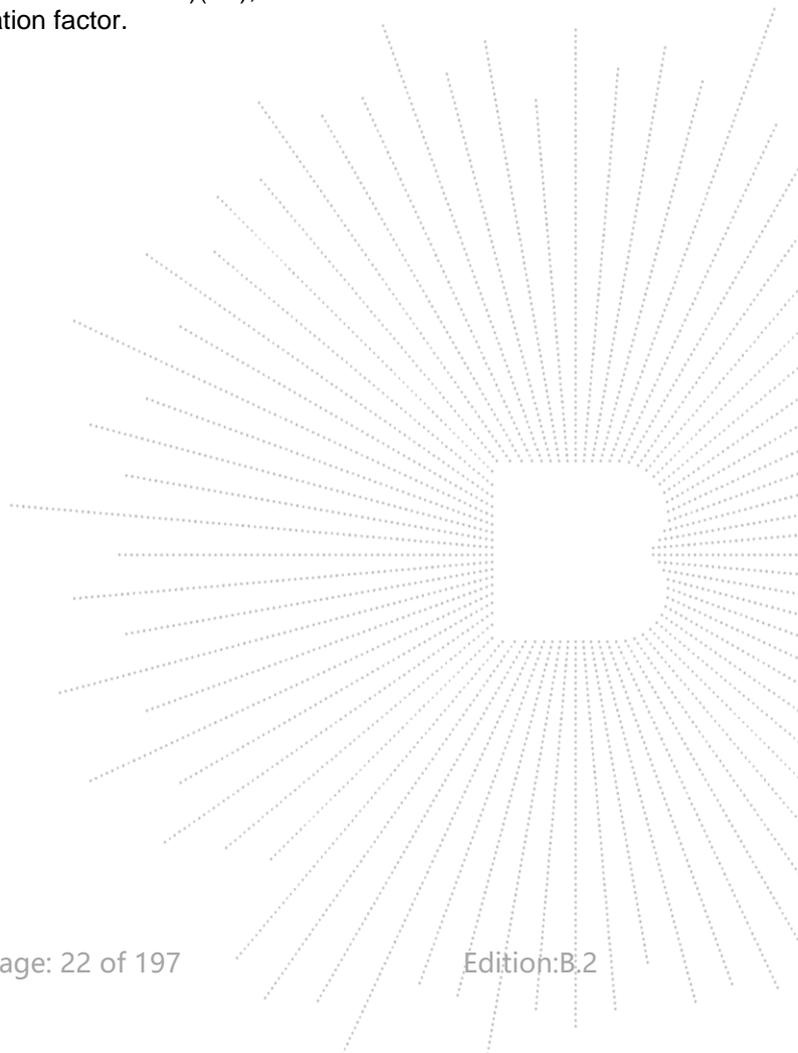

Between 30MHz – 1GHz

RK3582

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 4	Test Voltage:	AC 120V/60Hz

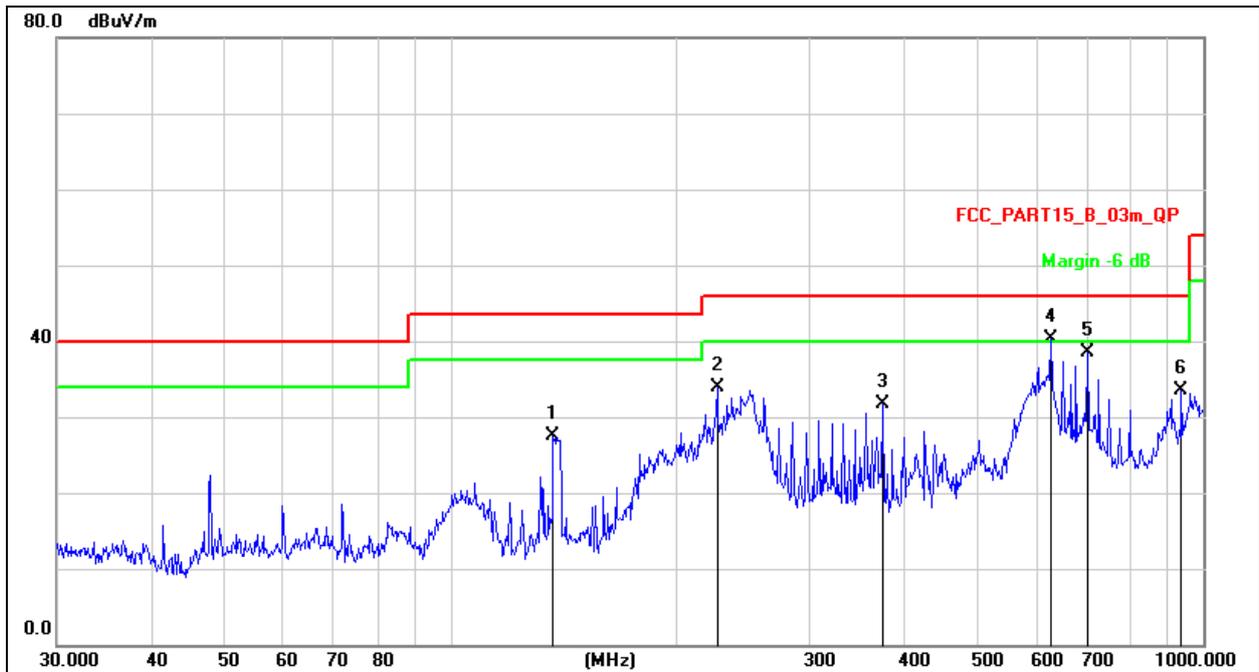


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		136.9391	46.01	-18.52	27.49	43.50	-16.01	QP
2		226.0994	48.97	-14.97	34.00	46.00	-12.00	QP
3		375.9385	42.77	-11.15	31.62	46.00	-14.38	QP
4	*	627.2738	46.76	-6.55	40.21	46.00	-5.79	QP
5		701.7610	44.21	-5.68	38.53	46.00	-7.47	QP
6		935.5463	36.50	-2.99	33.51	46.00	-12.49	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 4	Test Voltage:	AC 120V/60Hz

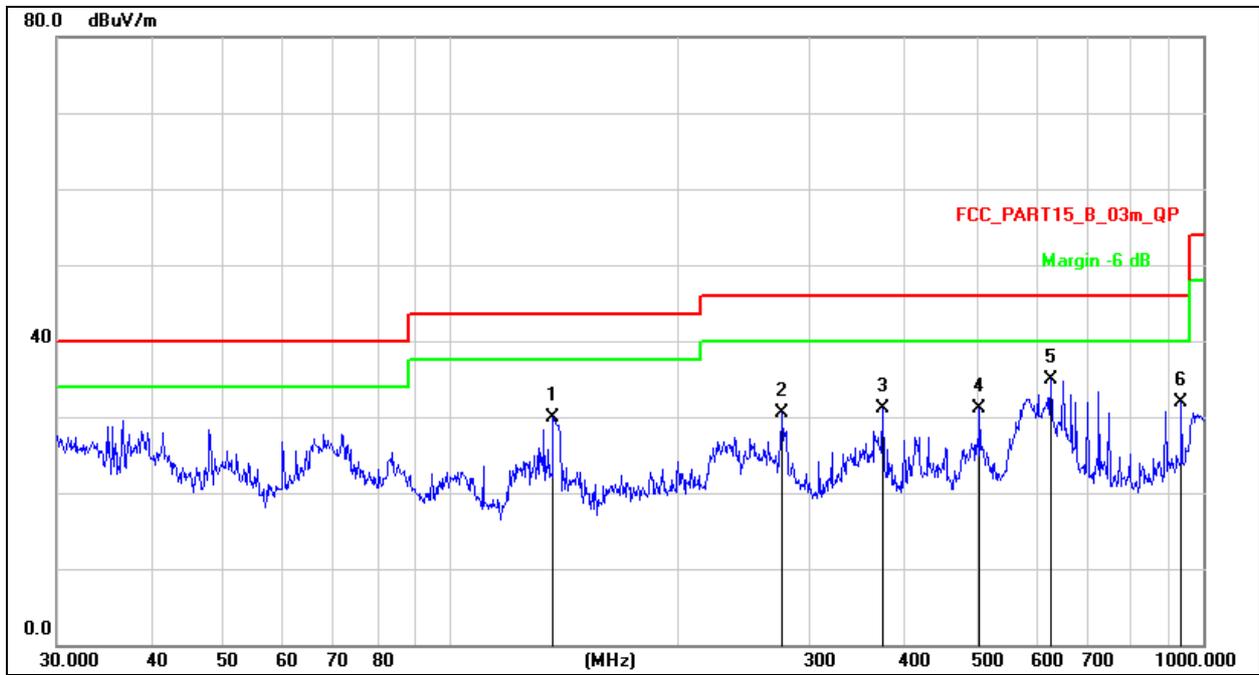


Remark:  
 1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
 2. Measurement=Reading Level+ Correct Factor  
 3. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		136.9391	48.41	-18.52	29.89	43.50	-13.61	QP
2		276.1235	44.27	-13.74	30.53	46.00	-15.47	QP
3		375.9385	42.19	-11.15	31.04	46.00	-14.96	QP
4		504.7062	39.81	-8.78	31.03	46.00	-14.97	QP
5	*	627.2738	41.40	-6.55	34.85	46.00	-11.15	QP
6		935.5463	34.98	-2.99	31.99	46.00	-14.01	QP

RK3588S2

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 4	Test Voltage:	AC 120V/60Hz

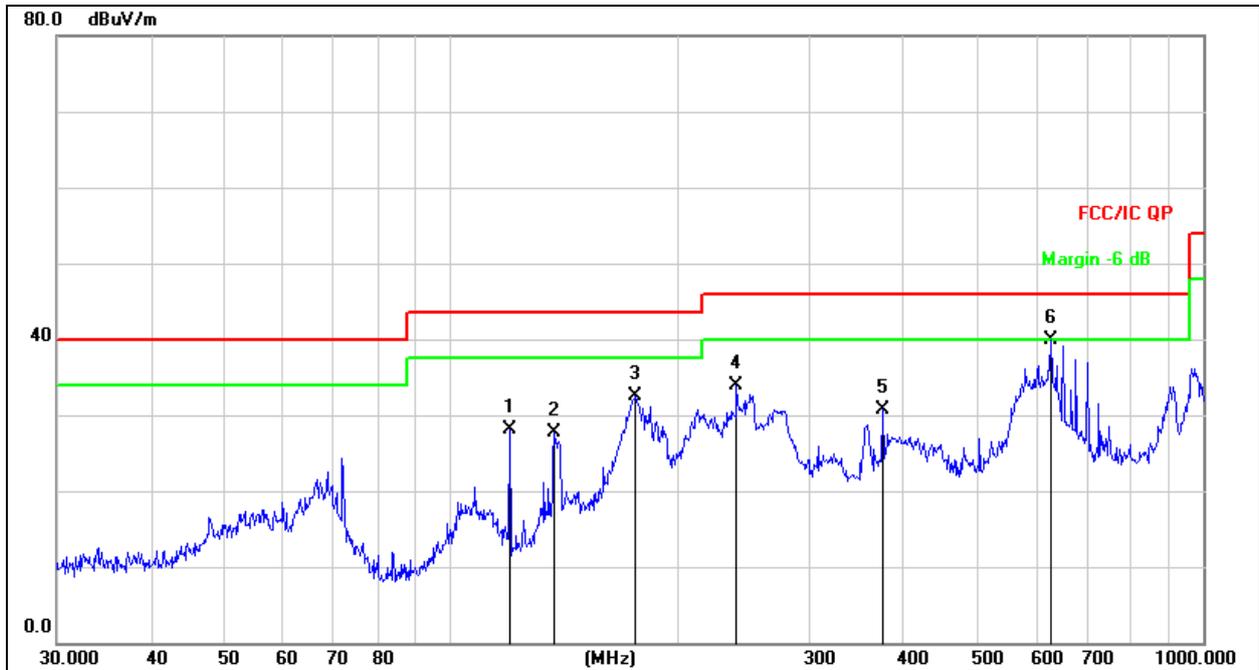


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		119.8556	45.43	-17.32	28.11	43.50	-15.39	QP
2		137.4202	46.22	-18.55	27.67	43.50	-15.83	QP
3		176.2686	49.97	-17.48	32.49	43.50	-11.01	QP
4		239.9874	48.50	-14.58	33.92	46.00	-12.08	QP
5		375.9385	41.92	-11.15	30.77	46.00	-15.23	QP
6	*	627.2738	46.36	-6.55	39.81	46.00	-6.19	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 4	Test Voltage:	AC 120V/60Hz

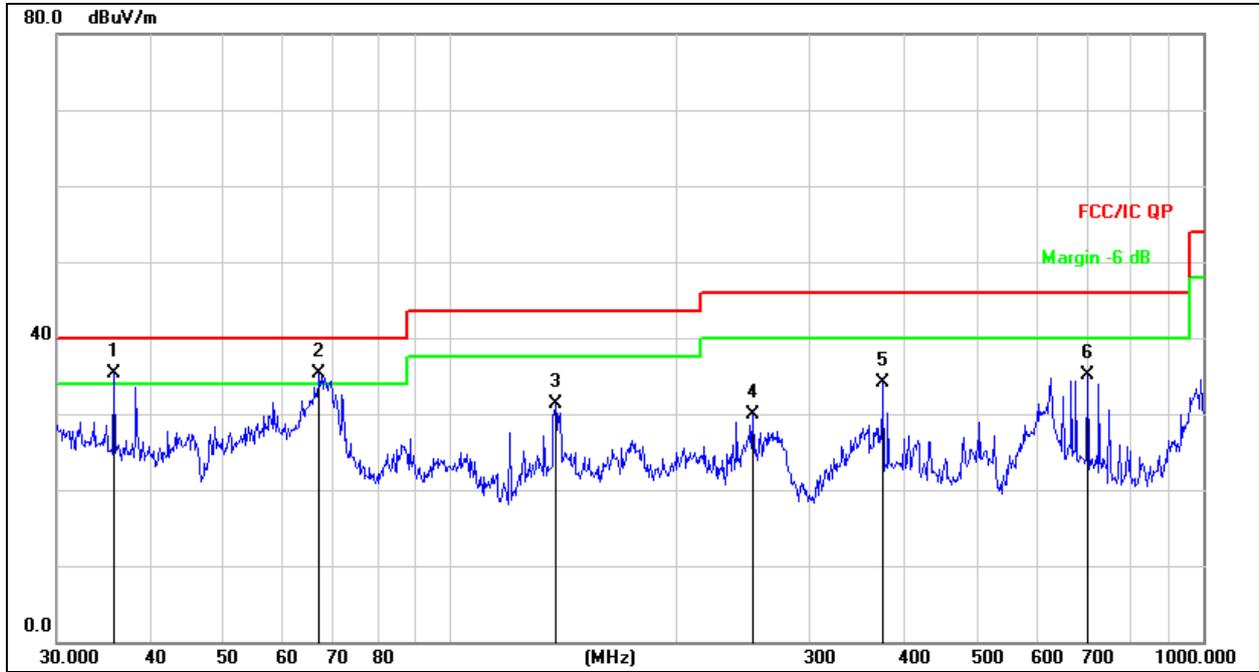

Remark:  
 1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
 2. Measurement=Reading Level+ Correct Factor  
 3. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	35.7490	50.85	-15.54	35.31	40.00	-4.69	QP
2	!	66.9669	52.45	-17.17	35.28	40.00	-4.72	QP
3		137.9028	49.98	-18.58	31.40	43.50	-12.10	QP
4		252.0627	44.24	-14.25	29.99	46.00	-16.01	QP
5		375.9385	45.24	-11.15	34.09	46.00	-11.91	QP
6		701.7610	40.71	-5.68	35.03	46.00	-10.97	QP

Between 1GHz – 40GHz

Test Mode:	TX(5.1G) - 802.11a
------------	--------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.02	74.40	-20.73	53.67	68.20	-14.53	PK
Vertical	4434.02	59.38	-20.73	38.65	54.00	-15.35	AV
Vertical	10360.14	64.01	-9.36	54.65	68.20	-13.55	PK
Vertical	10360.14	49.67	-9.36	40.31	54.00	-13.69	AV
Vertical	15540.02	63.54	-7.84	55.70	74.00	-18.30	PK
Vertical	15540.02	49.68	-7.84	41.84	54.00	-12.16	AV
Horizontal	4434.14	73.85	-20.73	53.12	68.20	-15.08	PK
Horizontal	4434.14	59.36	-20.73	38.63	54.00	-15.37	AV
Horizontal	10360.19	64.71	-9.36	55.35	68.20	-12.85	PK
Horizontal	10360.19	49.79	-9.36	40.43	54.00	-13.57	AV
Horizontal	15540.16	62.13	-7.84	54.29	74.00	-19.71	PK
Horizontal	15540.16	49.42	-7.84	41.58	54.00	-12.42	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.15	72.96	-20.42	52.54	74.00	-21.46	PK
Vertical	4592.15	59.04	-20.42	38.62	54.00	-15.38	AV
Vertical	10400.08	62.56	-9.30	53.26	68.20	-14.94	PK
Vertical	10400.08	49.37	-9.30	40.07	54.00	-13.93	AV
Vertical	15600.07	64.19	-7.82	56.37	74.00	-17.63	PK
Vertical	15600.07	49.50	-7.82	41.68	54.00	-12.32	AV
Horizontal	4592.16	71.65	-20.42	51.23	74.00	-22.77	PK
Horizontal	4592.16	59.03	-20.42	38.62	54.00	-15.38	AV
Horizontal	10400.05	61.52	-9.30	52.22	68.20	-15.98	PK
Horizontal	10400.05	49.99	-9.30	40.69	54.00	-13.31	AV
Horizontal	15600.13	64.91	-7.82	57.09	74.00	-16.91	PK
Horizontal	15600.13	49.77	-7.82	41.95	54.00	-12.05	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.10	74.17	-20.12	54.05	74.00	-19.95	PK
Vertical	4739.10	59.27	-20.12	39.15	54.00	-14.85	AV
Vertical	10480.09	61.59	-9.18	52.41	68.20	-15.79	PK
Vertical	10480.09	49.02	-9.18	39.84	54.00	-14.16	AV
Vertical	15720.15	62.21	-7.78	54.43	74.00	-19.57	PK
Vertical	15720.15	49.42	-7.78	41.64	54.00	-12.36	AV
Horizontal	4739.18	73.36	-20.12	53.24	74.00	-20.76	PK
Horizontal	4739.18	59.15	-20.12	39.03	54.00	-14.97	AV
Horizontal	10480.04	63.96	-9.18	54.78	68.20	-13.42	PK
Horizontal	10480.04	49.76	-9.18	40.58	54.00	-13.42	AV
Horizontal	15720.17	60.95	-7.78	53.17	74.00	-20.83	PK
Horizontal	15720.17	49.91	-7.78	42.13	54.00	-11.87	AV

Note: PK value is lower than the Average value limit, So average didn't record.  
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.  
 The worst case is Antenna A

Test Mode:	TX(5.1G) - 802.11n-HT20
------------	-------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.01	73.18	-20.73	52.45	68.20	-15.75	PK
Vertical	4434.01	59.26	-20.73	38.53	54.00	-15.47	AV
Vertical	10360.11	64.08	-9.36	54.72	68.20	-13.48	PK
Vertical	10360.11	49.50	-9.36	40.14	54.00	-13.86	AV
Vertical	15540.07	63.17	-7.84	55.33	74.00	-18.67	PK
Vertical	15540.07	49.73	-7.84	41.89	54.00	-12.11	AV
Horizontal	4434.03	74.22	-20.73	53.49	68.20	-14.71	PK
Horizontal	4434.03	59.88	-20.73	39.15	54.00	-14.85	AV
Horizontal	10360.16	61.34	-9.36	51.98	68.20	-16.22	PK
Horizontal	10360.16	49.55	-9.36	40.19	54.00	-13.81	AV
Horizontal	15540.10	61.91	-7.84	54.07	74.00	-19.93	PK
Horizontal	15540.10	49.49	-7.84	41.65	54.00	-12.35	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.17	74.50	-20.42	54.08	74.00	-19.92	PK
Vertical	4592.17	59.29	-20.42	38.87	54.00	-15.13	AV
Vertical	10400.09	64.67	-9.30	55.37	68.20	-12.83	PK
Vertical	10400.09	49.28	-9.30	39.98	54.00	-14.02	AV
Vertical	15600.13	63.66	-7.82	55.84	74.00	-18.16	PK
Vertical	15600.13	49.78	-7.82	41.96	54.00	-12.04	AV
Horizontal	4592.07	70.73	-20.42	50.31	74.00	-23.69	PK
Horizontal	4592.07	59.16	-20.42	38.75	54.00	-15.25	AV
Horizontal	10400.19	63.61	-9.30	54.31	68.20	-13.89	PK
Horizontal	10400.19	49.40	-9.30	40.10	54.00	-13.90	AV
Horizontal	15600.08	60.27	-7.82	52.45	74.00	-21.55	PK
Horizontal	15600.08	49.79	-7.82	41.97	54.00	-12.03	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.09	74.18	-20.12	54.05	74.00	-19.95	PK
Vertical	4739.09	59.41	-20.12	39.28	54.00	-14.72	AV
Vertical	10480.18	62.11	-9.18	52.93	68.20	-15.27	PK
Vertical	10480.18	49.43	-9.18	40.25	54.00	-13.75	AV
Vertical	15720.09	60.89	-7.78	53.11	74.00	-20.89	PK
Vertical	15720.09	49.57	-7.78	41.79	54.00	-12.21	AV
Horizontal	4739.12	73.94	-20.12	53.82	74.00	-20.18	PK
Horizontal	4739.12	59.90	-20.12	39.78	54.00	-14.22	AV
Horizontal	10480.14	63.67	-9.18	54.49	68.20	-13.71	PK
Horizontal	10480.14	49.30	-9.18	40.12	54.00	-13.88	AV
Horizontal	15720.05	64.44	-7.78	56.66	74.00	-17.34	PK
Horizontal	15720.05	49.69	-7.78	41.91	54.00	-12.09	AV

Note: PK value is lower than the Average value limit, So average didn't record.  
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11n-HT40
------------	-------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.07	74.62	-20.73	53.88	68.20	-14.32	PK
Vertical	4434.07	59.25	-20.73	38.52	54.00	-15.48	AV
Vertical	10380.06	63.70	-9.33	54.37	68.20	-13.83	PK
Vertical	10380.06	49.48	-9.33	40.15	54.00	-13.85	AV
Vertical	15570.14	64.08	-7.83	56.25	74.00	-17.75	PK
Vertical	15570.14	49.64	-7.83	41.81	54.00	-12.19	AV
Horizontal	4434.07	70.86	-20.73	50.13	74.00	-23.87	PK
Horizontal	4434.07	59.09	-20.73	38.36	54.00	-15.64	AV
Horizontal	10380.14	63.47	-9.33	54.14	68.20	-14.06	PK
Horizontal	10380.14	49.30	-9.33	39.97	54.00	-14.03	AV
Horizontal	15570.07	64.58	-7.83	56.75	74.00	-17.25	PK
Horizontal	15570.07	49.02	-7.83	41.19	54.00	-12.81	AV
Middle Channel (5230 MHz)-Above 1G							
Vertical	4739.08	71.10	-20.12	50.98	68.20	-17.22	PK
Vertical	4739.08	59.30	-20.12	39.18	54.00	-14.82	AV
Vertical	10460.09	60.11	-9.21	50.90	68.20	-17.30	PK
Vertical	10460.09	49.11	-9.21	39.90	54.00	-14.10	AV
Vertical	15690.00	61.56	-7.79	53.77	74.00	-20.23	PK
Vertical	15690.00	49.93	-7.79	42.14	54.00	-11.86	AV
Horizontal	4739.11	74.01	-20.12	53.89	68.20	-14.31	PK
Horizontal	4739.11	59.06	-20.12	38.94	54.00	-15.06	AV
Horizontal	10460.11	64.26	-9.21	55.05	68.20	-13.15	PK
Horizontal	10460.11	49.09	-9.21	39.88	54.00	-14.12	AV
Horizontal	15690.17	61.88	-7.79	54.09	74.00	-19.91	PK
Horizontal	15690.17	49.41	-7.79	41.62	54.00	-12.38	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT20
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.15	74.27	-20.73	53.54	68.20	-14.66	PK
Vertical	4434.15	59.94	-20.73	39.20	54.00	-14.80	AV
Vertical	10360.08	64.29	-9.36	54.93	68.20	-13.27	PK
Vertical	10360.08	49.45	-9.36	40.09	54.00	-13.91	AV
Vertical	15540.06	62.08	-7.84	54.24	74.00	-19.76	PK
Vertical	15540.06	49.66	-7.84	41.82	54.00	-12.18	AV
Horizontal	4434.18	72.58	-20.73	51.85	68.20	-16.35	PK
Horizontal	4434.18	59.07	-20.73	38.33	54.00	-15.67	AV
Horizontal	10360.02	61.97	-9.36	52.61	68.20	-15.59	PK
Horizontal	10360.02	49.88	-9.36	40.52	54.00	-13.48	AV
Horizontal	15540.16	60.12	-7.84	52.28	74.00	-21.72	PK
Horizontal	15540.16	49.69	-7.84	41.85	54.00	-12.15	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.06	73.93	-20.42	53.51	74.00	-20.49	PK
Vertical	4592.06	59.65	-20.42	39.23	54.00	-14.77	AV
Vertical	10400.08	64.08	-9.30	54.78	68.20	-13.42	PK
Vertical	10400.08	49.48	-9.30	40.18	54.00	-13.82	AV
Vertical	15600.15	63.86	-7.82	56.04	74.00	-17.96	PK
Vertical	15600.15	49.12	-7.82	41.30	54.00	-12.70	AV
Horizontal	4592.18	73.04	-20.42	52.62	74.00	-21.38	PK
Horizontal	4592.18	59.70	-20.42	39.29	54.00	-14.71	AV
Horizontal	10400.07	60.16	-9.30	50.86	68.20	-17.34	PK
Horizontal	10400.07	49.99	-9.30	40.69	54.00	-13.31	AV
Horizontal	15600.16	62.01	-7.82	54.19	74.00	-19.81	PK
Horizontal	15600.16	49.77	-7.82	41.95	54.00	-12.05	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.05	70.24	-20.12	50.12	74.00	-23.88	PK
Vertical	4739.05	59.83	-20.12	39.71	54.00	-14.29	AV
Vertical	10480.04	62.95	-9.18	53.77	68.20	-14.43	PK
Vertical	10480.04	49.16	-9.18	39.98	54.00	-14.02	AV
Vertical	15720.20	61.19	-7.78	53.41	74.00	-20.59	PK
Vertical	15720.20	49.20	-7.78	41.42	54.00	-12.58	AV
Horizontal	4739.13	70.24	-20.12	50.12	74.00	-23.88	PK
Horizontal	4739.13	59.23	-20.12	39.11	54.00	-14.89	AV
Horizontal	10480.08	64.88	-9.18	55.70	68.20	-12.50	PK
Horizontal	10480.08	49.63	-9.18	40.45	54.00	-13.55	AV
Horizontal	15720.13	62.49	-7.78	54.71	74.00	-19.29	PK
Horizontal	15720.13	49.56	-7.78	41.78	54.00	-12.22	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT40
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.17	70.04	-20.73	49.31	68.20	-18.89	PK
Vertical	4434.17	59.36	-20.73	38.63	54.00	-15.37	AV
Vertical	10380.04	64.31	-9.33	54.98	68.20	-13.22	PK
Vertical	10380.04	49.51	-9.33	40.18	54.00	-13.82	AV
Vertical	15570.05	60.61	-7.83	52.78	74.00	-21.22	PK
Vertical	15570.05	49.78	-7.83	41.95	54.00	-12.05	AV
Horizontal	4434.02	70.67	-20.73	49.93	74.00	-24.07	PK
Horizontal	4434.02	59.78	-20.73	39.05	54.00	-14.95	AV
Horizontal	10380.19	60.67	-9.33	51.34	68.20	-16.86	PK
Horizontal	10380.19	49.94	-9.33	40.61	54.00	-13.39	AV
Horizontal	15570.02	60.56	-7.83	52.73	74.00	-21.27	PK
Horizontal	15570.02	49.05	-7.83	41.22	54.00	-12.78	AV
Middle Channel (5230 MHz)-Above 1G							
Vertical	4739.11	74.08	-20.12	53.96	68.20	-14.24	PK
Vertical	4739.11	59.63	-20.12	39.51	54.00	-14.49	AV
Vertical	10460.06	60.11	-9.21	50.90	68.20	-17.30	PK
Vertical	10460.06	49.72	-9.21	40.51	54.00	-13.49	AV
Vertical	15690.05	60.31	-7.79	52.52	74.00	-21.48	PK
Vertical	15690.05	49.49	-7.79	41.70	54.00	-12.30	AV
Horizontal	4739.04	73.79	-20.12	53.67	68.20	-14.53	PK
Horizontal	4739.04	59.17	-20.12	39.05	54.00	-14.95	AV
Horizontal	10460.12	62.78	-9.21	53.57	68.20	-14.63	PK
Horizontal	10460.12	49.51	-9.21	40.30	54.00	-13.70	AV
Horizontal	15690.17	60.70	-7.79	52.91	74.00	-21.09	PK
Horizontal	15690.17	49.77	-7.79	41.98	54.00	-12.02	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT80
------------	--------------------------


Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
(5210 MHz)-Above 1G							
Vertical	4434.11	70.66	-20.73	49.92	68.20	-18.28	PK
Vertical	4434.11	59.21	-20.73	38.48	54.00	-15.52	AV
Vertical	10420.06	64.72	-9.27	55.45	68.20	-12.75	PK
Vertical	10420.06	49.36	-9.27	40.09	54.00	-13.91	AV
Vertical	15630.16	61.24	-7.81	53.43	74.00	-20.57	PK
Vertical	15630.16	49.75	-7.81	41.94	54.00	-12.06	AV
Horizontal	4434.01	72.00	-20.73	51.26	68.20	-16.94	PK
Horizontal	4434.01	49.68	-20.73	28.95	54.00	-25.05	AV
Horizontal	10420.12	43.84	9.27	53.11	68.20	-15.09	PK
Horizontal	10420.12	29.96	9.27	39.23	54.00	-14.77	AV
Horizontal	15630.08	64.52	-7.81	56.71	74.00	-17.29	PK
Horizontal	15630.08	49.67	-7.81	41.86	54.00	-12.14	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

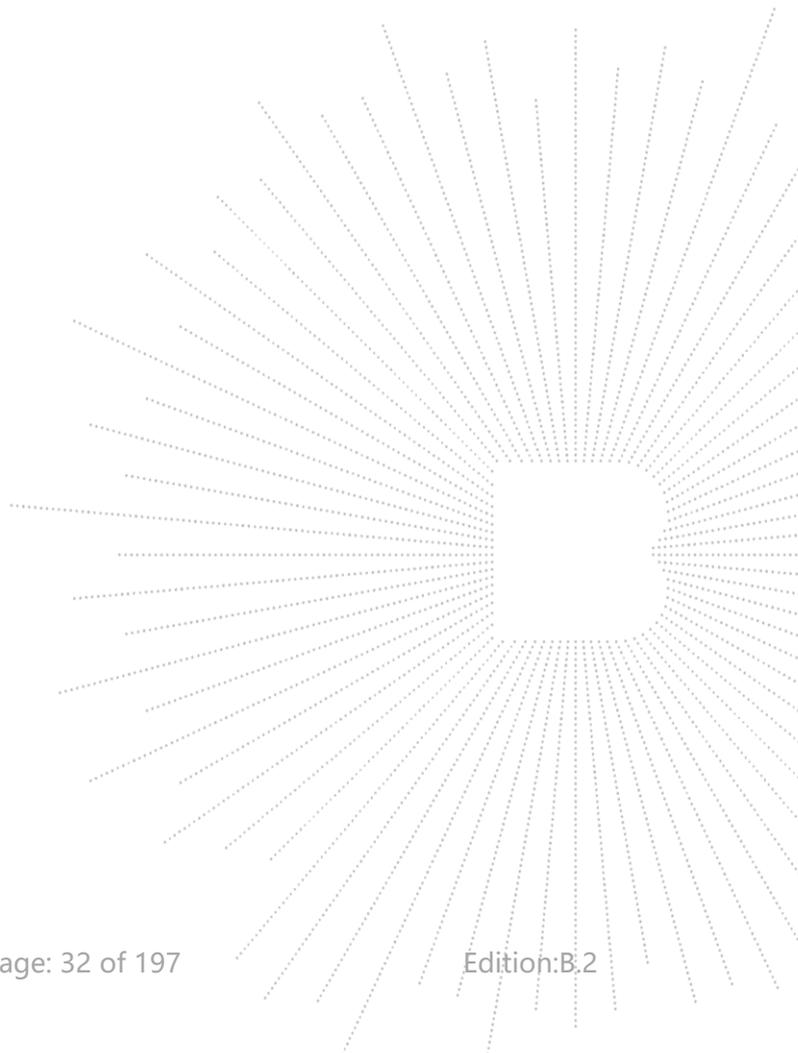

Test Mode:	TX(5.1G) - 802.11ax-HT20
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.12	73.75	-20.73	53.02	68.20	-15.18	PK
Vertical	4434.12	59.23	-20.73	38.50	54.00	-15.50	AV
Vertical	10360.01	61.07	-9.36	51.71	68.20	-16.49	PK
Vertical	10360.01	49.77	-9.36	40.41	54.00	-13.59	AV
Vertical	15540.02	63.73	-7.84	55.89	74.00	-18.11	PK
Vertical	15540.02	49.75	-7.84	41.91	54.00	-12.09	AV
Horizontal	4434.00	71.02	-20.73	50.29	68.20	-17.91	PK
Horizontal	4434.00	59.35	-20.73	38.62	54.00	-15.38	AV
Horizontal	10360.17	62.60	-9.36	53.24	68.20	-14.96	PK
Horizontal	10360.17	49.80	-9.36	40.44	54.00	-13.56	AV
Horizontal	15540.06	64.55	-7.84	56.71	74.00	-17.29	PK
Horizontal	15540.06	49.68	-7.84	41.84	54.00	-12.16	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.05	72.78	-20.42	52.37	74.00	-21.63	PK
Vertical	4592.05	59.06	-20.42	38.65	54.00	-15.35	AV
Vertical	10400.20	62.08	-9.30	52.78	68.20	-15.42	PK
Vertical	10400.20	49.58	-9.30	40.28	54.00	-13.72	AV
Vertical	15600.13	64.46	-7.82	56.64	74.00	-17.36	PK
Vertical	15600.13	49.61	-7.82	41.79	54.00	-12.21	AV
Horizontal	4592.03	74.48	-20.42	54.07	74.00	-19.93	PK
Horizontal	4592.03	59.18	-20.42	38.76	54.00	-15.24	AV
Horizontal	10400.18	60.04	-9.30	50.74	68.20	-17.46	PK
Horizontal	10400.18	49.17	-9.30	39.87	54.00	-14.13	AV
Horizontal	15600.13	61.53	-7.82	53.71	74.00	-20.29	PK
Horizontal	15600.13	49.92	-7.82	42.10	54.00	-11.90	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.03	74.29	-20.12	54.16	74.00	-19.84	PK
Vertical	4739.03	59.50	-20.12	39.38	54.00	-14.62	AV
Vertical	10480.08	63.88	-9.18	54.70	68.20	-13.50	PK
Vertical	10480.08	49.17	-9.18	39.99	54.00	-14.01	AV
Vertical	15720.01	61.51	-7.78	53.73	74.00	-20.27	PK
Vertical	15720.01	49.62	-7.78	41.84	54.00	-12.16	AV
Horizontal	4739.16	70.90	-20.12	50.78	74.00	-23.22	PK
Horizontal	4739.16	59.21	-20.12	39.08	54.00	-14.92	AV
Horizontal	10480.02	60.22	-9.18	51.04	68.20	-17.16	PK
Horizontal	10480.02	49.13	-9.18	39.95	54.00	-14.05	AV
Horizontal	15720.16	64.42	-7.78	56.64	74.00	-17.36	PK
Horizontal	15720.16	49.74	-7.78	41.96	54.00	-12.04	AV

Note: PK value is lower than the Average value limit, So average didn't record.  
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ax-HT40
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.14	70.35	-20.73	49.61	68.20	-18.59	PK
Vertical	4434.14	59.86	-20.73	39.12	54.00	-14.88	AV
Vertical	10380.06	63.17	-9.33	53.84	68.20	-14.36	PK
Vertical	10380.06	49.34	-9.33	40.01	54.00	-13.99	AV
Vertical	15570.12	61.23	-7.83	53.40	74.00	-20.60	PK
Vertical	15570.12	49.15	-7.83	41.32	54.00	-12.68	AV
Horizontal	4434.01	74.72	-20.73	53.99	74.00	-20.01	PK
Horizontal	4434.01	59.50	-20.73	38.77	54.00	-15.23	AV
Horizontal	10380.15	63.03	-9.33	53.70	68.20	-14.50	PK
Horizontal	10380.15	49.56	-9.33	40.23	54.00	-13.77	AV
Horizontal	15570.15	64.45	-7.83	56.62	74.00	-17.38	PK
Horizontal	15570.15	50.00	-7.83	42.17	54.00	-11.83	AV
Middle Channel (5230 MHz)-Above 1G							
Vertical	4739.08	71.20	-20.12	51.08	68.20	-17.12	PK
Vertical	4739.08	59.23	-20.12	39.11	54.00	-14.89	AV
Vertical	10460.20	63.33	-9.21	54.12	68.20	-14.08	PK
Vertical	10460.20	49.19	-9.21	39.98	54.00	-14.02	AV
Vertical	15690.03	63.53	-7.79	55.74	74.00	-18.26	PK
Vertical	15690.03	49.94	-7.79	42.15	54.00	-11.85	AV
Horizontal	4739.04	73.37	-20.12	53.25	68.20	-14.95	PK
Horizontal	4739.04	59.88	-20.12	39.76	54.00	-14.24	AV
Horizontal	10460.18	61.60	-9.21	52.39	68.20	-15.81	PK
Horizontal	10460.18	49.22	-9.21	40.01	54.00	-13.99	AV
Horizontal	15690.07	63.56	-7.79	55.77	74.00	-18.23	PK
Horizontal	15690.07	49.01	-7.79	41.22	54.00	-12.78	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ax-HT80
------------	--------------------------


Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
(5210 MHz)-Above 1G							
Vertical	4434.02	74.96	-20.73	54.23	68.20	-13.97	PK
Vertical	4434.02	59.28	-20.73	38.54	54.00	-15.46	AV
Vertical	10420.09	62.15	-9.27	52.88	68.20	-15.32	PK
Vertical	10420.09	49.37	-9.27	40.10	54.00	-13.90	AV
Vertical	15630.05	60.74	-7.81	52.93	74.00	-21.07	PK
Vertical	15630.05	49.44	-7.81	41.63	54.00	-12.37	AV
Horizontal	4434.14	73.10	-20.73	52.37	68.20	-15.83	PK
Horizontal	4434.14	49.94	-20.73	29.21	54.00	-24.79	AV
Horizontal	10420.04	42.91	9.27	52.18	68.20	-16.02	PK
Horizontal	10420.04	29.58	9.27	38.85	54.00	-15.15	AV
Horizontal	15630.03	61.97	-7.81	54.16	74.00	-19.84	PK
Horizontal	15630.03	49.87	-7.81	42.06	54.00	-11.94	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

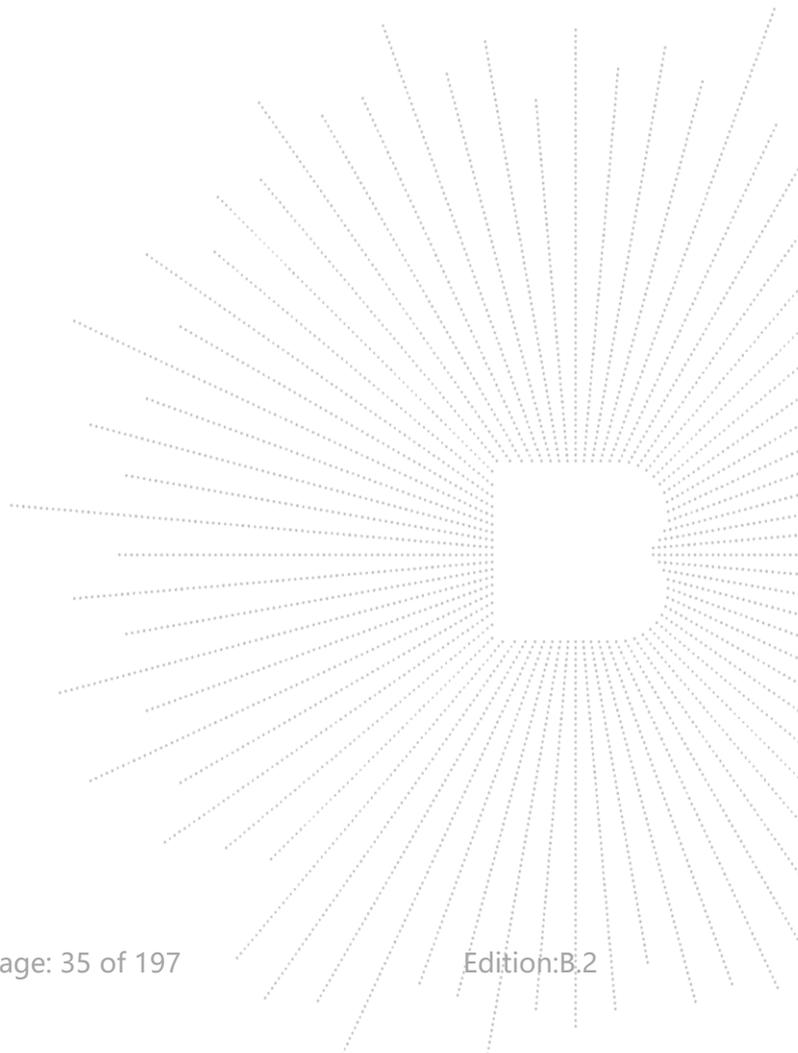

Test Mode:	TX (5.8G) -- 802.11a
------------	----------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.04	74.00	-20.24	53.76	74.00	-20.24	PK
Vertical	4679.04	59.82	-20.24	39.58	54.00	-14.42	AV
Vertical	11490.19	63.17	-8.79	54.38	68.20	-13.82	PK
Vertical	11490.19	49.86	-8.79	41.07	54.00	-12.93	AV
Vertical	17235.15	55.46	-3.18	52.28	68.20	-15.92	PK
Vertical	17235.15	44.68	-3.18	41.50	54.00	-12.50	AV
Horizontal	4679.00	71.41	-20.73	50.68	74.00	-23.32	PK
Horizontal	4679.00	59.10	-20.73	38.37	54.00	-15.63	AV
Horizontal	11490.19	64.87	-8.79	56.08	68.20	-12.12	PK
Horizontal	11490.19	49.68	-8.79	40.89	54.00	-13.11	AV
Horizontal	17235.05	59.78	-3.18	56.60	68.20	-11.60	PK
Horizontal	17235.05	44.07	-3.18	40.89	54.00	-13.11	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.17	71.73	-20.42	51.31	74.00	-22.69	PK
Vertical	4592.17	59.91	-20.42	39.49	54.00	-14.51	AV
Vertical	11570.03	62.42	-8.86	53.56	68.20	-14.64	PK
Vertical	11570.03	49.82	-8.86	40.96	54.00	-13.04	AV
Vertical	17355.04	56.12	-2.52	53.60	68.20	-14.60	PK
Vertical	17355.04	44.58	-2.52	42.06	54.00	-11.94	AV
Horizontal	4592.14	72.26	-20.42	51.85	74.00	-22.15	PK
Horizontal	4592.14	59.56	-20.42	39.15	54.00	-14.85	AV
Horizontal	11570.08	60.46	-8.86	51.60	68.20	-16.60	PK
Horizontal	11570.08	49.46	-8.86	40.60	54.00	-13.40	AV
Horizontal	17355.18	56.26	-2.52	53.74	68.20	-14.46	PK
Horizontal	17355.18	44.86	-2.52	42.34	54.00	-11.66	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.14	73.29	-18.93	54.36	68.20	-13.84	PK
Vertical	6039.14	59.90	-18.93	40.97	54.00	-13.03	AV
Vertical	11650.09	61.08	-8.92	52.16	74.00	-21.84	PK
Vertical	11650.09	49.77	-8.92	40.85	54.00	-13.15	AV
Vertical	17475.19	56.93	-1.86	55.07	68.20	-13.13	PK
Vertical	17475.19	44.57	-1.86	42.71	54.00	-11.29	AV
Horizontal	6039.00	72.08	-18.93	53.15	68.20	-15.05	PK
Horizontal	6039.00	59.97	-18.93	41.03	54.00	-12.97	AV
Horizontal	11650.06	61.93	-8.92	53.01	74.00	-20.99	PK
Horizontal	11650.06	49.14	-8.92	40.22	54.00	-13.78	AV
Horizontal	17475.08	58.24	-1.86	56.38	68.20	-11.82	PK
Horizontal	17475.08	44.45	-1.86	42.59	54.00	-11.41	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX (5.8G) --802.11n-HT20
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.16	73.35	-20.24	53.10	74.00	-20.90	PK
Vertical	4679.16	59.93	-20.24	39.69	54.00	-14.31	AV
Vertical	11490.06	61.00	-8.79	52.21	68.20	-15.99	PK
Vertical	11490.06	49.55	-8.79	40.76	54.00	-13.24	AV
Vertical	17235.19	58.07	-3.18	54.89	68.20	-13.31	PK
Vertical	17235.19	44.27	-3.18	41.09	54.00	-12.91	AV
Horizontal	4679.02	70.98	-20.24	50.73	74.00	-23.27	PK
Horizontal	4679.02	59.71	-20.24	39.47	54.00	-14.53	AV
Horizontal	11490.06	64.46	-8.79	55.67	68.20	-12.53	PK
Horizontal	11490.06	49.56	-8.79	40.77	54.00	-13.23	AV
Horizontal	17235.18	56.07	-3.18	52.89	68.20	-15.31	PK
Horizontal	17235.18	44.11	-3.18	40.93	54.00	-13.07	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.17	72.14	-20.42	51.73	74.00	-22.27	PK
Vertical	4592.17	59.85	-20.42	39.43	54.00	-14.57	AV
Vertical	11570.13	63.24	-8.86	54.38	68.20	-13.82	PK
Vertical	11570.13	49.84	-8.86	40.98	54.00	-13.02	AV
Vertical	17355.02	56.85	-2.52	54.33	68.20	-13.87	PK
Vertical	17355.02	44.74	-2.52	42.22	54.00	-11.78	AV
Horizontal	4592.05	74.92	-20.42	54.50	74.00	-19.50	PK
Horizontal	4592.05	59.52	-20.42	39.10	54.00	-14.90	AV
Horizontal	11570.04	60.00	-8.86	51.14	68.20	-17.06	PK
Horizontal	11570.04	49.03	-8.86	40.17	54.00	-13.83	AV
Horizontal	17355.08	57.74	-2.52	55.22	68.20	-12.98	PK
Horizontal	17355.08	44.65	-2.52	42.13	54.00	-11.87	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.15	73.01	-18.93	54.08	68.20	-14.12	PK
Vertical	6039.15	59.57	-18.93	40.64	54.00	-13.36	AV
Vertical	11650.01	64.86	-8.92	55.94	74.00	-18.06	PK
Vertical	11650.01	49.07	-8.92	40.15	54.00	-13.85	AV
Vertical	17475.17	56.35	-1.86	54.49	68.20	-13.71	PK
Vertical	17475.17	44.74	-1.86	42.88	54.00	-11.12	AV
Horizontal	6039.12	73.37	-18.93	54.44	68.20	-13.76	PK
Horizontal	6039.12	59.21	-18.93	40.28	54.00	-13.72	AV
Horizontal	11650.02	62.91	-8.92	53.99	74.00	-20.01	PK
Horizontal	11650.02	49.82	-8.92	40.90	54.00	-13.10	AV
Horizontal	17475.02	58.65	-1.86	56.79	68.20	-11.41	PK
Horizontal	17475.02	44.61	-1.86	42.75	54.00	-11.25	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX (5.8G) -- 802.11n-HT40
------------	---------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G							
Vertical	4679.03	70.80	-20.24	50.56	74.00	-23.44	PK
Vertical	4679.03	59.41	-20.24	39.17	54.00	-14.83	AV
Vertical	11510.02	62.55	-8.81	53.74	74.00	-20.26	PK
Vertical	11510.02	49.86	-8.81	41.05	54.00	-12.95	AV
Vertical	17265.03	57.41	-3.01	54.40	68.20	-13.80	PK
Vertical	17265.03	44.82	-3.01	41.81	54.00	-12.19	AV
Horizontal	4679.04	71.46	-20.24	51.22	74.00	-22.78	PK
Horizontal	4679.04	59.53	-20.24	39.29	54.00	-14.71	AV
Horizontal	11510.02	60.57	-8.81	51.76	74.00	-22.24	PK
Horizontal	11510.02	49.62	-8.81	40.81	54.00	-13.19	AV
Horizontal	17265.16	57.26	-3.01	54.25	68.20	-13.95	PK
Horizontal	17265.16	44.16	-3.01	41.15	54.00	-12.85	AV
Middle Channel (5795 MHz)-Above 1G							
Vertical	6039.09	70.24	-18.93	51.30	68.20	-16.90	PK
Vertical	6039.09	59.51	-18.93	40.58	54.00	-13.42	AV
Vertical	11590.12	64.07	-8.87	55.20	74.00	-18.80	PK
Vertical	11590.12	49.36	-8.87	40.49	54.00	-13.51	AV
Vertical	17385.14	57.95	-2.35	55.60	68.20	-12.60	PK
Vertical	17385.14	44.61	-2.35	42.26	54.00	-11.74	AV
Horizontal	6039.04	72.58	-18.93	53.65	68.20	-14.55	PK
Horizontal	6039.04	59.63	-18.93	40.70	54.00	-13.30	AV
Horizontal	11590.03	62.29	-8.87	53.42	74.00	-20.58	PK
Horizontal	11590.03	49.42	-8.87	40.55	54.00	-13.45	AV
Horizontal	17385.18	57.25	-2.35	54.90	68.20	-13.30	PK
Horizontal	17385.18	44.61	-2.35	42.26	54.00	-11.74	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX (5.8G) --802.11ac-HT20
------------	---------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.12	70.47	-20.24	50.23	74.00	-23.77	PK
Vertical	4679.12	59.07	-20.24	38.83	54.00	-15.17	AV
Vertical	11490.16	64.34	-8.79	55.55	68.20	-12.65	PK
Vertical	11490.16	49.98	-8.79	41.19	54.00	-12.81	AV
Vertical	17235.16	56.97	-3.18	53.79	68.20	-14.41	PK
Vertical	17235.16	44.06	-3.18	40.88	54.00	-13.12	AV
Horizontal	4679.17	71.70	-20.24	51.46	74.00	-22.54	PK
Horizontal	4679.17	59.30	-20.24	39.06	54.00	-14.94	AV
Horizontal	11490.12	61.63	-8.79	52.84	68.20	-15.36	PK
Horizontal	11490.12	49.41	-8.79	40.62	54.00	-13.38	AV
Horizontal	17235.18	56.24	-3.18	53.06	68.20	-15.14	PK
Horizontal	17235.18	44.72	-3.18	41.54	54.00	-12.46	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.02	72.73	-20.42	52.31	74.00	-21.69	PK
Vertical	4592.02	59.98	-20.42	39.56	54.00	-14.44	AV
Vertical	11570.02	61.42	-8.86	52.56	68.20	-15.64	PK
Vertical	11570.02	49.27	-8.86	40.41	54.00	-13.59	AV
Vertical	17355.14	59.51	-2.52	56.99	68.20	-11.21	PK
Vertical	17355.14	44.24	-2.52	41.72	54.00	-12.28	AV
Horizontal	4592.02	70.47	-20.42	50.06	74.00	-23.94	PK
Horizontal	4592.02	59.62	-20.42	39.21	54.00	-14.79	AV
Horizontal	11570.13	61.66	-8.86	52.80	68.20	-15.40	PK
Horizontal	11570.13	49.63	-8.86	40.77	54.00	-13.23	AV
Horizontal	17355.03	57.53	-2.52	55.01	68.20	-13.19	PK
Horizontal	17355.03	44.32	-2.52	41.80	54.00	-12.20	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.08	71.25	-18.93	52.32	68.20	-15.88	PK
Vertical	6039.08	59.71	-18.93	40.77	54.00	-13.23	AV
Vertical	11650.09	63.26	-8.92	54.34	74.00	-19.66	PK
Vertical	11650.09	49.69	-8.92	40.77	54.00	-13.23	AV
Vertical	17475.09	55.05	-1.86	53.19	68.20	-15.01	PK
Vertical	17475.09	44.19	-1.86	42.33	54.00	-11.67	AV
Horizontal	6039.00	72.79	-18.93	53.85	68.20	-14.35	PK
Horizontal	6039.00	59.16	-18.93	40.23	54.00	-13.77	AV
Horizontal	11650.18	62.49	-8.92	53.57	74.00	-20.43	PK
Horizontal	11650.18	49.30	-8.92	40.38	54.00	-13.62	AV
Horizontal	17475.17	59.79	-1.86	57.93	68.20	-10.27	PK
Horizontal	17475.17	44.30	-1.86	42.44	54.00	-11.56	AV

Note: PK value is lower than the Average value limit, So average didn't record.  
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX (5.8G) -- 802.11ac-HT40
-------------	----------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G							
Vertical	4679.02	70.95	-20.24	50.71	74.00	-23.29	PK
Vertical	4679.02	59.99	-20.24	39.75	54.00	-14.25	AV
Vertical	11510.17	61.68	-8.81	52.87	74.00	-21.13	PK
Vertical	11510.17	49.30	-8.81	40.49	54.00	-13.51	AV
Vertical	17265.14	56.34	-3.01	53.33	68.20	-14.87	PK
Vertical	17265.14	44.43	-3.01	41.42	54.00	-12.58	AV
Horizontal	4679.10	73.87	-20.24	53.63	74.00	-20.37	PK
Horizontal	4679.10	59.40	-20.24	39.16	54.00	-14.84	AV
Horizontal	11510.13	62.41	-8.81	53.60	74.00	-20.40	PK
Horizontal	11510.13	49.63	-8.81	40.82	54.00	-13.18	AV
Horizontal	17265.18	55.92	-3.01	52.91	68.20	-15.29	PK
Horizontal	17265.18	44.58	-3.01	41.57	54.00	-12.43	AV
Middle Channel (5795 MHz)-Above 1G							
Vertical	6039.18	72.00	-18.93	53.07	68.20	-15.13	PK
Vertical	6039.18	59.56	-18.93	40.63	54.00	-13.37	AV
Vertical	11590.08	63.70	-8.87	54.83	74.00	-19.17	PK
Vertical	11590.08	49.46	-8.87	40.59	54.00	-13.41	AV
Vertical	17385.02	55.25	-2.35	52.90	68.20	-15.30	PK
Vertical	17385.02	44.62	-2.35	42.27	54.00	-11.73	AV
Horizontal	6039.06	70.08	-18.93	51.15	68.20	-17.05	PK
Horizontal	6039.06	59.56	-18.93	40.63	54.00	-13.37	AV
Horizontal	11590.02	61.92	-8.87	53.05	74.00	-20.95	PK
Horizontal	11590.02	49.94	-8.87	41.07	54.00	-12.93	AV
Horizontal	17385.05	55.87	-2.35	53.52	68.20	-14.68	PK
Horizontal	17385.05	44.45	-2.35	42.10	54.00	-11.90	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX (5.8G) -- 802.11ac-HT80
-------------	----------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
(5775 MHz)-Above 1G							
Vertical	4679.20	74.93	-20.24	54.68	74.00	-19.32	PK
Vertical	4679.20	59.81	-20.24	39.57	54.00	-14.43	AV
Vertical	11550.13	63.17	-8.84	54.33	74.00	-19.67	PK
Vertical	11550.13	49.90	-8.84	41.06	54.00	-12.94	AV
Vertical	17325.11	57.94	-2.68	55.26	68.20	-12.94	PK
Vertical	17325.11	44.22	-2.68	41.54	54.00	-12.46	AV
Horizontal	4679.14	72.51	-20.24	52.27	74.00	-21.73	PK
Horizontal	4679.14	59.40	-20.24	39.15	54.00	-14.85	AV
Horizontal	11550.06	64.29	-8.84	55.45	74.00	-18.55	PK
Horizontal	11550.06	49.29	-8.84	40.45	54.00	-13.55	AV
Horizontal	17325.03	58.72	-2.68	56.04	68.20	-12.16	PK
Horizontal	17325.03	44.70	-2.68	42.02	54.00	-11.98	AV

Note: PK value is lower than the Average value limit, So average didn't record.  
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

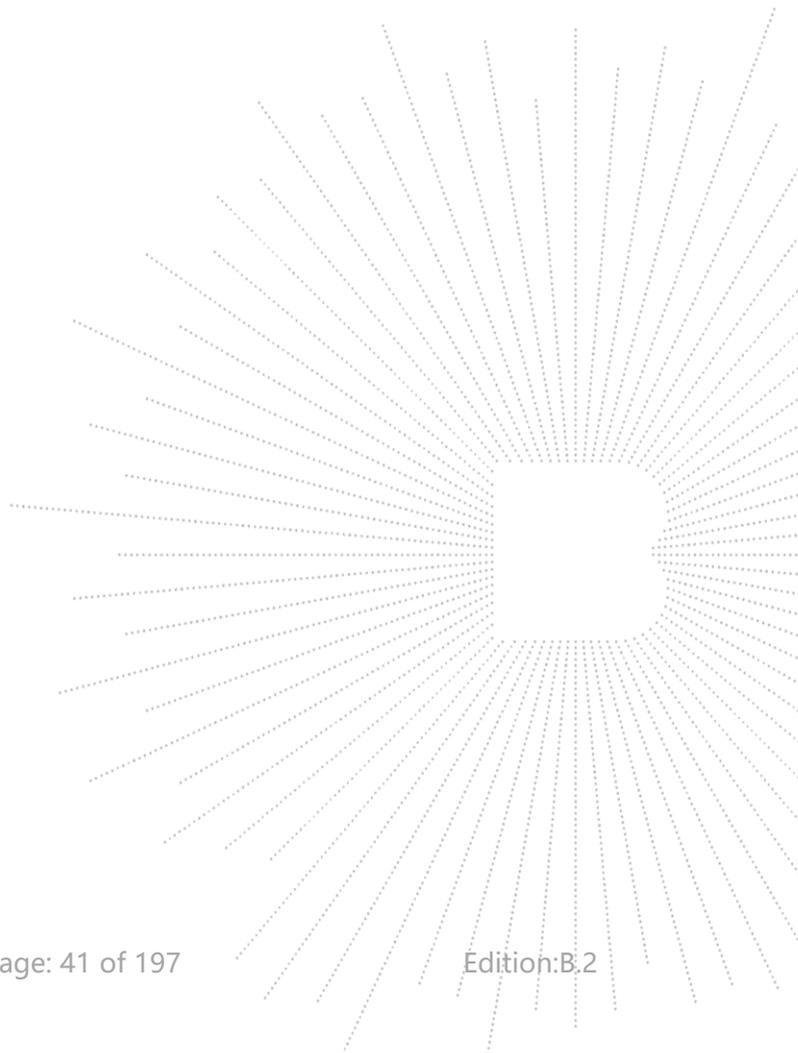

Test Mode:	TX (5.8G) --802.11ax-HT20
------------	---------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.15	73.20	-20.24	52.96	74.00	-21.04	PK
Vertical	4679.15	59.59	-20.24	39.34	54.00	-14.66	AV
Vertical	11490.11	62.29	-8.79	53.50	68.20	-14.70	PK
Vertical	11490.11	49.47	-8.79	40.68	54.00	-13.32	AV
Vertical	17235.11	55.37	-3.18	52.19	68.20	-16.01	PK
Vertical	17235.11	44.62	-3.18	41.44	54.00	-12.56	AV
Horizontal	4679.11	73.76	-20.24	53.52	74.00	-20.48	PK
Horizontal	4679.11	59.43	-20.24	39.19	54.00	-14.81	AV
Horizontal	11490.11	64.52	-8.79	55.73	68.20	-12.47	PK
Horizontal	11490.11	49.81	-8.79	41.02	54.00	-12.98	AV
Horizontal	17235.02	55.82	-3.18	52.64	68.20	-15.56	PK
Horizontal	17235.02	44.79	-3.18	41.61	54.00	-12.39	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.13	71.51	-20.42	51.09	74.00	-22.91	PK
Vertical	4592.13	59.17	-20.42	38.76	54.00	-15.24	AV
Vertical	11570.04	63.15	-8.86	54.29	68.20	-13.91	PK
Vertical	11570.04	49.66	-8.86	40.80	54.00	-13.20	AV
Vertical	17355.03	55.37	-2.52	52.85	68.20	-15.35	PK
Vertical	17355.03	44.69	-2.52	42.17	54.00	-11.83	AV
Horizontal	4592.17	73.14	-20.42	52.72	74.00	-21.28	PK
Horizontal	4592.17	59.60	-20.42	39.18	54.00	-14.82	AV
Horizontal	11570.13	61.27	-8.86	52.41	68.20	-15.79	PK
Horizontal	11570.13	49.15	-8.86	40.29	54.00	-13.71	AV
Horizontal	17355.08	58.02	-2.52	55.50	68.20	-12.70	PK
Horizontal	17355.08	44.05	-2.52	41.53	54.00	-12.47	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.10	71.78	-18.93	52.85	68.20	-15.35	PK
Vertical	6039.10	59.21	-18.93	40.28	54.00	-13.72	AV
Vertical	11650.17	64.46	-8.92	55.54	74.00	-18.46	PK
Vertical	11650.17	49.21	-8.92	40.29	54.00	-13.71	AV
Vertical	17475.16	57.85	-1.86	55.99	68.20	-12.21	PK
Vertical	17475.16	44.14	-1.86	42.28	54.00	-11.72	AV
Horizontal	6039.05	73.22	-18.93	54.29	68.20	-13.91	PK
Horizontal	6039.05	59.84	-18.93	40.90	54.00	-13.10	AV
Horizontal	11650.04	60.79	-8.92	51.87	74.00	-22.13	PK
Horizontal	11650.04	49.30	-8.92	40.38	54.00	-13.62	AV
Horizontal	17475.17	57.84	-1.86	55.98	68.20	-12.22	PK
Horizontal	17475.17	44.43	-1.86	42.57	54.00	-11.43	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX (5.8G) -- 802.11ax-HT40
-------------	----------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G							
Vertical	4679.06	74.17	-20.24	53.93	74.00	-20.07	PK
Vertical	4679.06	59.19	-20.24	38.94	54.00	-15.06	AV
Vertical	11510.19	60.81	-8.81	52.00	74.00	-22.00	PK
Vertical	11510.19	49.71	-8.81	40.90	54.00	-13.10	AV
Vertical	17265.02	59.16	-3.01	56.15	68.20	-12.05	PK
Vertical	17265.02	44.58	-3.01	41.57	54.00	-12.43	AV
Horizontal	4679.02	72.18	-20.24	51.94	74.00	-22.06	PK
Horizontal	4679.02	59.85	-20.24	39.60	54.00	-14.40	AV
Horizontal	11510.15	63.69	-8.81	54.88	74.00	-19.12	PK
Horizontal	11510.15	49.52	-8.81	40.71	54.00	-13.29	AV
Horizontal	17265.06	58.50	-3.01	55.49	68.20	-12.71	PK
Horizontal	17265.06	44.80	-3.01	41.79	54.00	-12.21	AV
Middle Channel (5795 MHz)-Above 1G							
Vertical	6039.13	71.93	-18.93	53.00	68.20	-15.20	PK
Vertical	6039.13	59.14	-18.93	40.21	54.00	-13.79	AV
Vertical	11590.04	63.18	-8.87	54.31	74.00	-19.69	PK
Vertical	11590.04	49.67	-8.87	40.80	54.00	-13.20	AV
Vertical	17385.19	59.78	-2.35	57.43	68.20	-10.77	PK
Vertical	17385.19	44.19	-2.35	41.84	54.00	-12.16	AV
Horizontal	6039.06	70.63	-18.93	51.70	68.20	-16.50	PK
Horizontal	6039.06	59.43	-18.93	40.50	54.00	-13.50	AV
Horizontal	11590.06	64.01	-8.87	55.14	74.00	-18.86	PK
Horizontal	11590.06	49.74	-8.87	40.87	54.00	-13.13	AV
Horizontal	17385.07	59.56	-2.35	57.21	68.20	-10.99	PK
Horizontal	17385.07	44.90	-2.35	42.55	54.00	-11.45	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX (5.8G) -- 802.11ax-HT80
-------------	----------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
(5775 MHz)-Above 1G							
Vertical	4679.09	74.91	-20.24	54.67	74.00	-19.33	PK
Vertical	4679.09	59.18	-20.24	38.94	54.00	-15.06	AV
Vertical	11550.17	63.25	-8.84	54.41	74.00	-19.59	PK
Vertical	11550.17	49.99	-8.84	41.15	54.00	-12.85	AV
Vertical	17325.10	58.82	-2.68	56.14	68.20	-12.06	PK
Vertical	17325.10	44.77	-2.68	42.09	54.00	-11.91	AV
Horizontal	4679.09	71.72	-20.24	51.48	74.00	-22.52	PK
Horizontal	4679.09	59.10	-20.24	38.86	54.00	-15.14	AV
Horizontal	11550.15	63.21	-8.84	54.37	74.00	-19.63	PK
Horizontal	11550.15	49.03	-8.84	40.19	54.00	-13.81	AV
Horizontal	17325.01	55.37	-2.68	52.69	68.20	-15.51	PK
Horizontal	17325.01	44.33	-2.68	41.65	54.00	-12.35	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

- Undesirable radiated Undesirable radiated Spurious Emission in Band Edge
- All the modes 802.11a/n/ac/ax has been tested and the worst result 802.11ax20 recorded as below:

Test mode: 802.11ax20 Frequency(MHz): 5180

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5150.35	H	63.54	74	45.43	54
5150.21	V	63.22	74	43.25	54

Test mode: 802.11ax20 Frequency(MHz): 5240

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5360.32	H	45.38	74	28.31	54
5360.22	V	43.26	74	28.52	54

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp

## 8. Power Spectral Density Test

### 8.1 Block Diagram Of Test Setup



### 8.2 Limit

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 8.3 Test Procedure


For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

### 8.4 EUT Operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

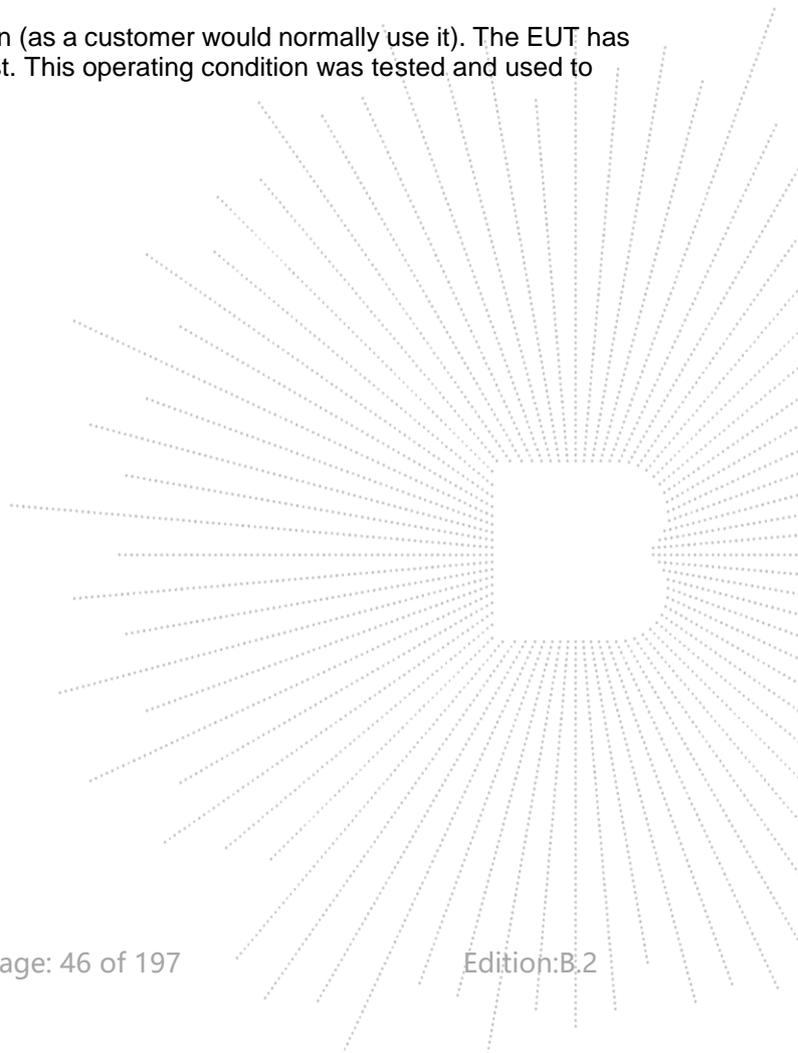


## 8.5 Test Result


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 5V
Test Mode:	(5180-5240MHz); (5745-5825MHz)		



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	-2.16	11	Pass
NVNT	a	5200	-1.13	11	Pass
NVNT	a	5240	-2.52	11	Pass
NVNT	n20	5180	-3.14	11	Pass
NVNT	n20	5200	-2.74	11	Pass
NVNT	n20	5240	-3.45	11	Pass
NVNT	n40	5190	-6.77	11	Pass
NVNT	n40	5230	-7.64	11	Pass
NVNT	ac20	5180	-2.6	11	Pass
NVNT	ac20	5200	-2.48	11	Pass
NVNT	ac20	5240	-3.31	11	Pass
NVNT	ac40	5190	-7.46	11	Pass
NVNT	ac40	5230	-8.38	11	Pass
NVNT	ac80	5210	-12.26	11	Pass
NVNT	ax20	5180	-2.79	11	Pass
NVNT	ax20	5200	-2.74	11	Pass
NVNT	ax20	5240	-3.59	11	Pass
NVNT	ax40	5190	-5.46	11	Pass
NVNT	ax40	5230	-6.23	11	Pass
NVNT	ax80	5210	-13.16	11	Pass


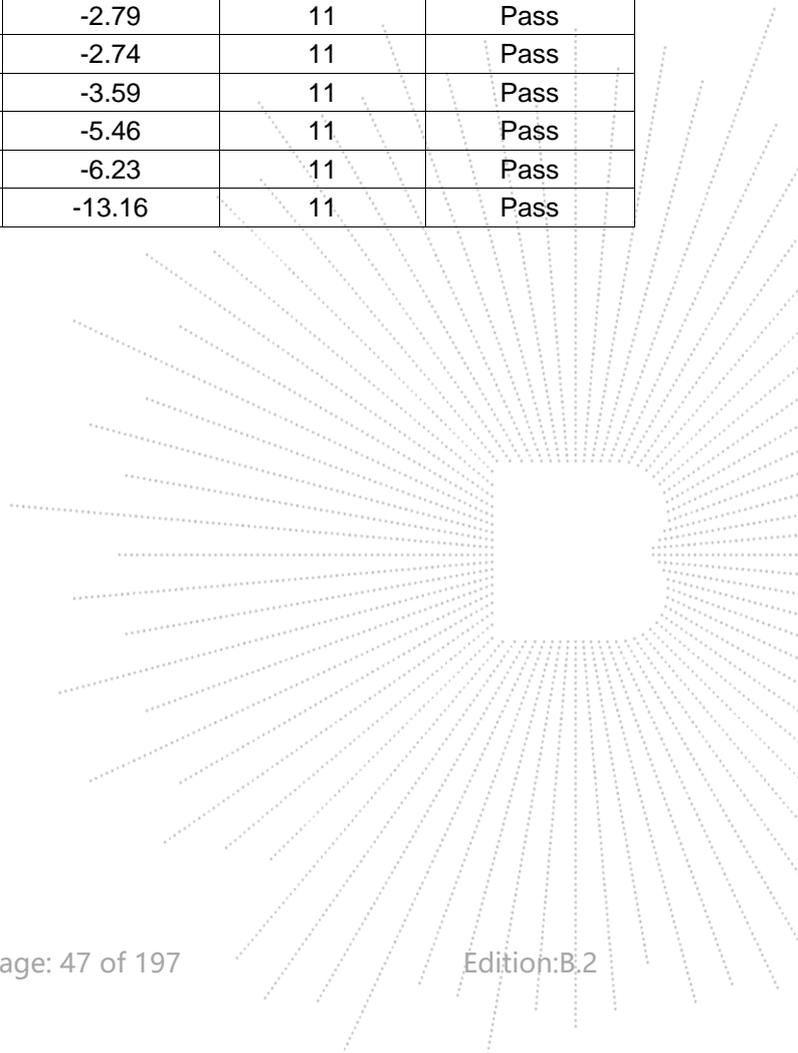




Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	-5.67	30	Pass
NVNT	a	5785	-5.9	30	Pass
NVNT	a	5825	-7.68	30	Pass
NVNT	n20	5745	-6.8	30	Pass
NVNT	n20	5785	-7.46	30	Pass
NVNT	n20	5825	-8.9	30	Pass
NVNT	n40	5755	-10.9	30	Pass
NVNT	n40	5795	-11.66	30	Pass
NVNT	ac20	5745	-6.71	30	Pass
NVNT	ac20	5785	-7.31	30	Pass
NVNT	ac20	5825	-8.95	30	Pass
NVNT	ac40	5755	-10.93	30	Pass
NVNT	ac40	5795	-12.07	30	Pass
NVNT	ac80	5775	-16.14	30	Pass
NVNT	ax20	5745	-6.87	30	Pass
NVNT	ax20	5785	-7.66	30	Pass
NVNT	ax20	5825	-9	30	Pass
NVNT	ax40	5755	-11.28	30	Pass
NVNT	ax40	5795	-11.79	30	Pass
NVNT	ax80	5775	-15.88	30	Pass


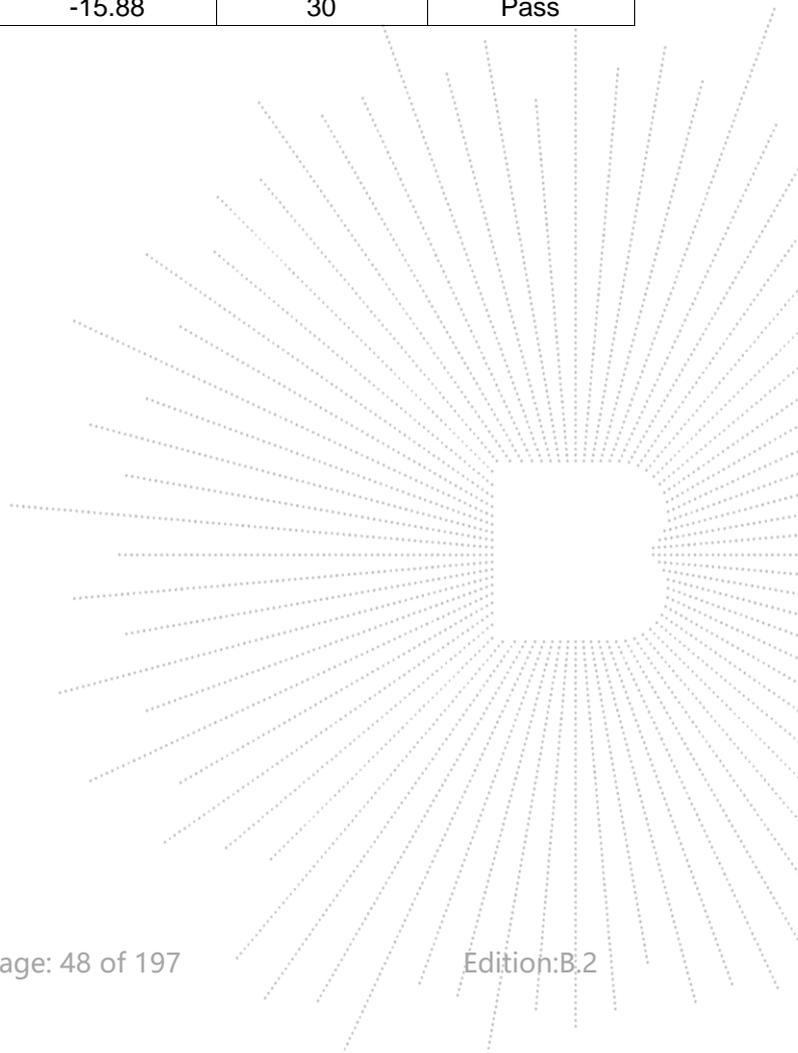



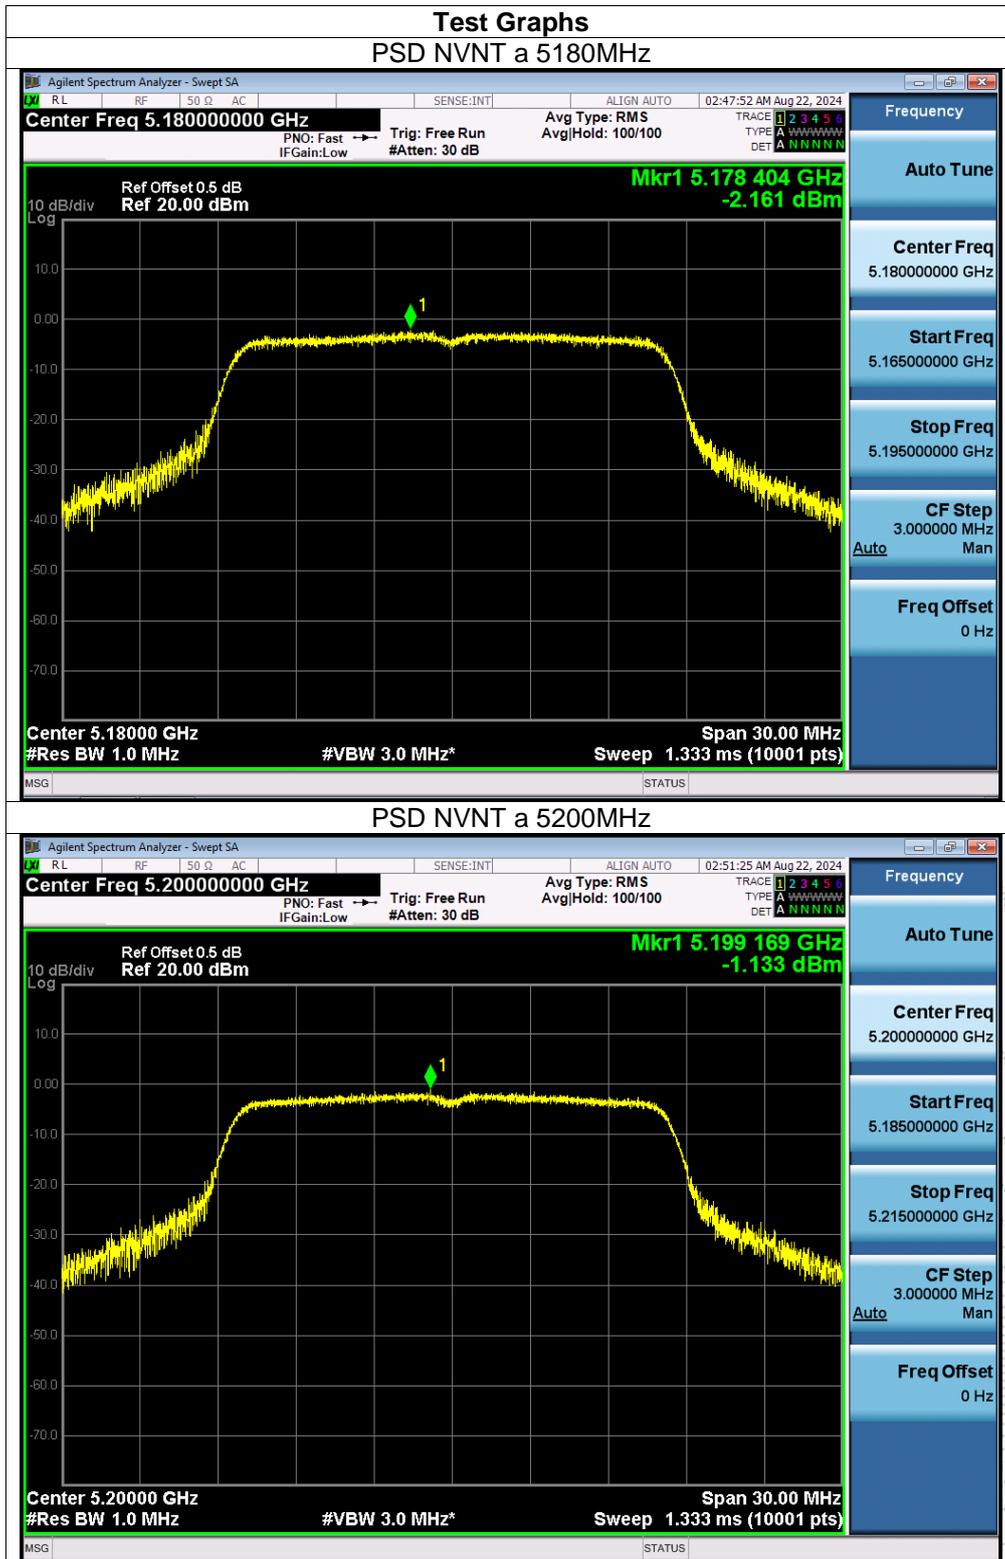


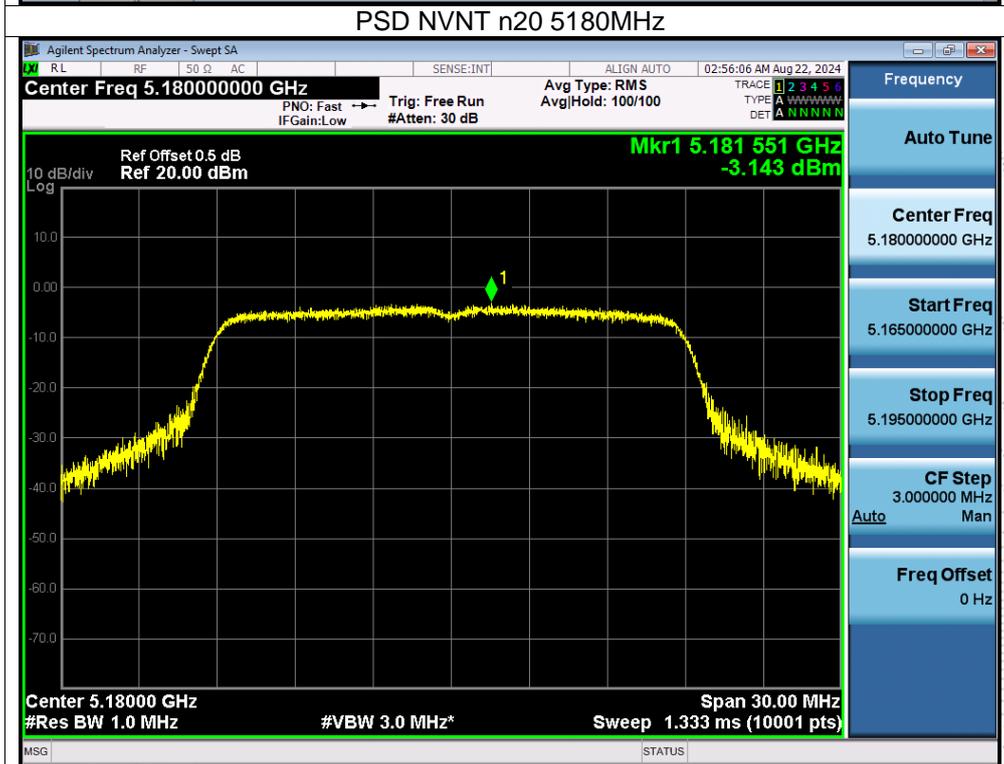
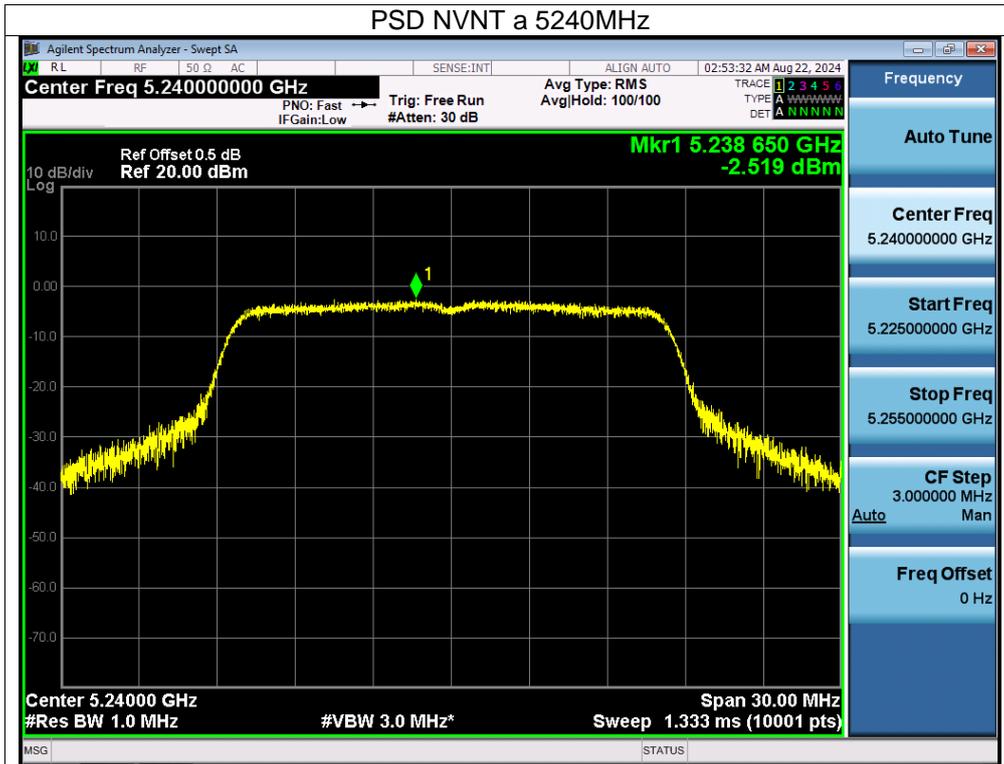


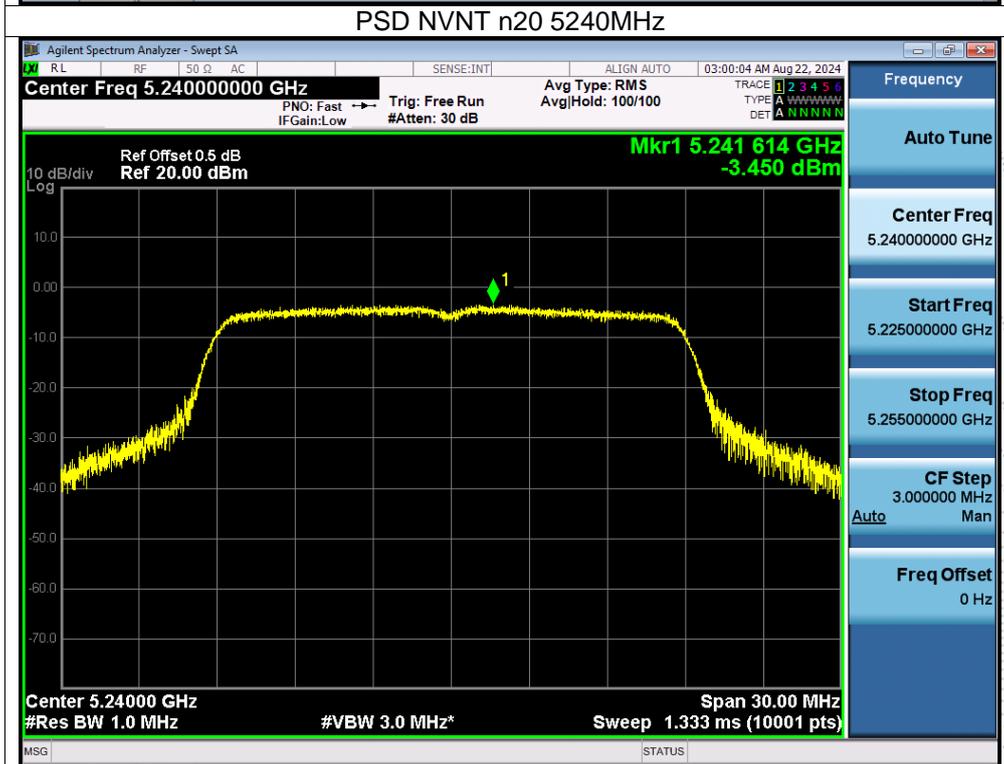
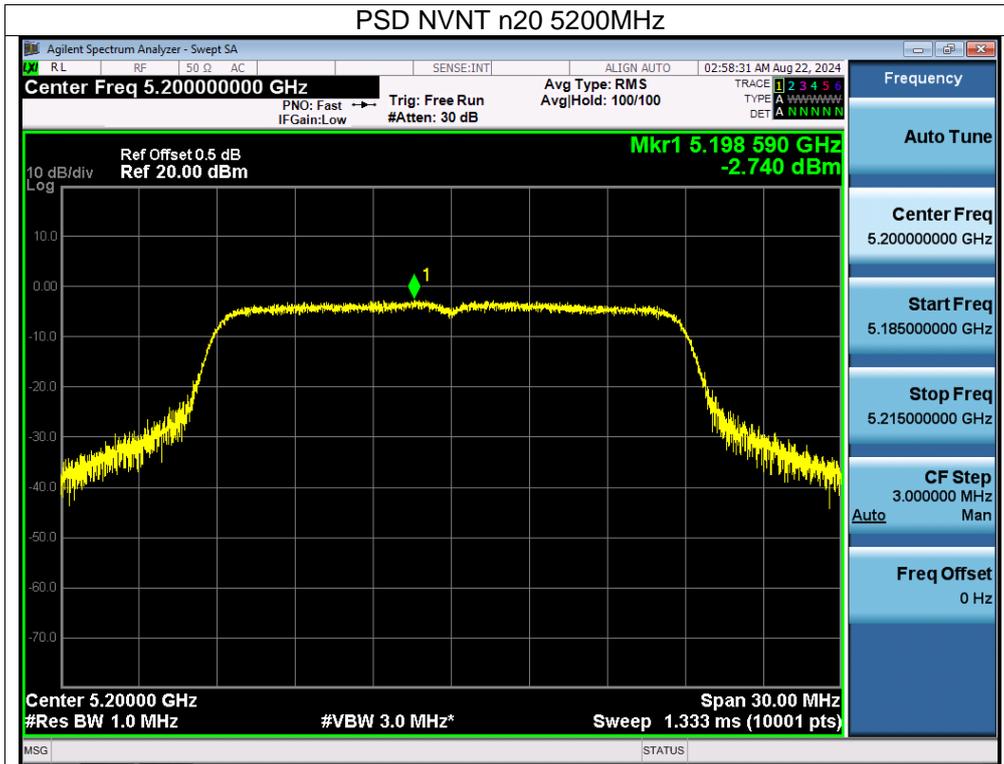


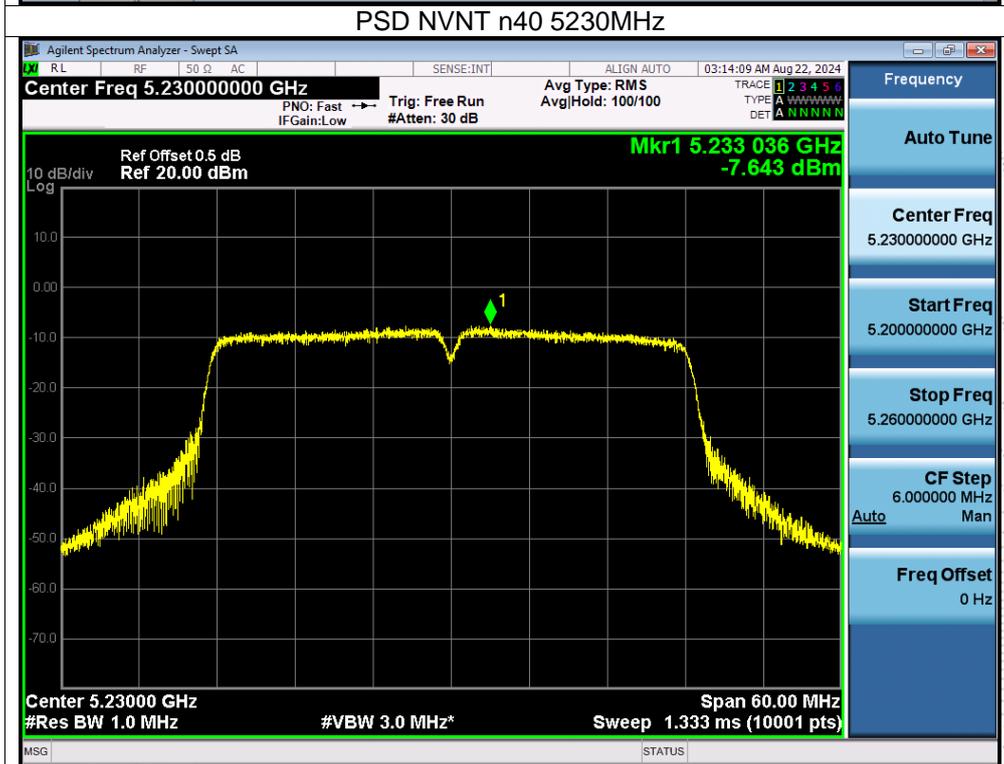
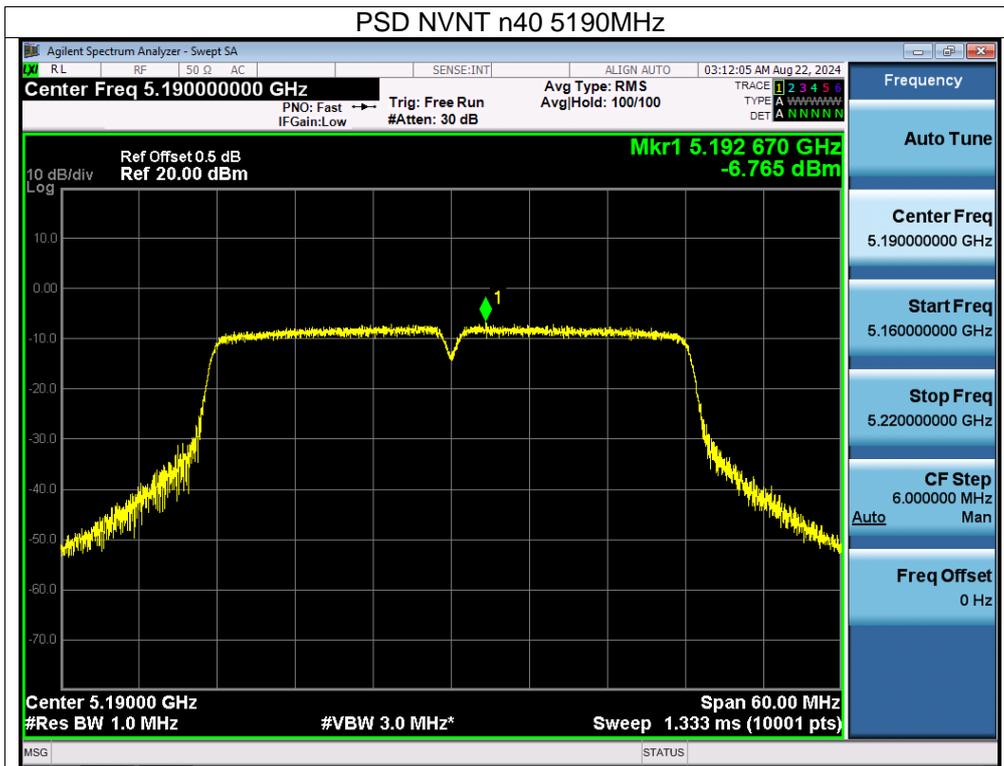


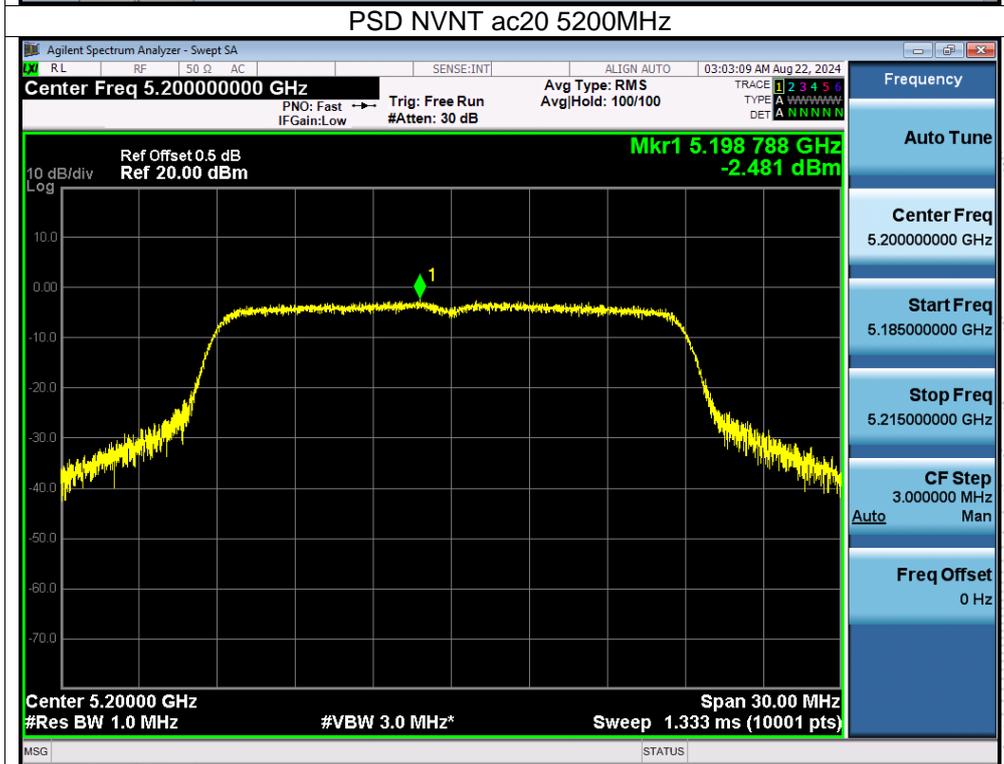
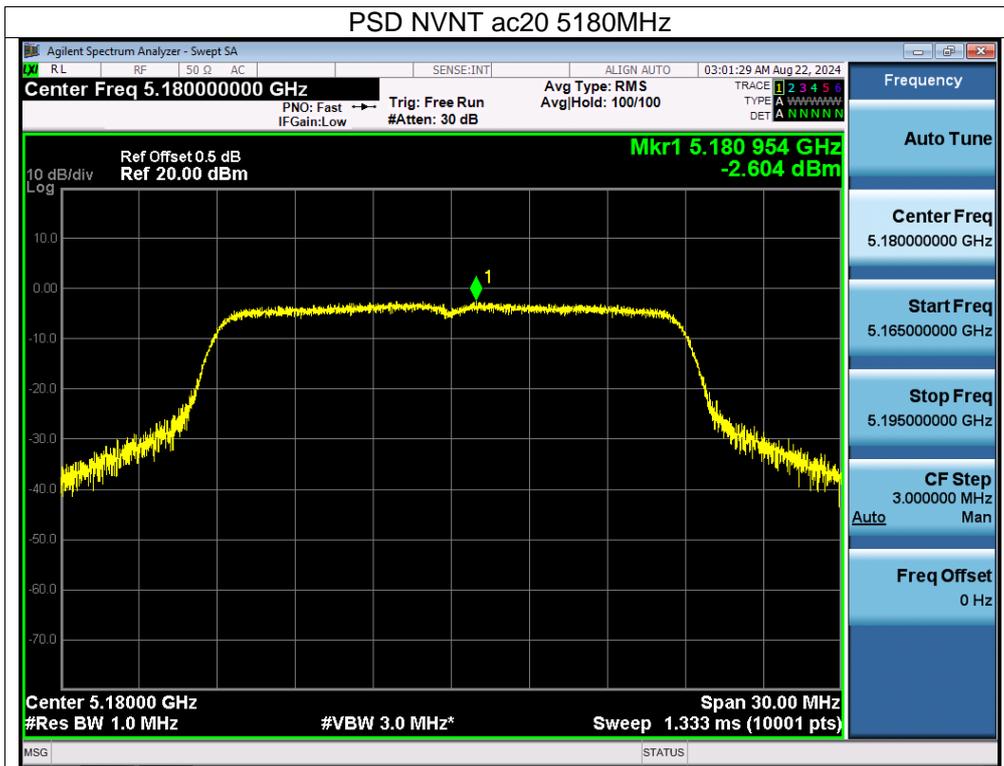


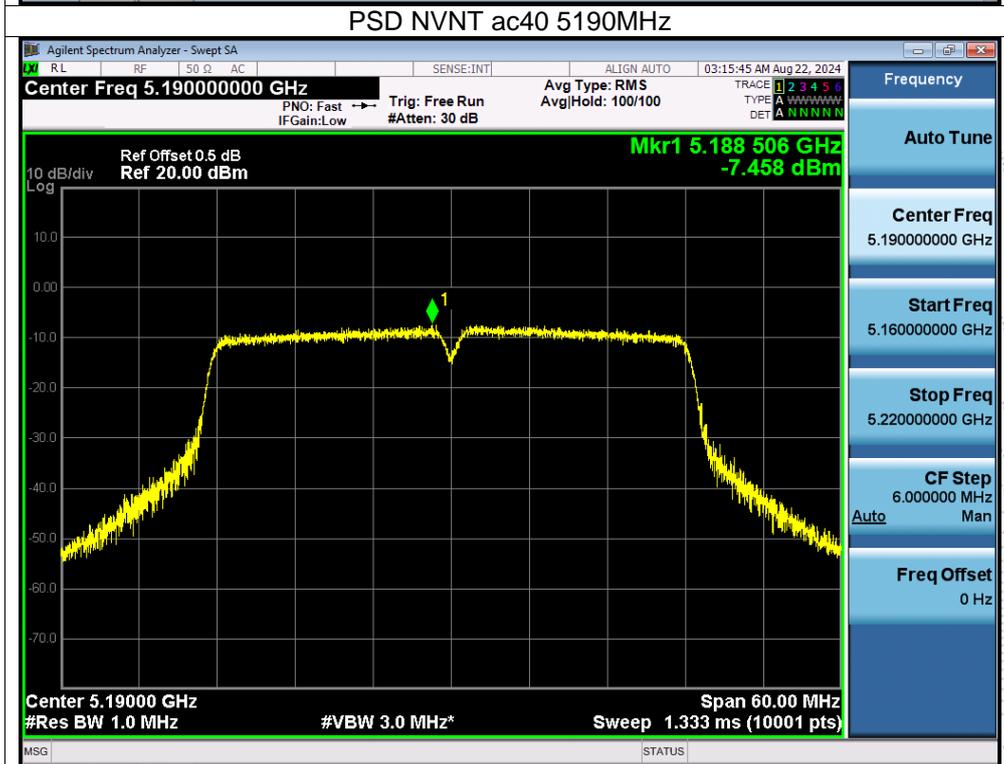
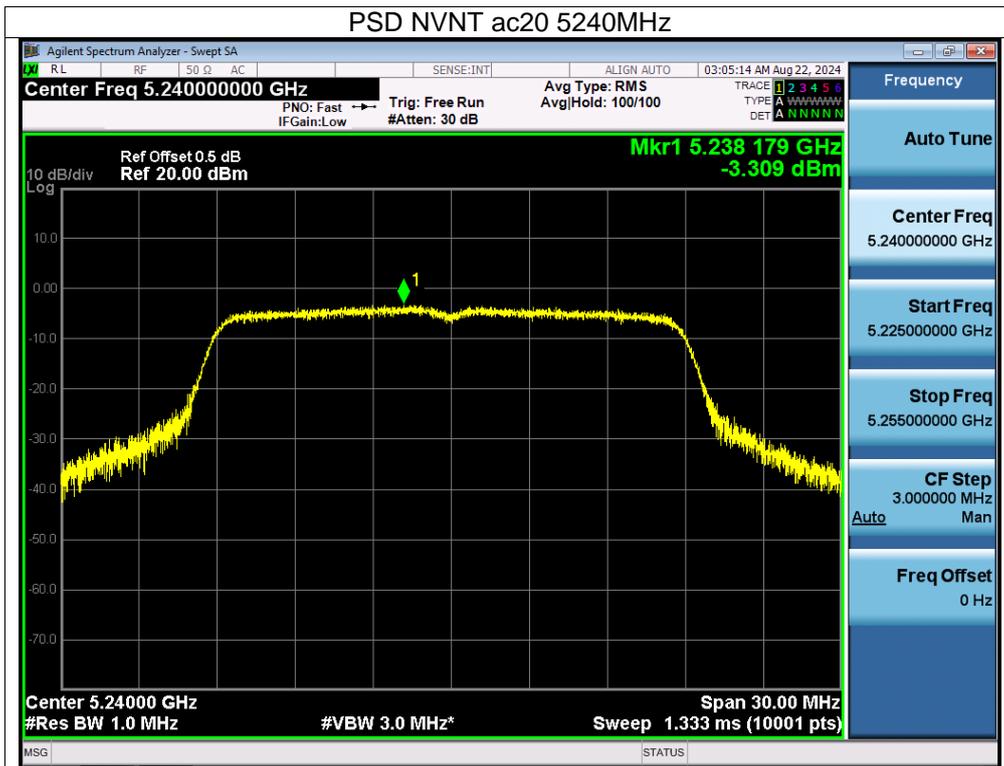


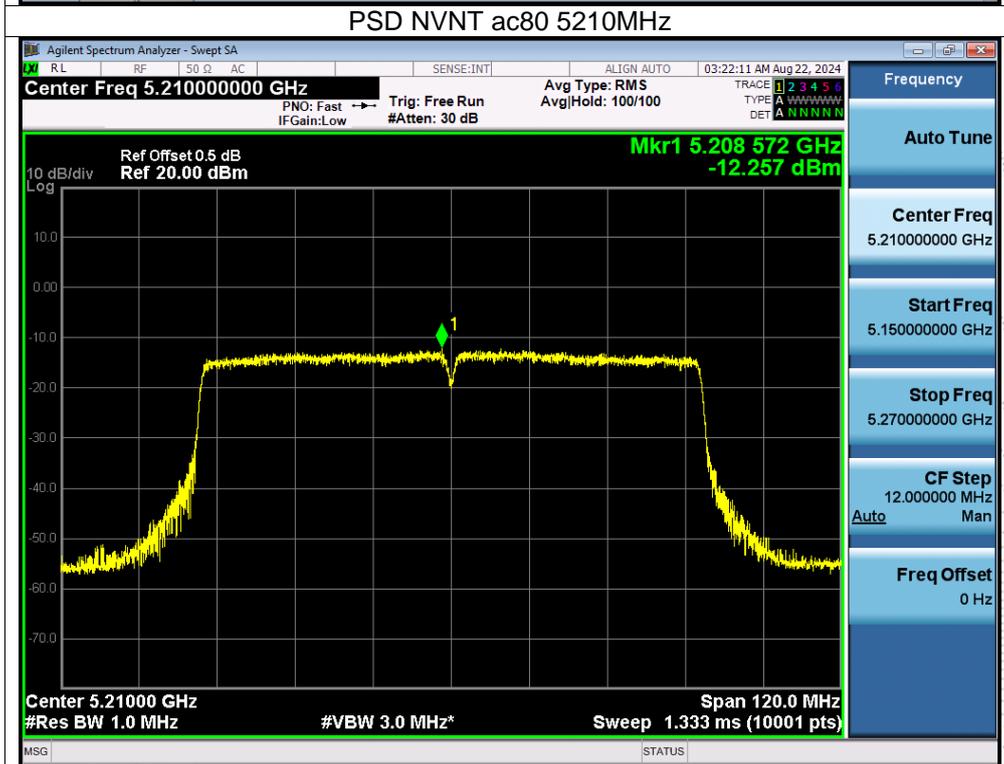
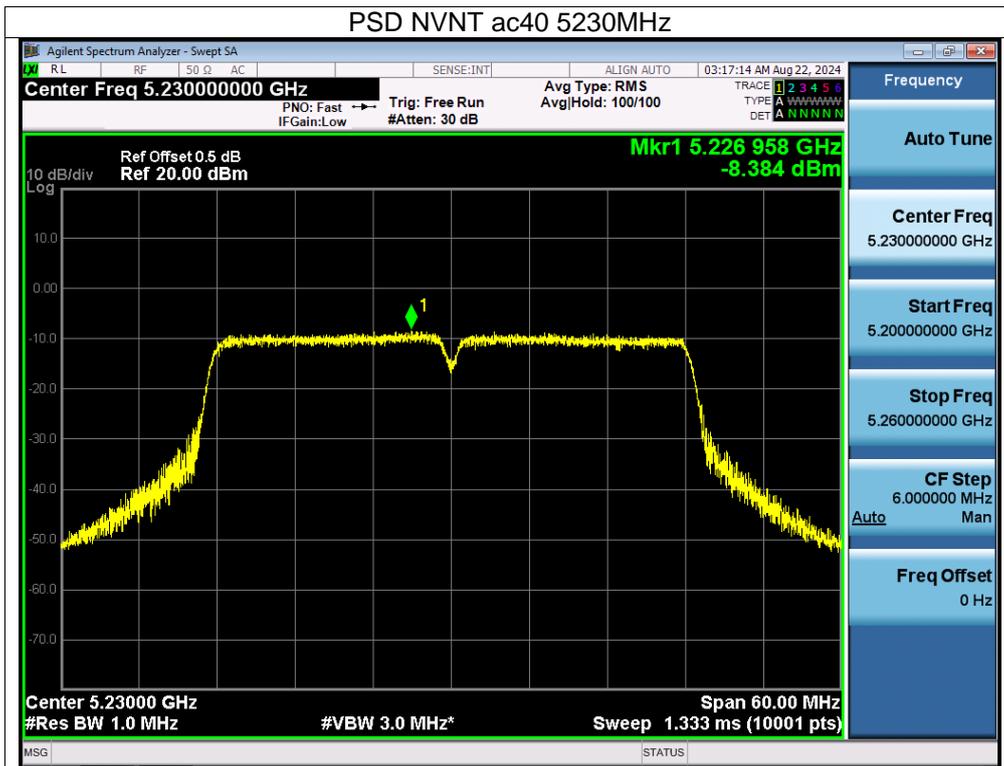


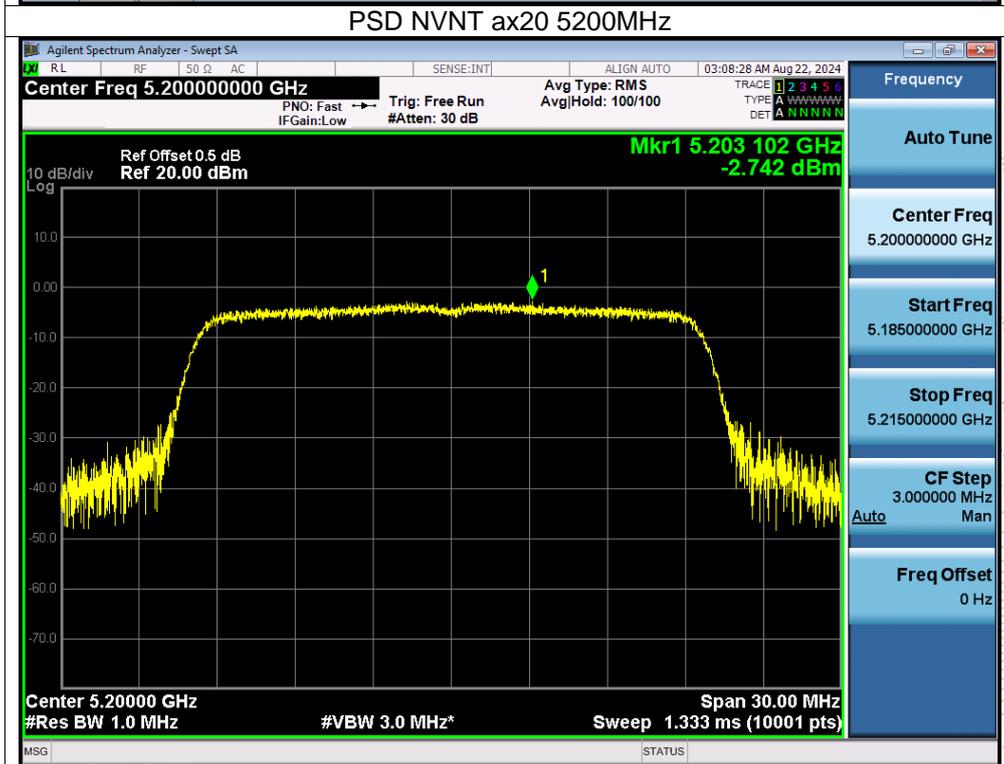
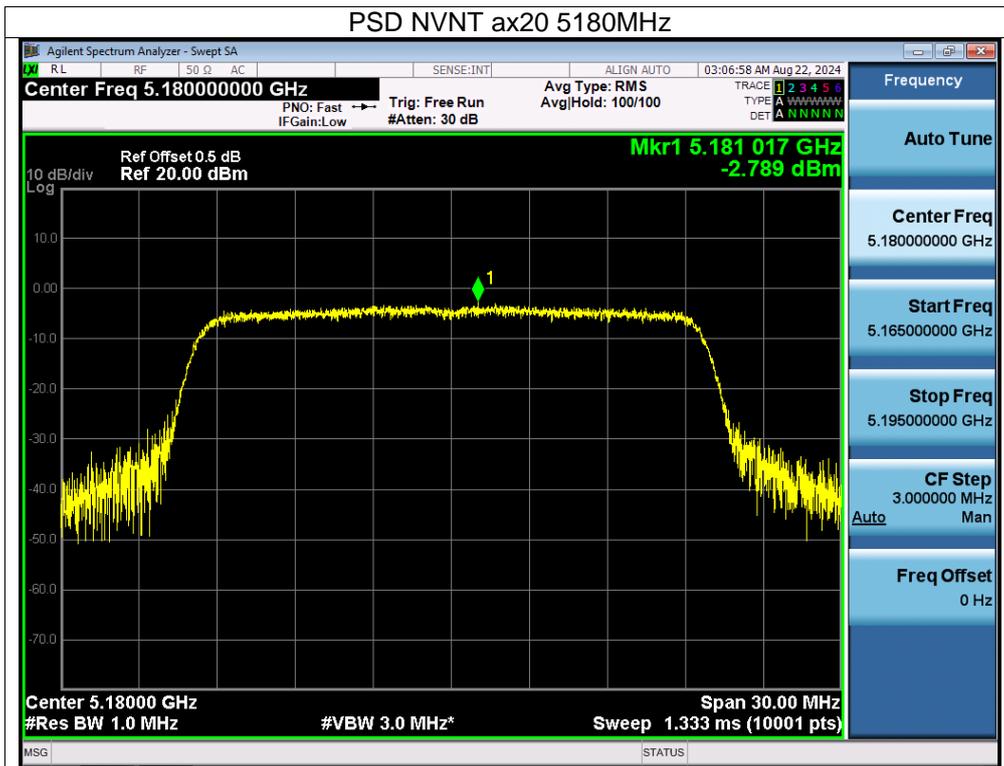


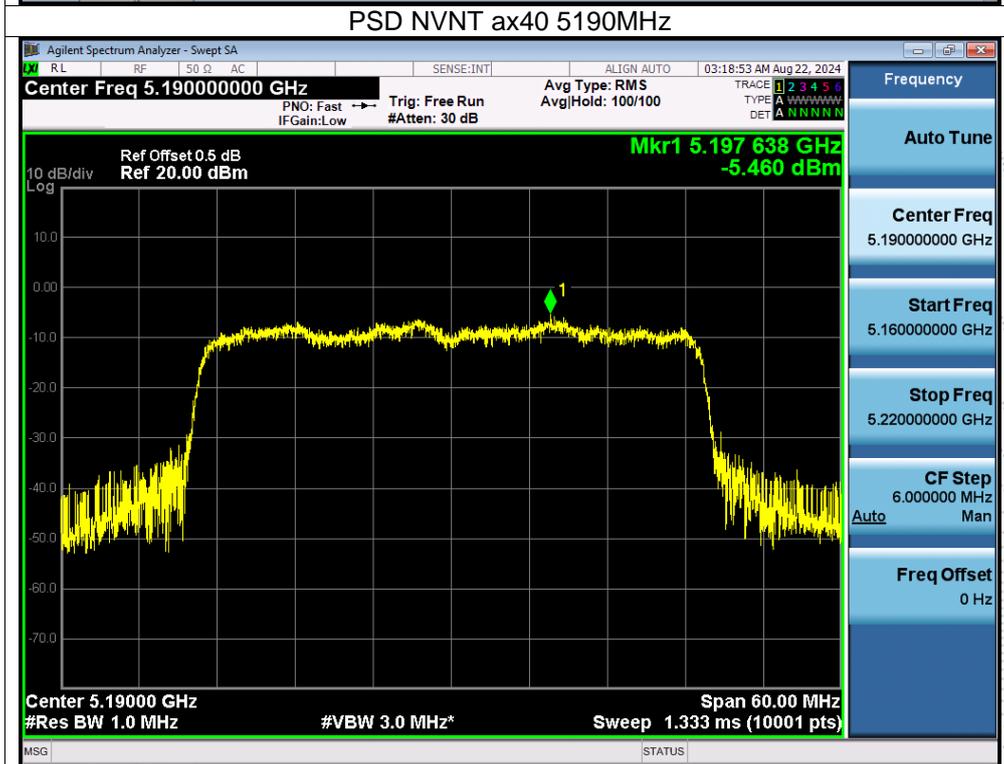
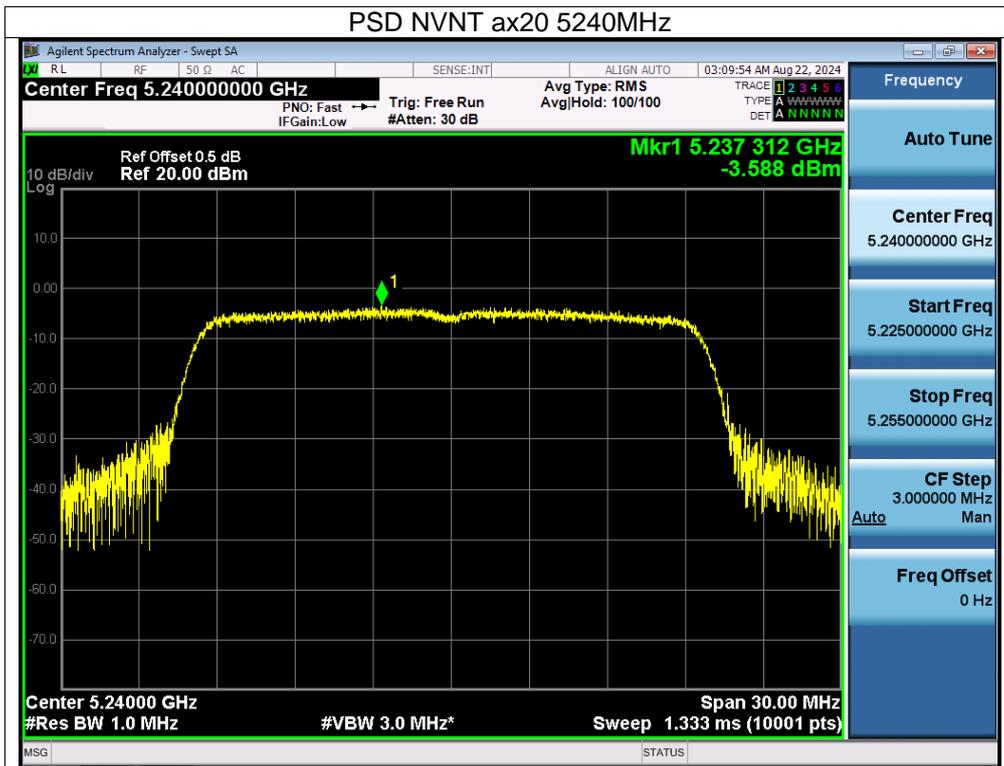


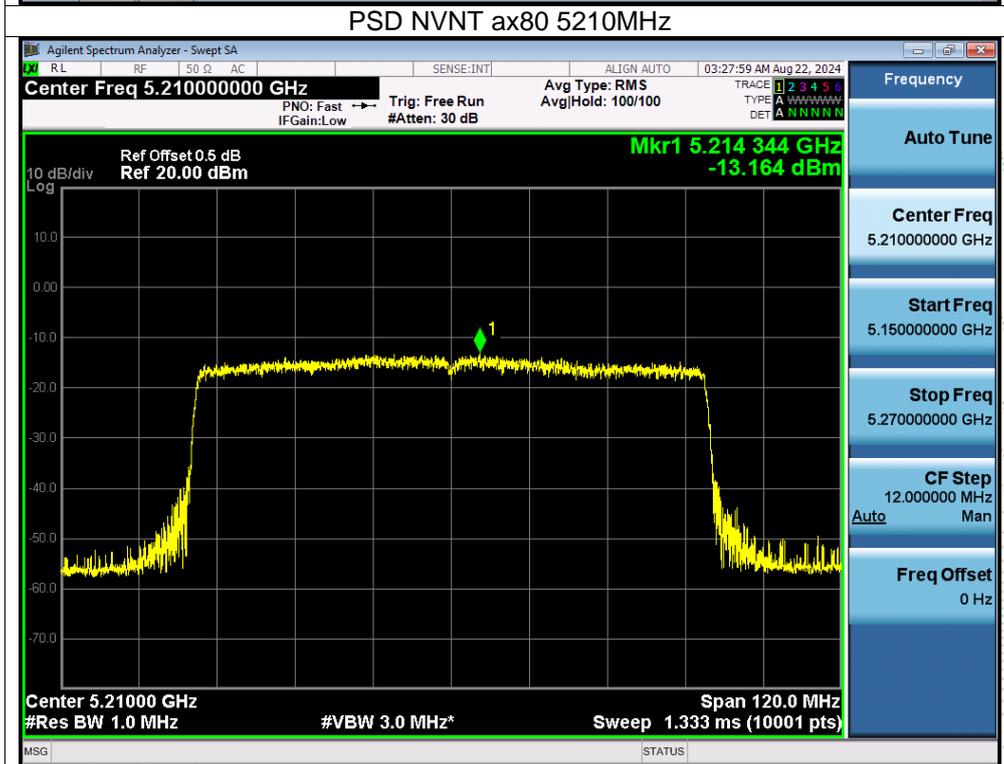
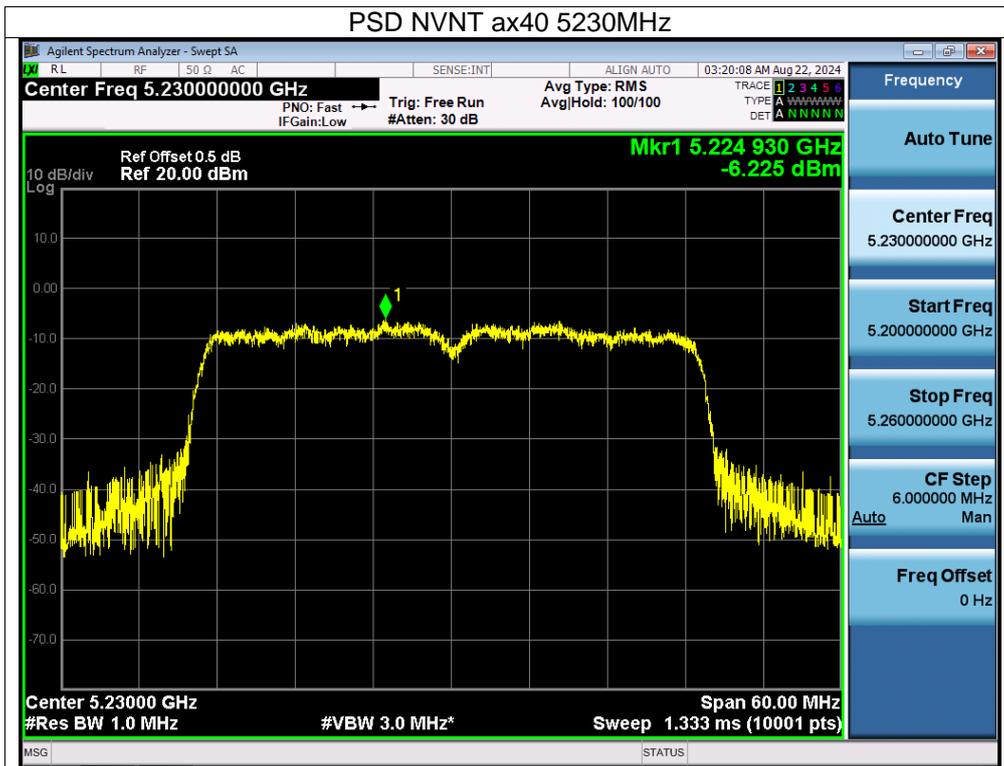


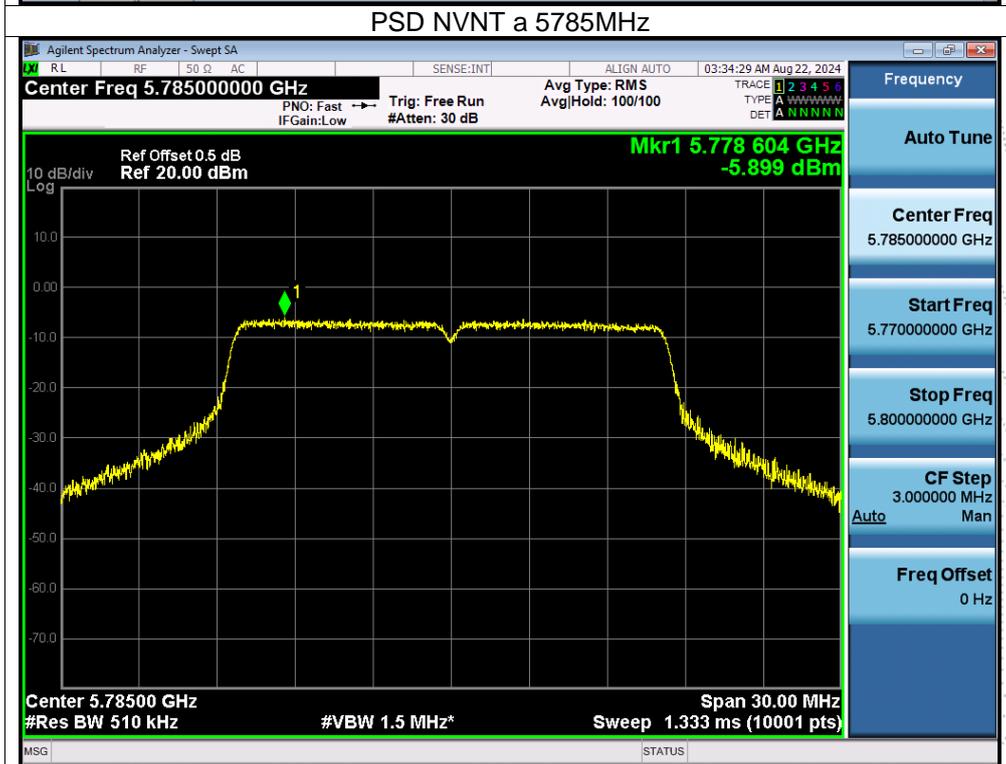
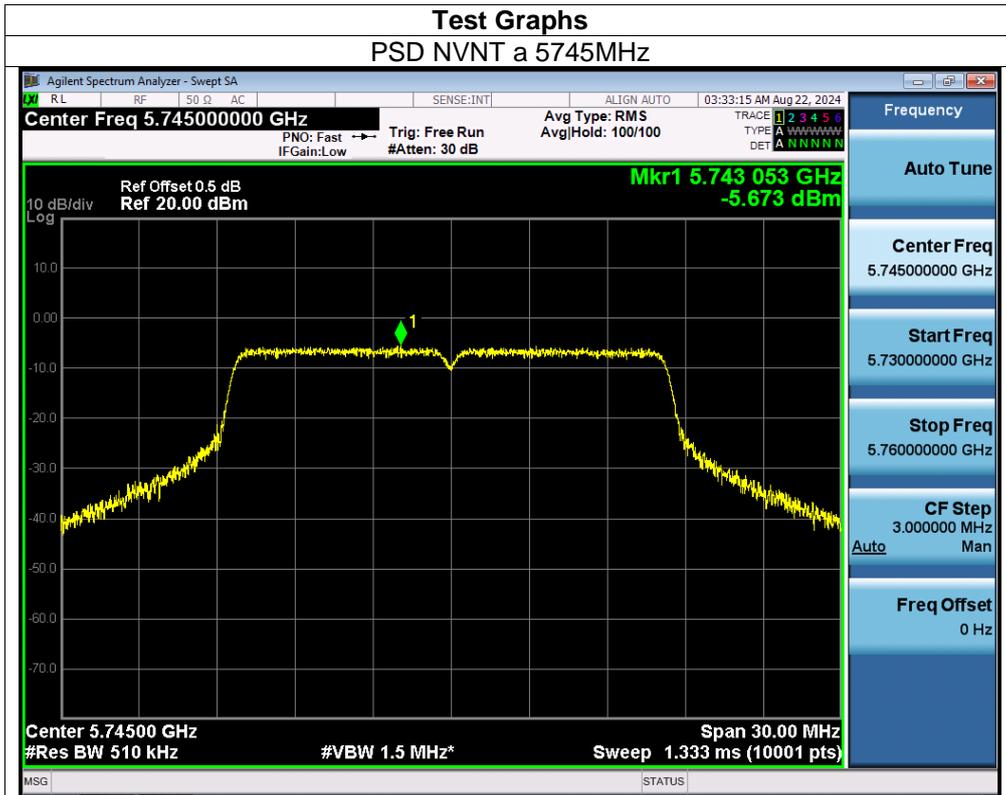


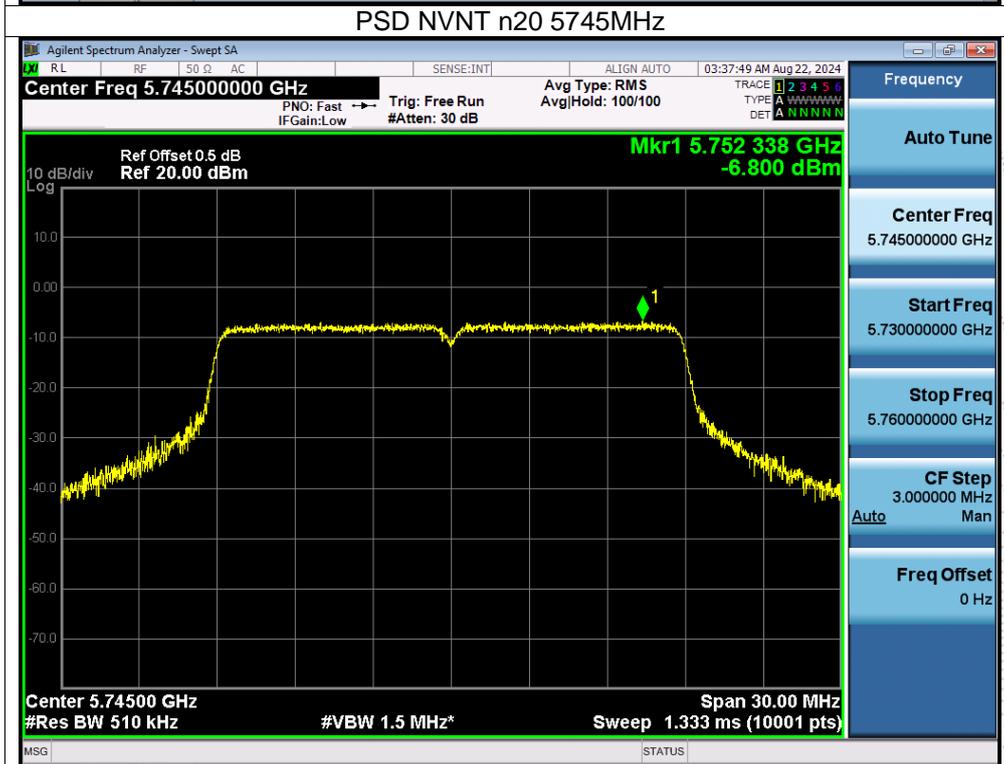
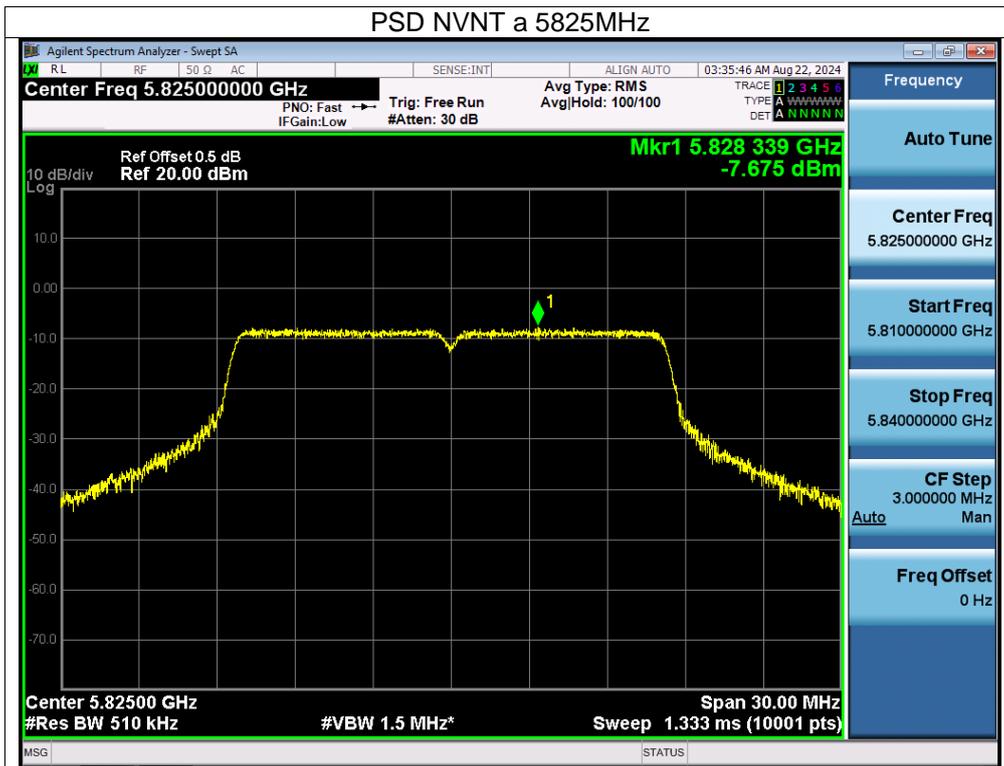


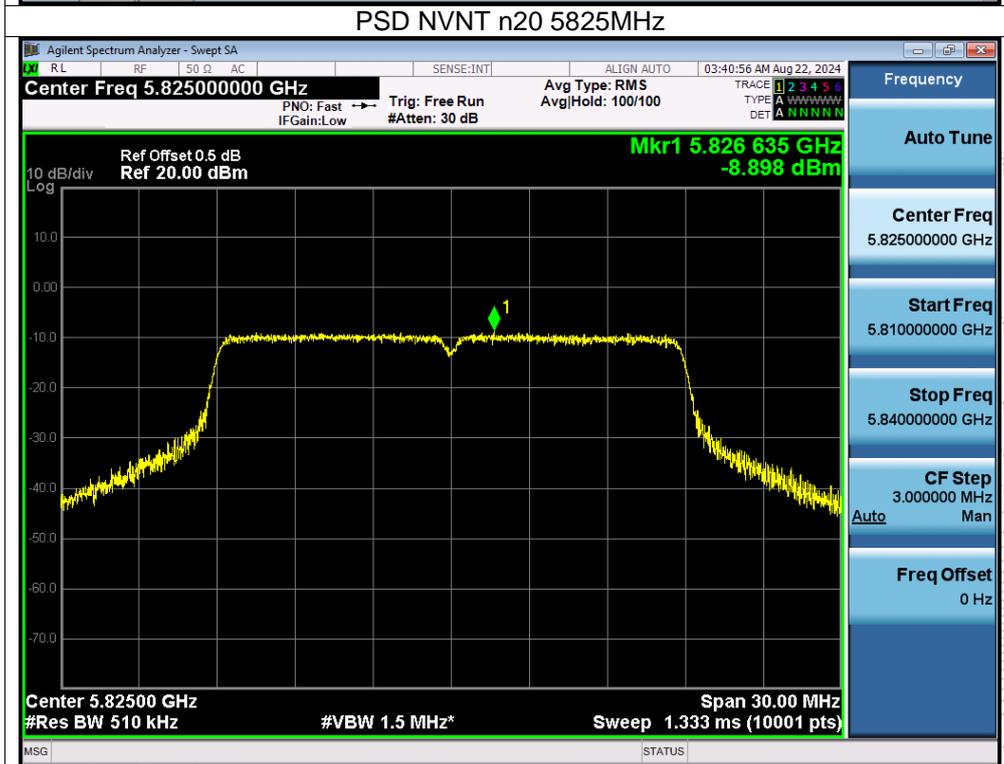
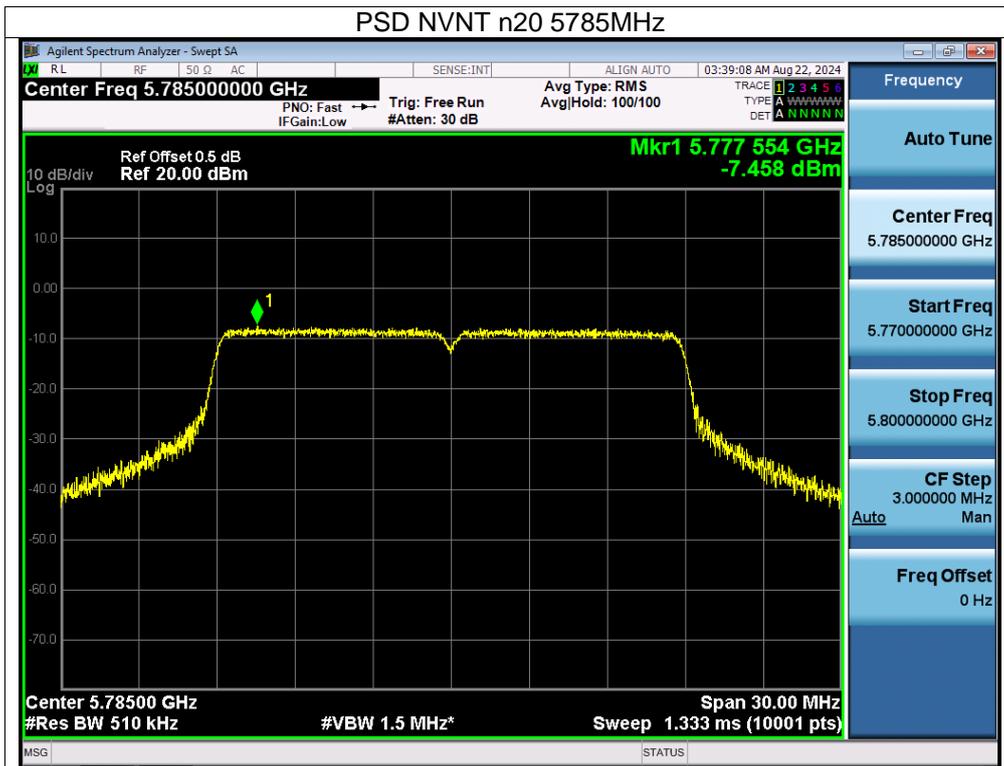


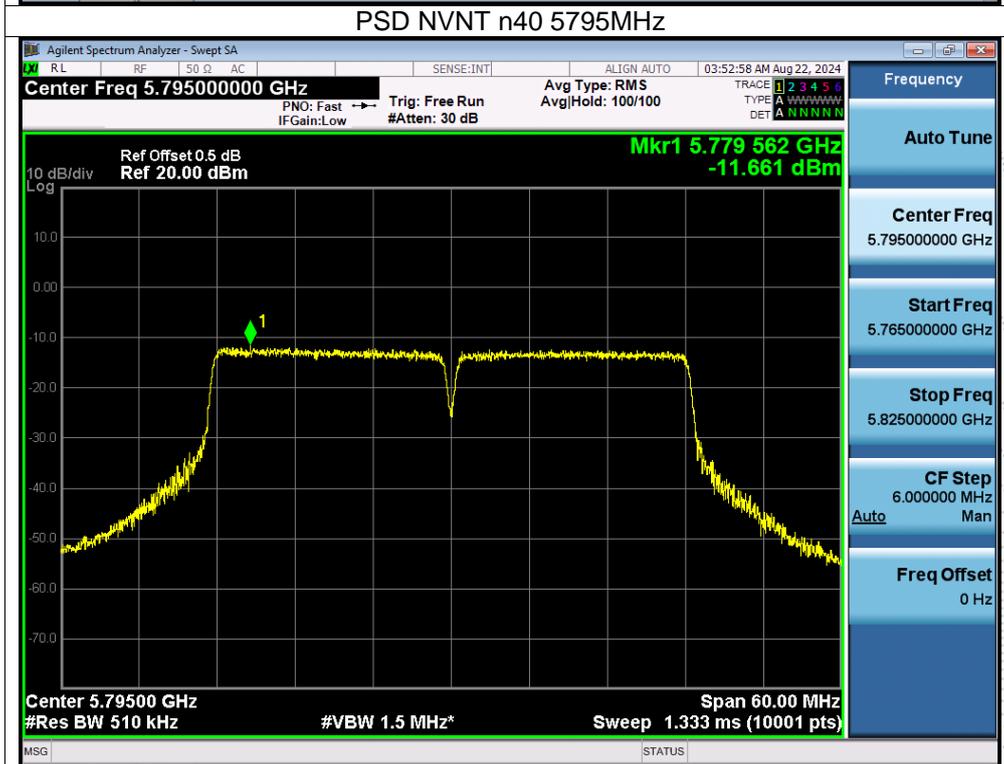
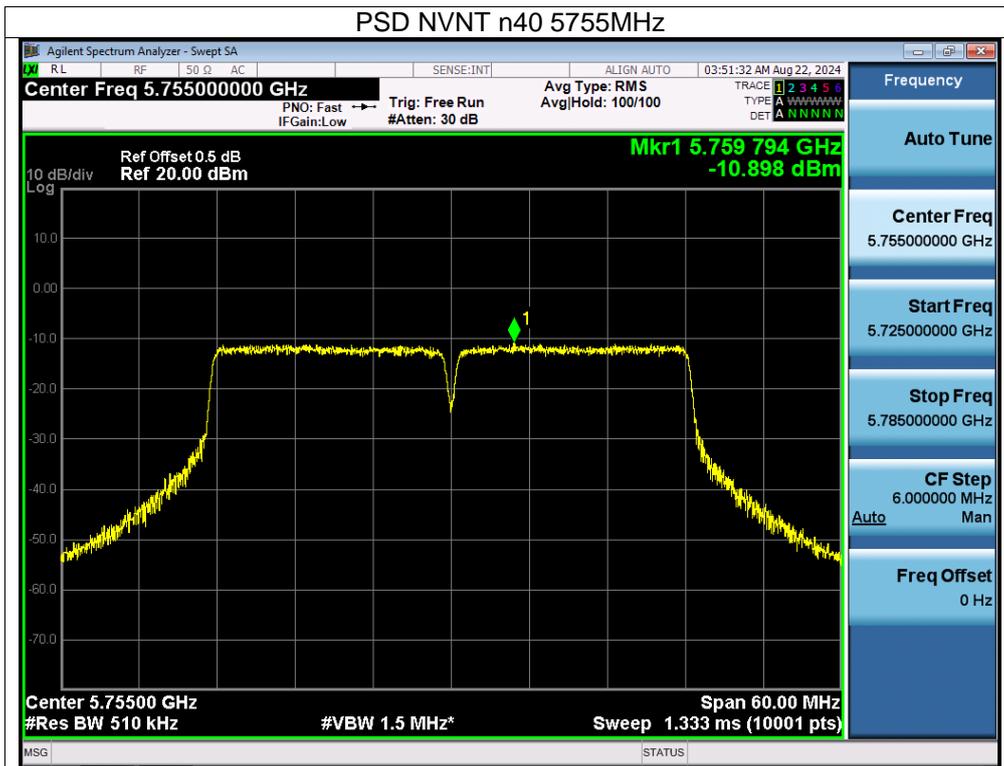


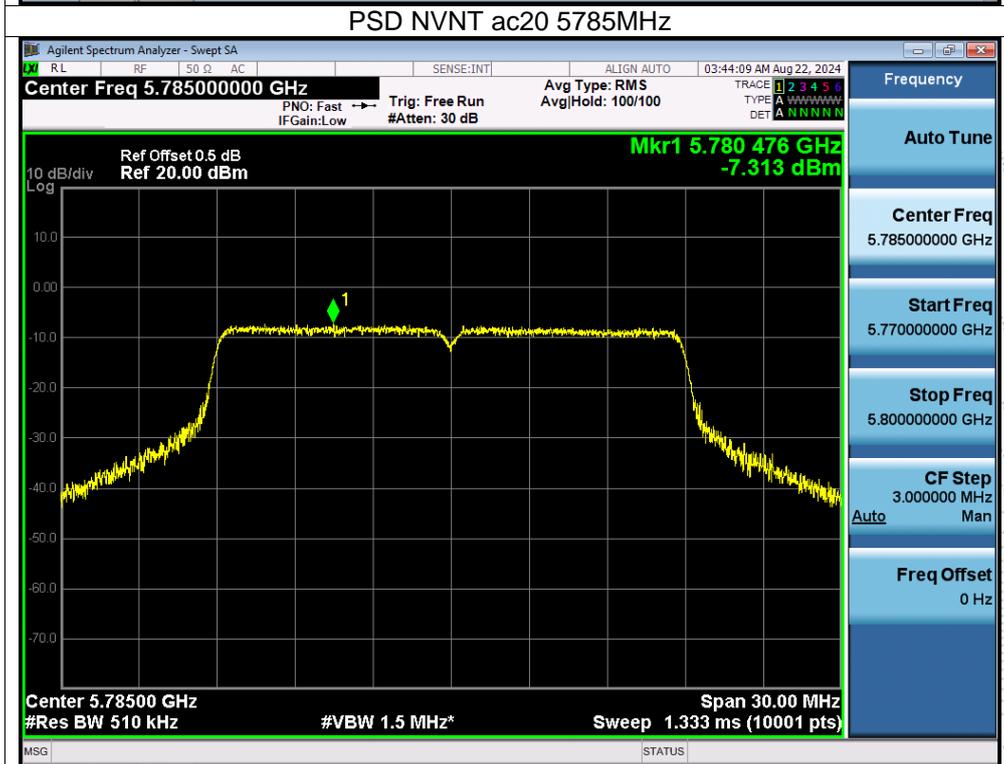
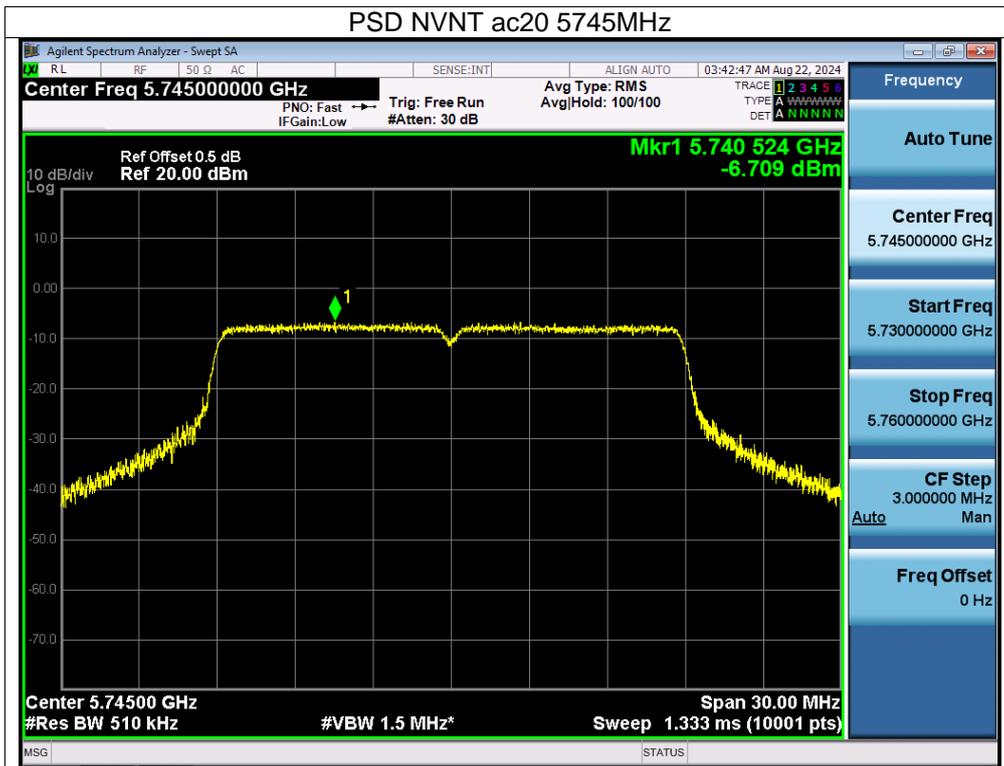


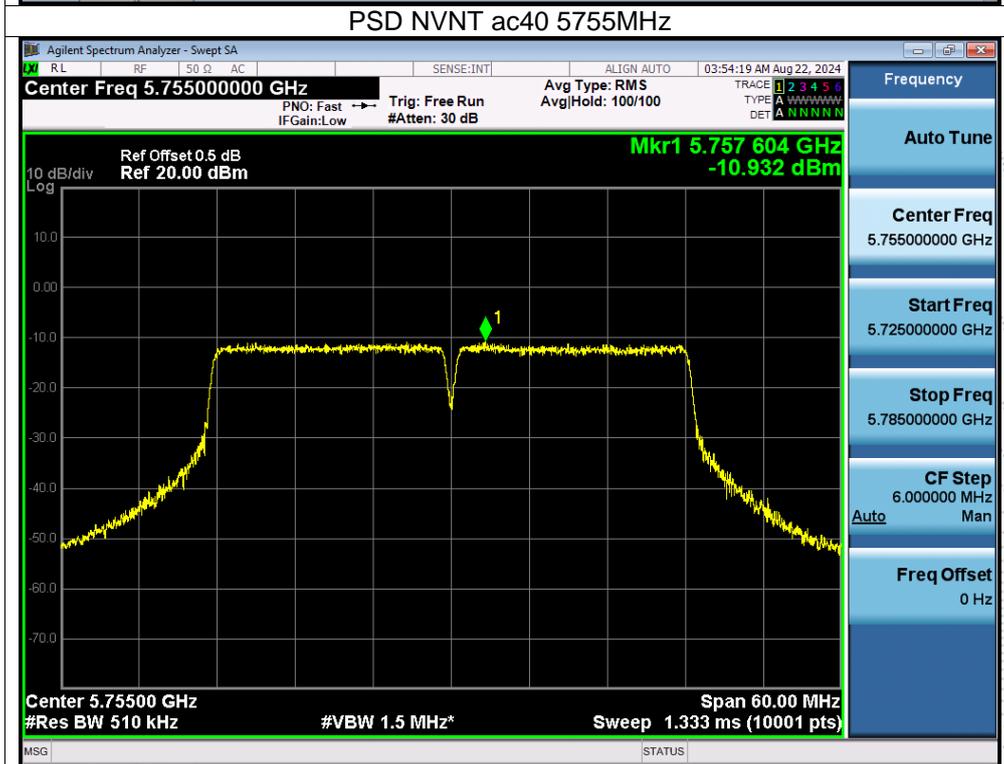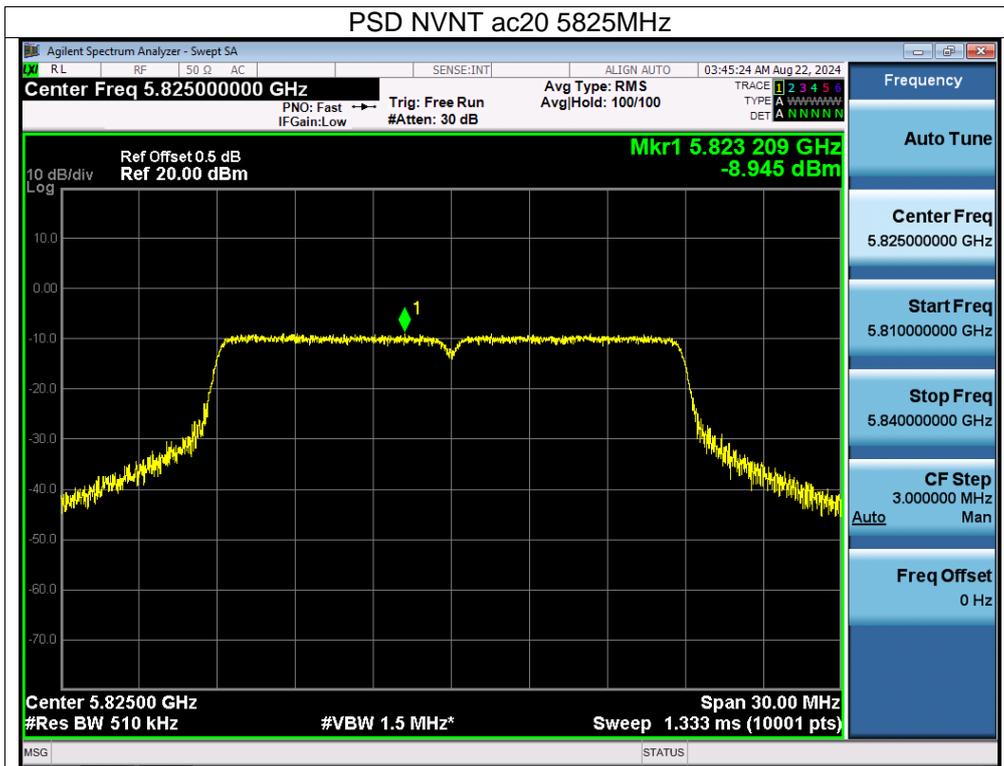

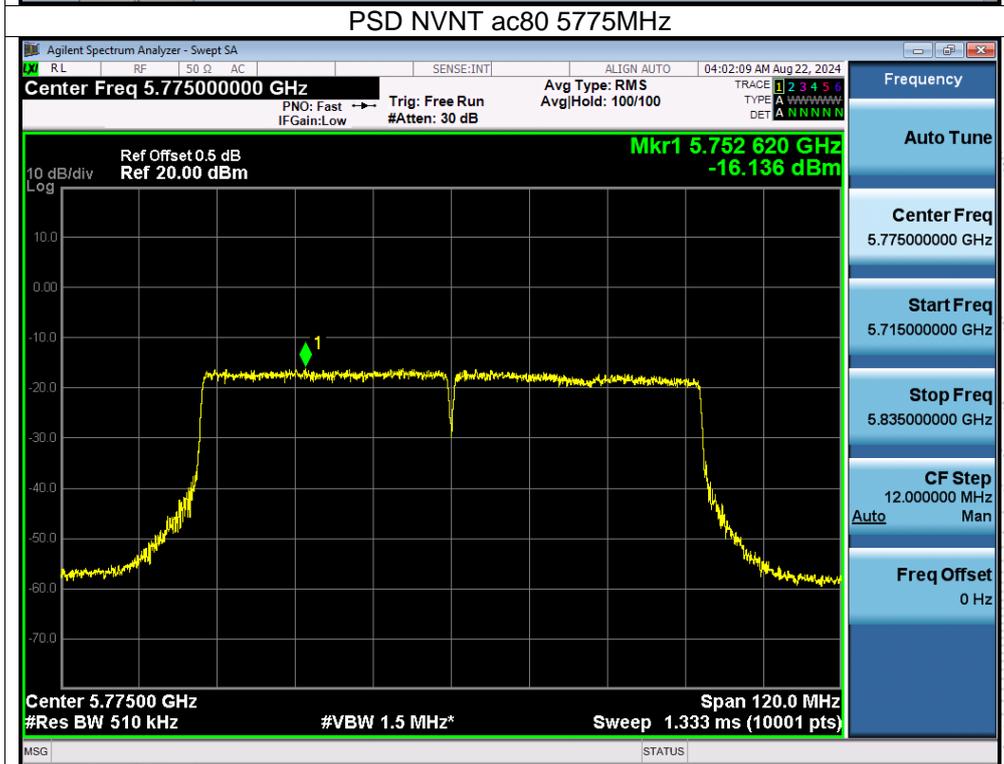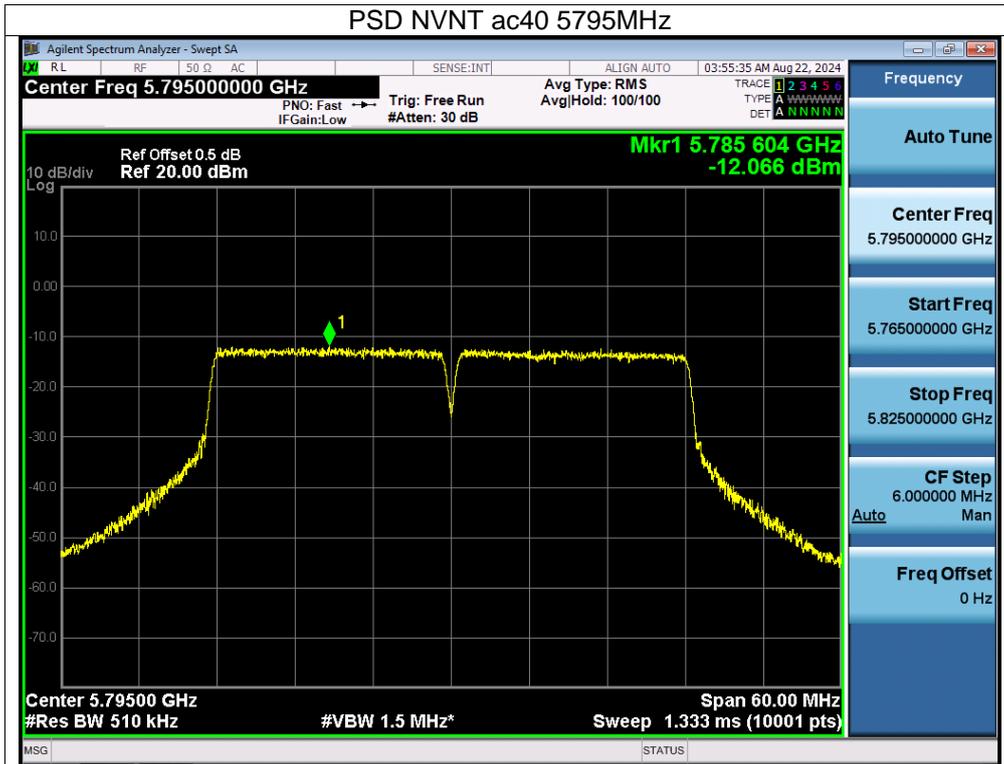

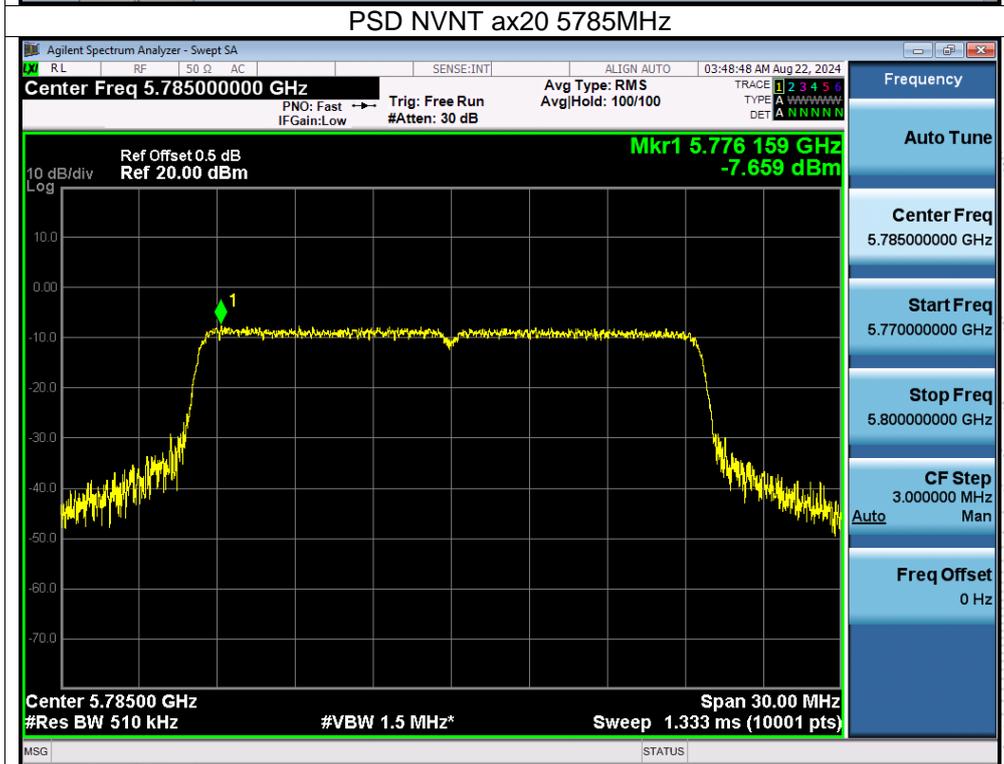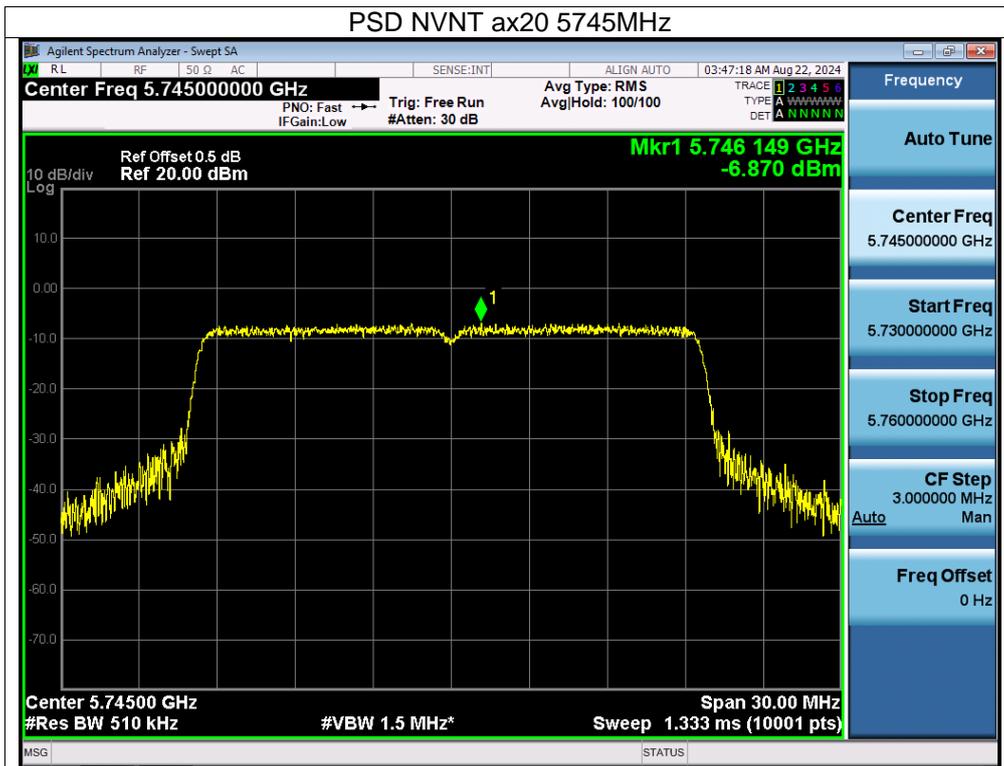


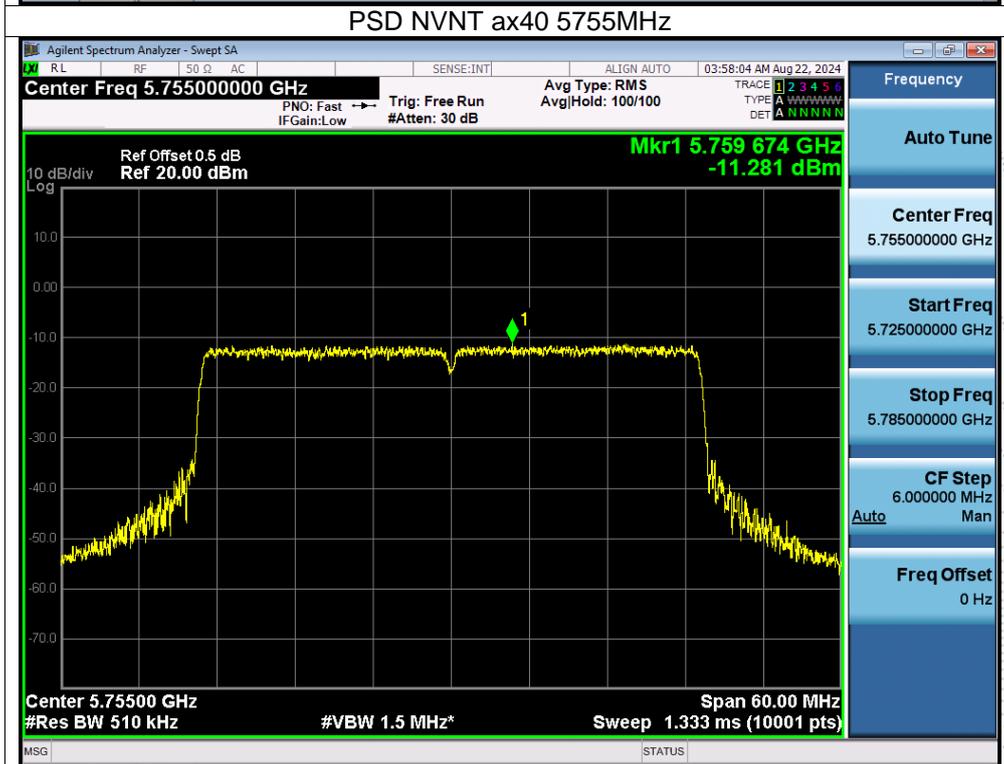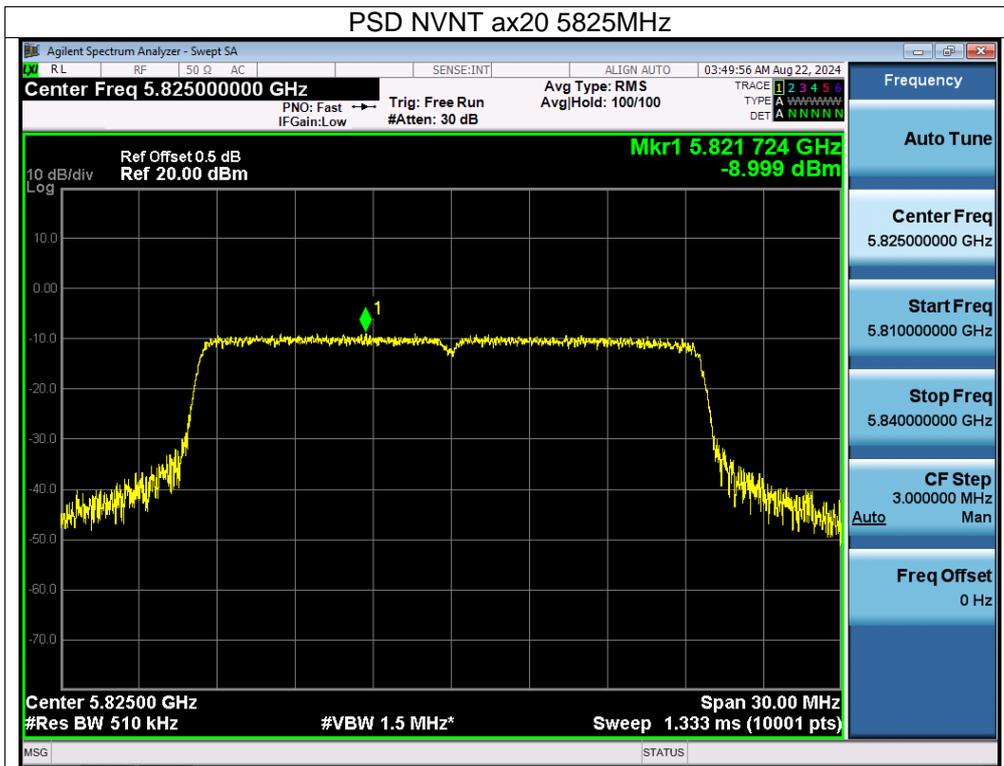

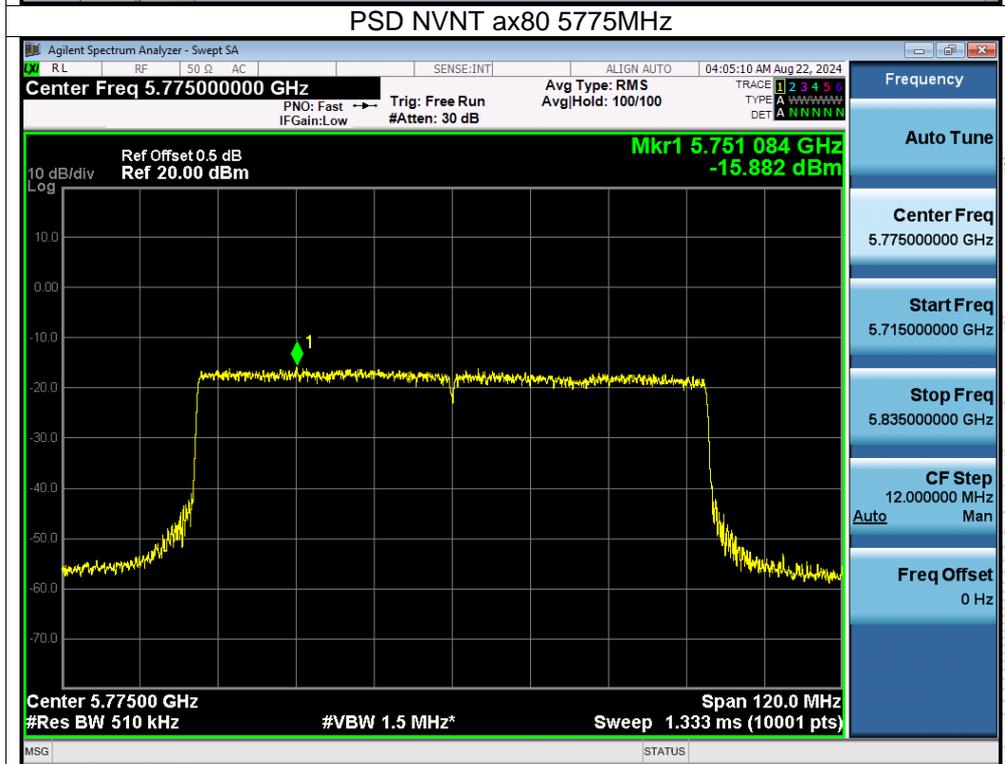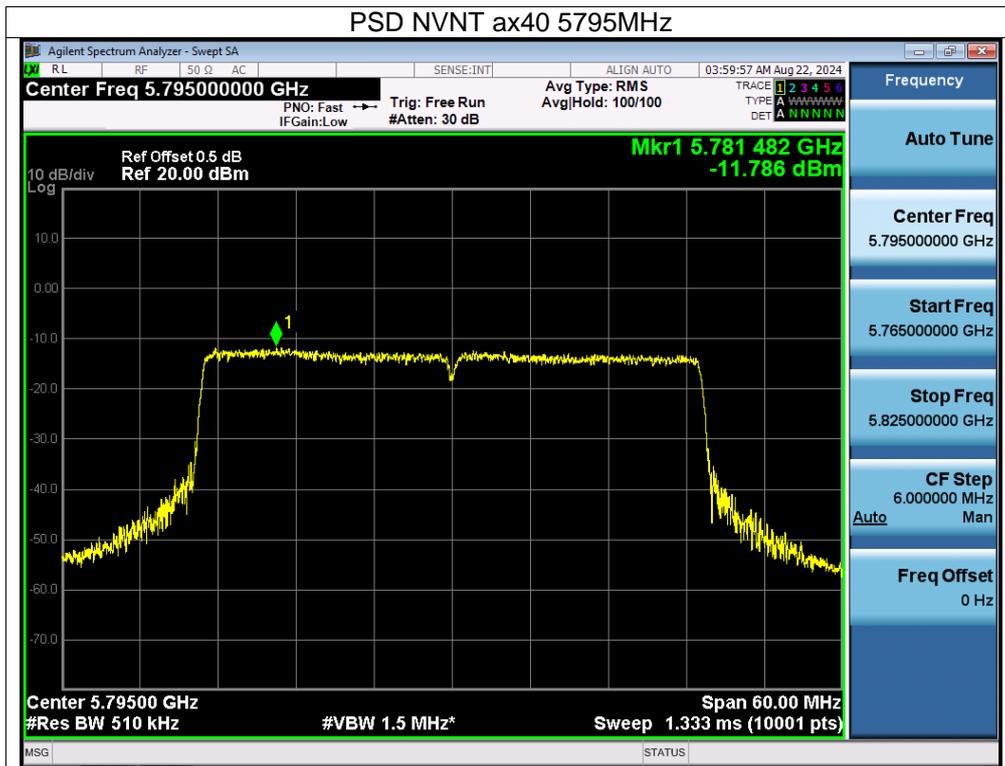

## 9. 26dB & 6dB & 99% Emission Bandwidth

### 9.1 Block Diagram Of Test Setup

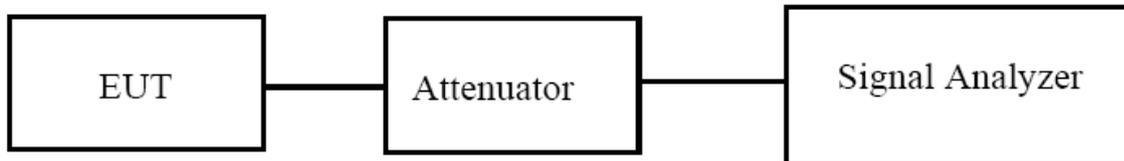

### 9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.  
(6dB bandwidth)>500kHz

### 9.3 Test Procedure

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set  $VBW \geq 3 \cdot RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6dB

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times RBW$ .
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.

6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



## 9.4 EUT Operating Conditions



The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



## 9.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 5V
Test Mode:	(5180-5240MHz)		



Condition	Mode	Frequency (MHz)	99% bandwidth (MHz)	26dB bandwidth (MHz)	Result
NVNT	a	5180	16.62	23.761	Pass
NVNT	a	5200	16.672	24.373	Pass
NVNT	a	5240	16.681	24.897	Pass
NVNT	n20	5180	17.858	24.375	Pass
NVNT	n20	5200	17.825	25.683	Pass
NVNT	n20	5240	17.822	23.96	Pass
NVNT	n40	5190	36.349	44.58	Pass
NVNT	n40	5230	36.345	45.453	Pass
NVNT	ac20	5180	17.819	24.984	Pass
NVNT	ac20	5200	17.865	24.49	Pass
NVNT	ac20	5240	17.83	24.796	Pass
NVNT	ac40	5190	36.337	46.201	Pass
NVNT	ac40	5230	36.367	45.48	Pass
NVNT	ac80	5210	75.751	86.543	Pass
NVNT	ax20	5180	19.027	24.538	Pass
NVNT	ax20	5200	19.035	25.313	Pass
NVNT	ax20	5240	18.991	23.452	Pass
NVNT	ax40	5190	37.736	43.345	Pass
NVNT	ax40	5230	37.763	43.195	Pass
NVNT	ax80	5210	77.244	84.066	Pass

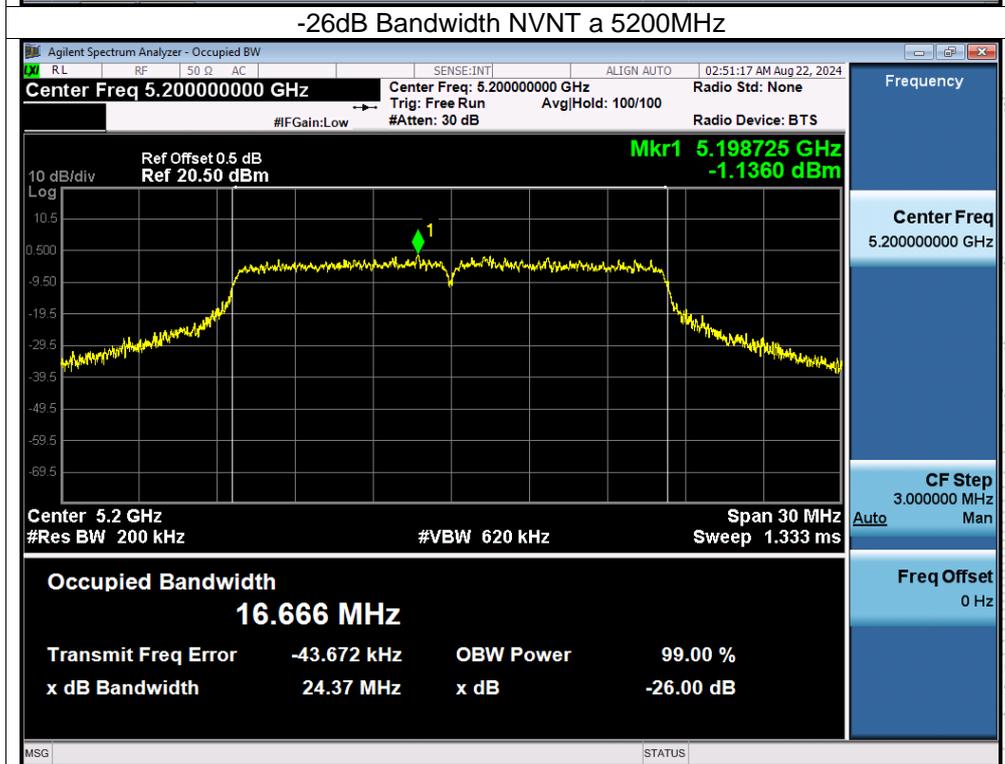
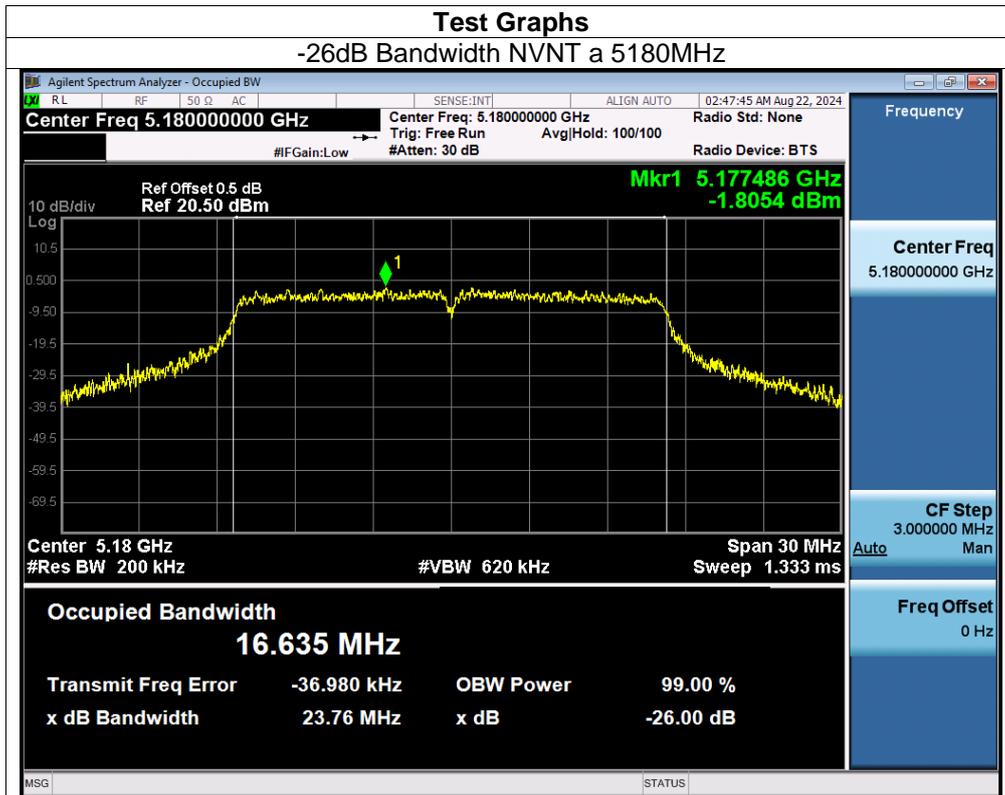


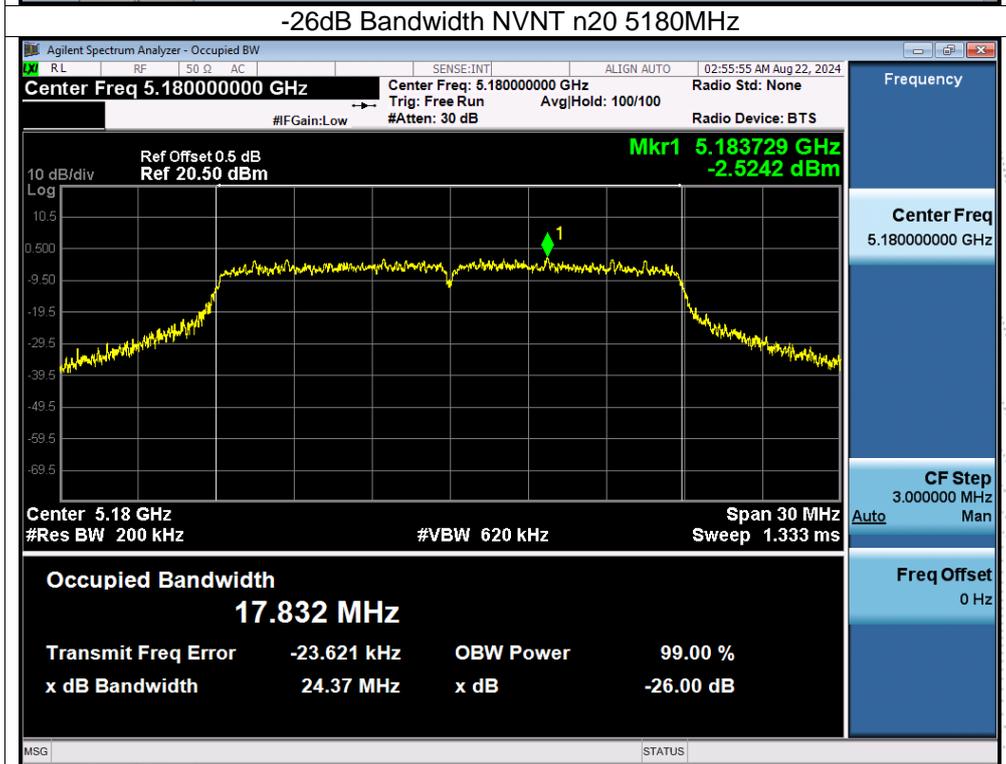
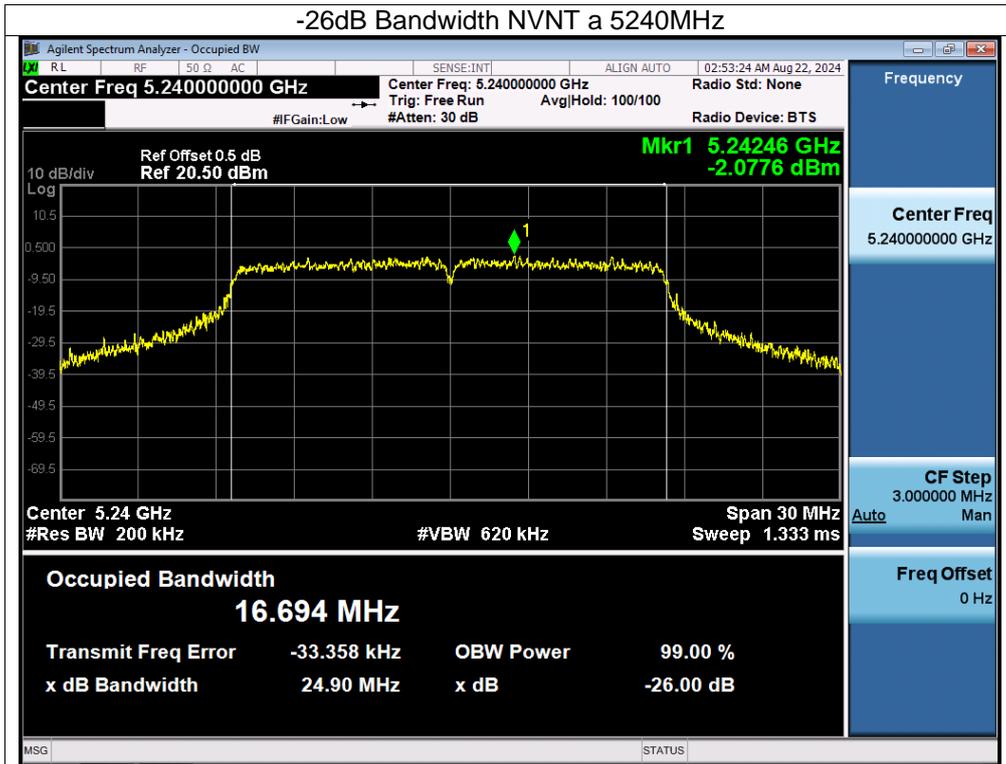


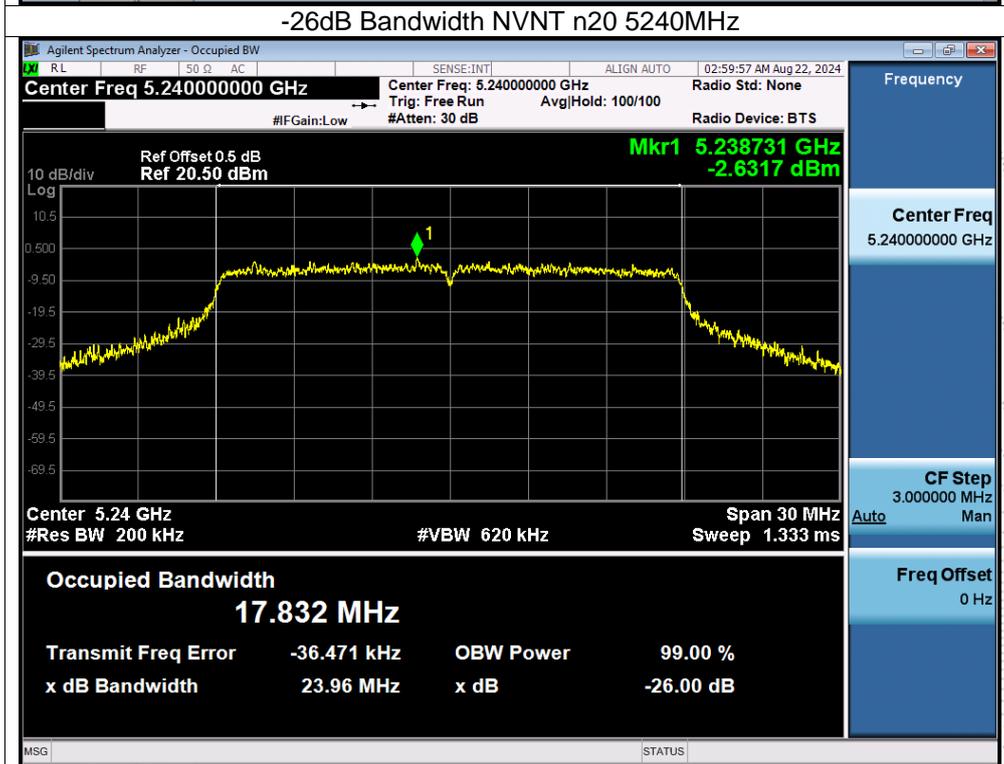
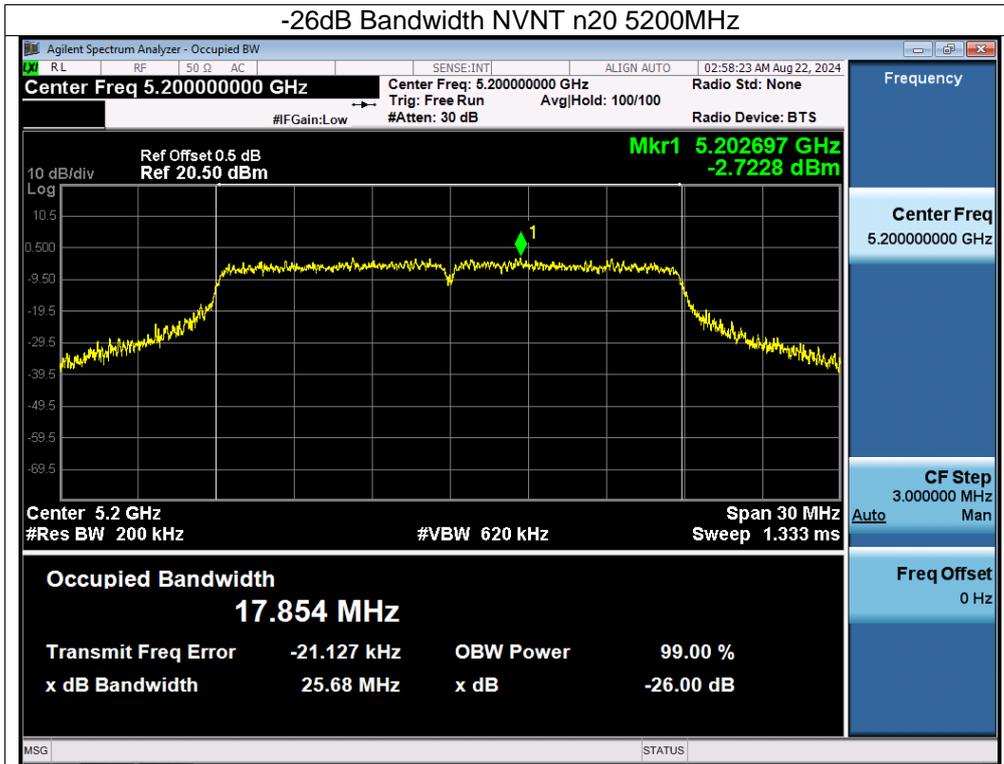


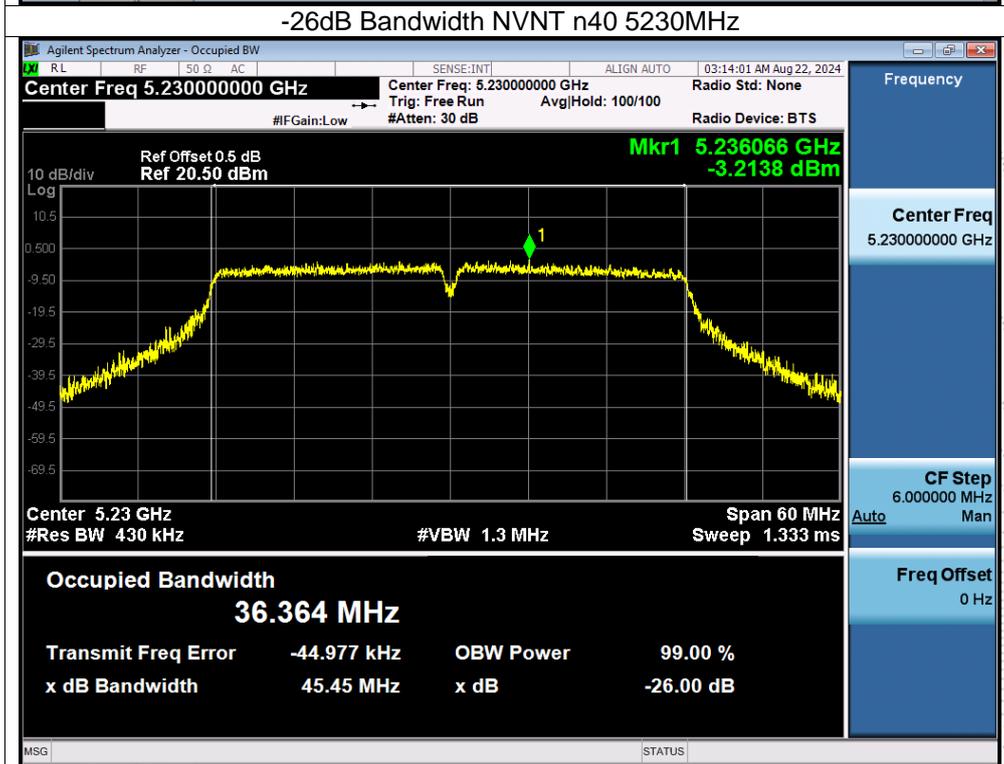
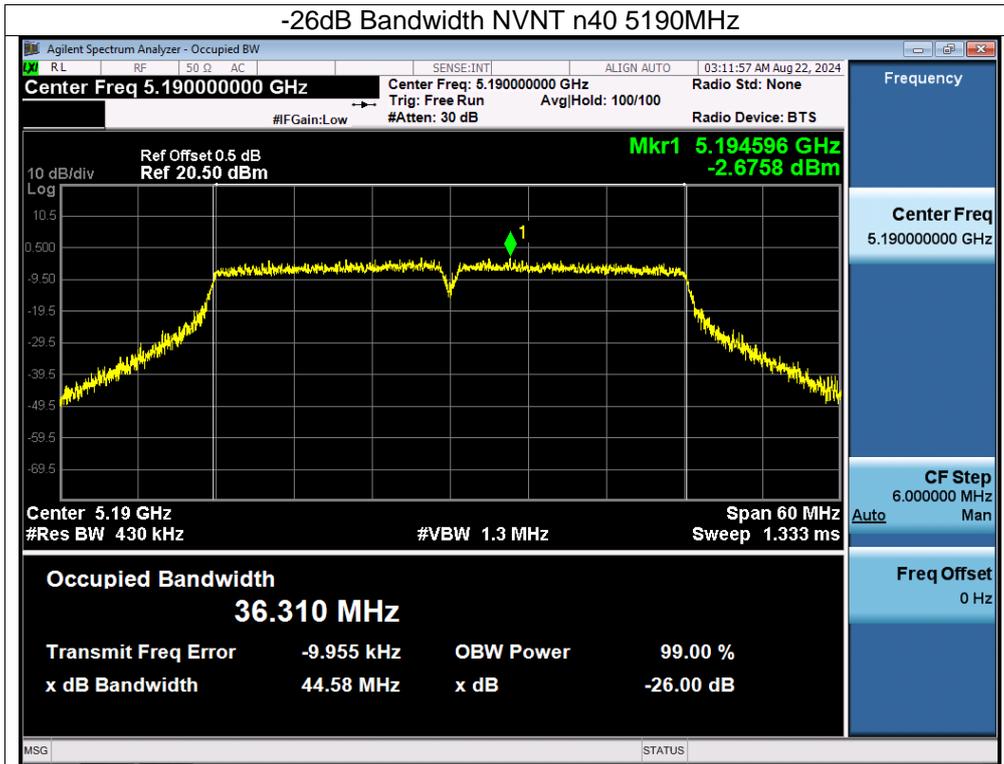


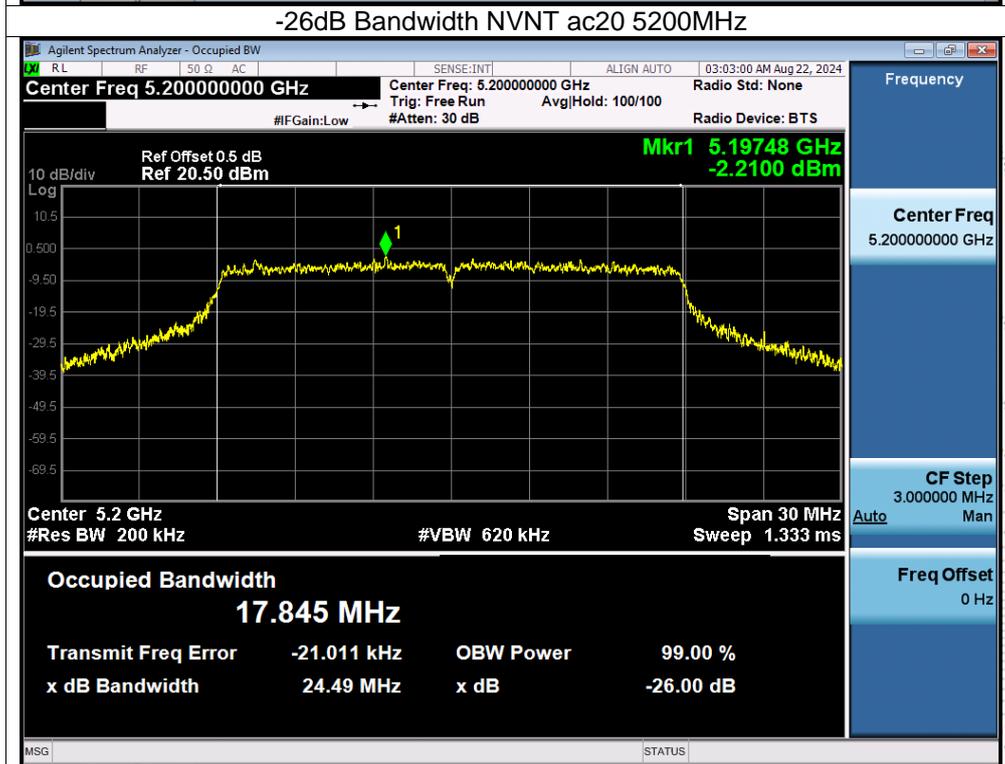
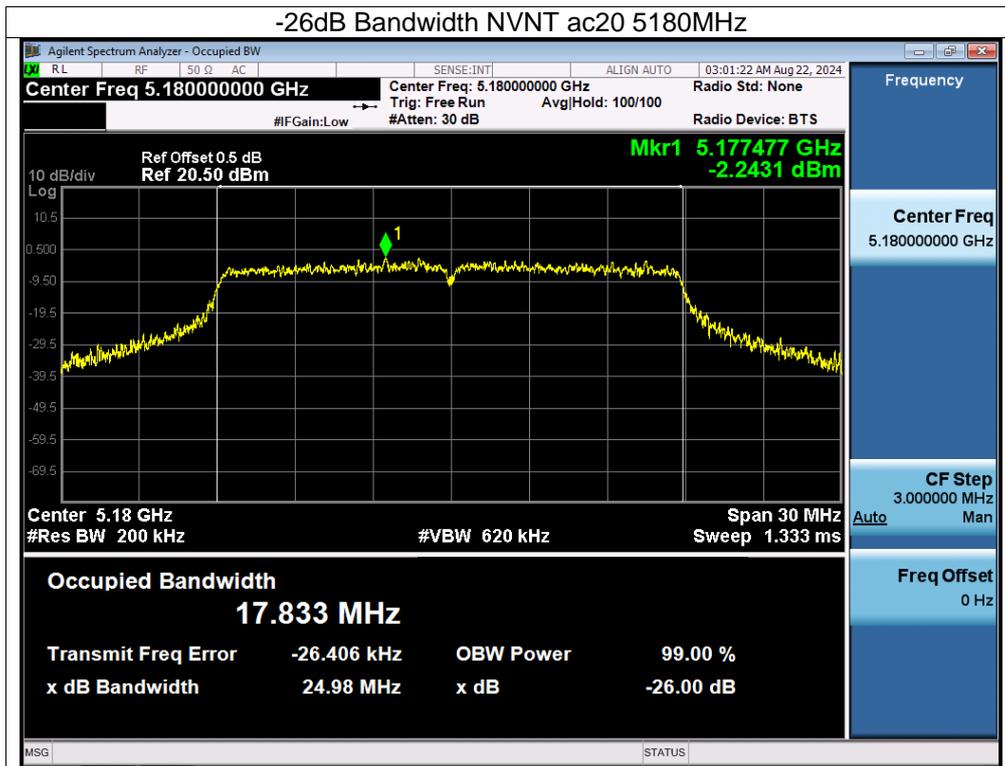


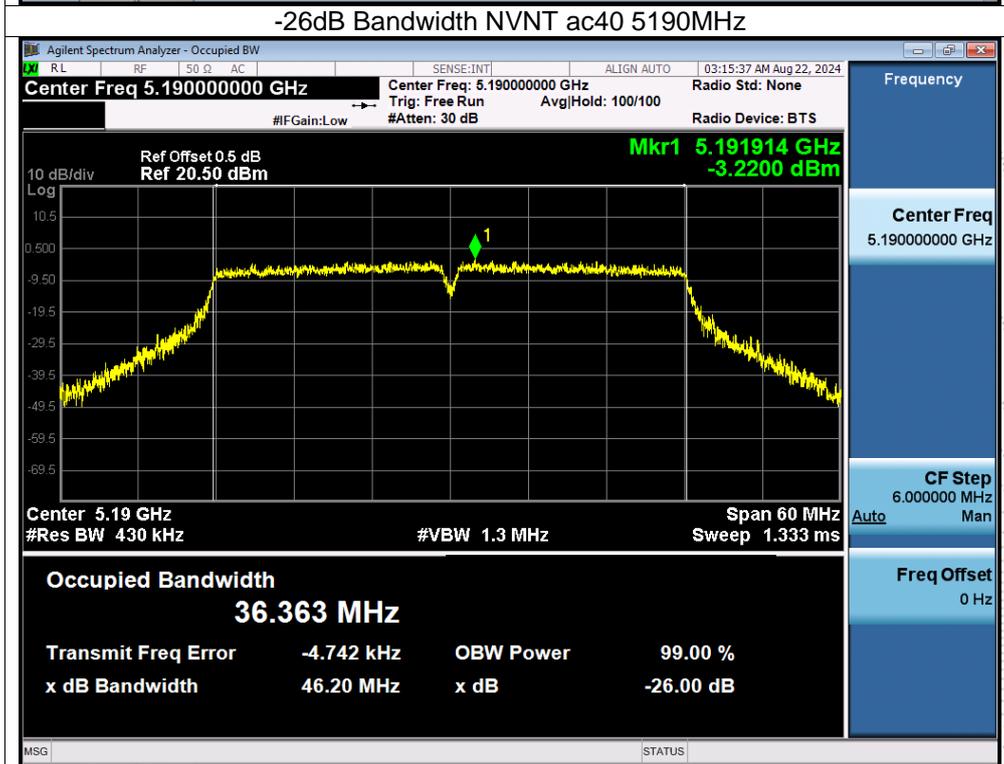
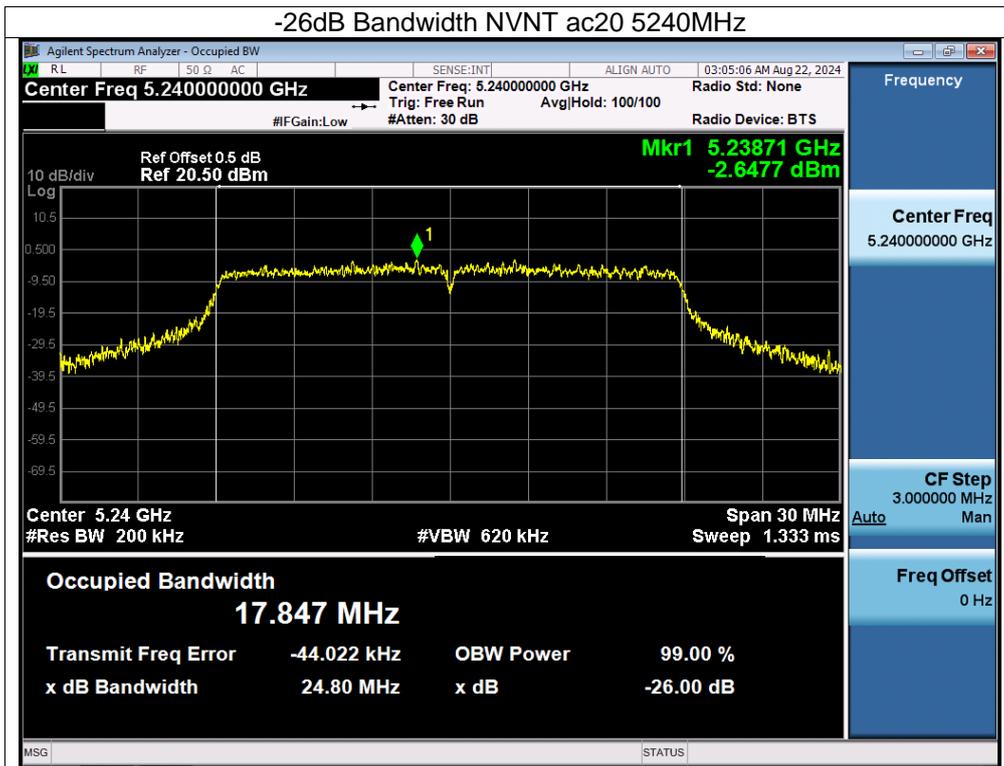


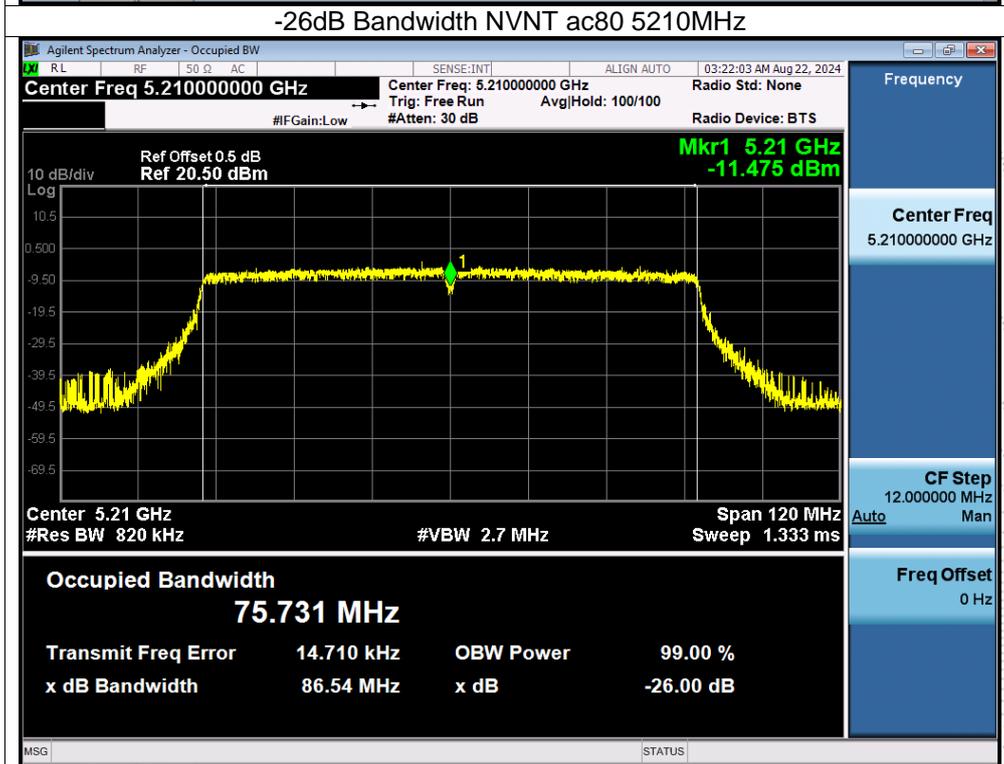
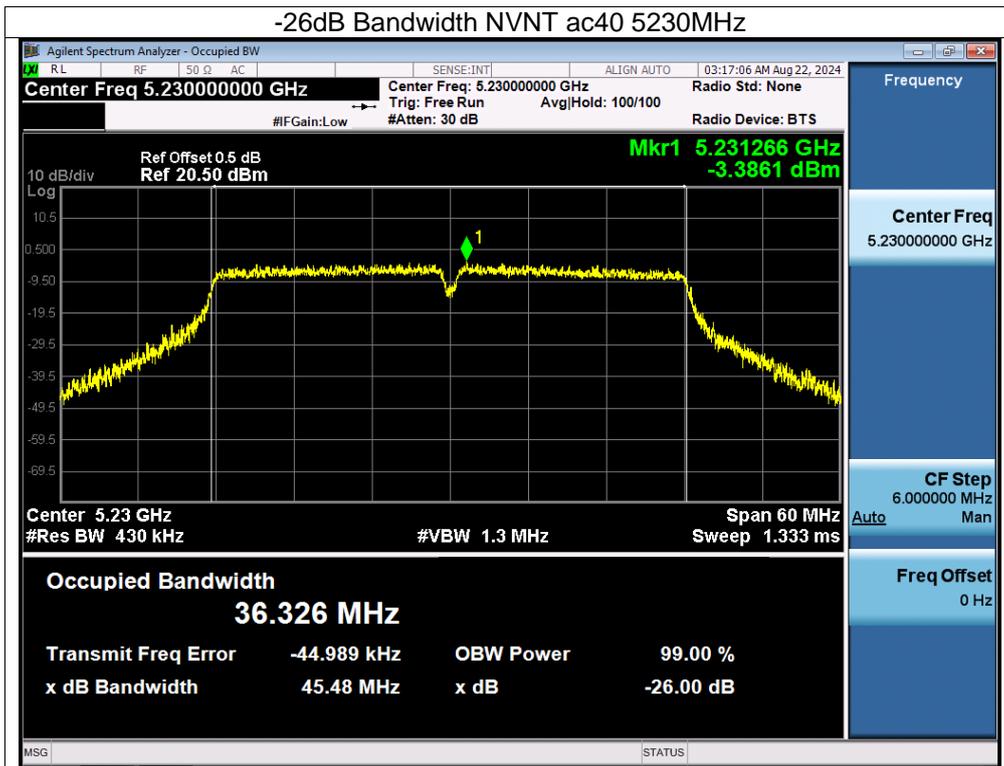


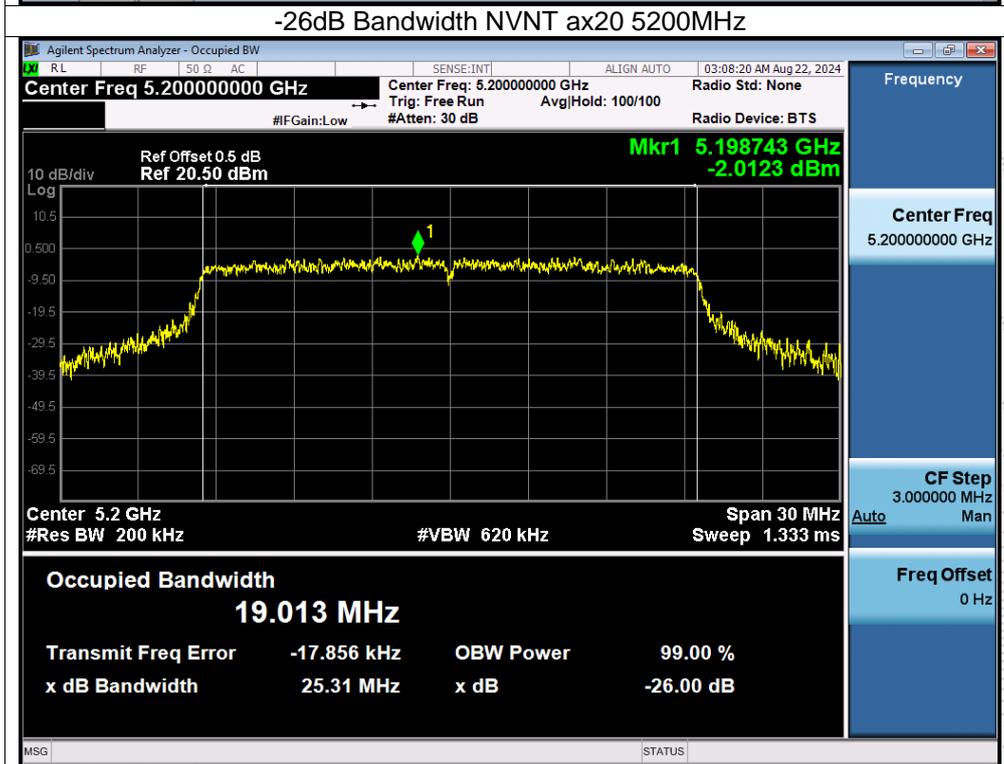
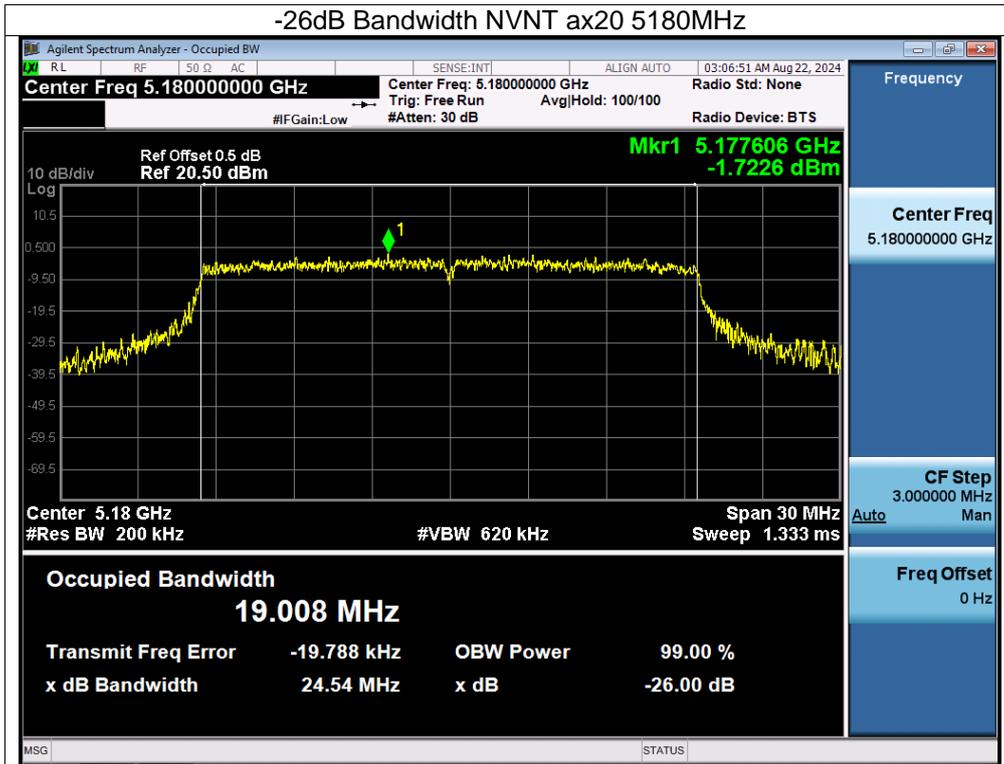


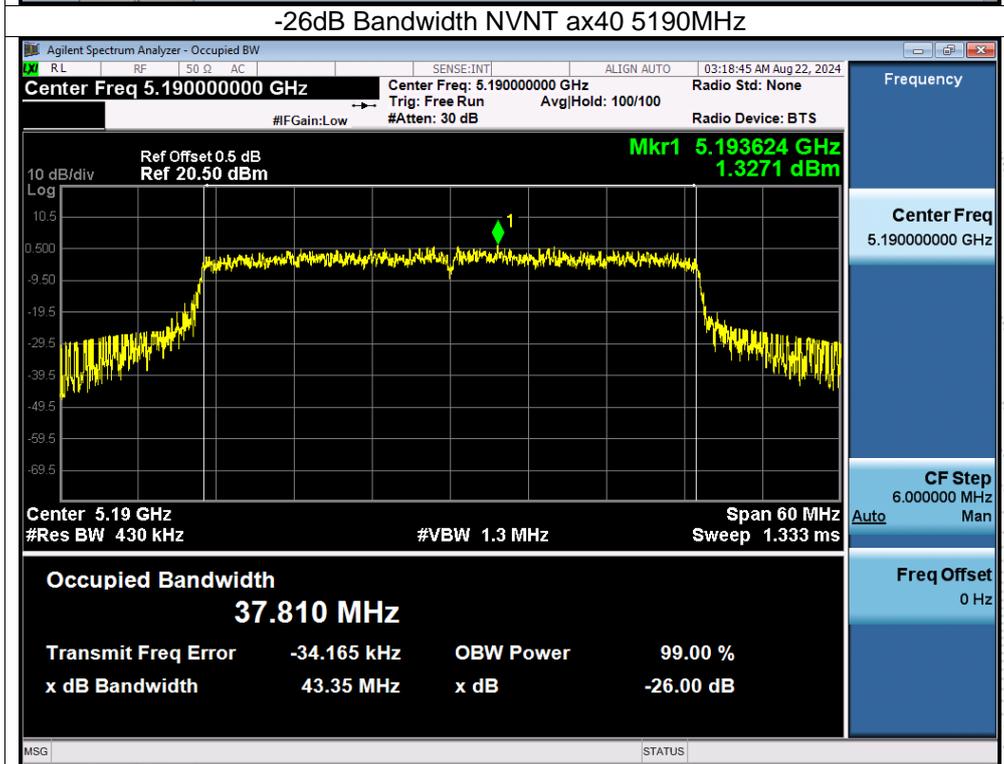
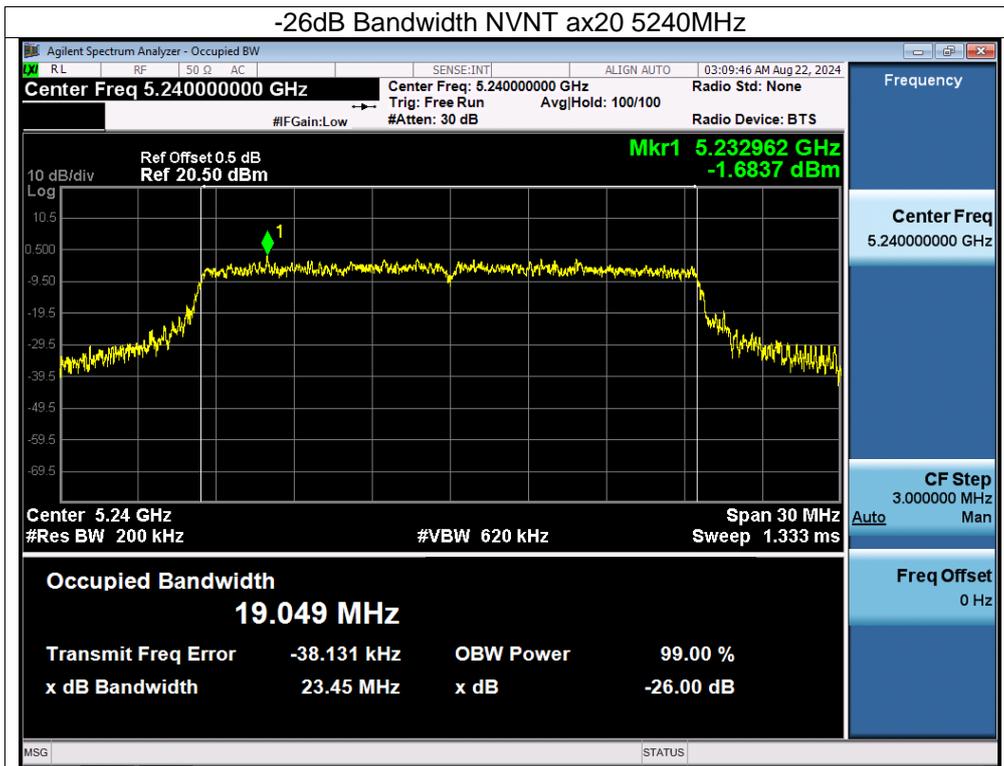


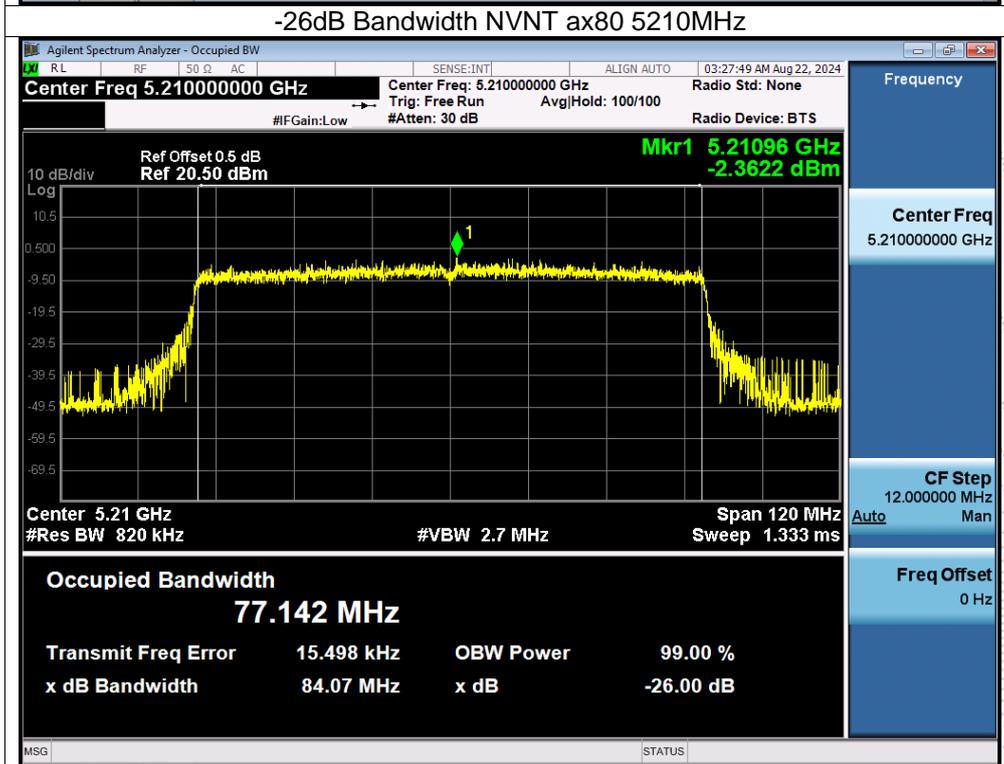
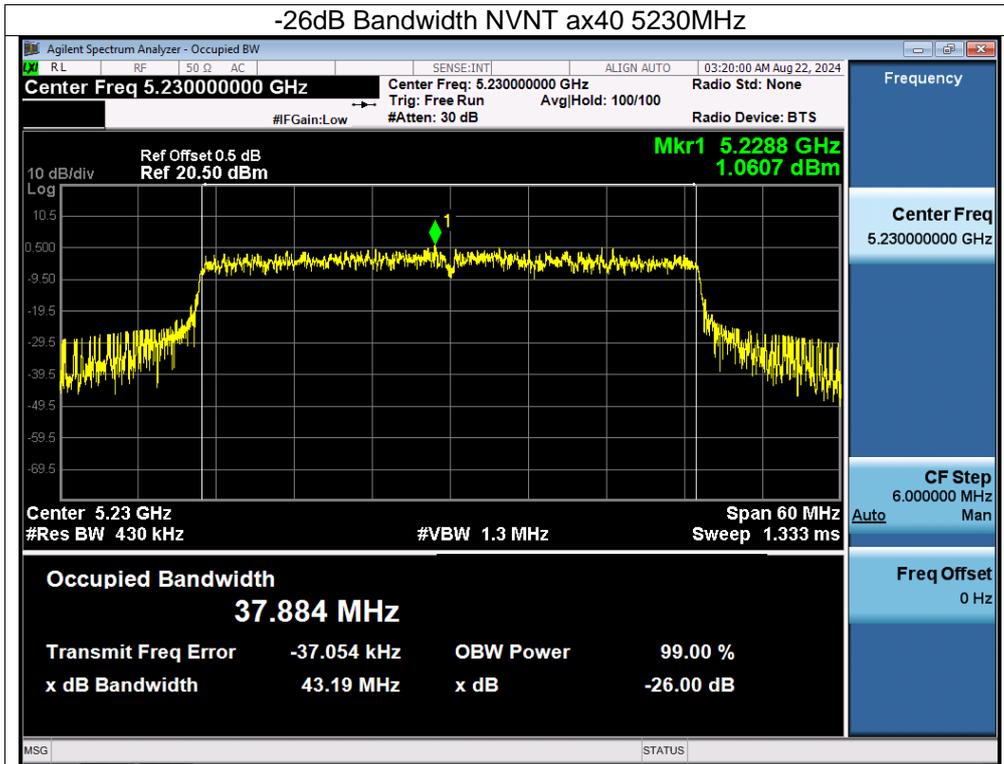


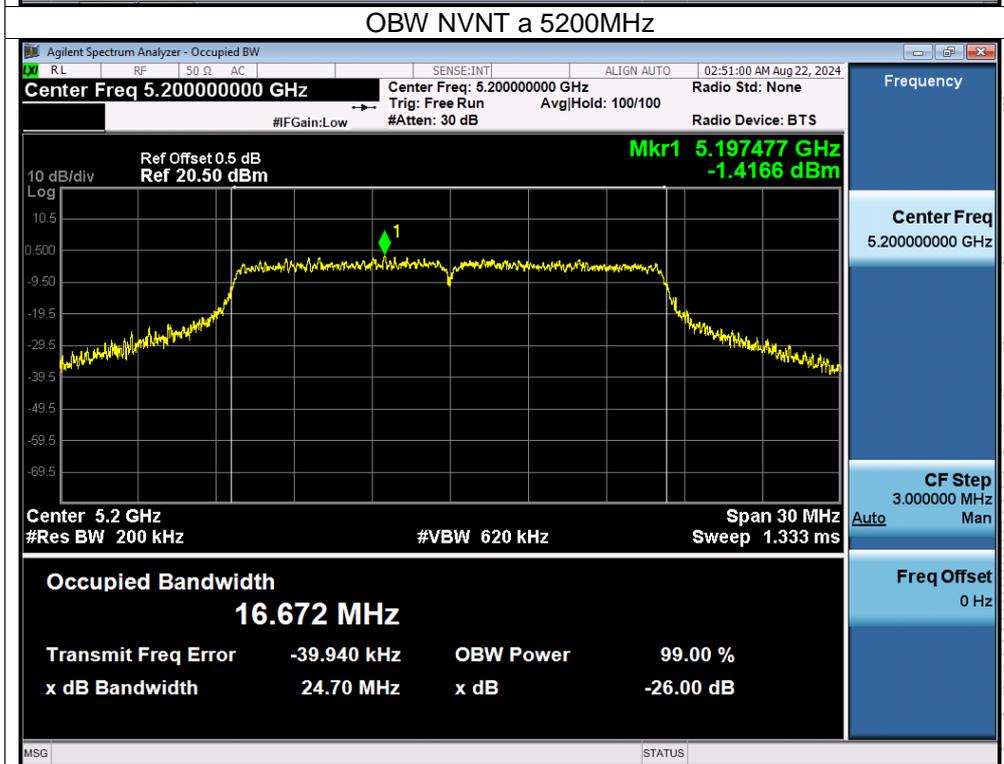
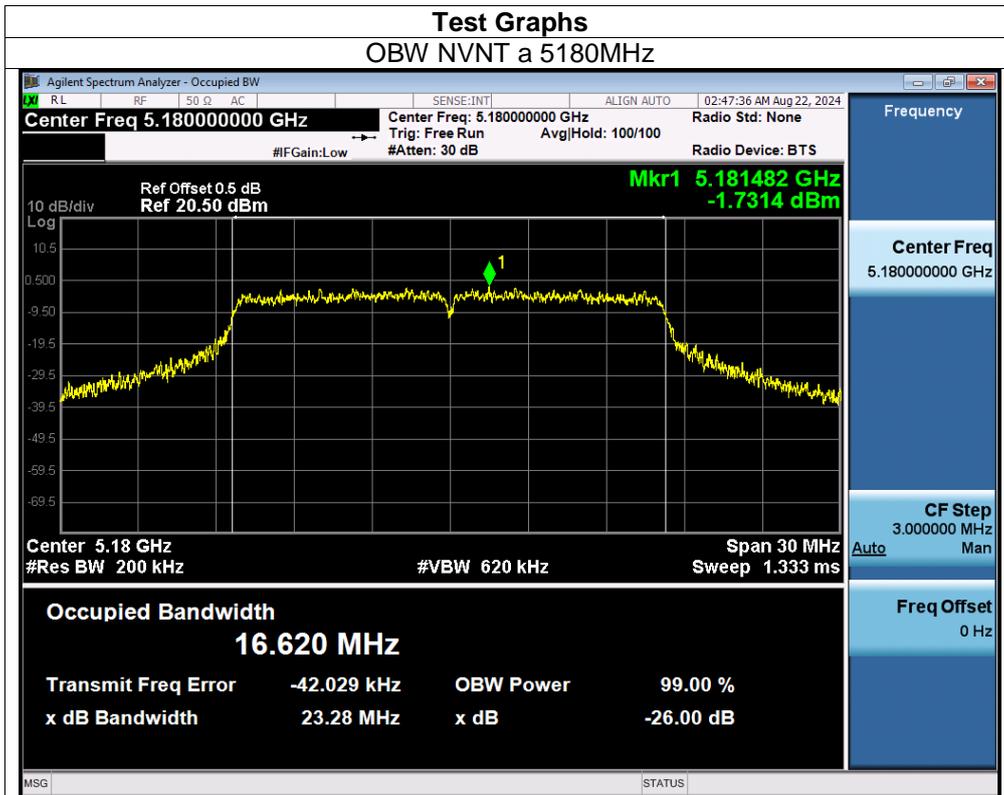


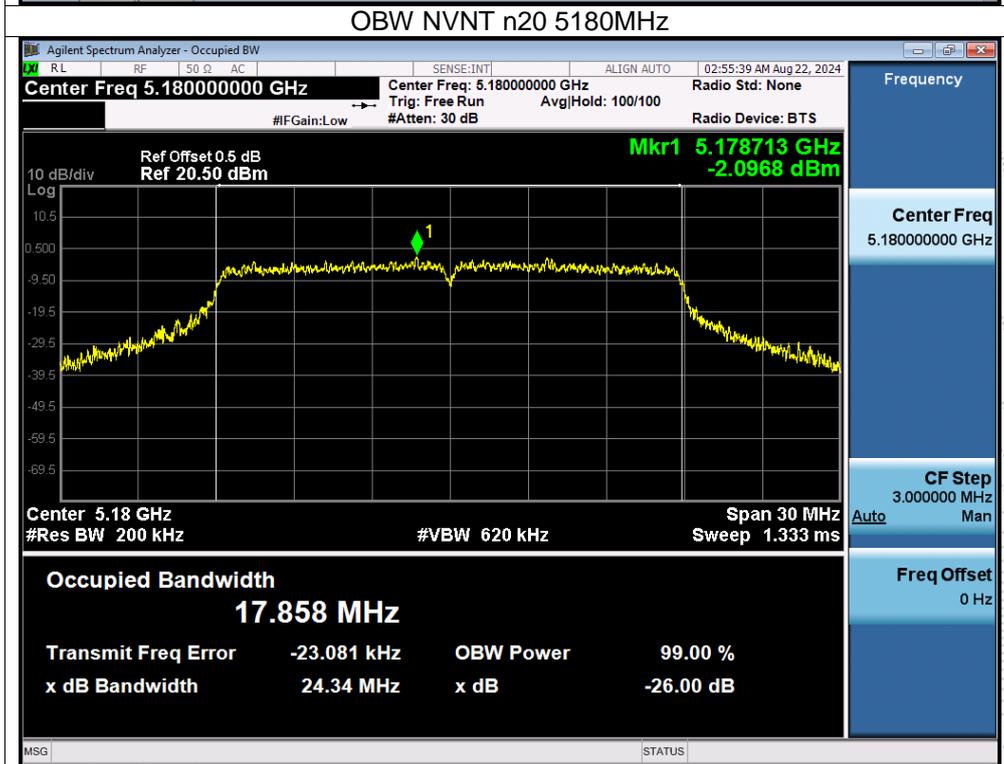
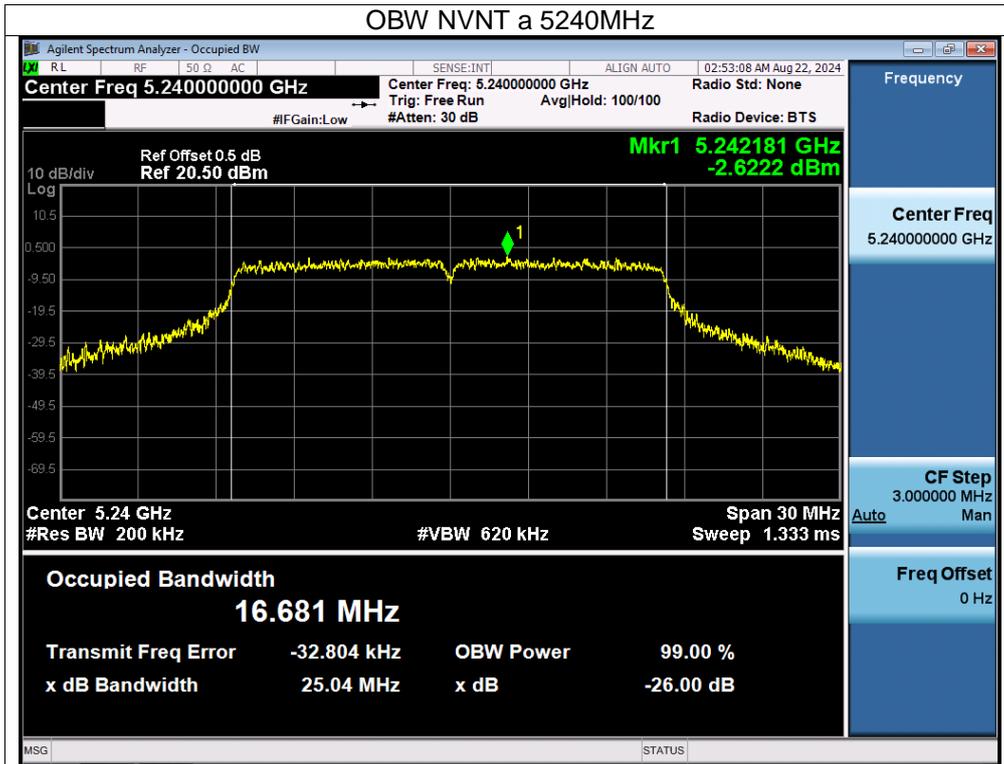


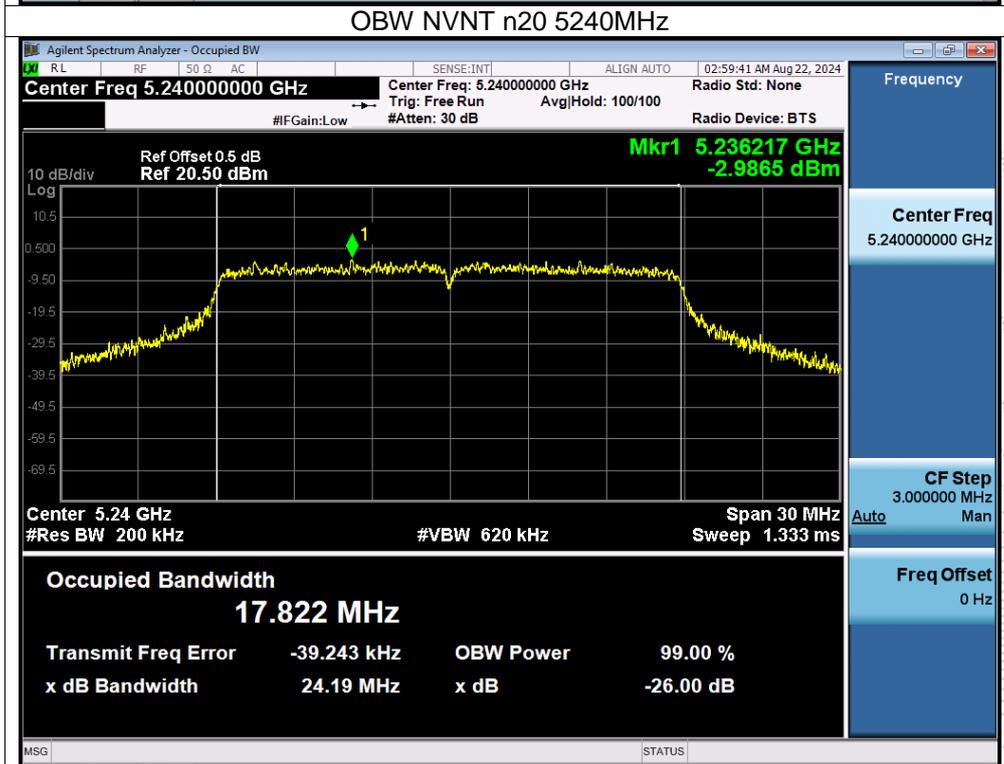
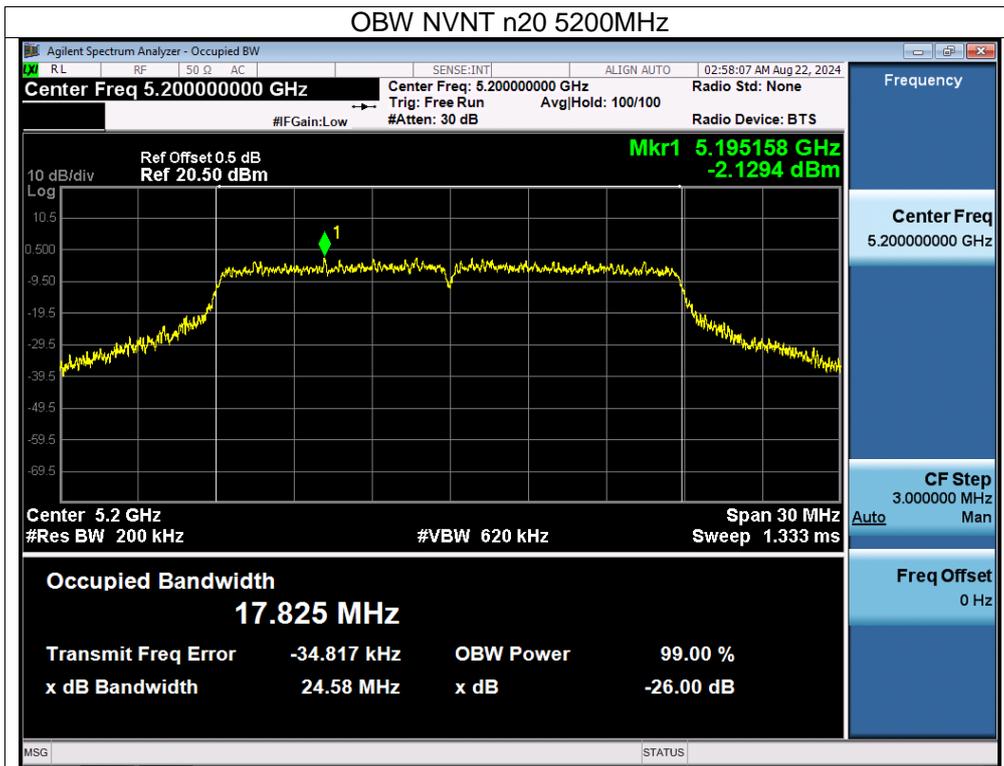


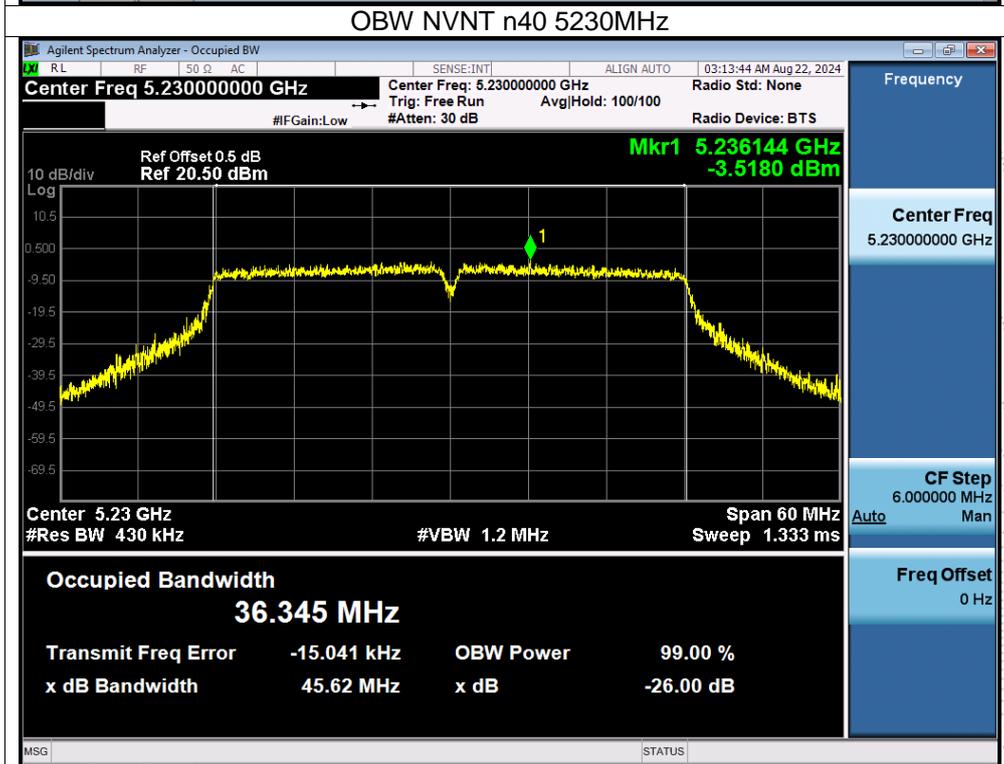
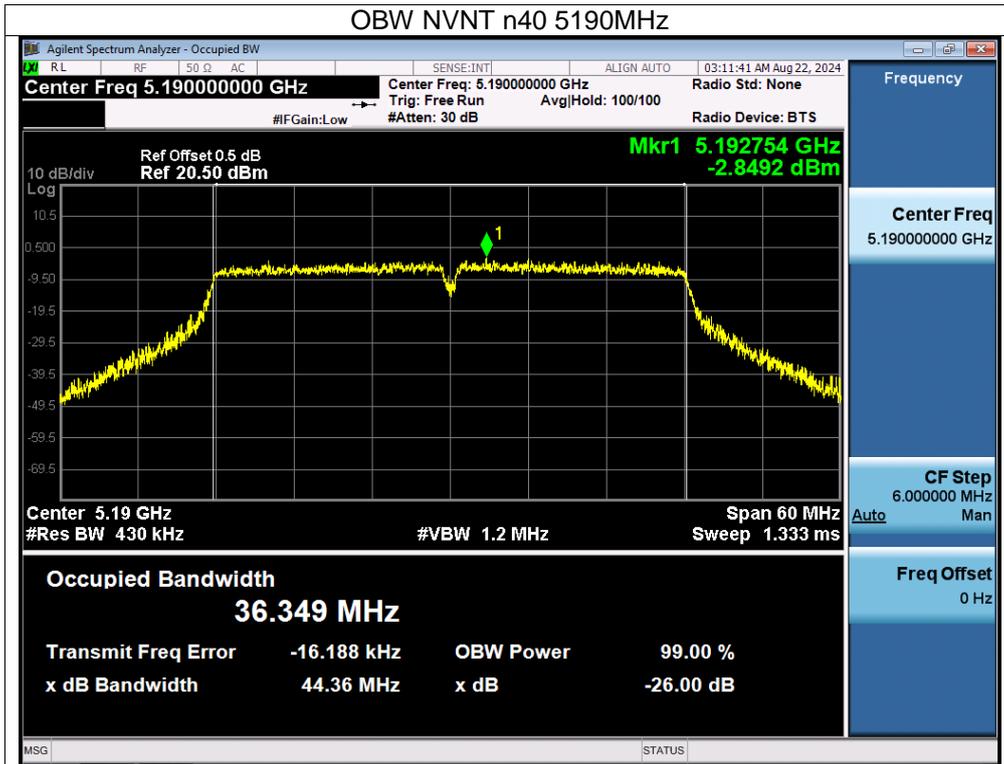


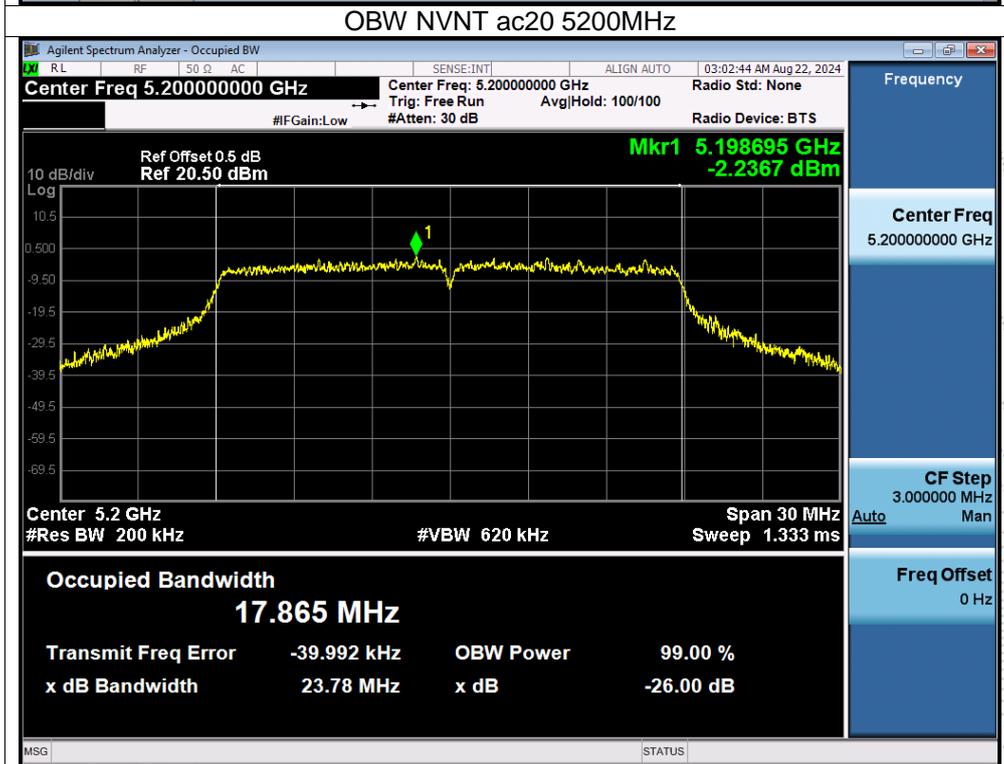
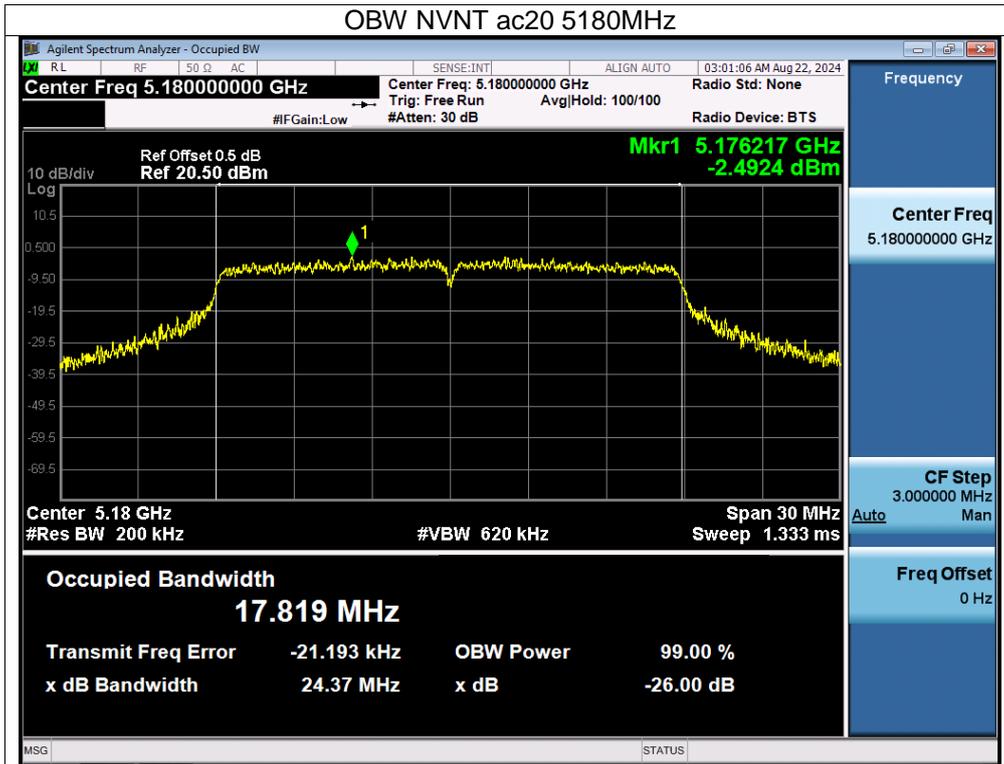


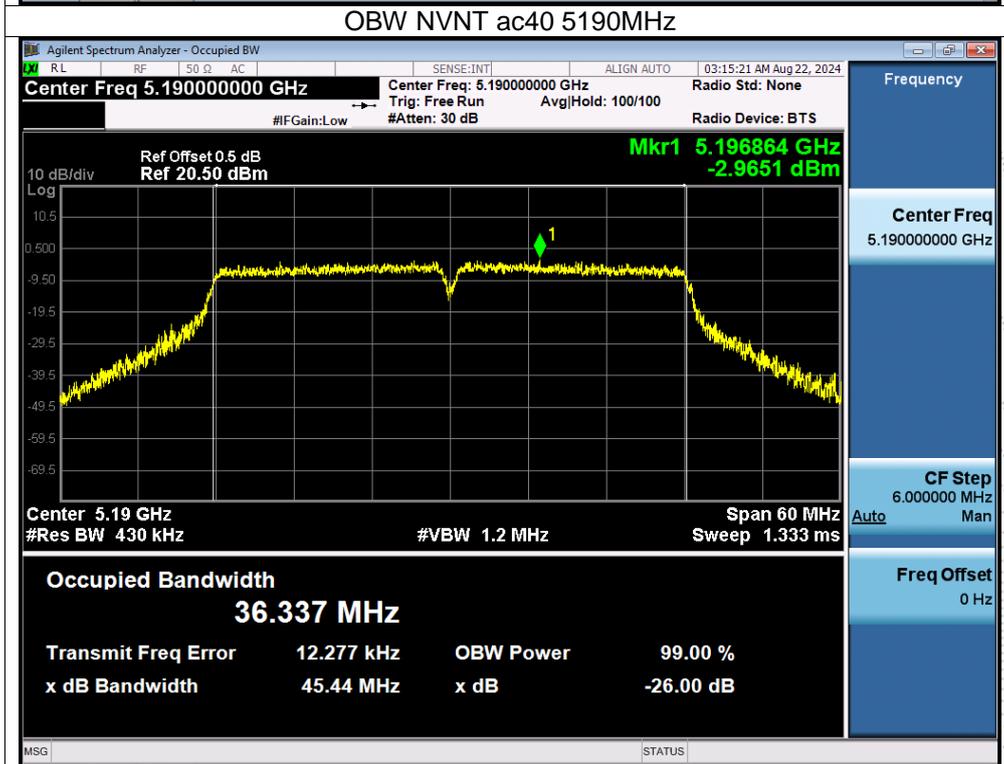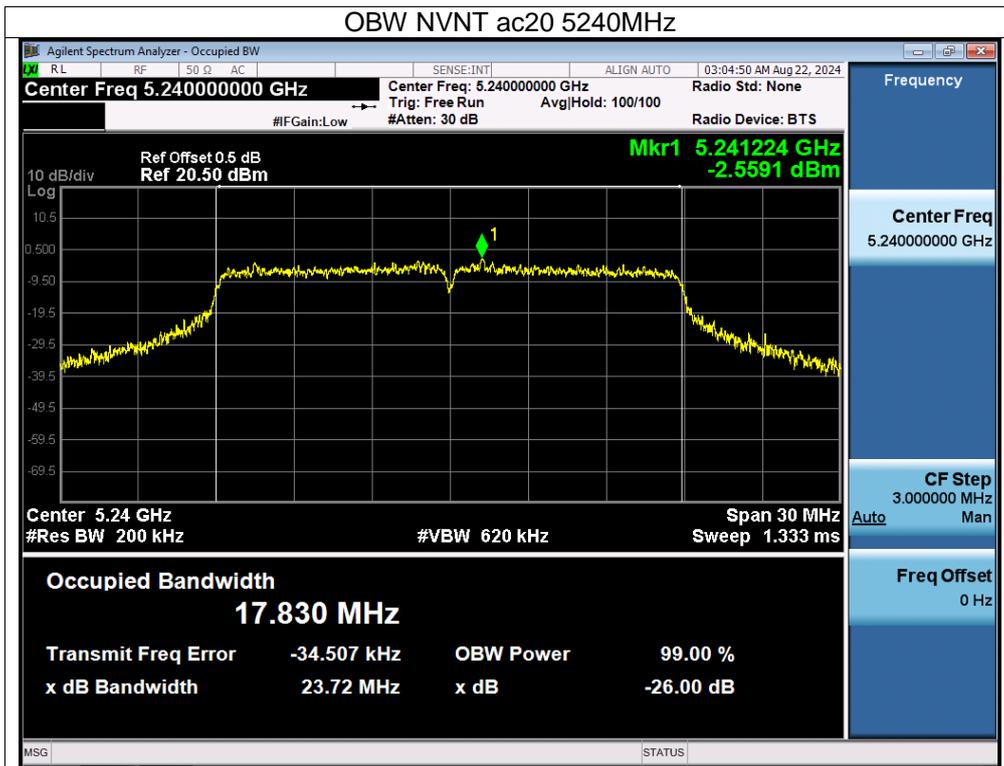

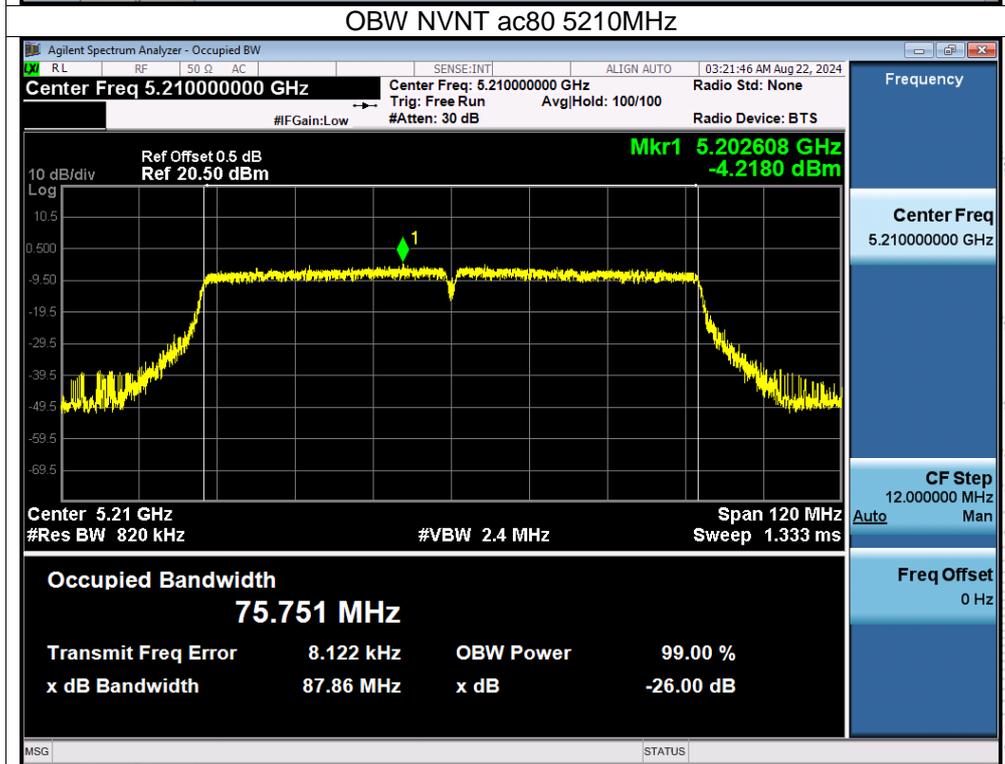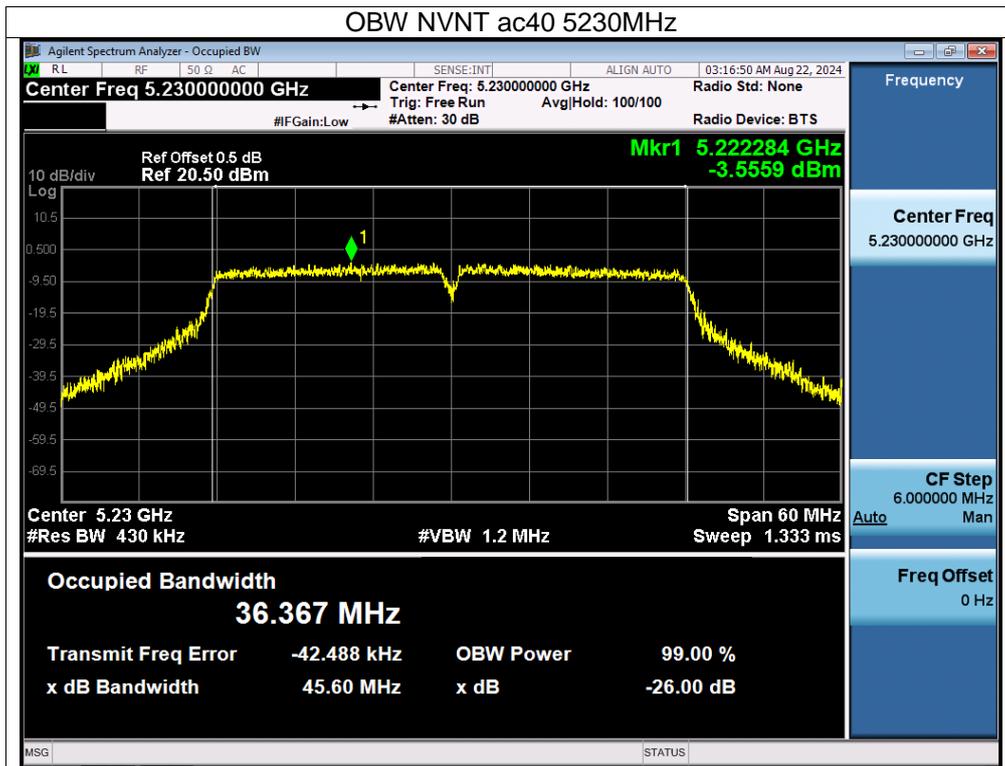

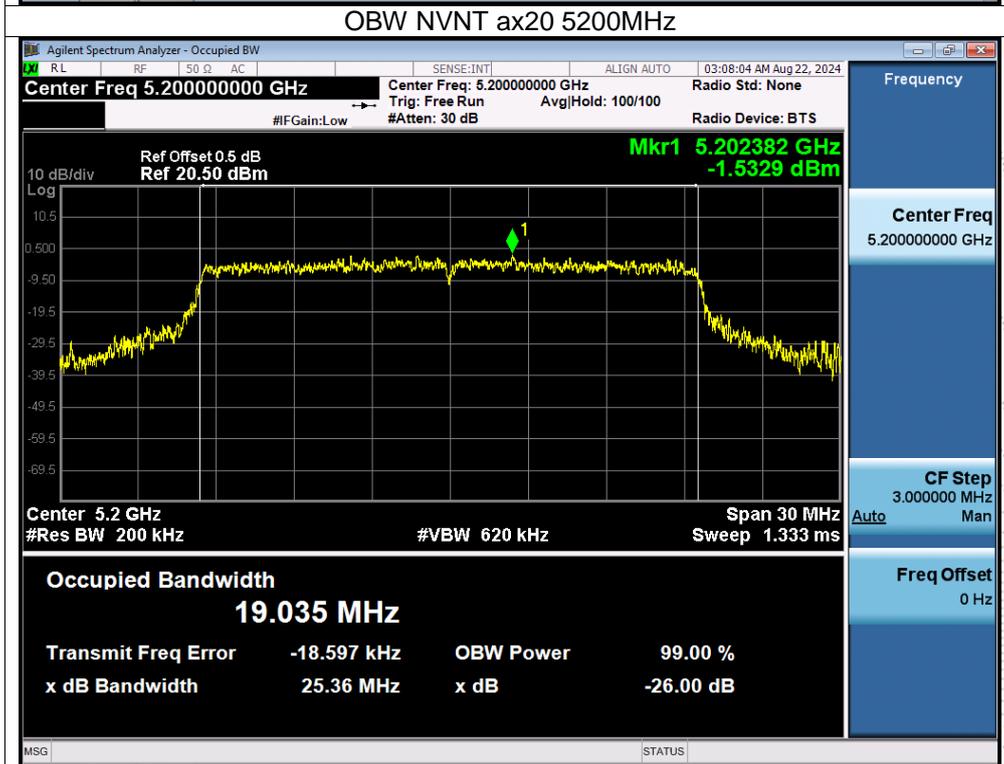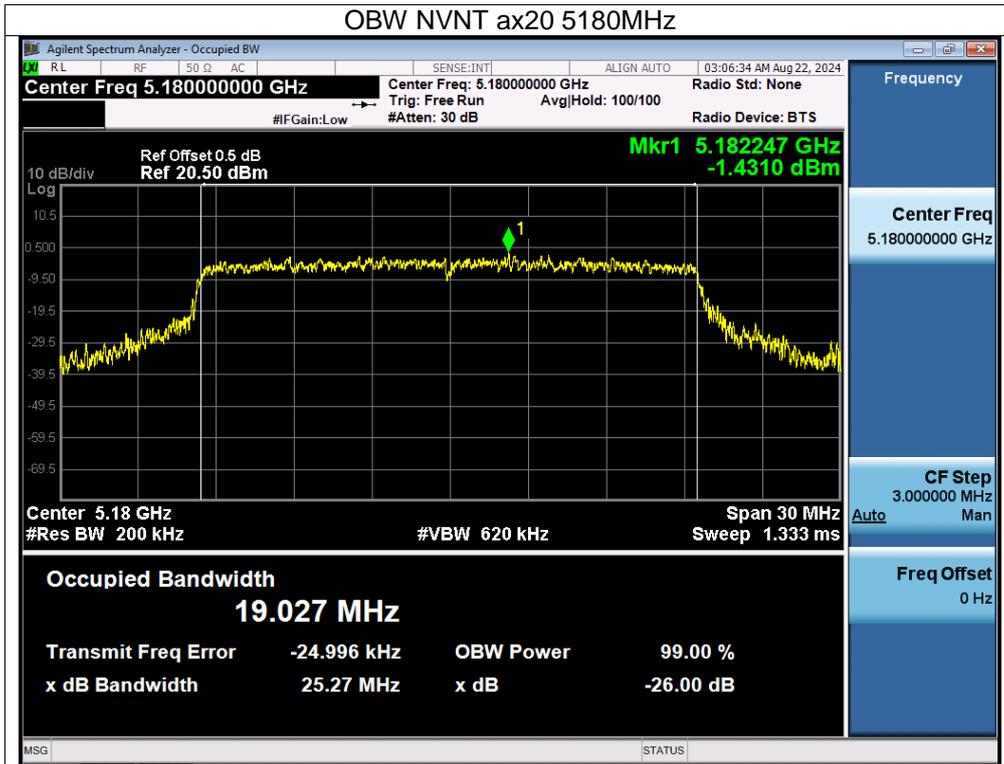


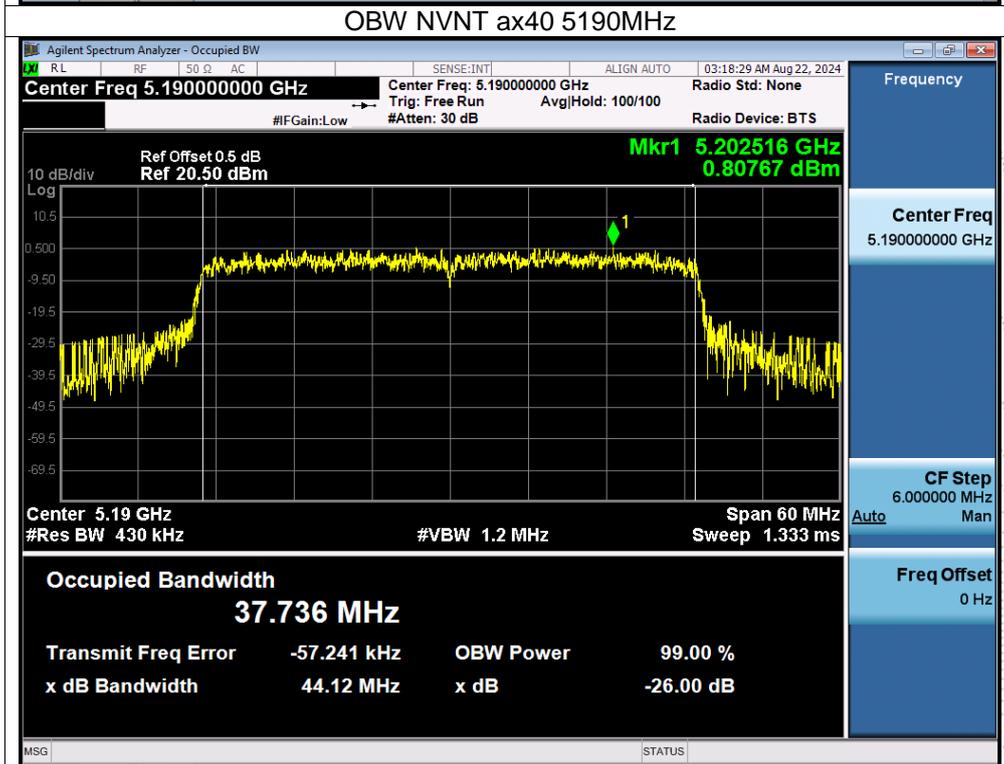
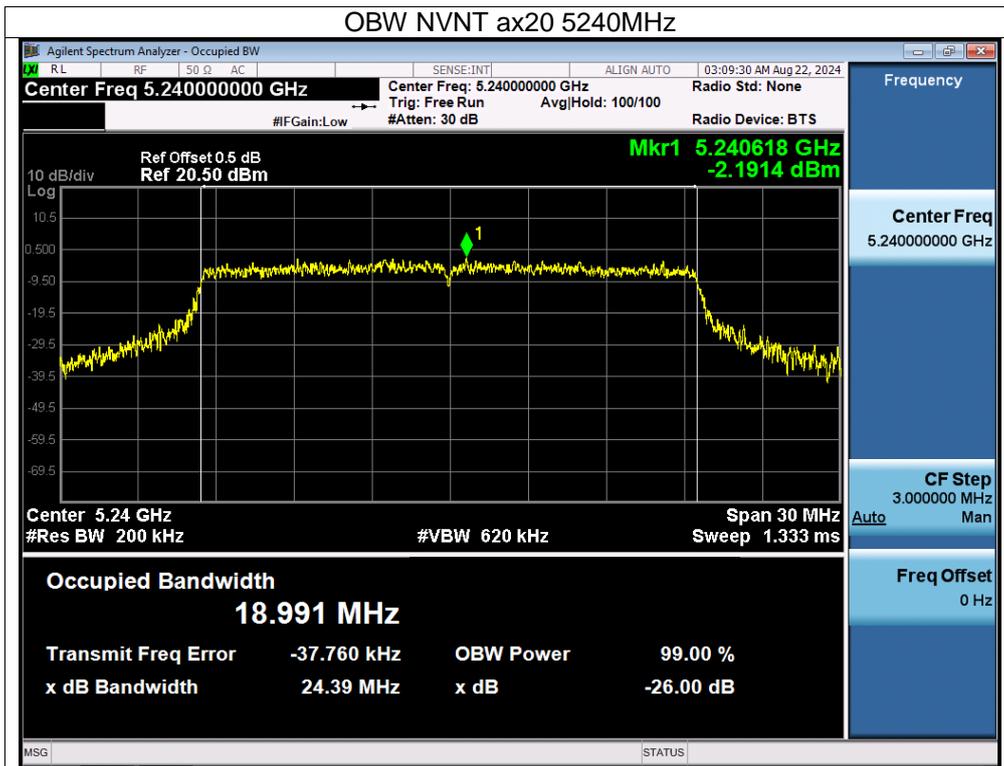


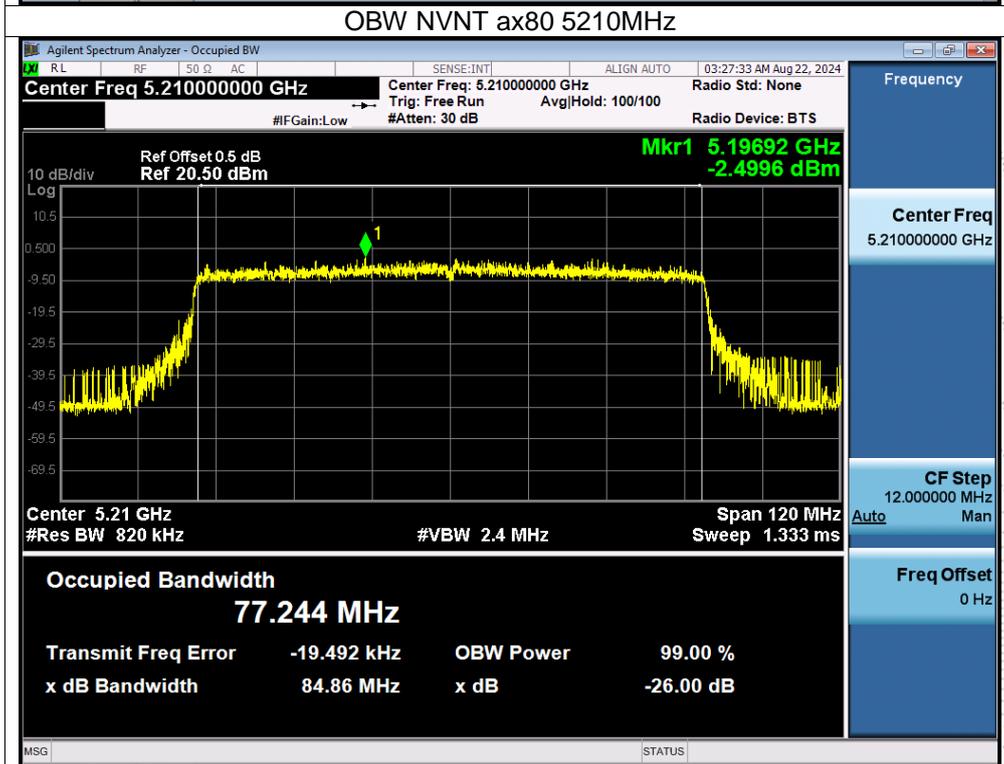
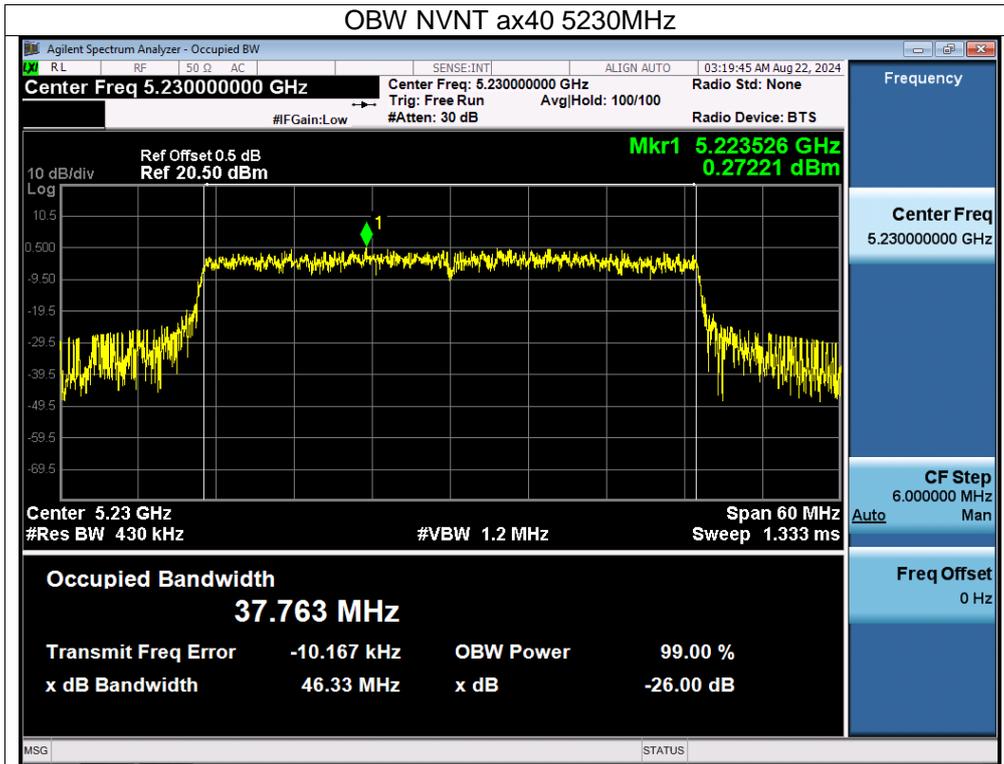




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 5V
Test Mode:	(5745-5825MHz)		



Condition	Mode	Frequency (MHz)	99% bandwidth (MHz)	-6dB bandwidth (MHz)	Limit -6dB bandwidth (MHz)	Result
NVNT	a	5745	16.745	16.382	0.5	Pass
NVNT	a	5785	16.724	16.344	0.5	Pass
NVNT	a	5825	16.746	16.404	0.5	Pass
NVNT	n20	5745	17.946	17.614	0.5	Pass
NVNT	n20	5785	17.922	17.597	0.5	Pass
NVNT	n20	5825	17.936	17.609	0.5	Pass
NVNT	n40	5755	36.55	36.359	0.5	Pass
NVNT	n40	5795	36.541	36.325	0.5	Pass
NVNT	ac20	5745	17.936	17.605	0.5	Pass
NVNT	ac20	5785	17.957	17.614	0.5	Pass
NVNT	ac20	5825	17.928	17.618	0.5	Pass
NVNT	ac40	5755	36.506	36.334	0.5	Pass
NVNT	ac40	5795	36.554	36.3	0.5	Pass
NVNT	ac80	5775	75.862	75.957	0.5	Pass
NVNT	ax20	5745	19.104	18.988	0.5	Pass
NVNT	ax20	5785	19.119	18.843	0.5	Pass
NVNT	ax20	5825	19.18	18.919	0.5	Pass
NVNT	ax40	5755	37.979	37.943	0.5	Pass
NVNT	ax40	5795	37.999	37.984	0.5	Pass
NVNT	ax80	5775	77.435	77.054	0.5	Pass


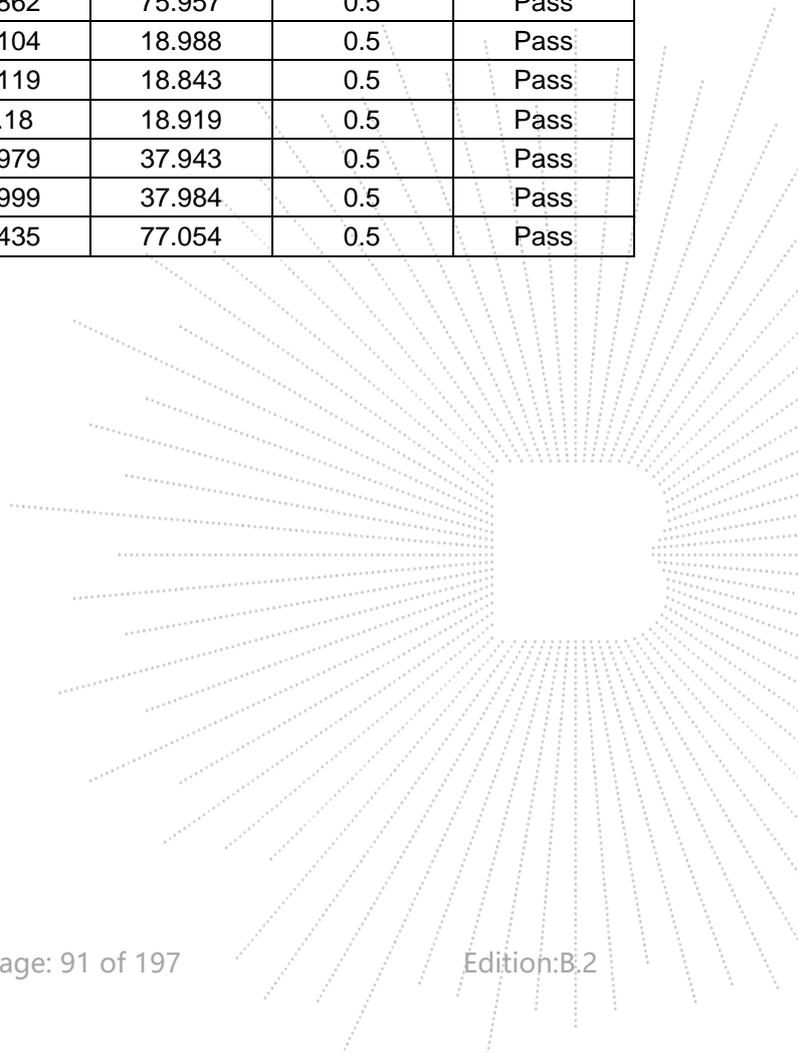


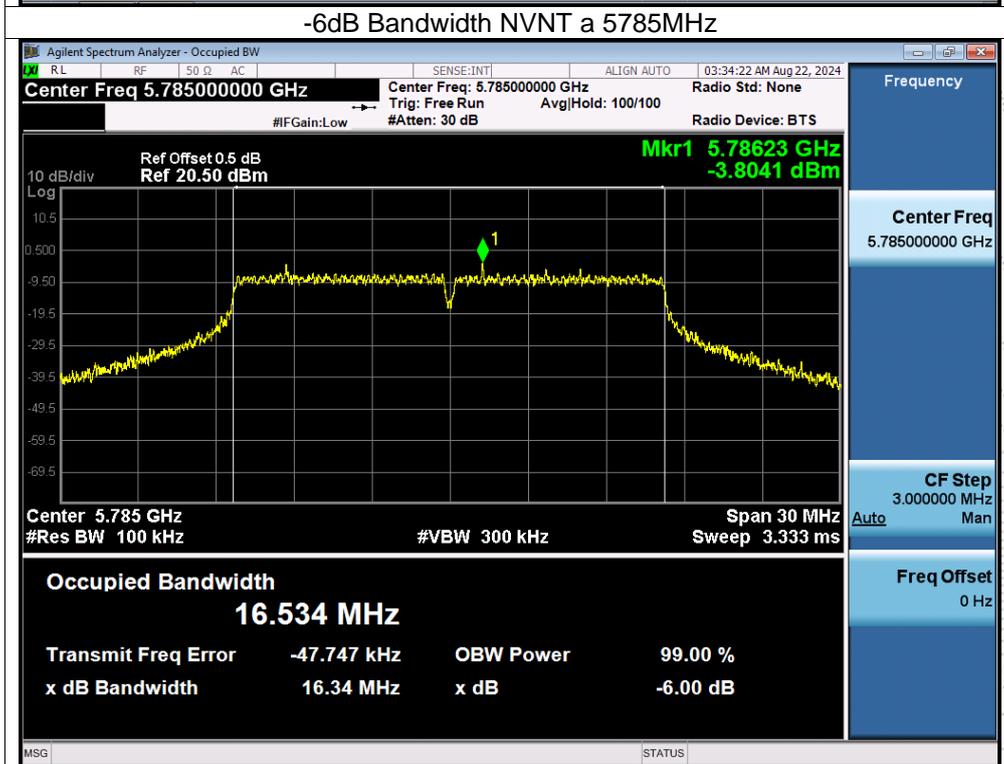
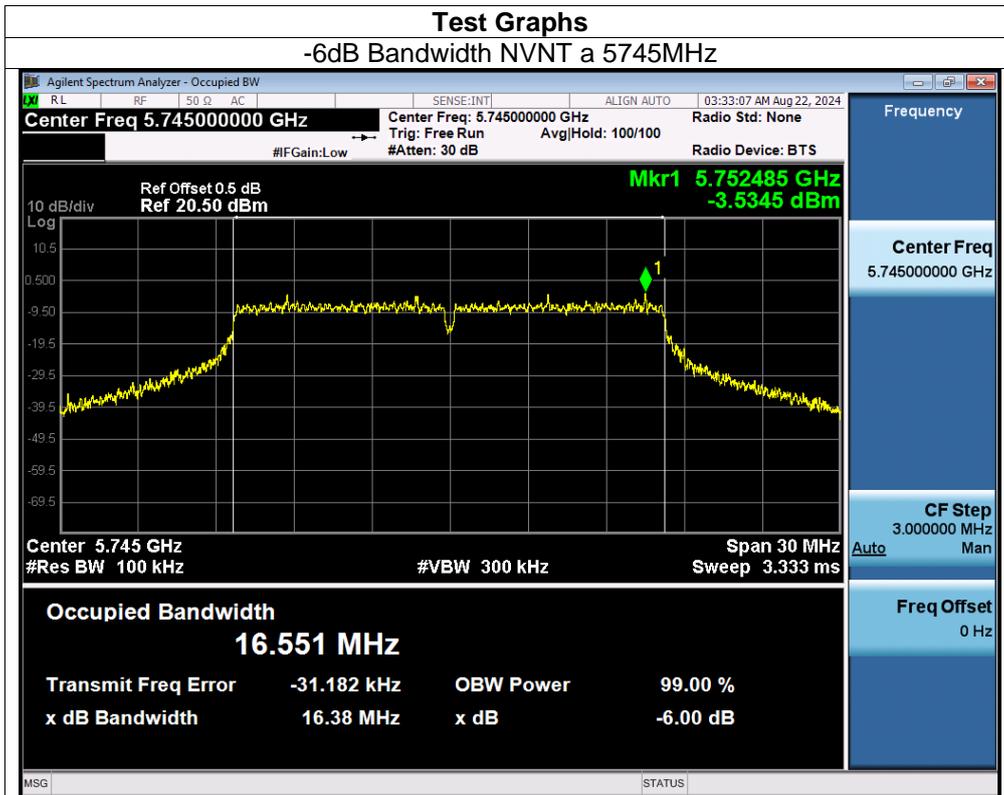


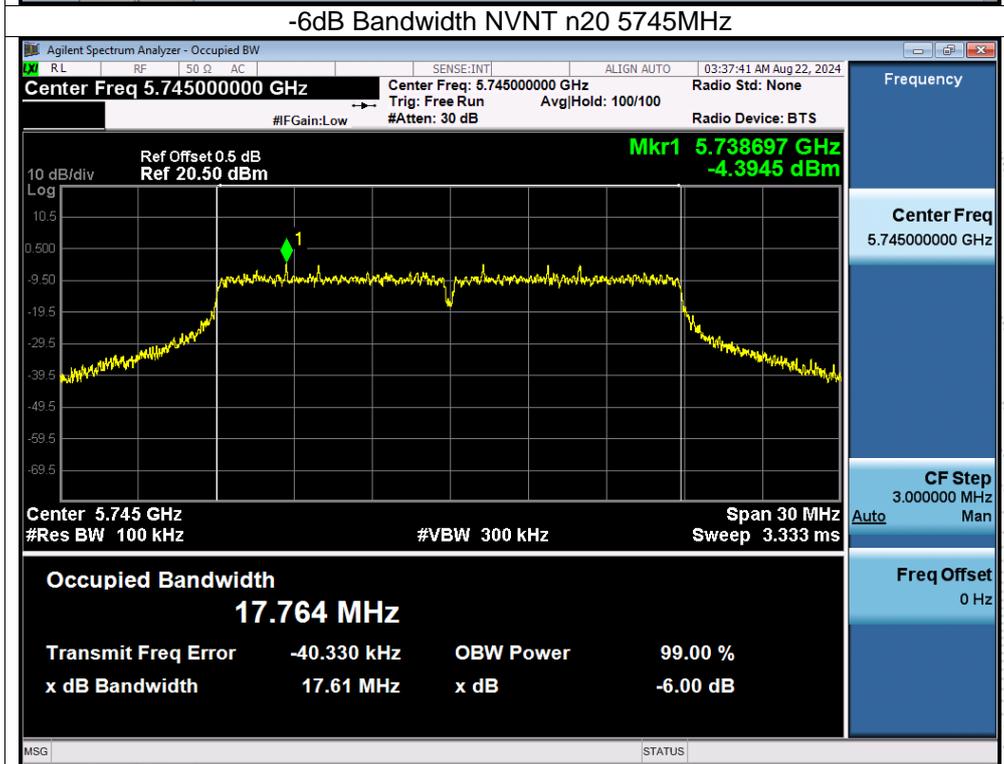
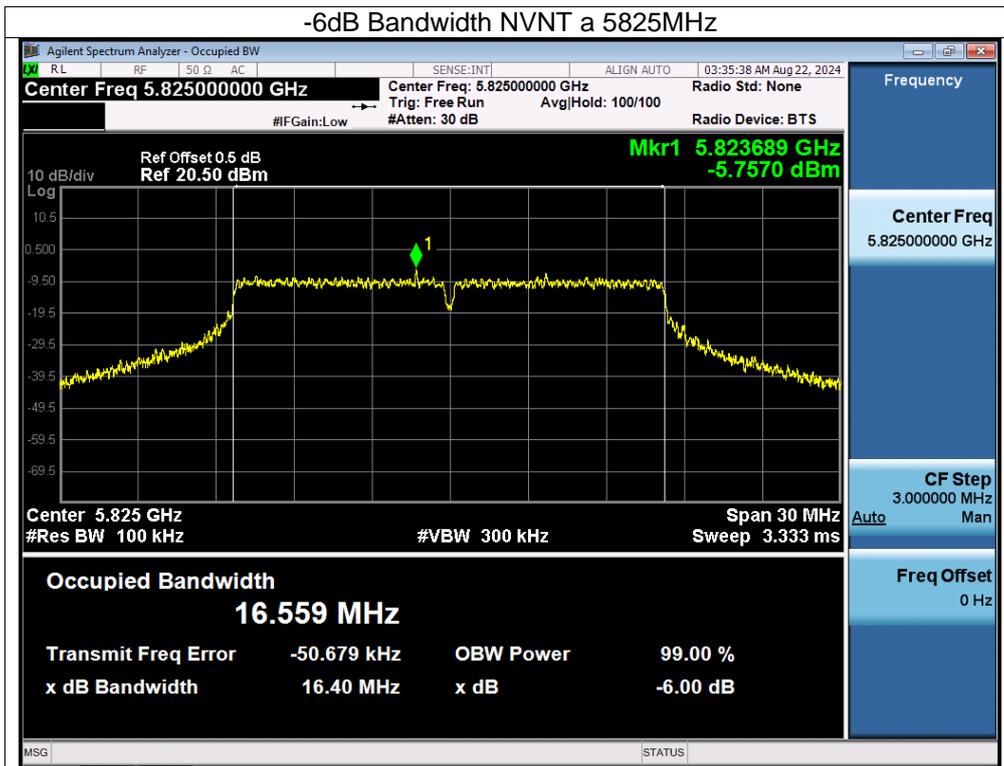


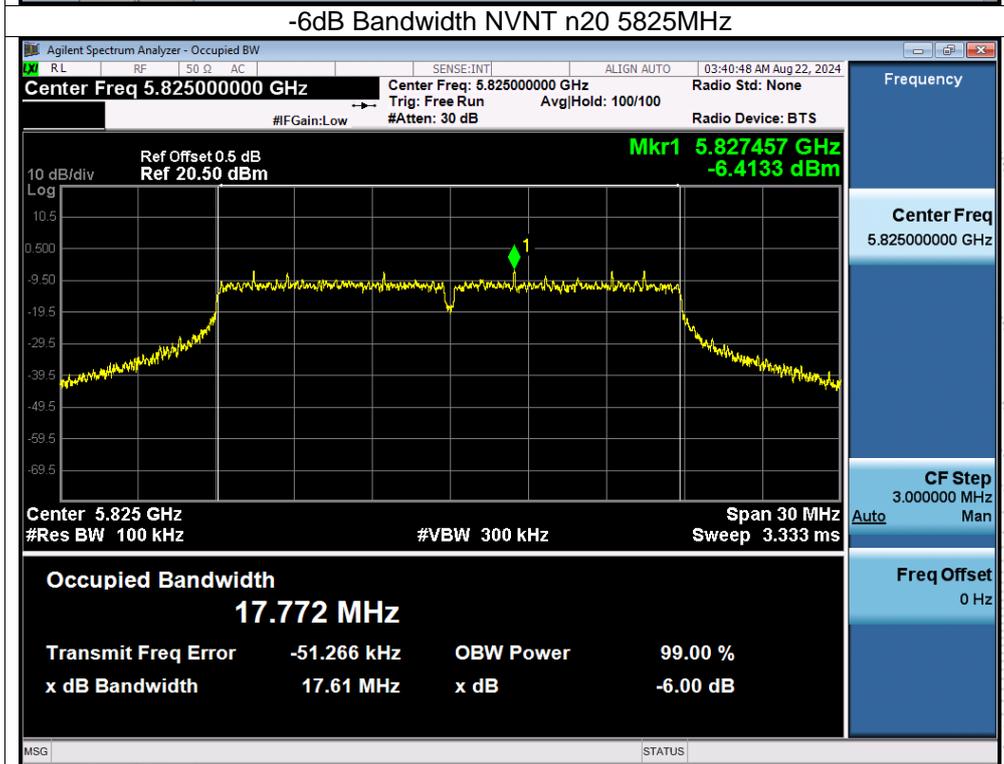
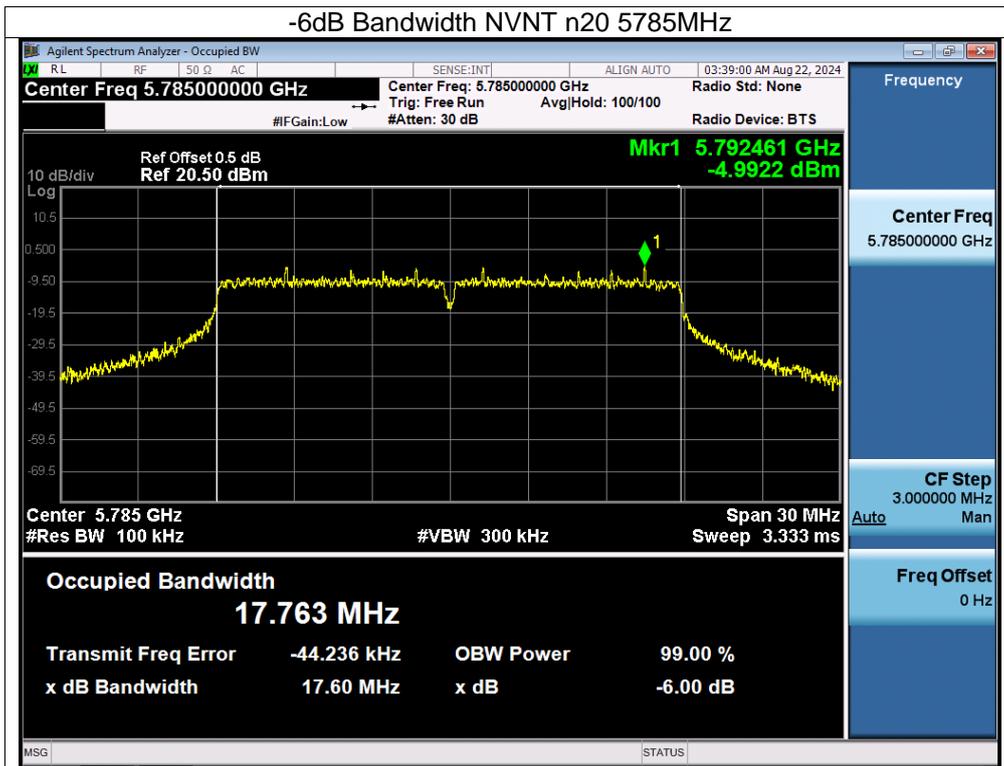


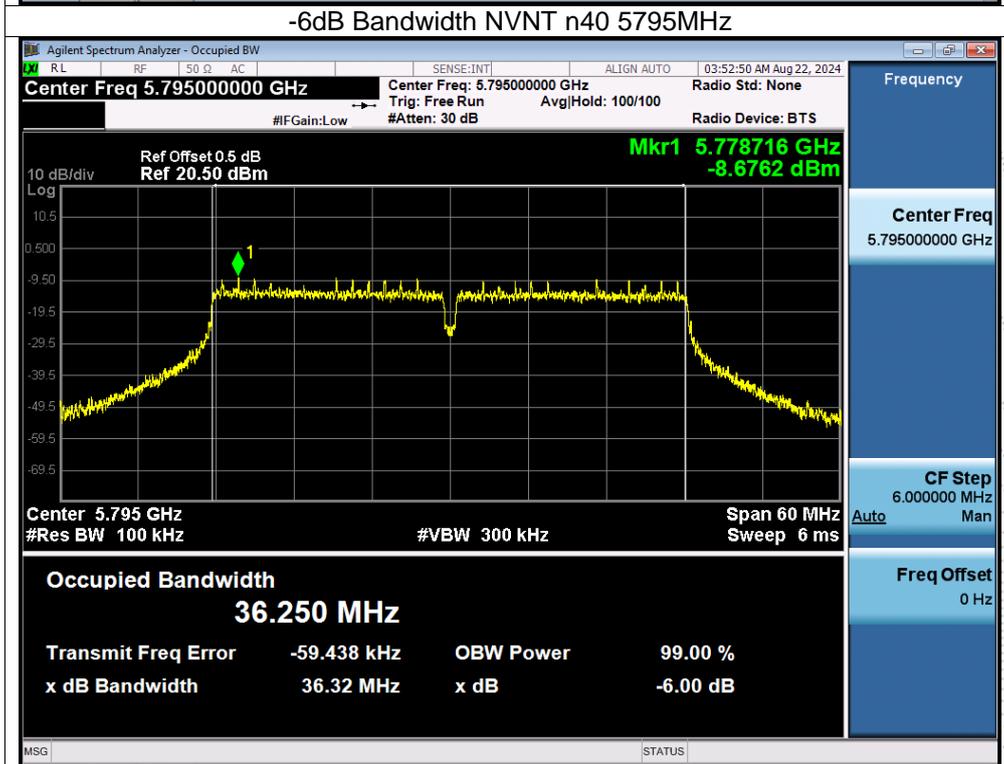
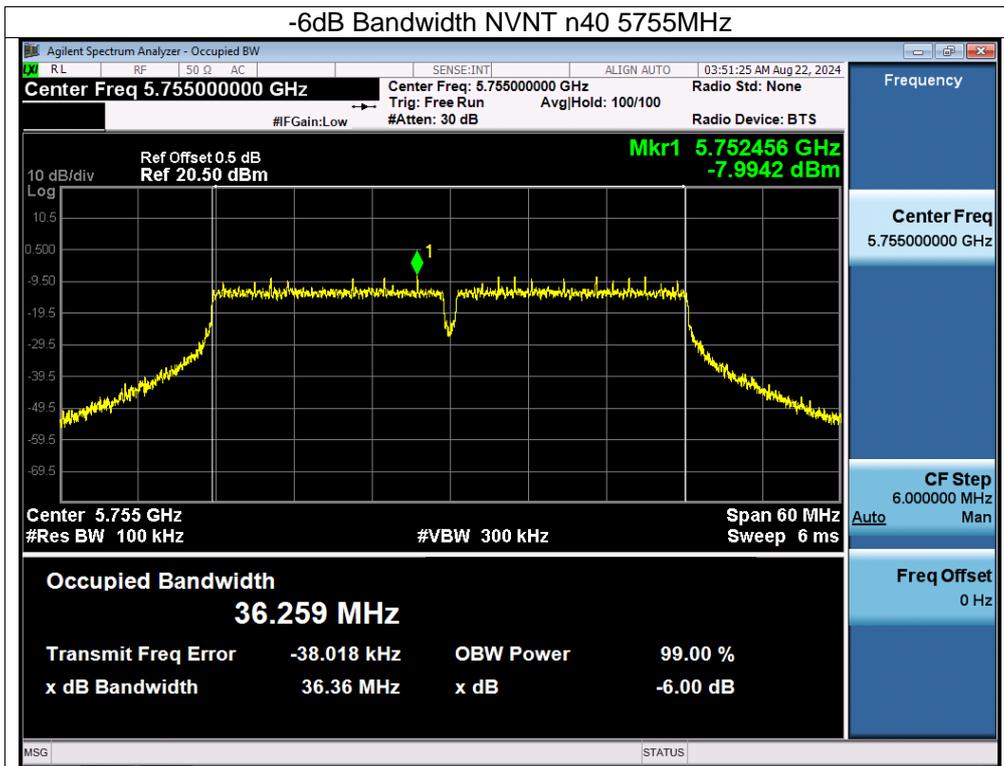


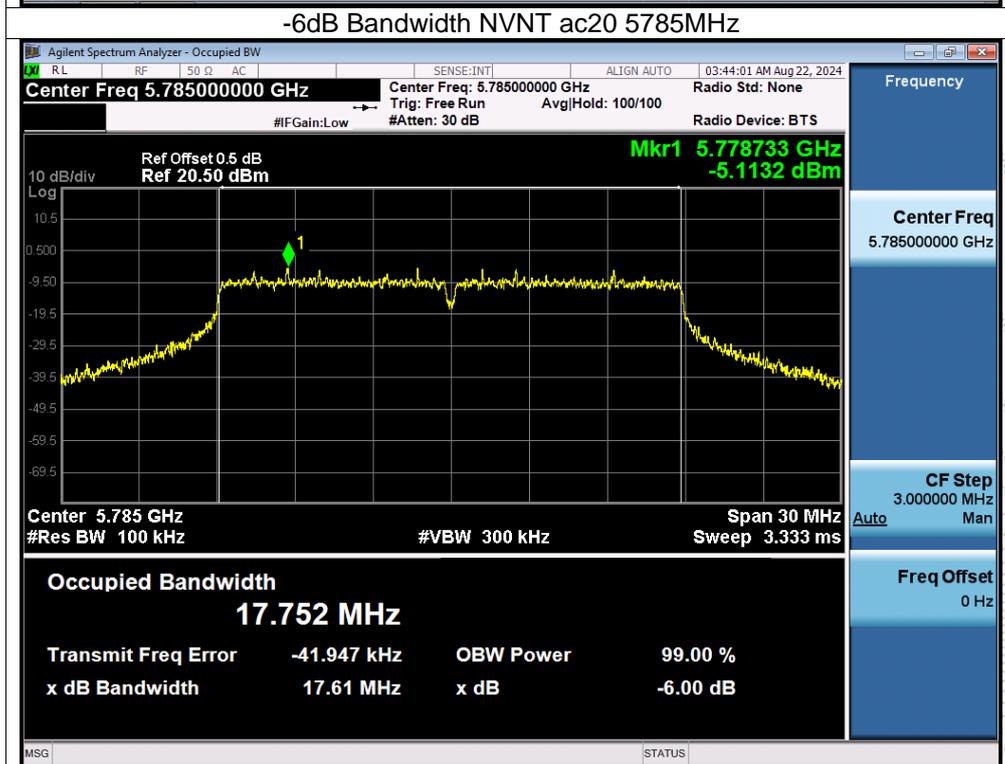
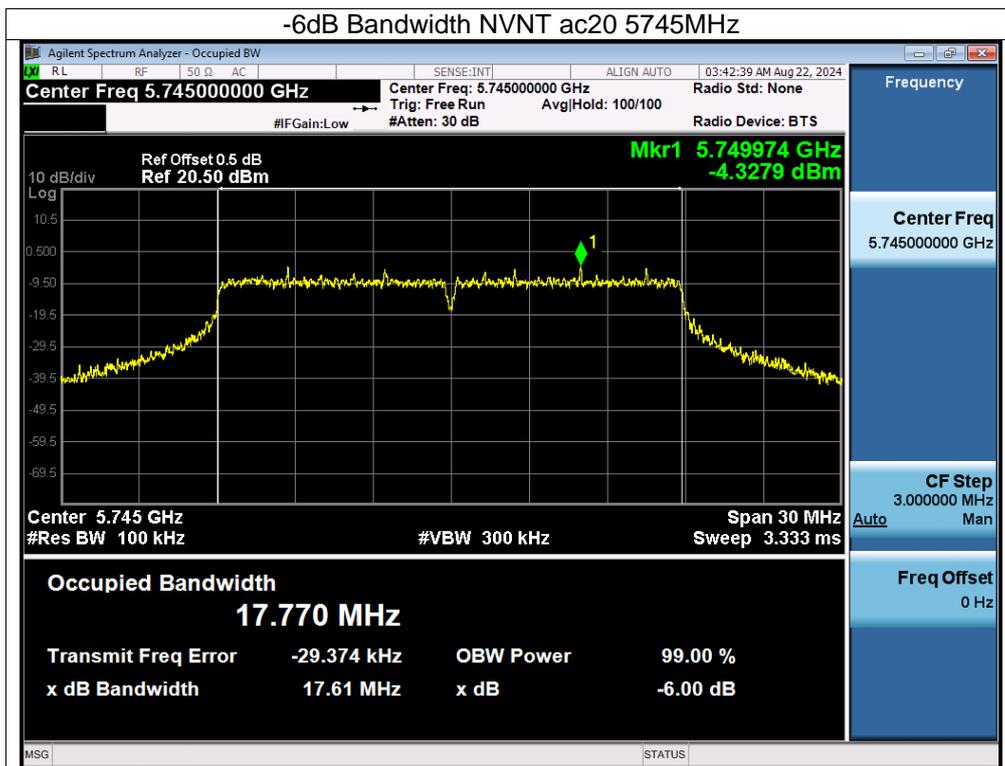


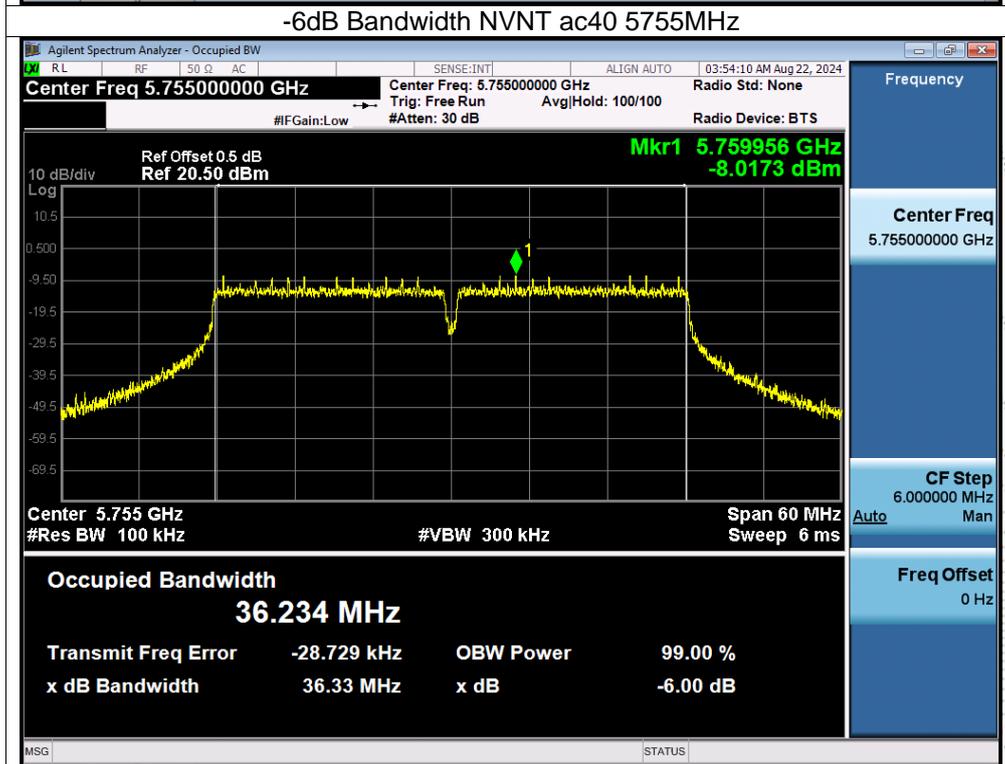
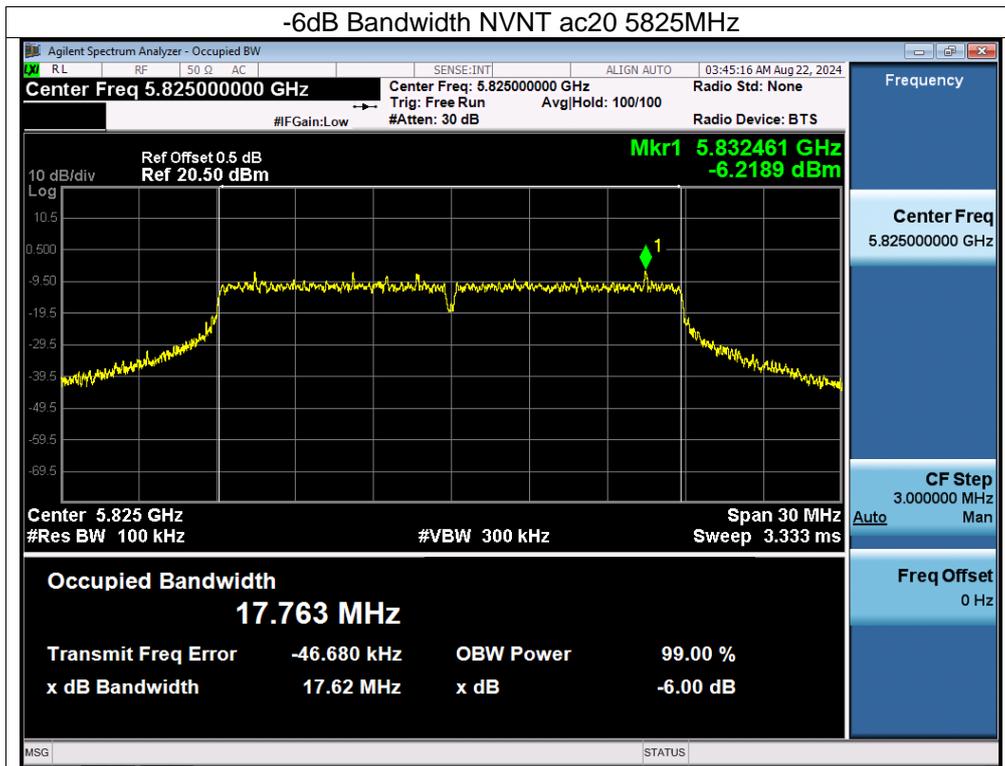


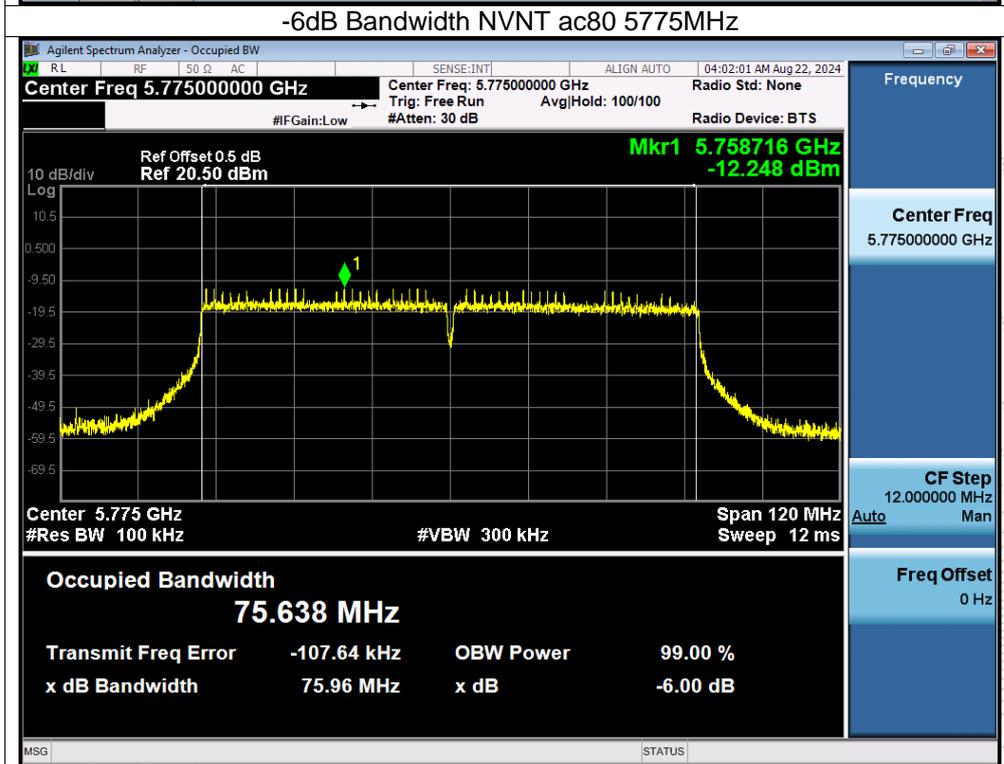
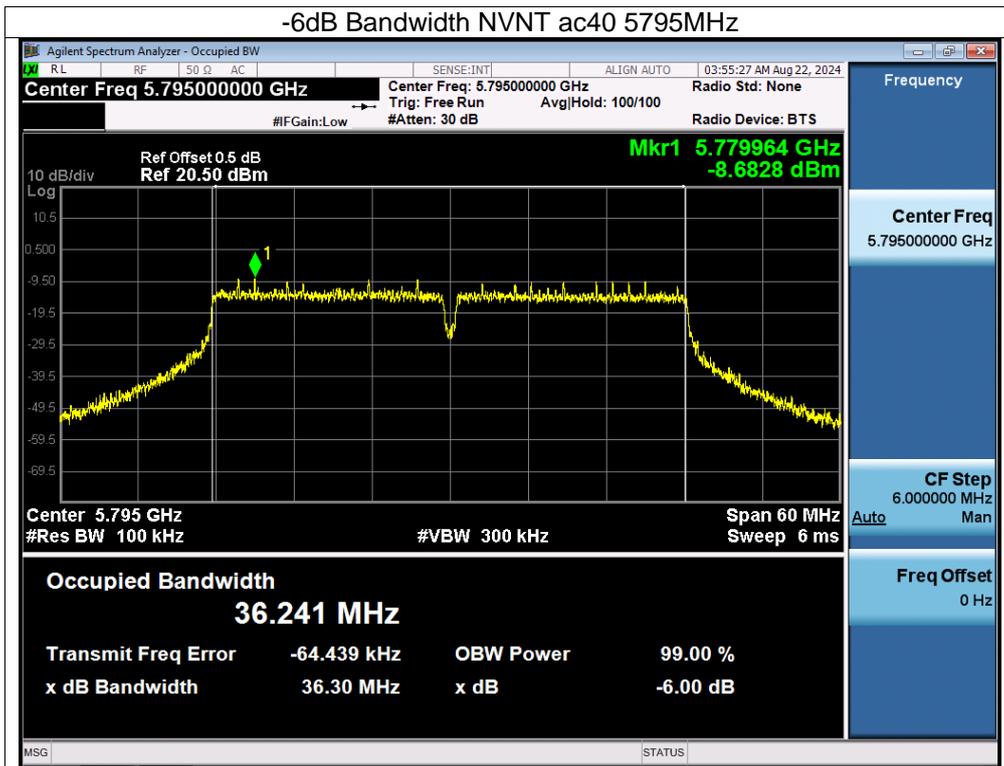


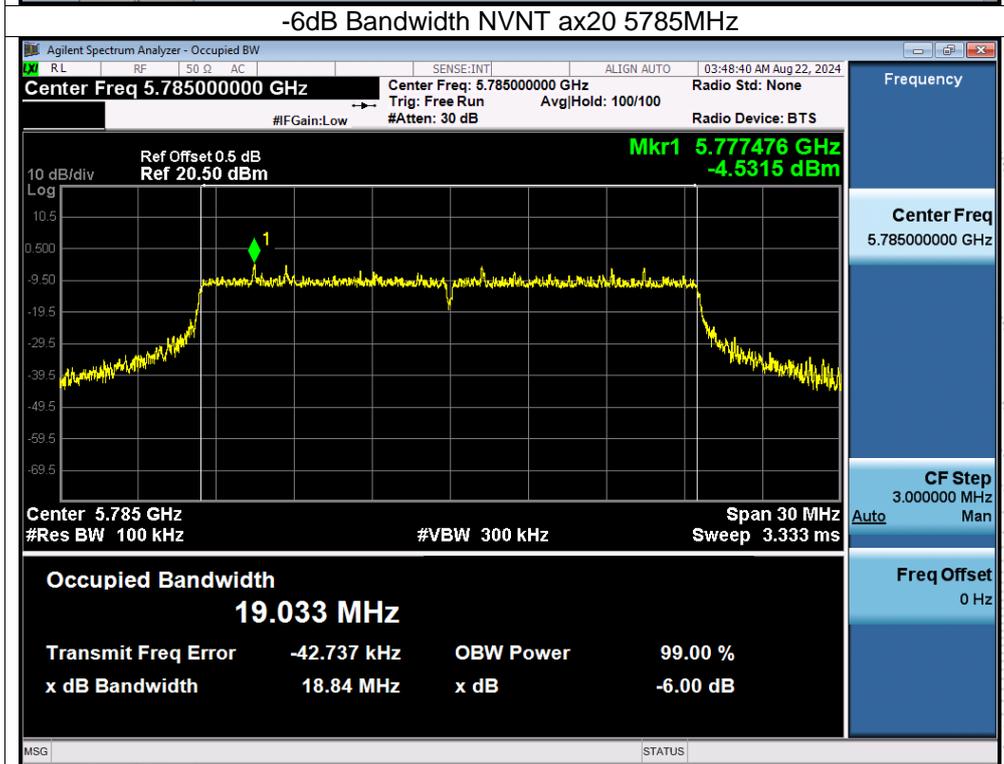
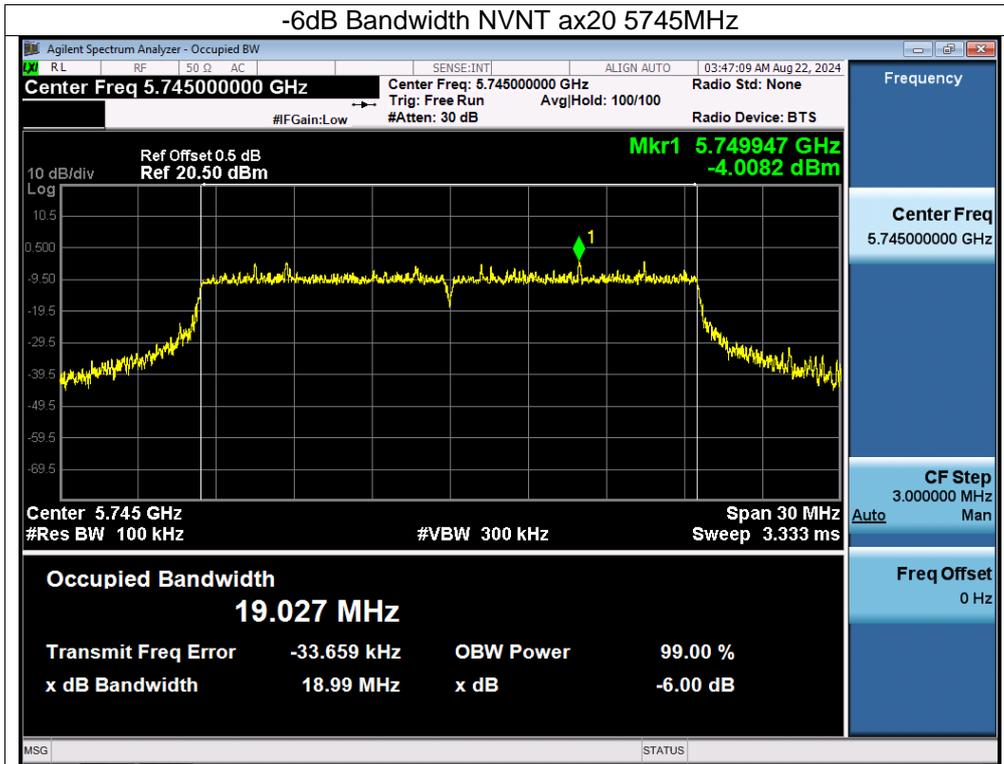


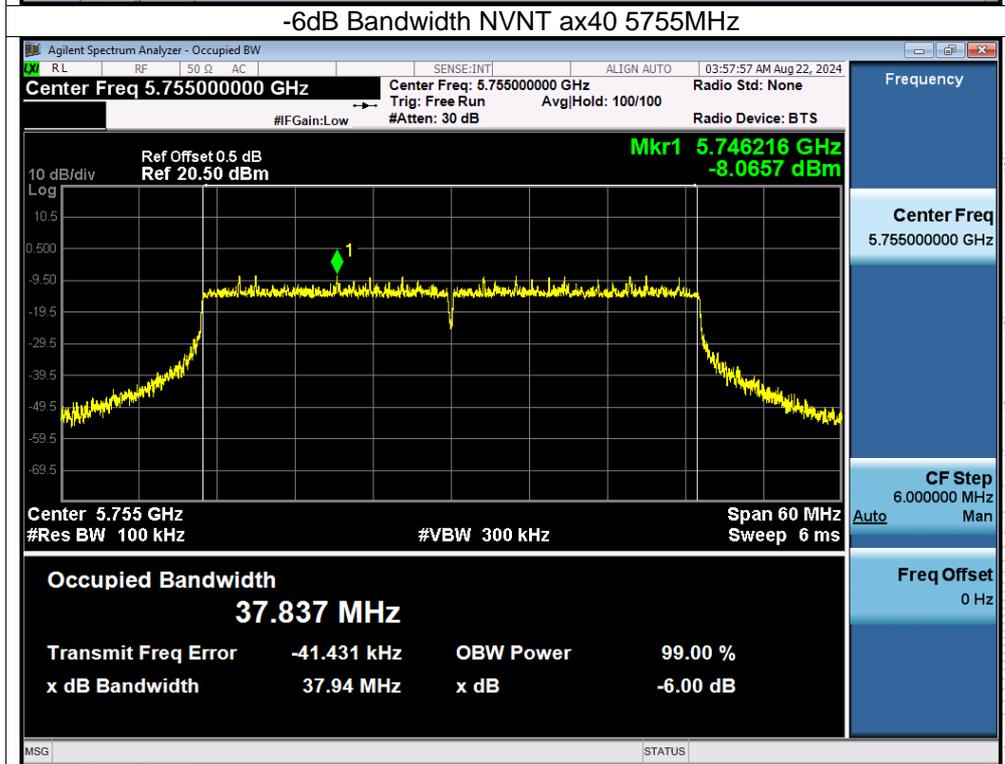
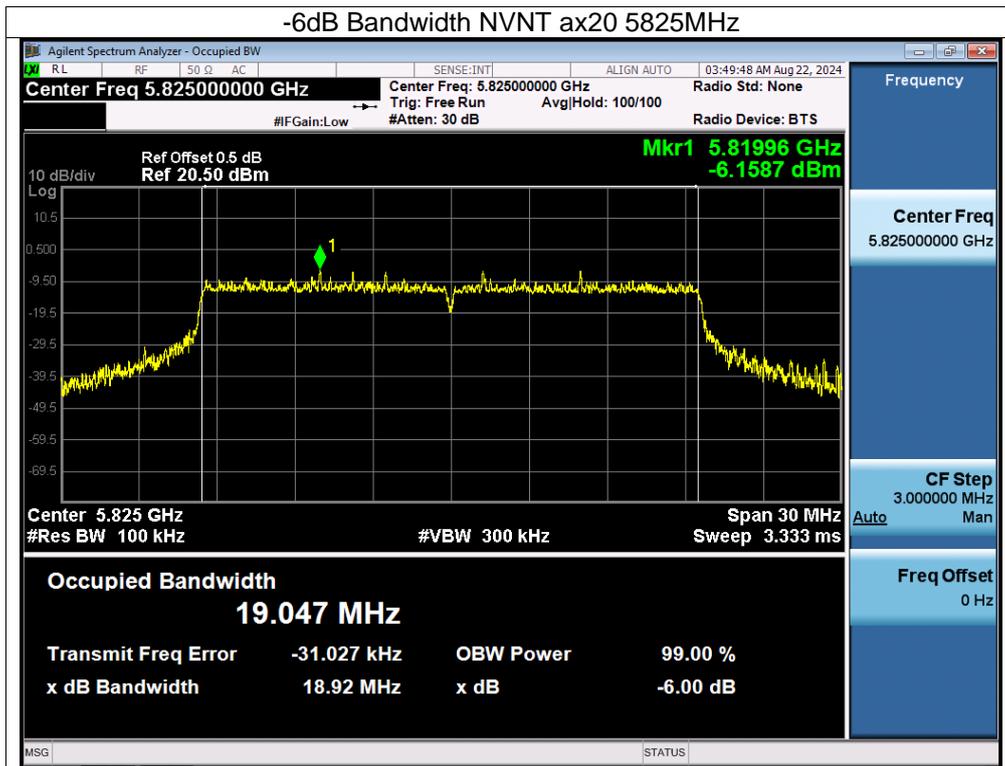


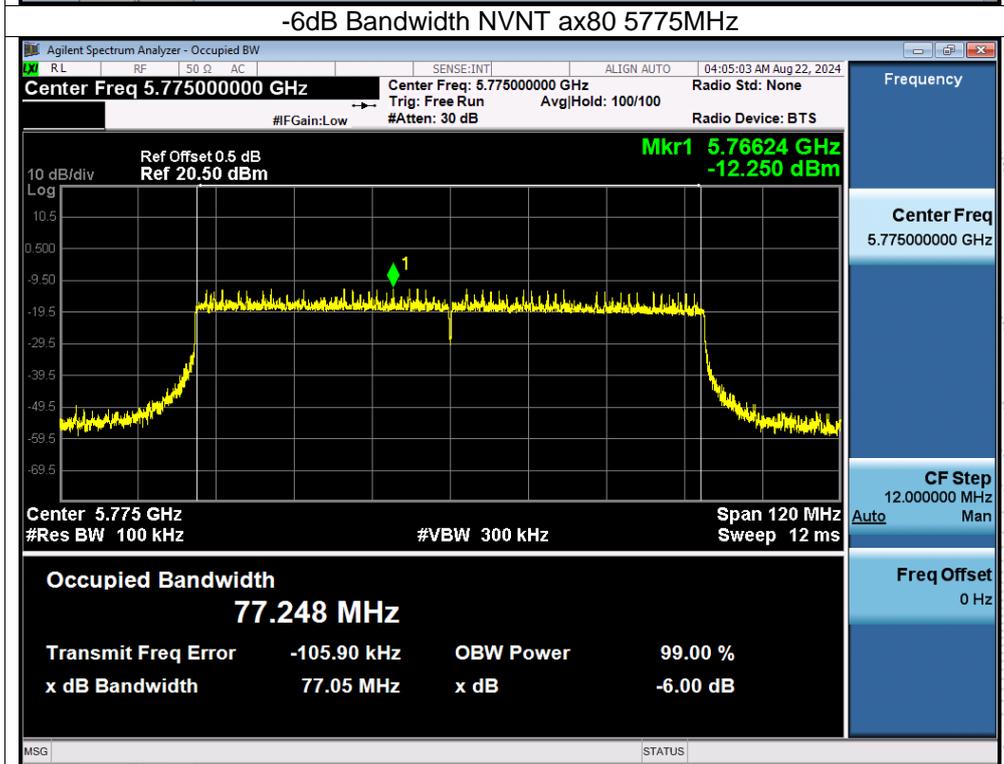
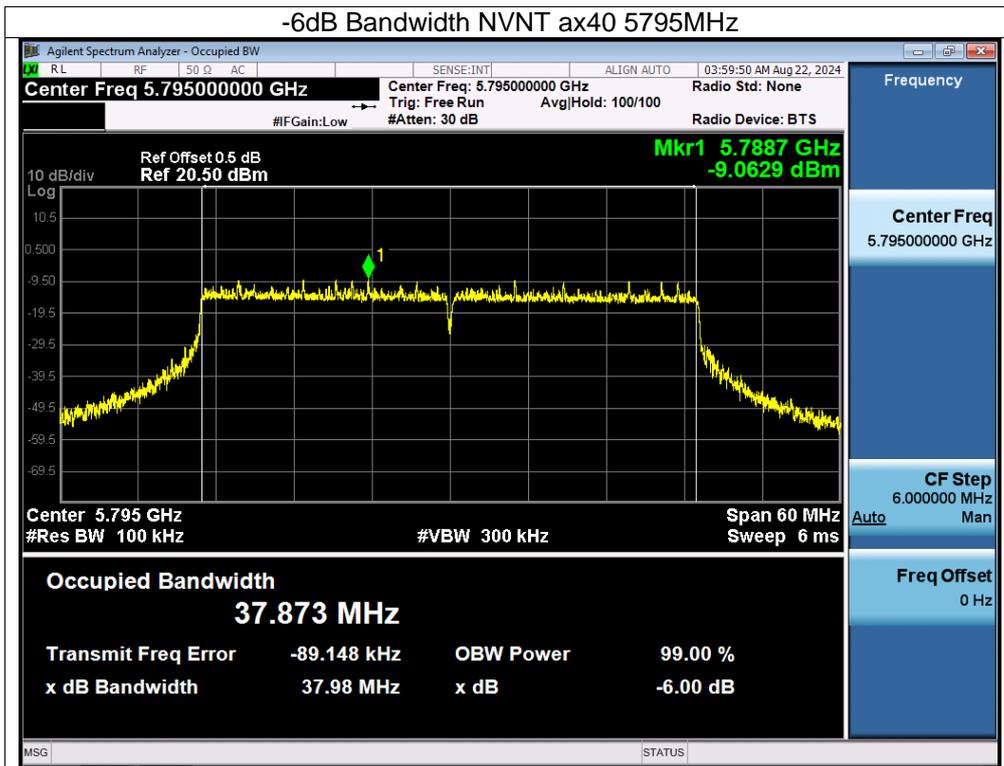


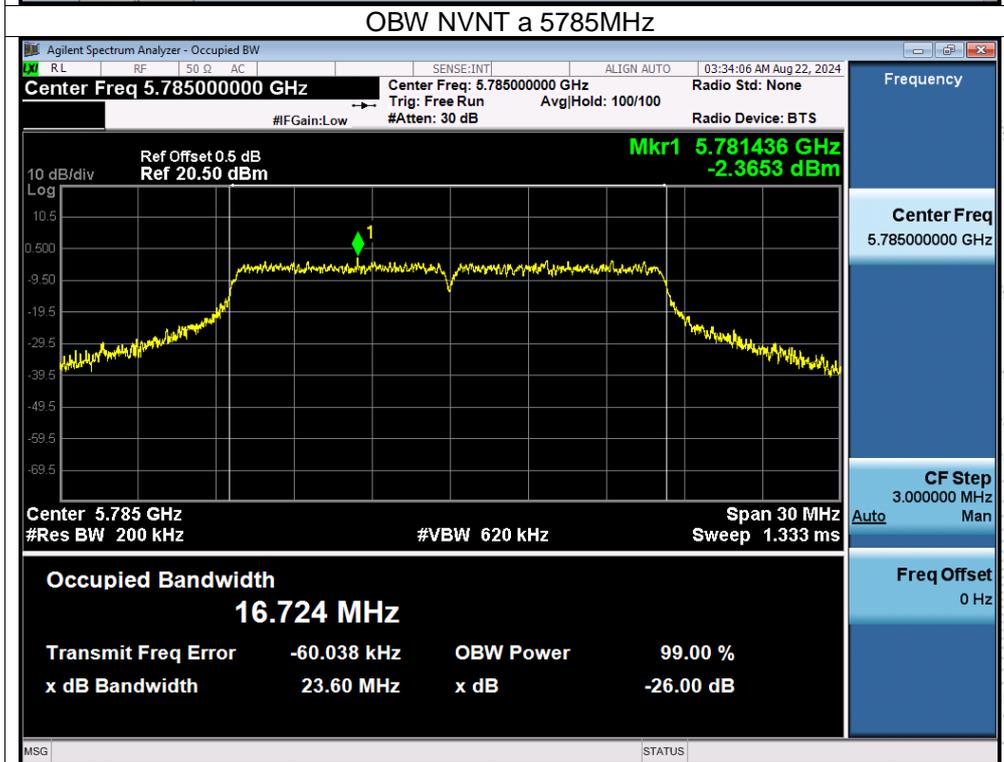
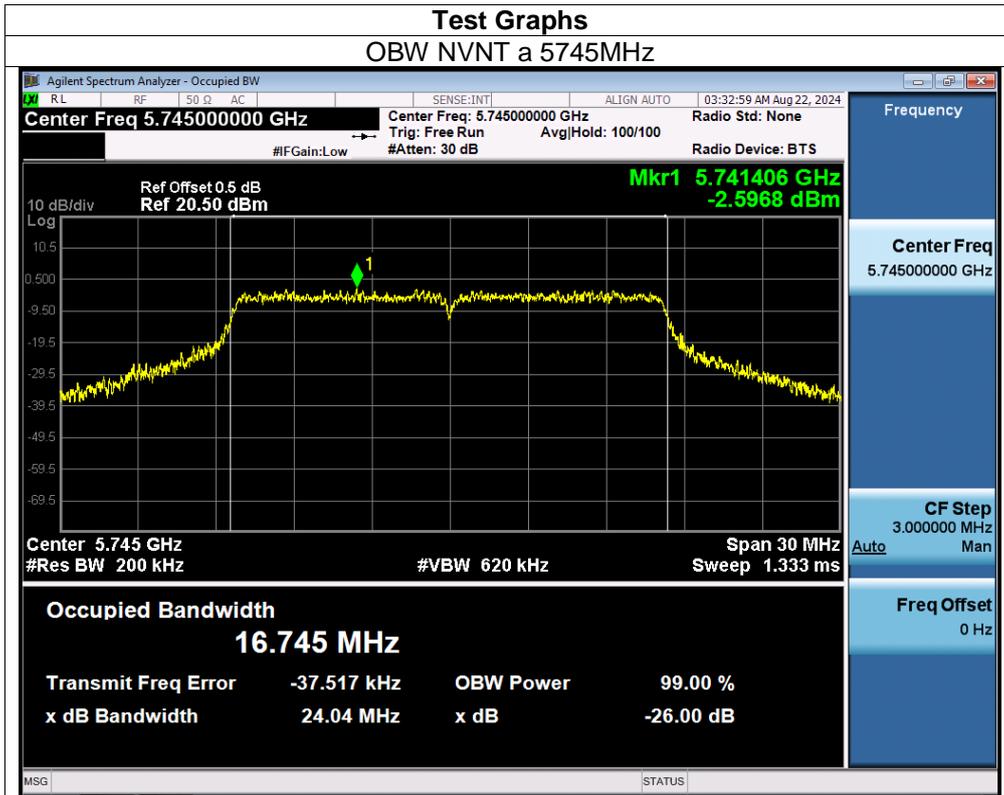


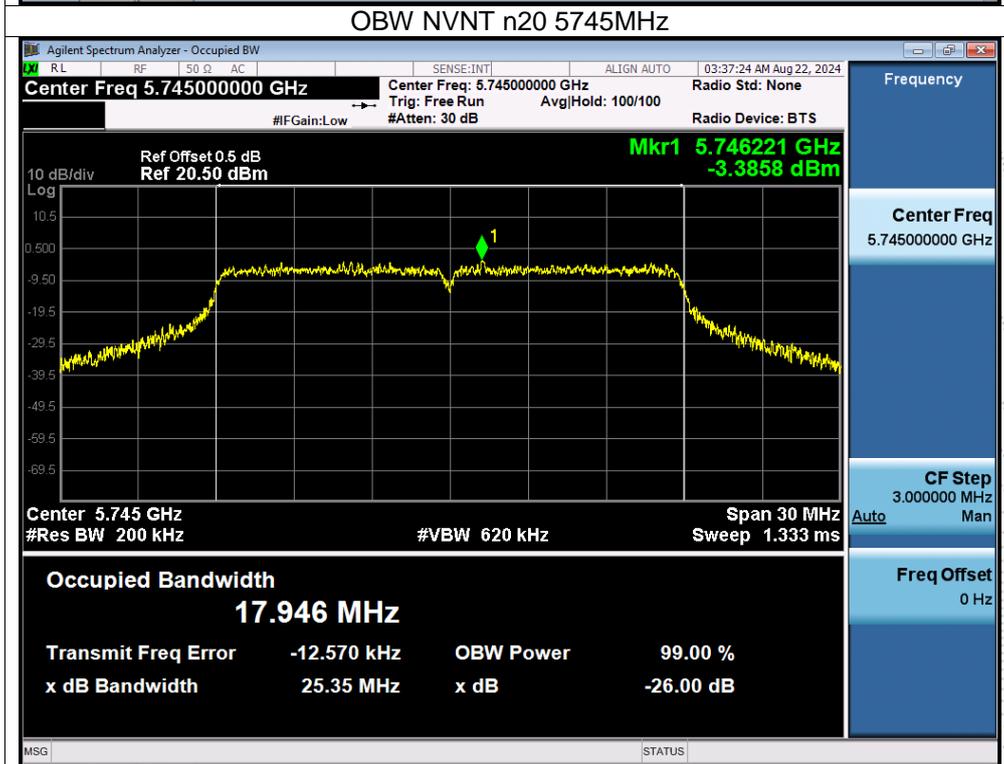
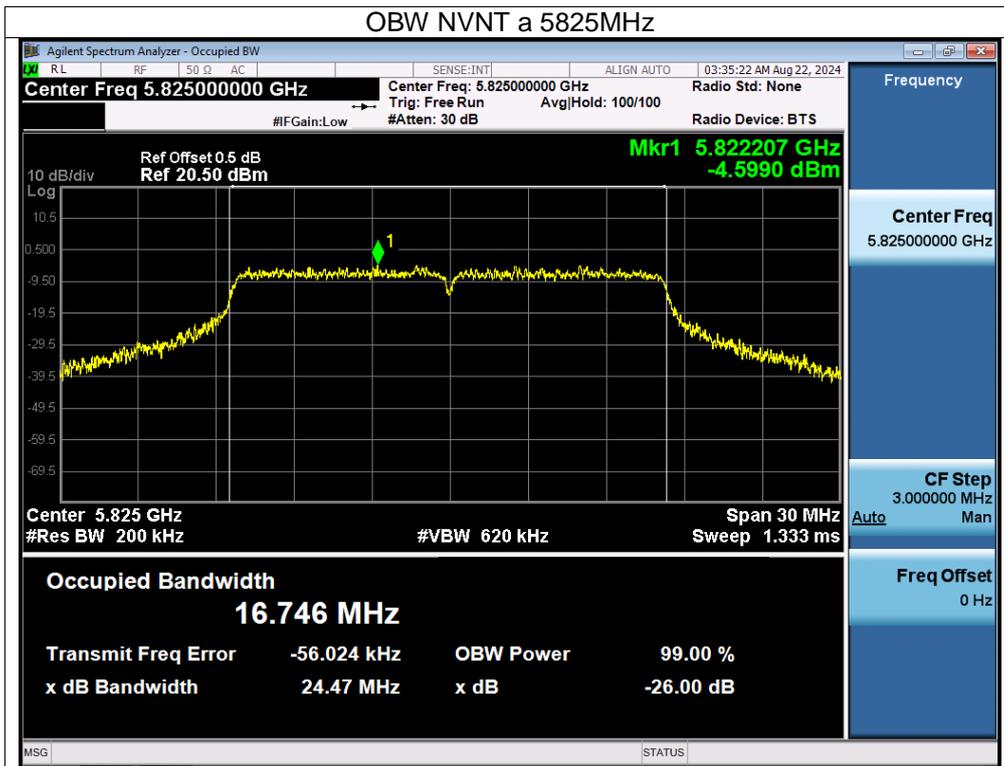


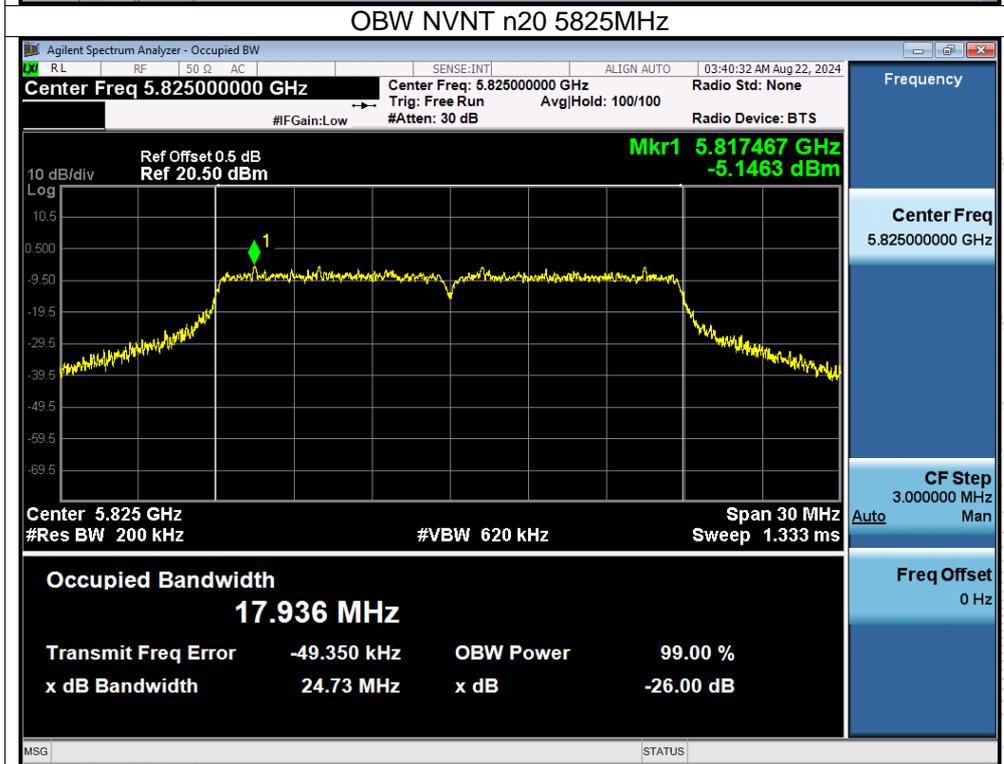
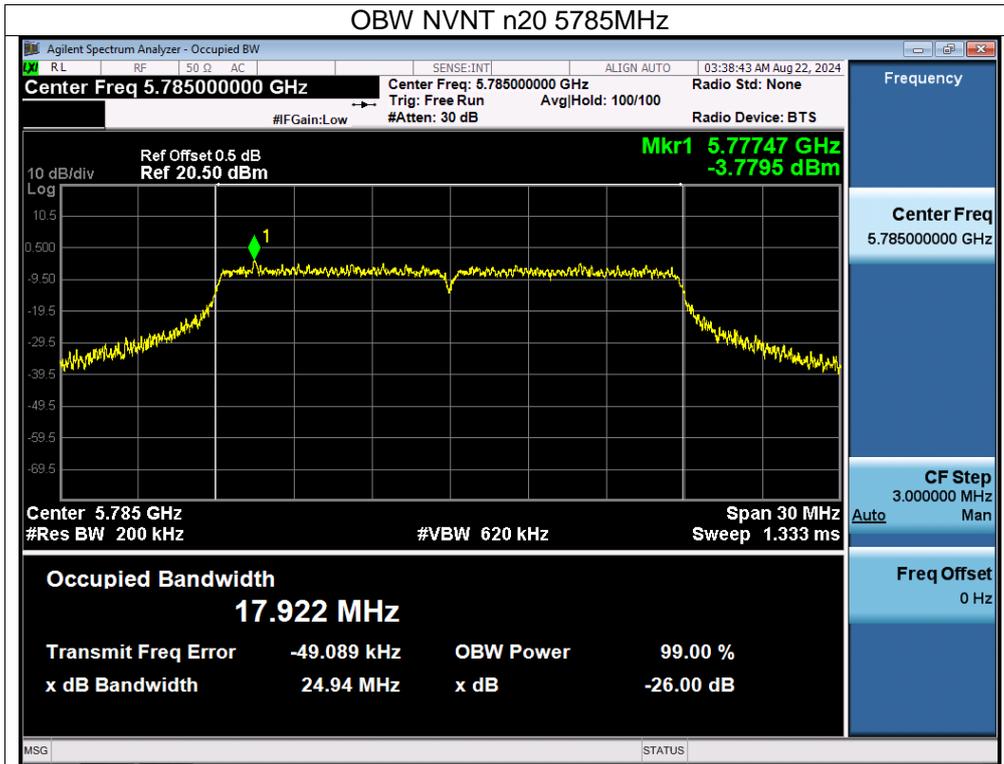


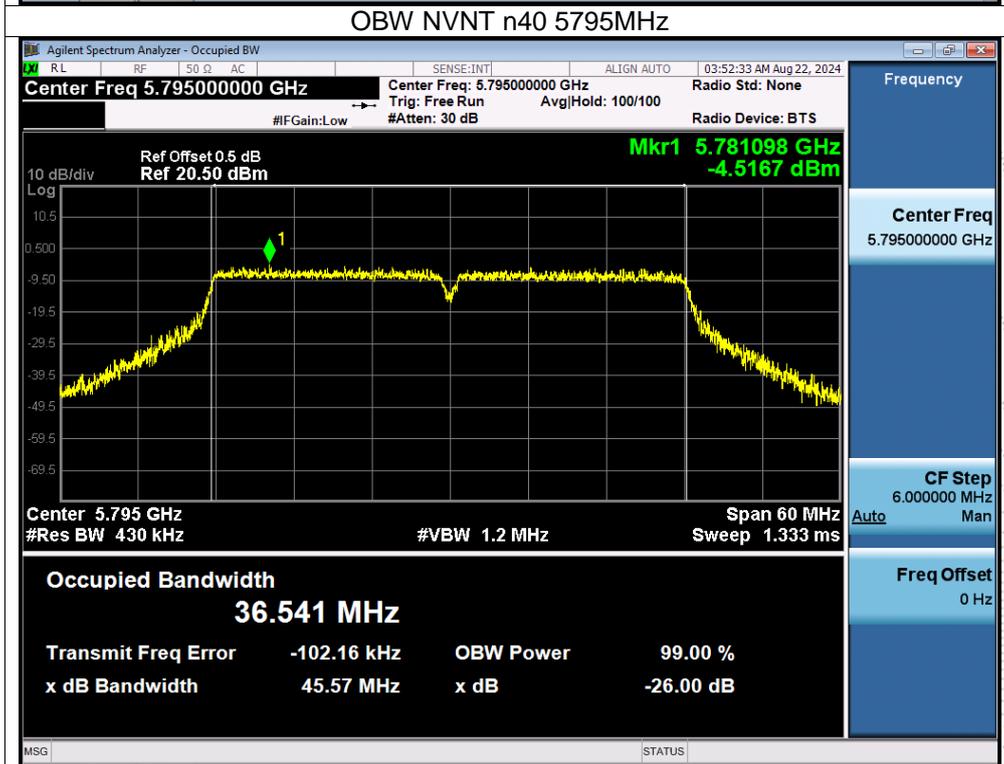
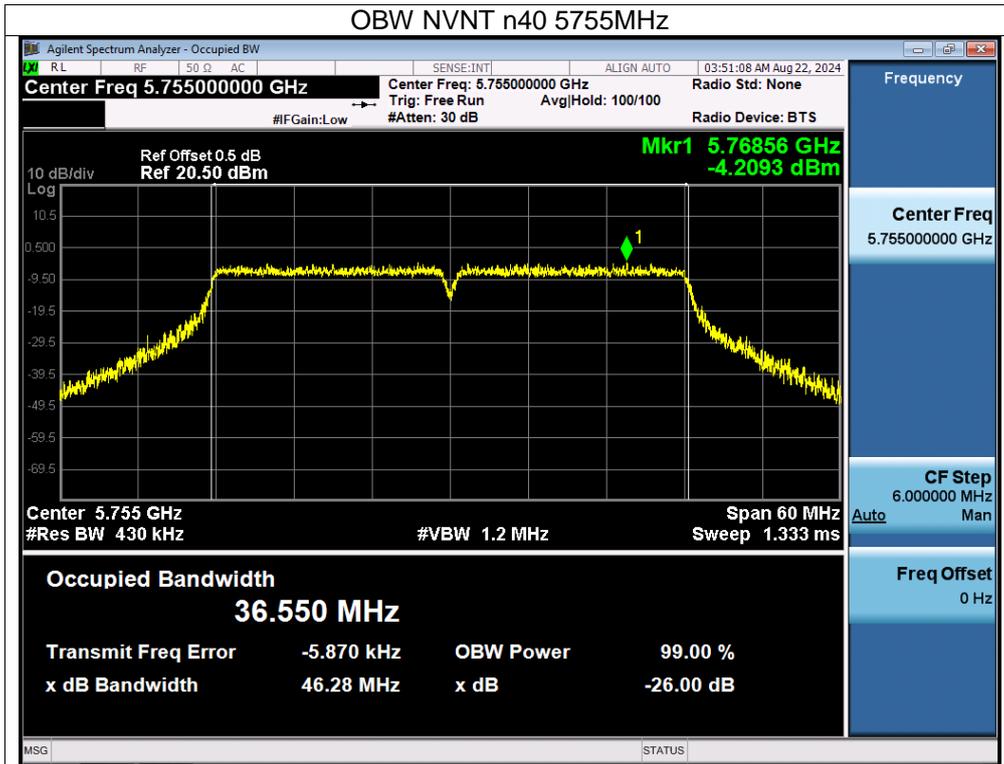


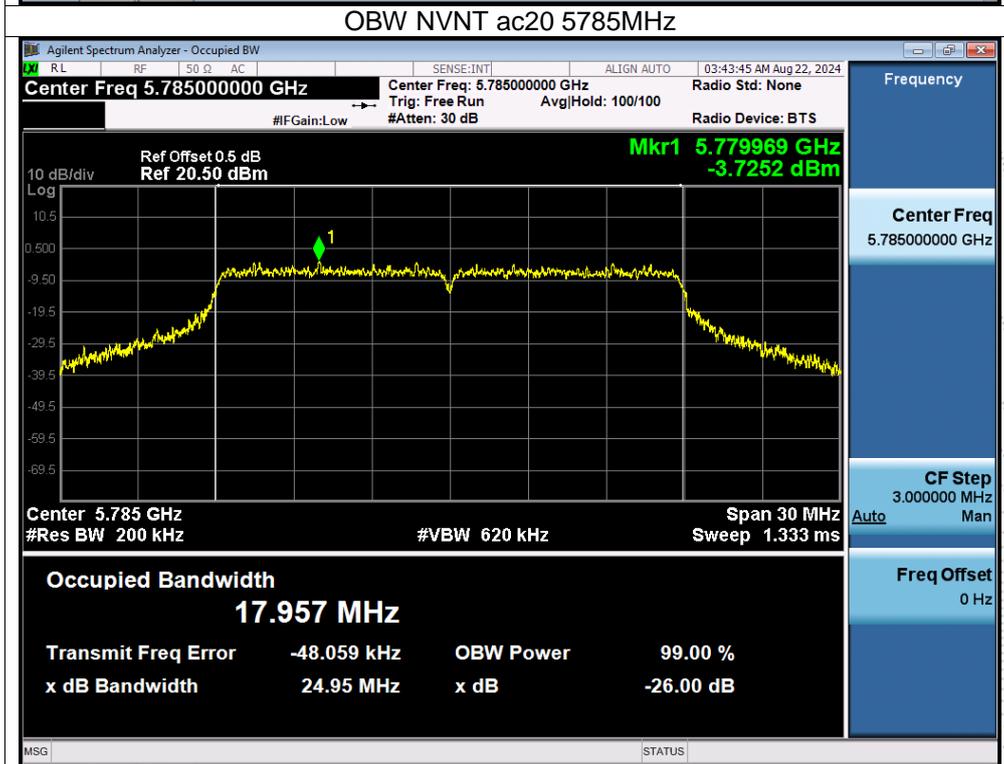
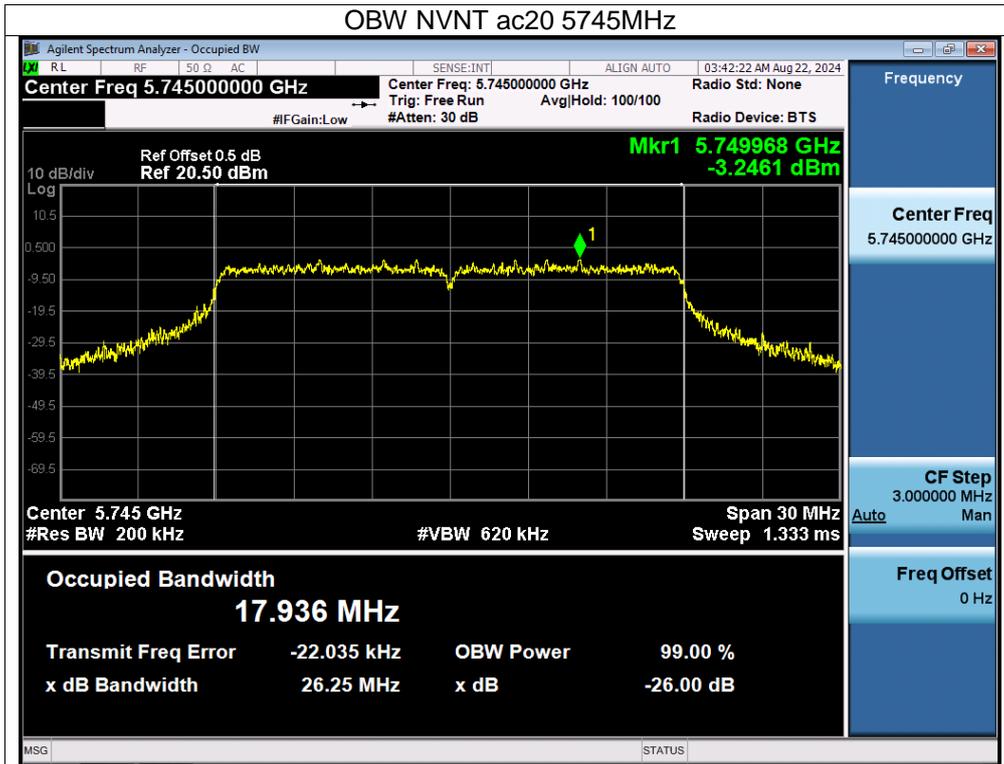


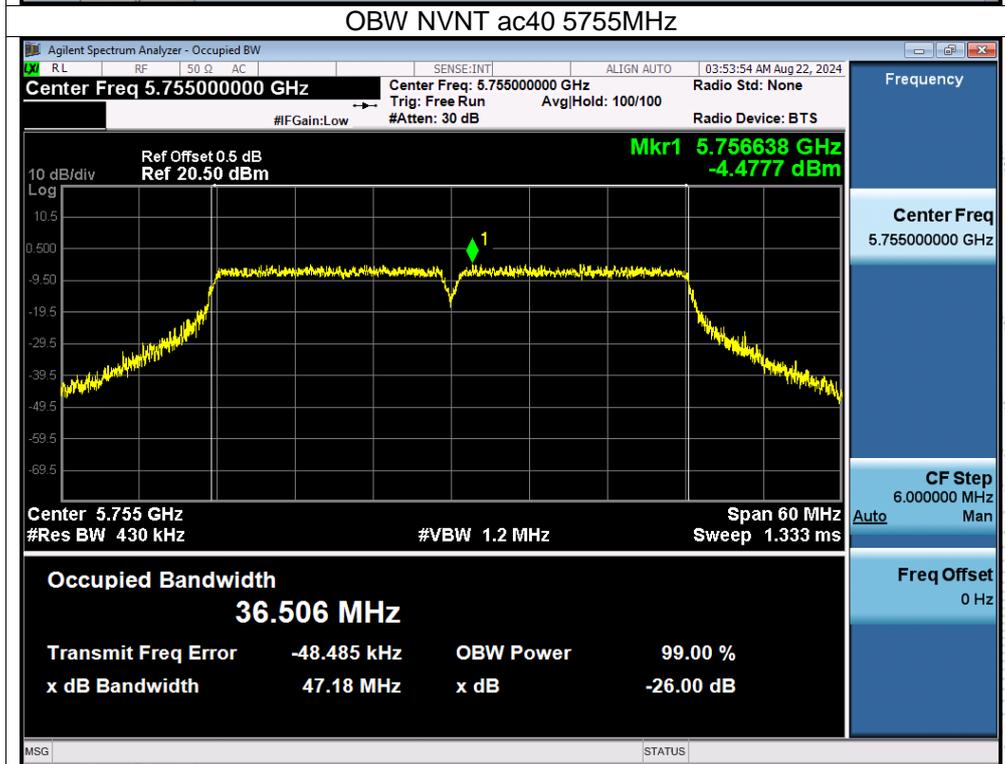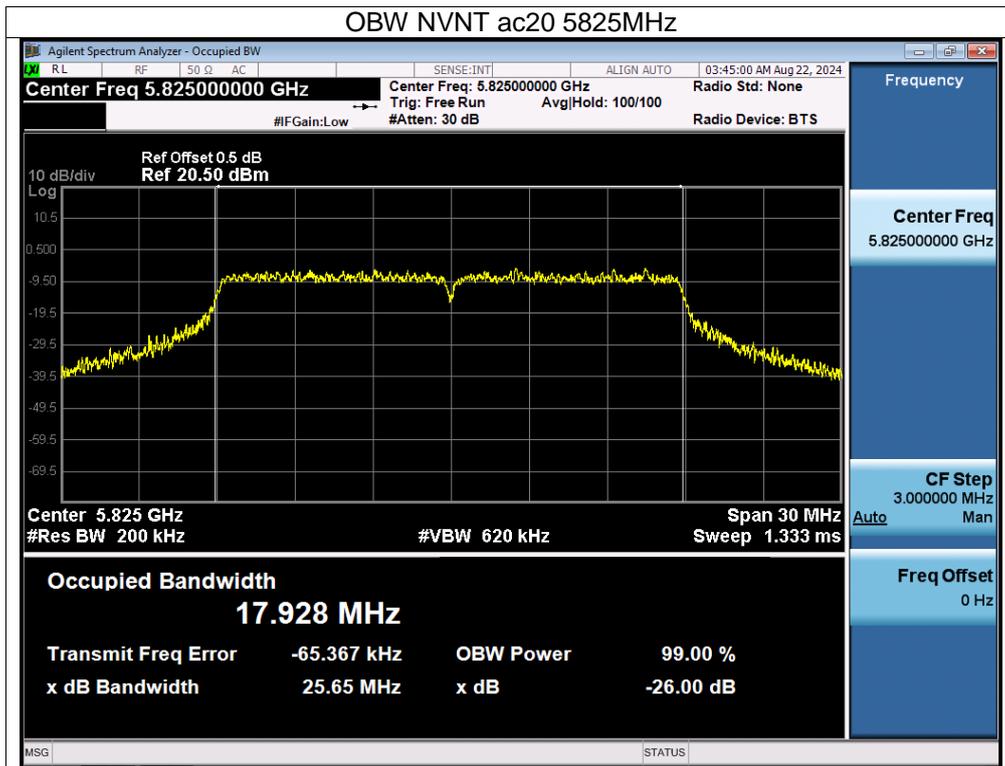

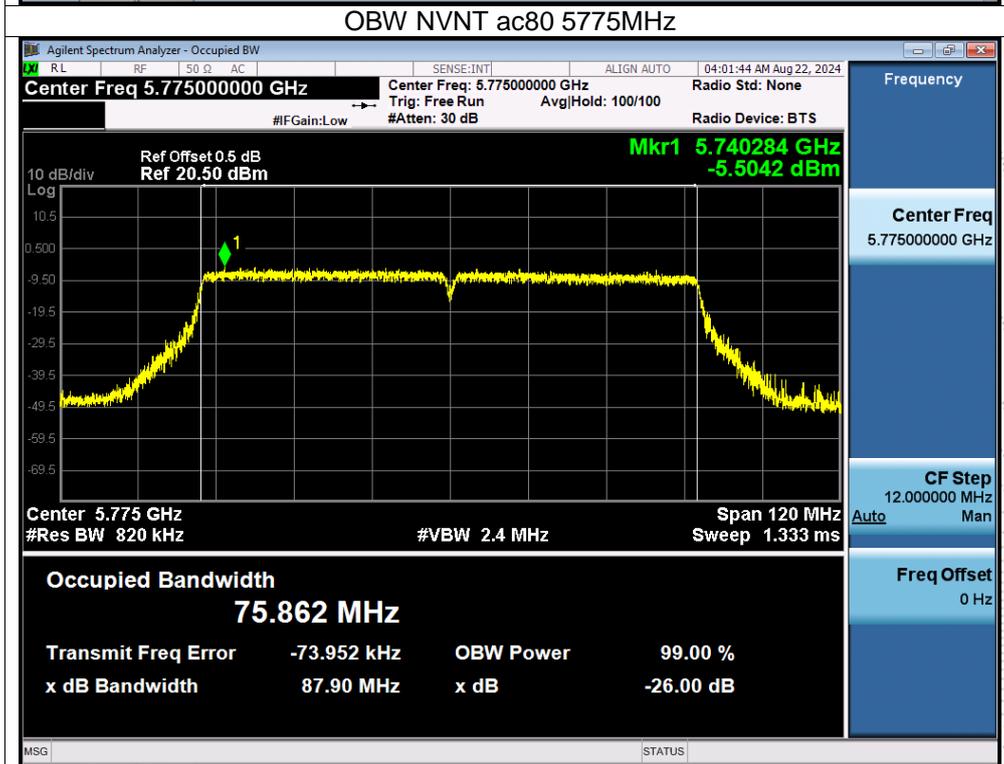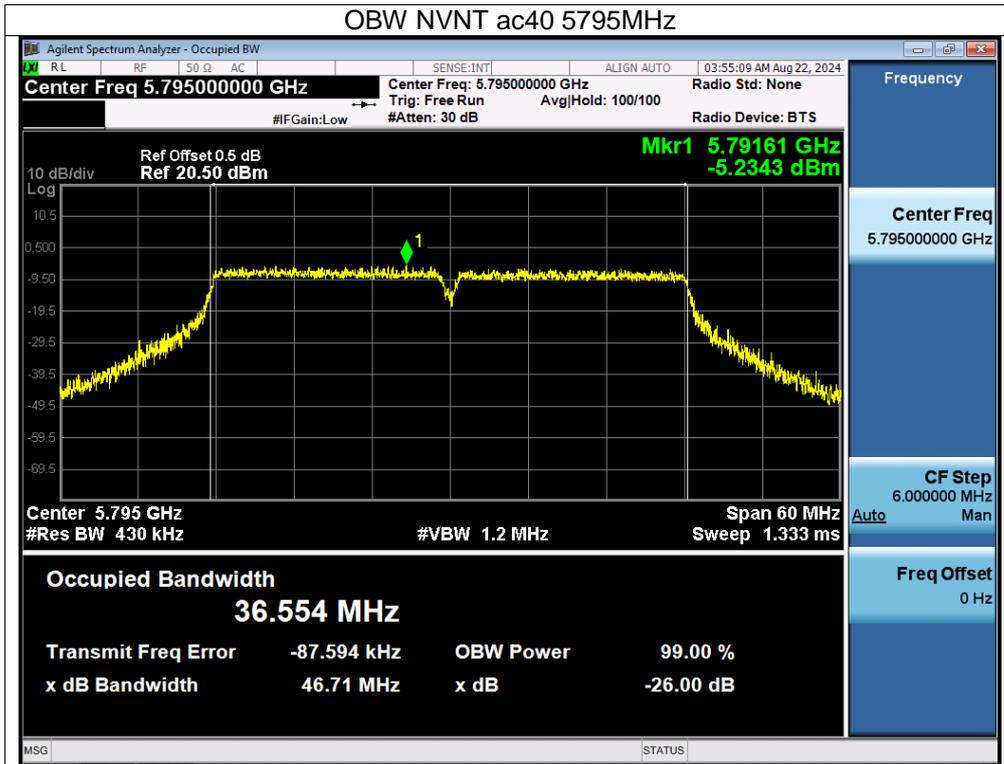

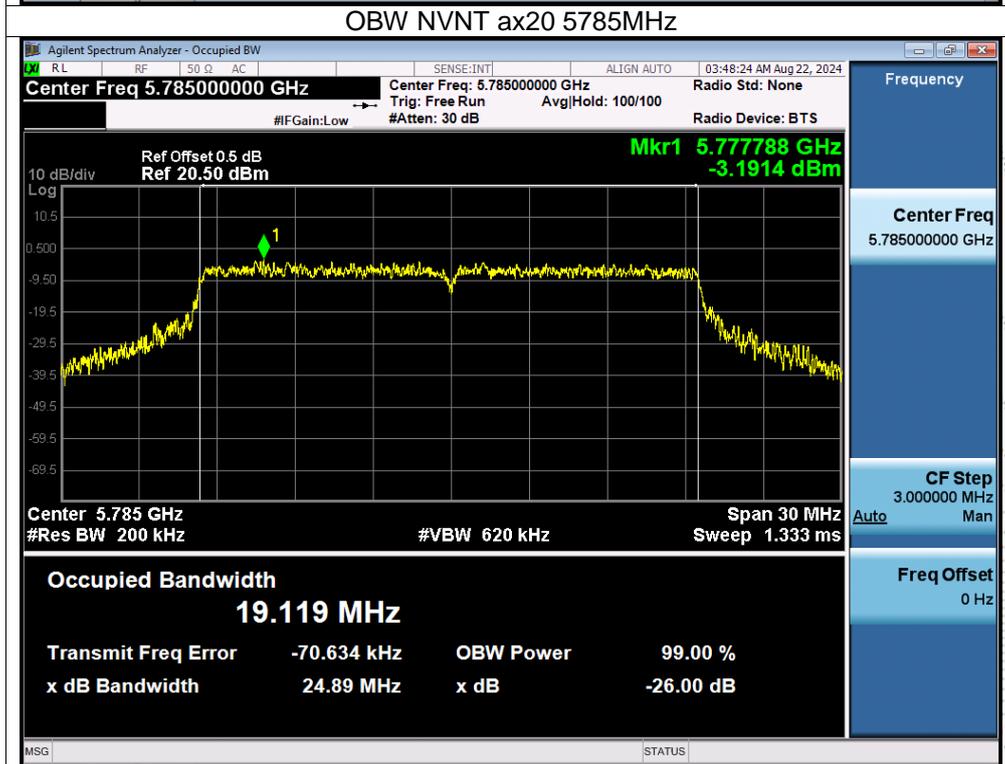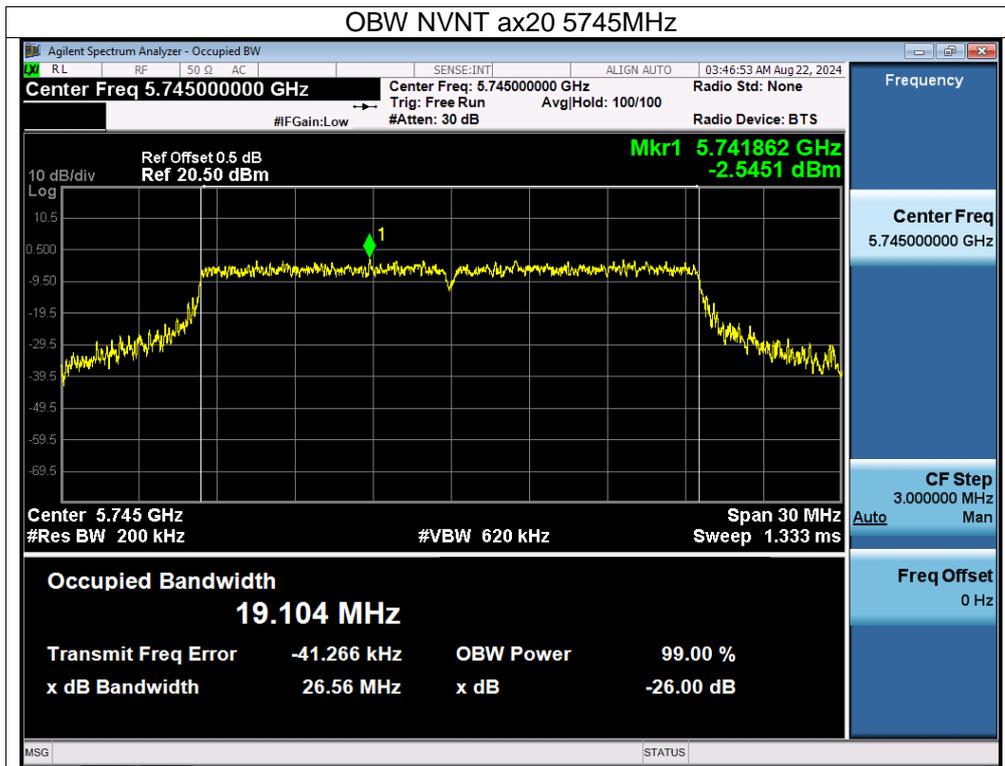

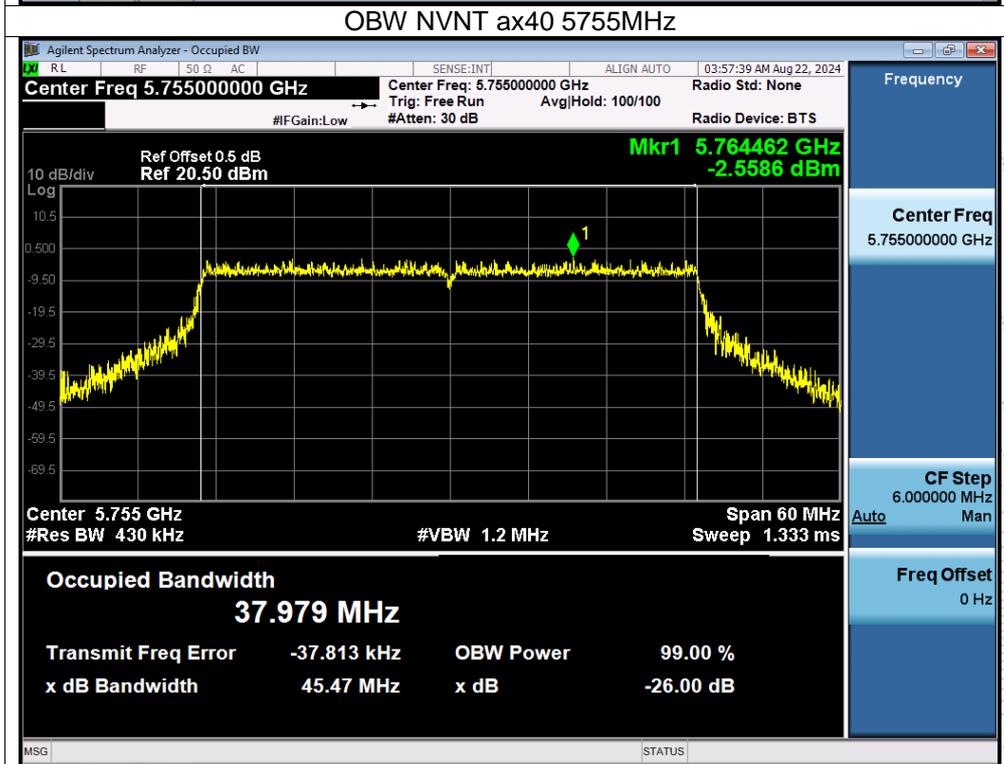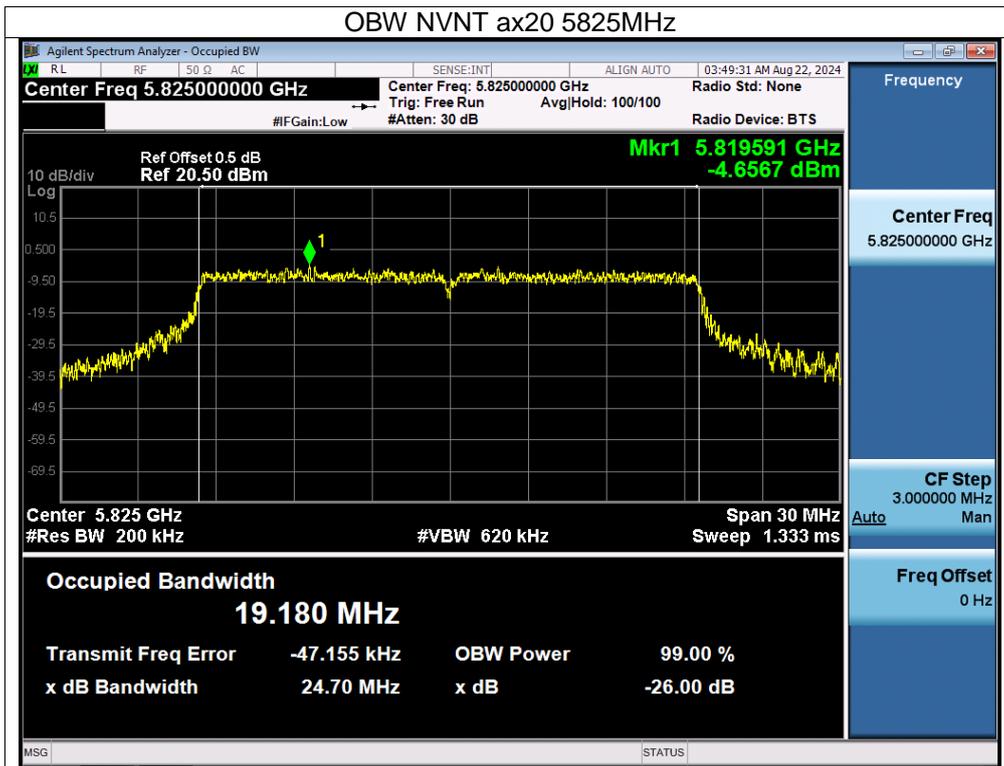

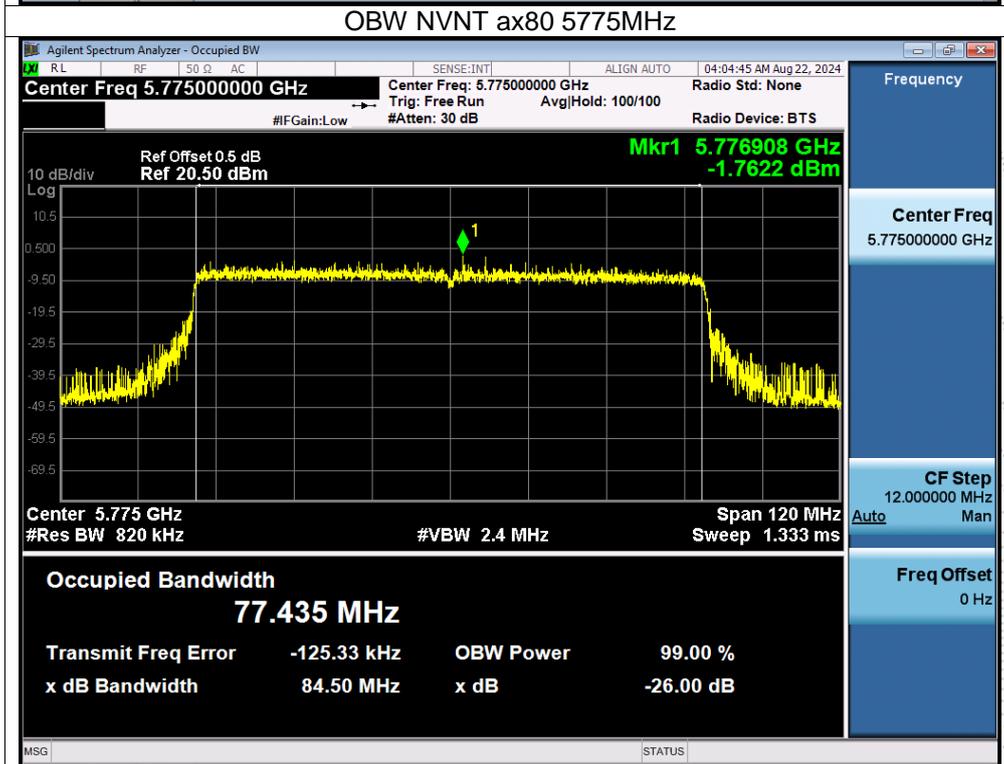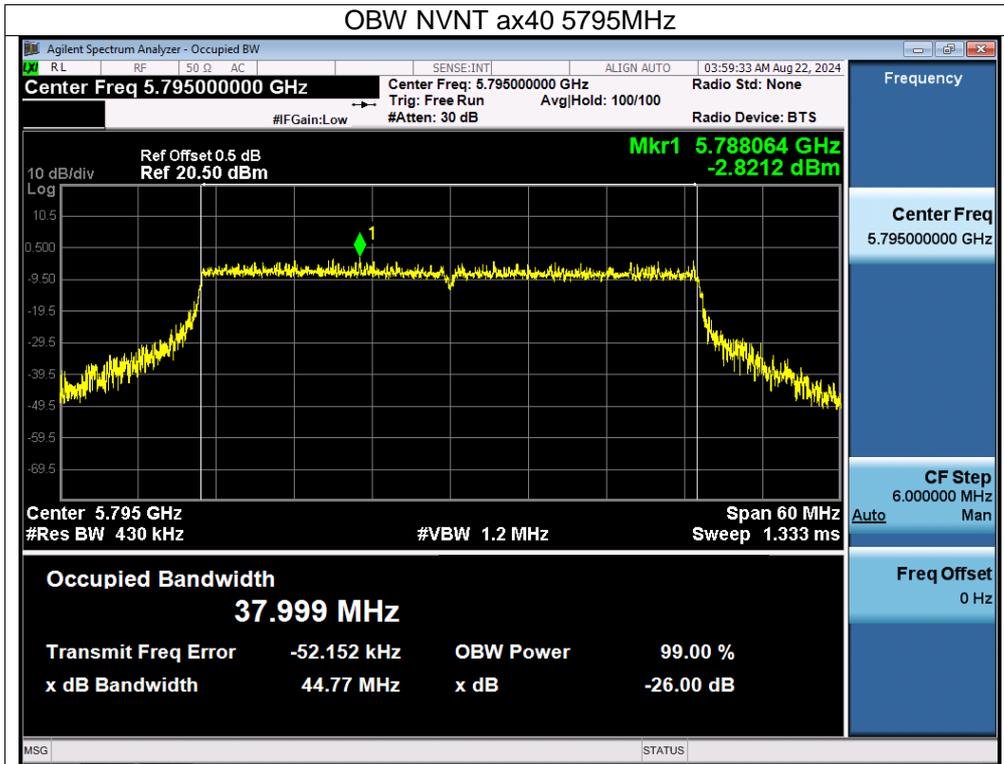

## 10. Maximum Conducted Output Power

### 10.1 Block Diagram Of Test Setup



### 10.2 Limit

#### According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

### 10.3 Test Procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

#### 1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

- a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.
- b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

#### 2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.<sup>1</sup> However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle  $\geq$  98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm$  2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW  $\geq$  3 MHz.

(iv) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.


(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq$  98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

## 10.4 EUT Operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

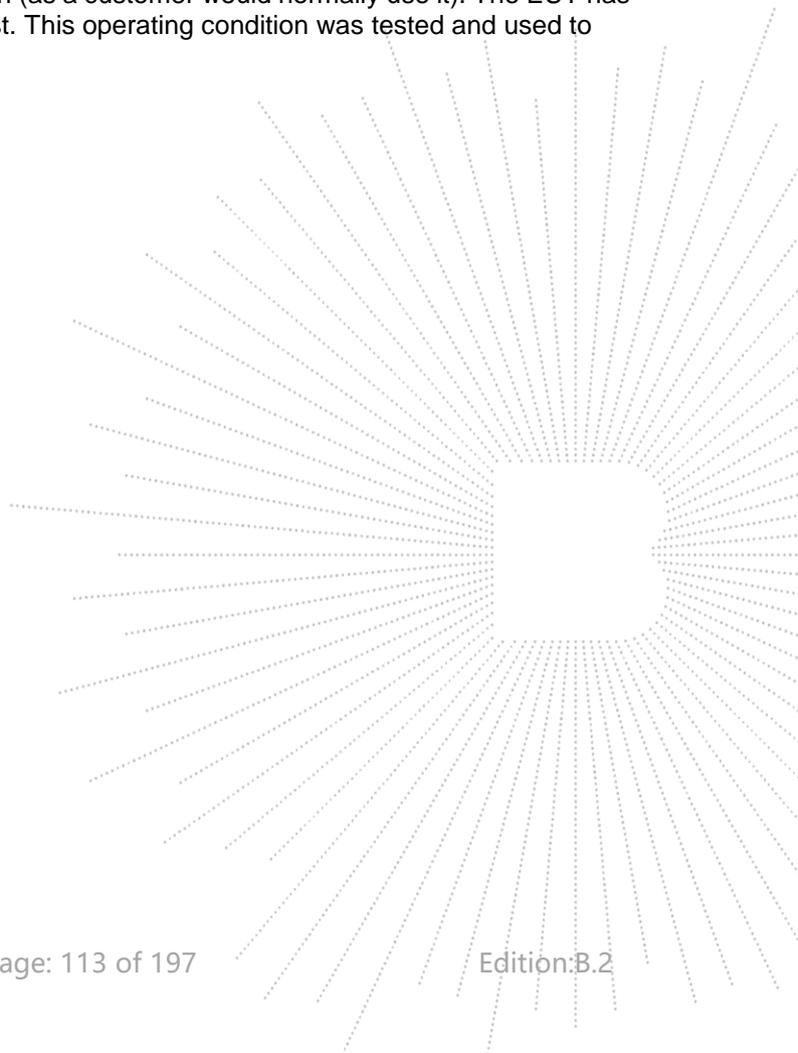


## 10.5 Test Result


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 5V
Test Mode:	(5180-5240MHz); (5745-5825MHz)		



Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	11.09	24	Pass
NVNT	a	5200	11.53	24	Pass
NVNT	a	5240	10.95	24	Pass
NVNT	n20	5180	10.58	24	Pass
NVNT	n20	5200	10.62	24	Pass
NVNT	n20	5240	10.02	24	Pass
NVNT	n40	5190	8.5	24	Pass
NVNT	n40	5230	7.81	24	Pass
NVNT	ac20	5180	10.19	24	Pass
NVNT	ac20	5200	10.65	24	Pass
NVNT	ac20	5240	9.46	24	Pass
NVNT	ac40	5190	9.22	24	Pass
NVNT	ac40	5230	8.88	24	Pass
NVNT	ac80	5210	6.36	24	Pass
NVNT	ax20	5180	9.85	24	Pass
NVNT	ax20	5200	10.55	24	Pass
NVNT	ax20	5240	9.93	24	Pass
NVNT	ax40	5190	8.89	24	Pass
NVNT	ax40	5230	5.85	24	Pass
NVNT	ax80	5210	5.57	24	Pass


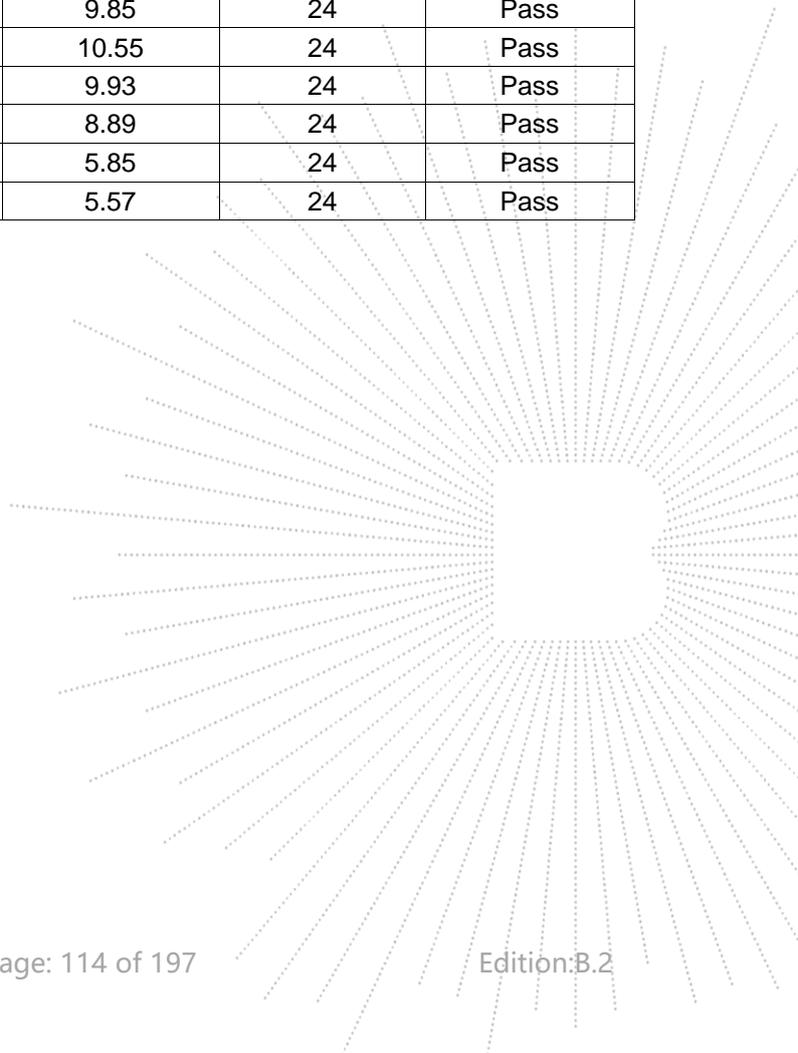




Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	10.75	30	Pass
NVNT	a	5785	10.06	30	Pass
NVNT	a	5825	8.72	30	Pass
NVNT	n20	5745	9.7	30	Pass
NVNT	n20	5785	9	30	Pass
NVNT	n20	5825	7.71	30	Pass
NVNT	n40	5755	8.62	30	Pass
NVNT	n40	5795	7.61	30	Pass
NVNT	ac20	5745	9.8	30	Pass
NVNT	ac20	5785	9.3	30	Pass
NVNT	ac20	5825	7.54	30	Pass
NVNT	ac40	5755	8.68	30	Pass
NVNT	ac40	5795	7.54	30	Pass
NVNT	ac80	5775	6.46	30	Pass
NVNT	ax20	5745	9.59	30	Pass
NVNT	ax20	5785	9.07	30	Pass
NVNT	ax20	5825	7.56	30	Pass
NVNT	ax40	5755	8.49	30	Pass
NVNT	ax40	5795	7.56	30	Pass
NVNT	ax80	5775	6.35	30	Pass


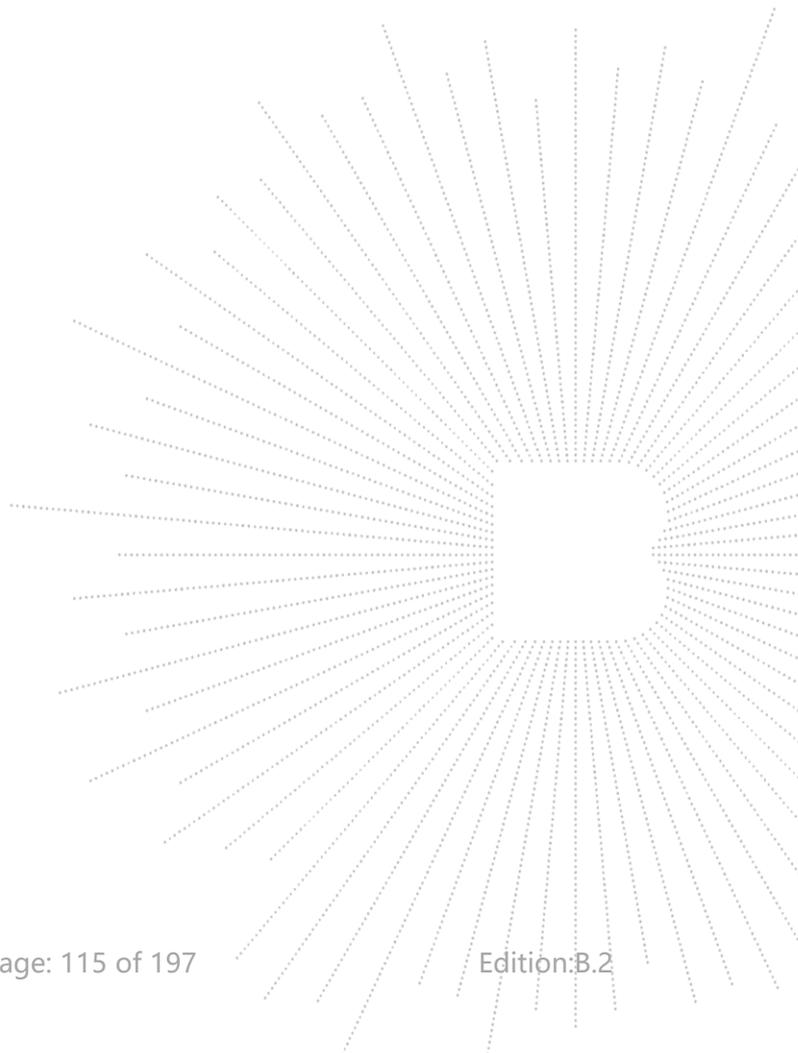



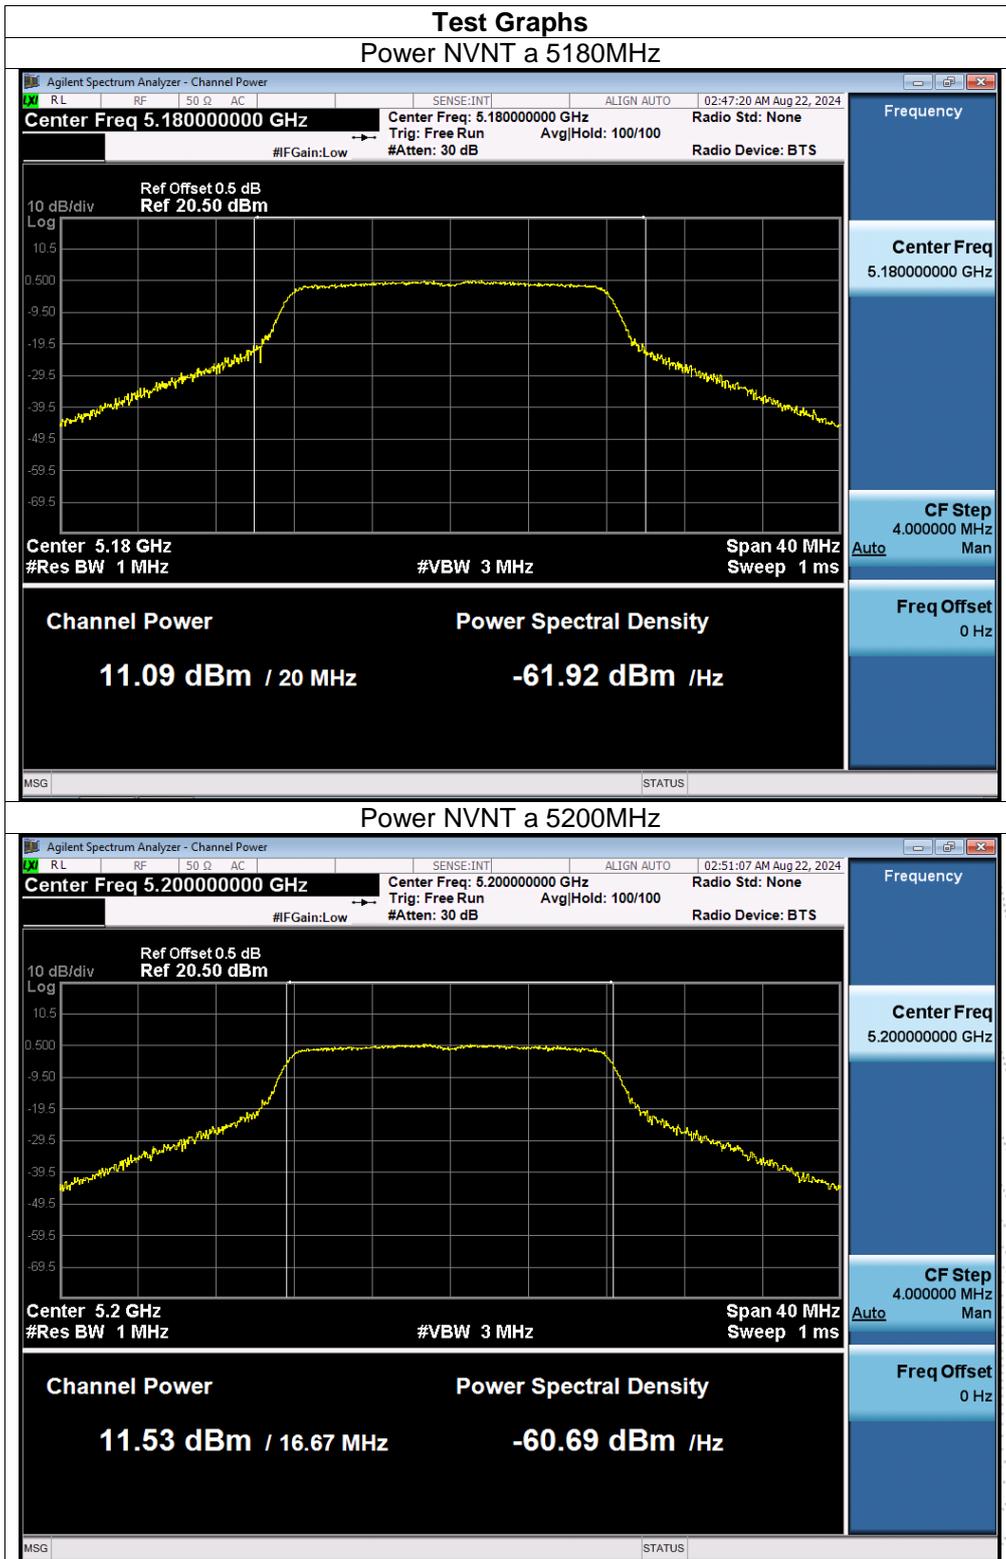


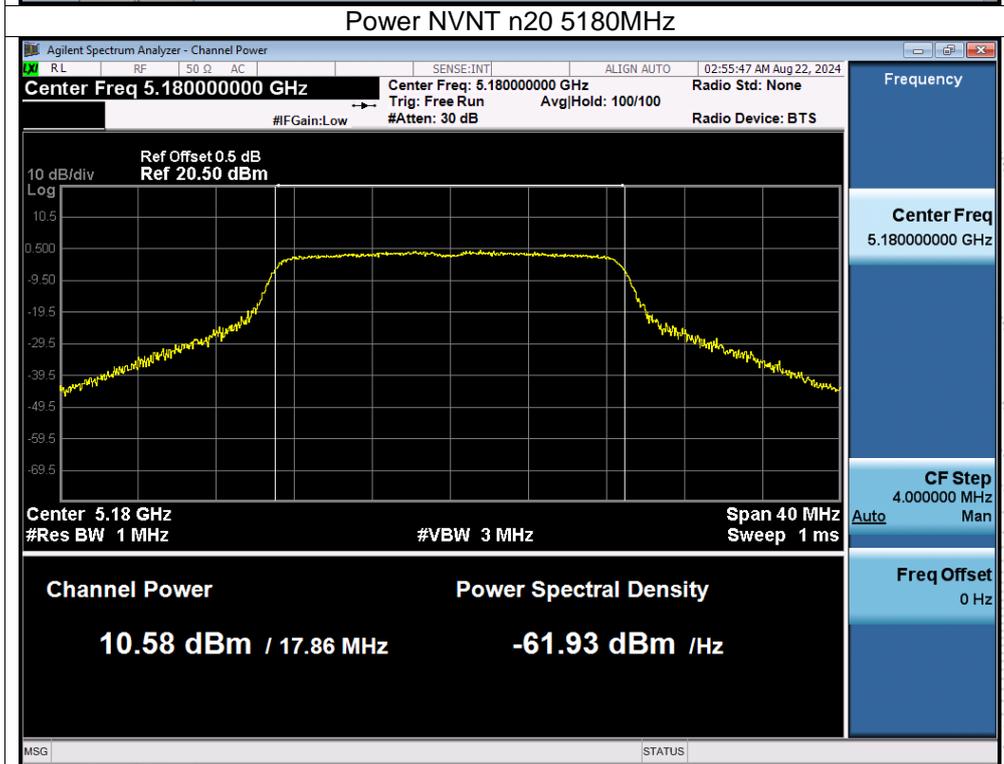
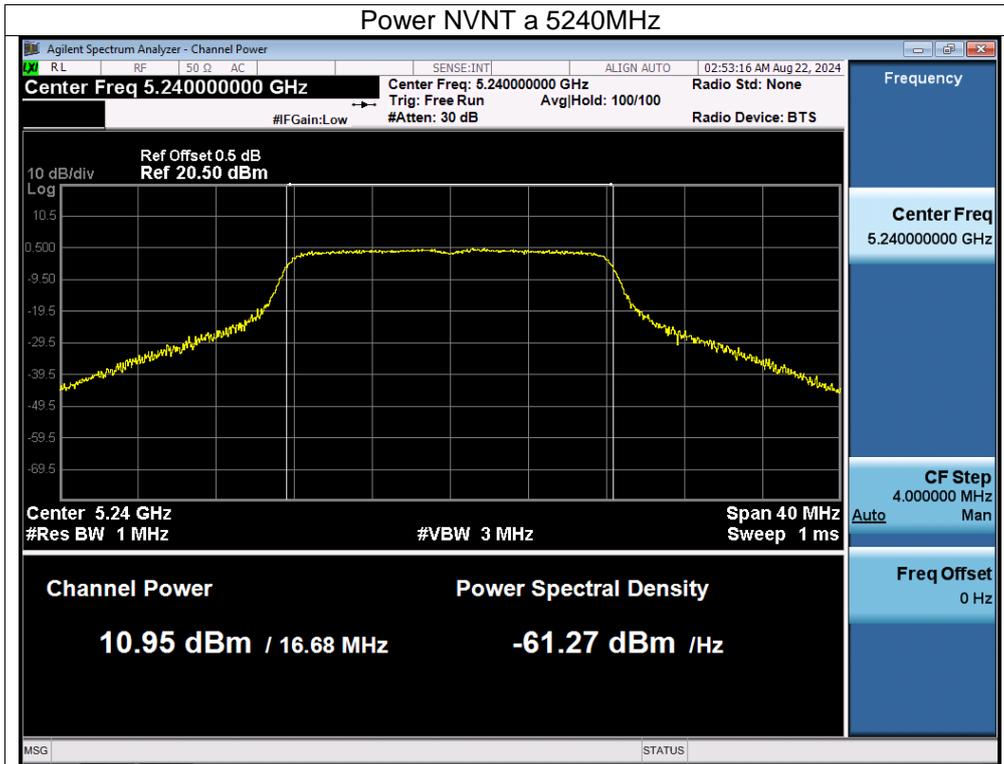


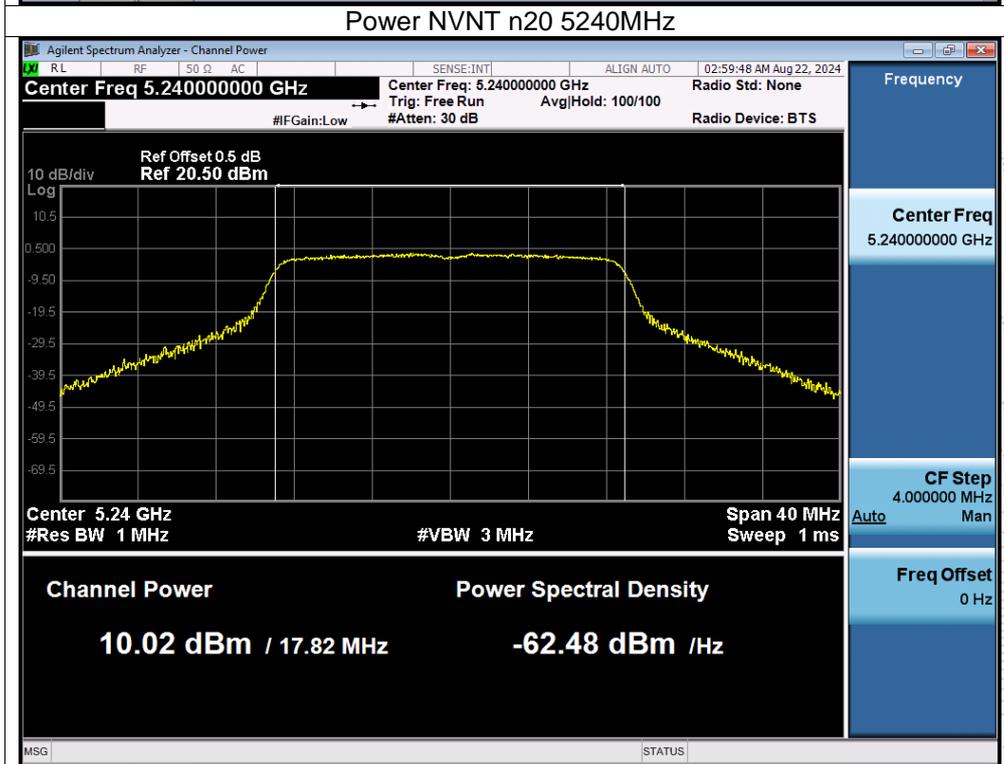
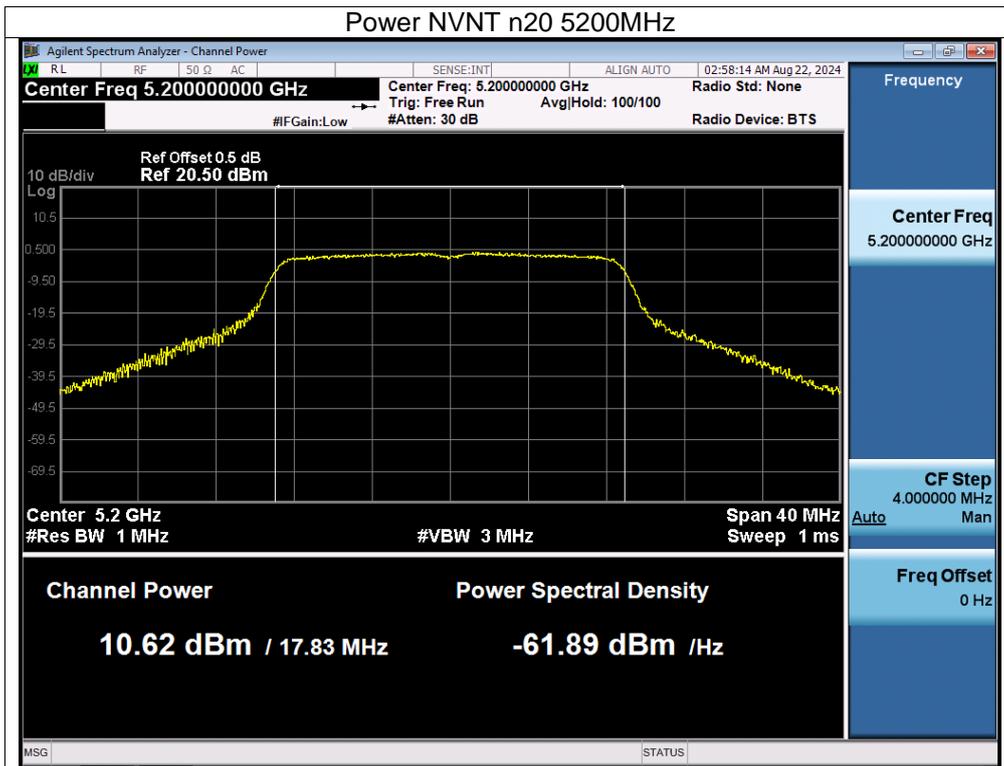


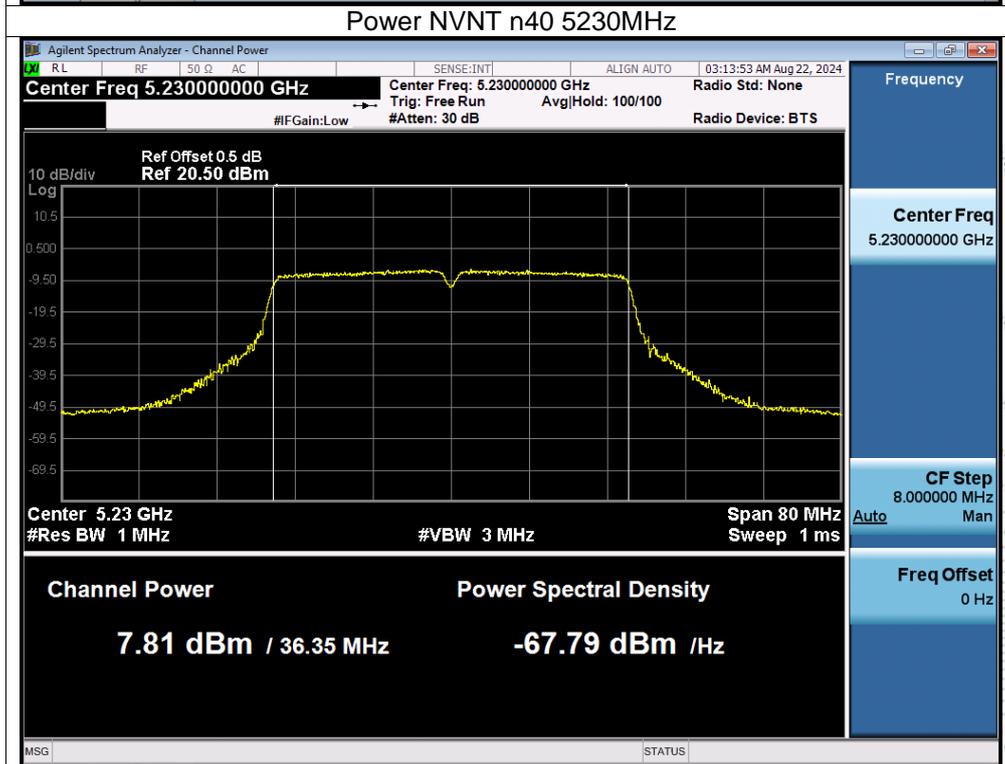
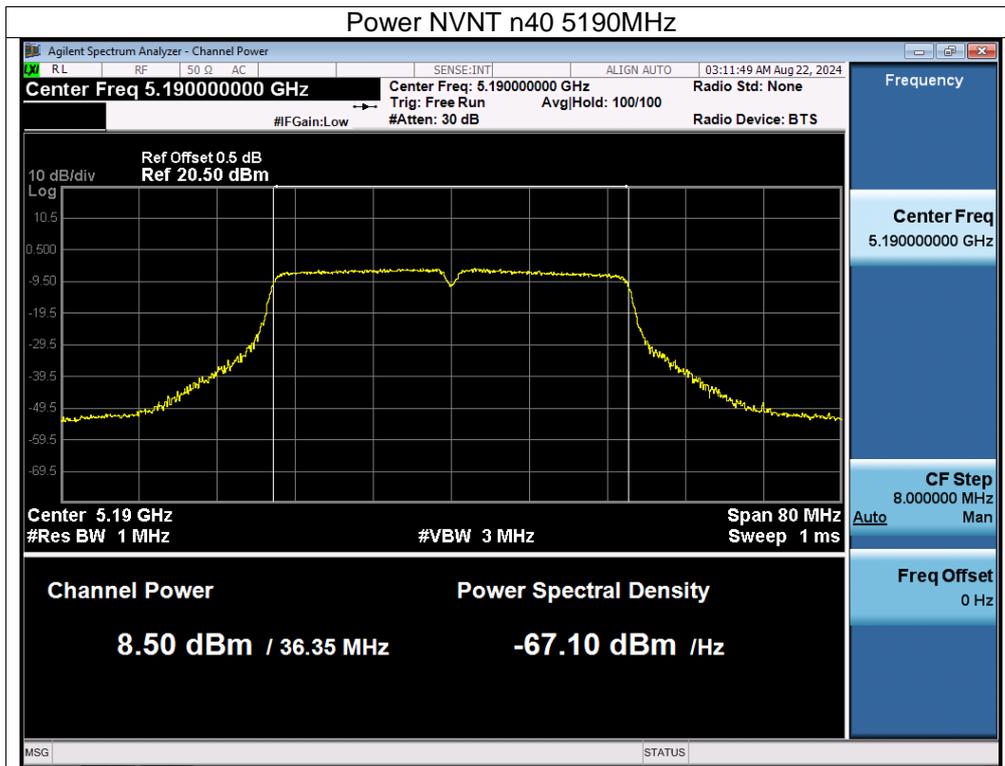


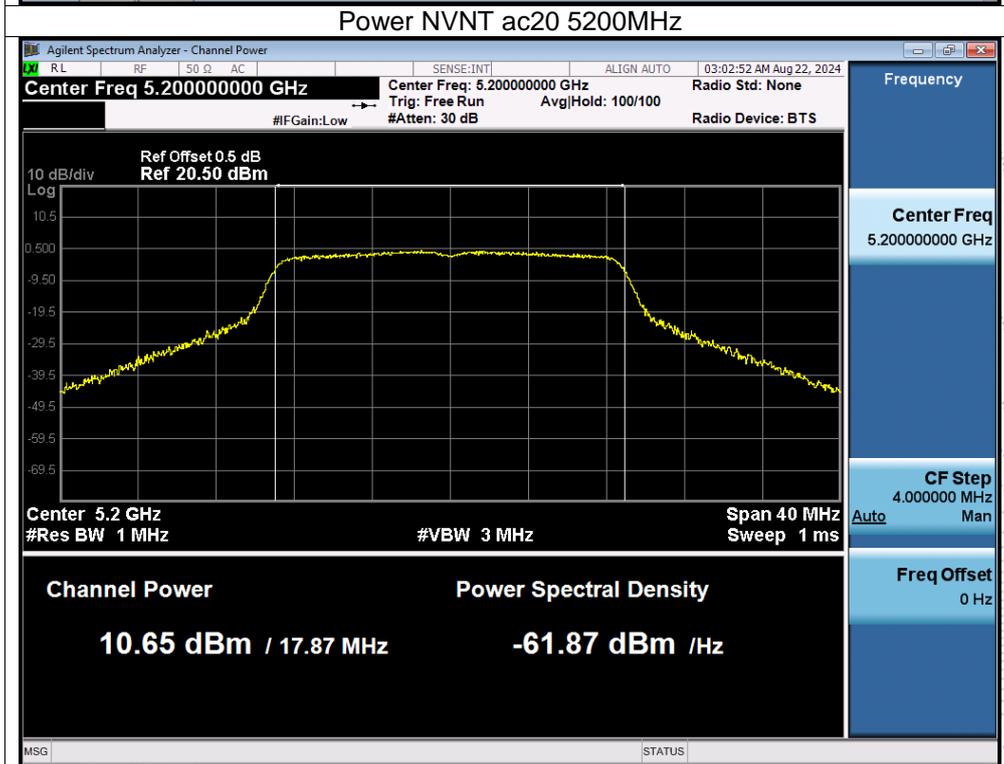
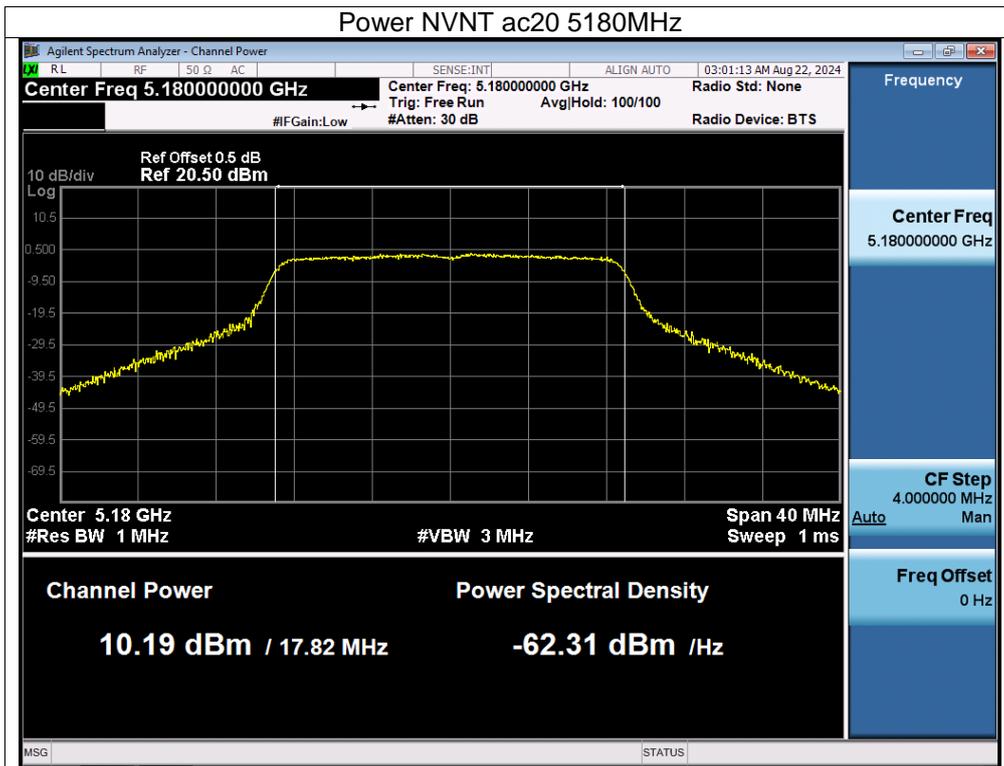


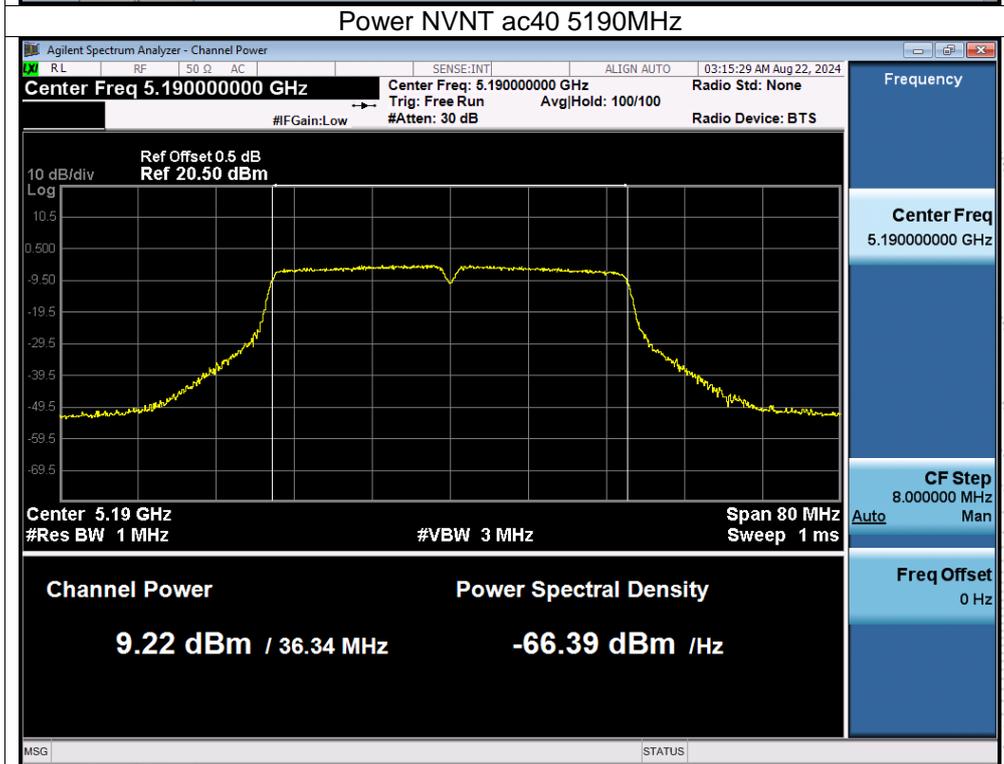
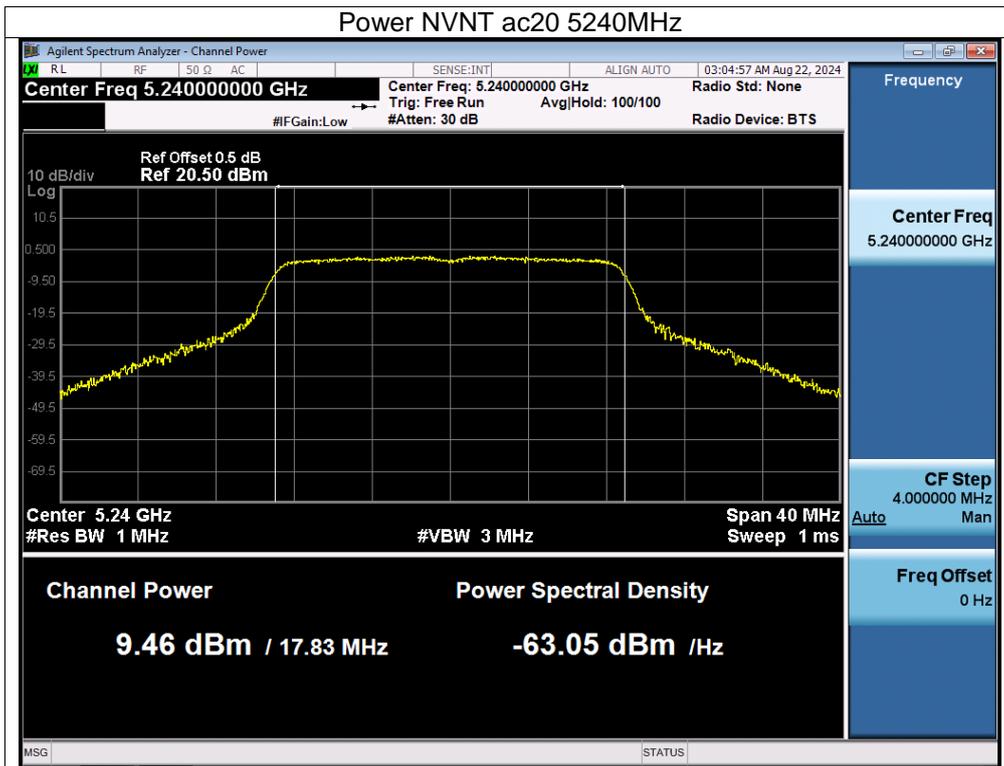


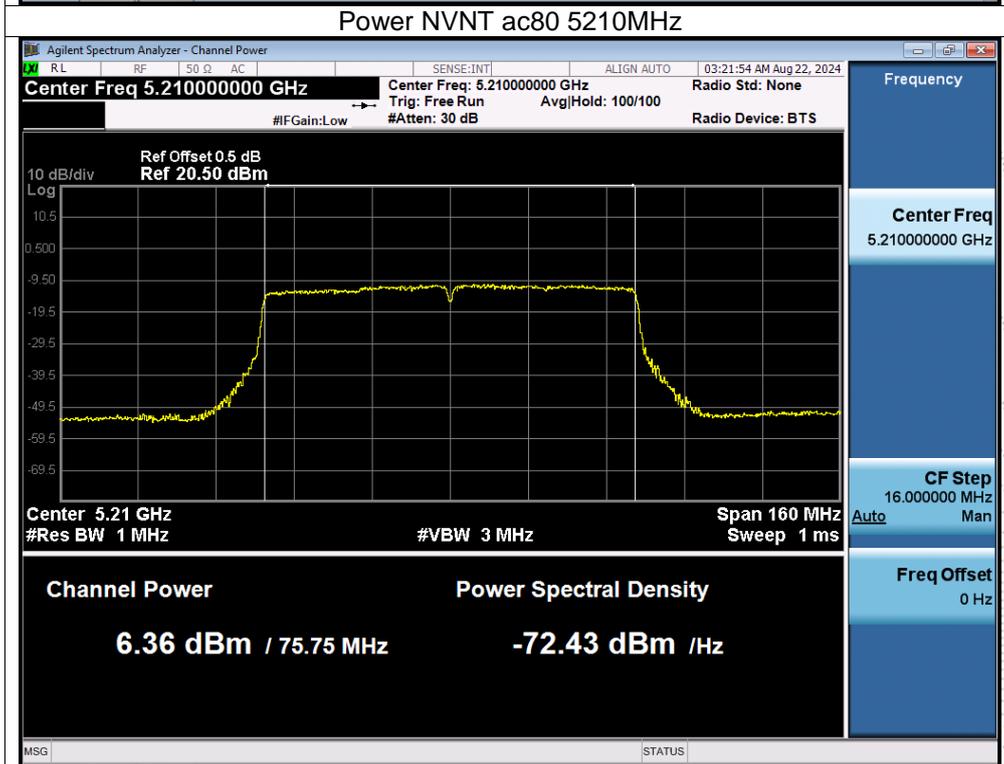
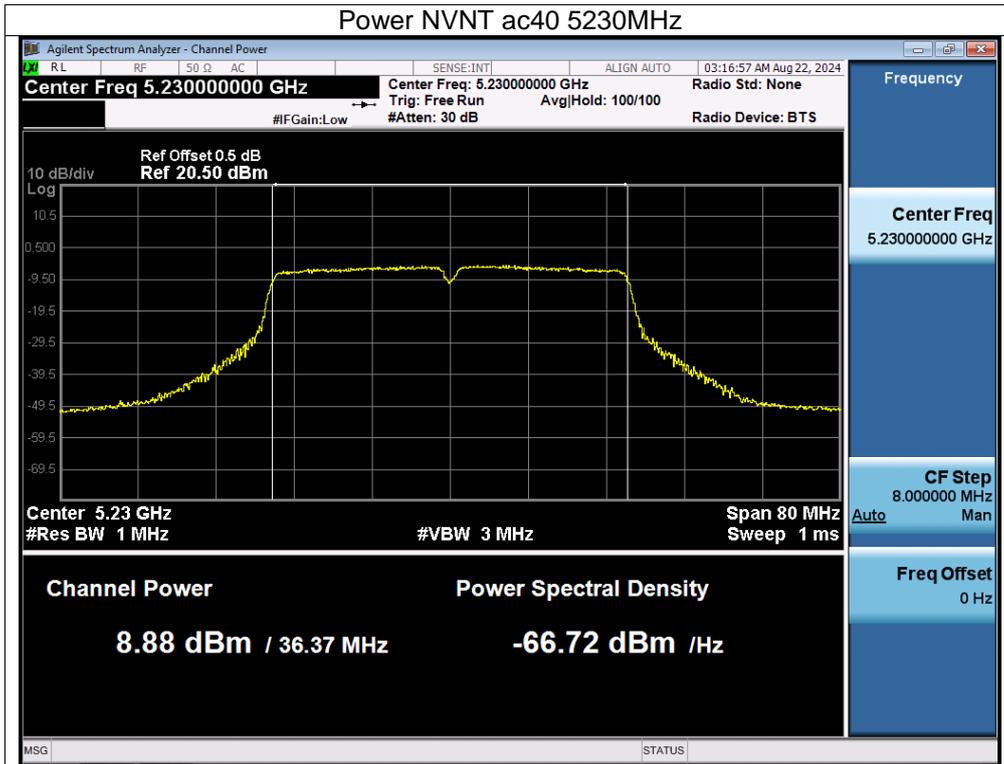


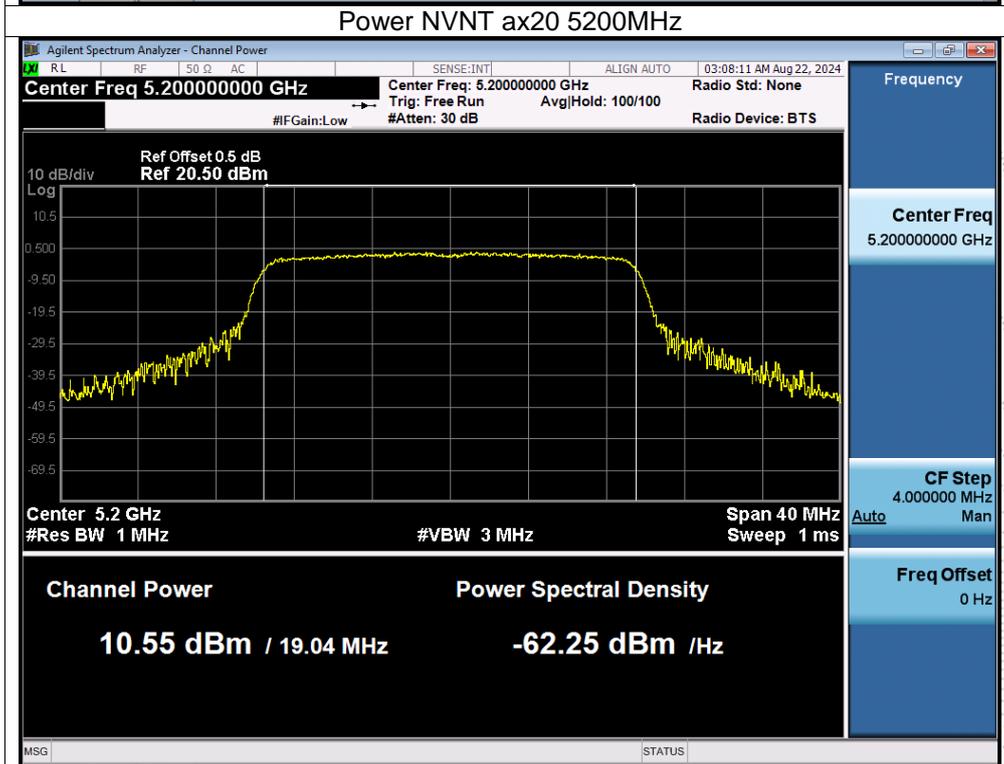
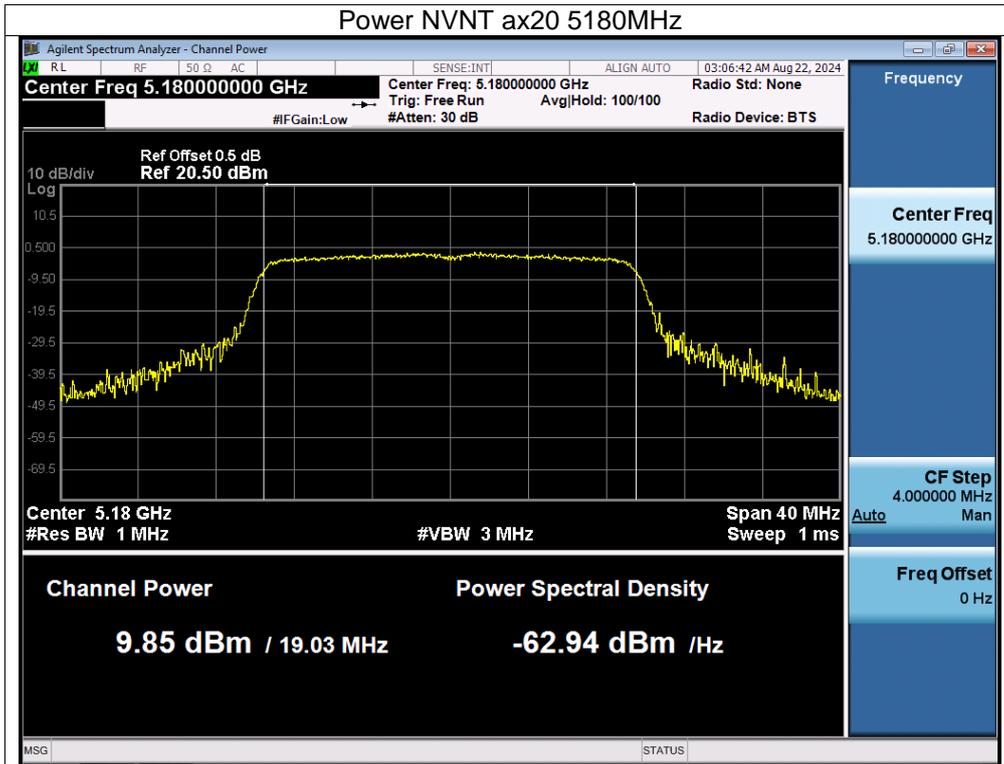


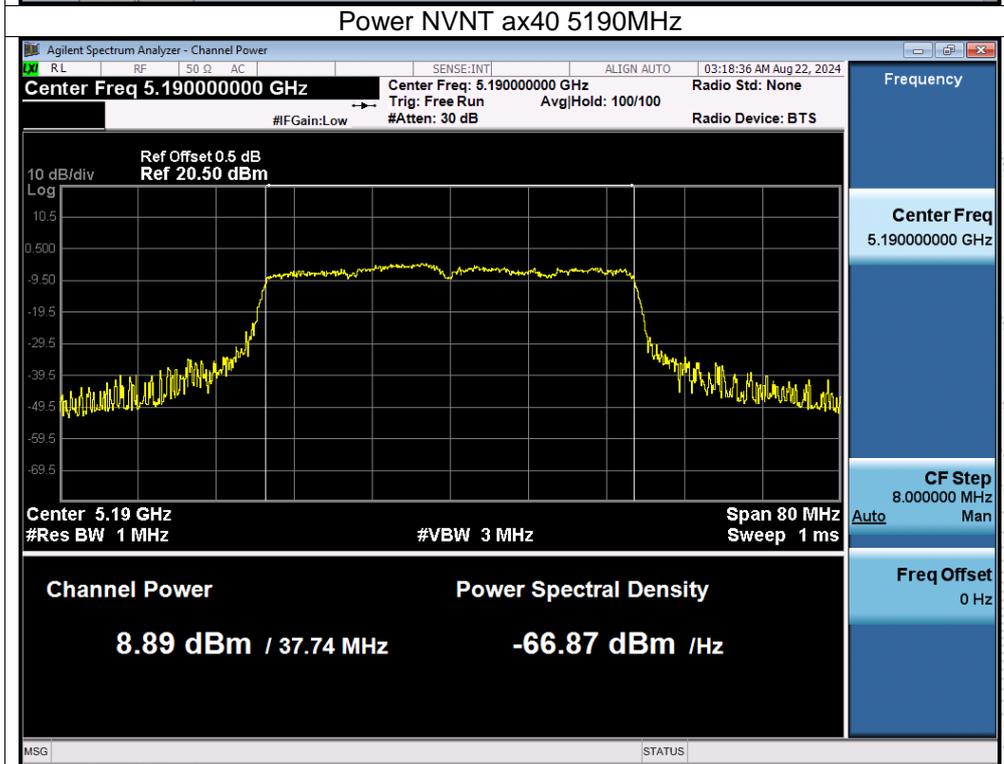
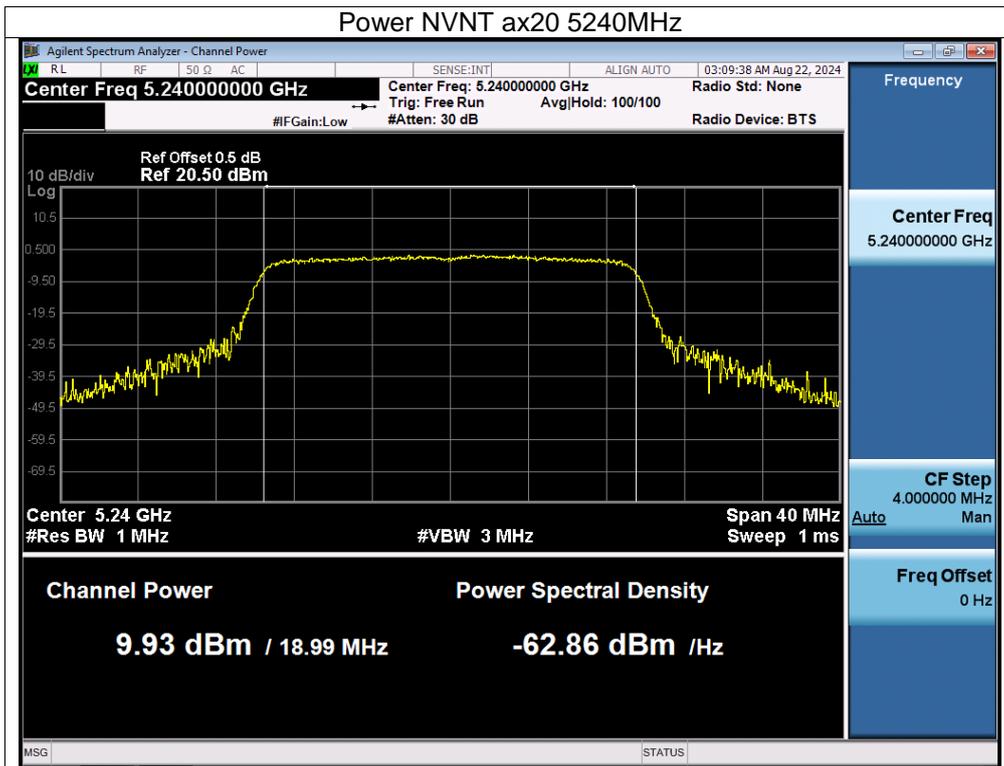


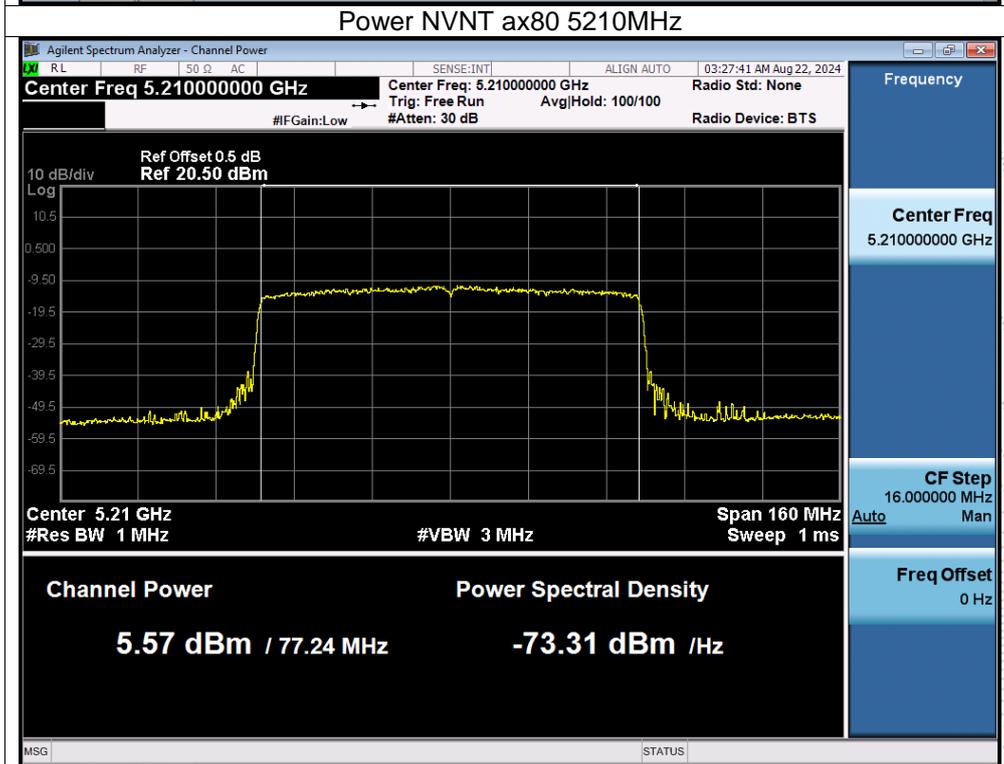
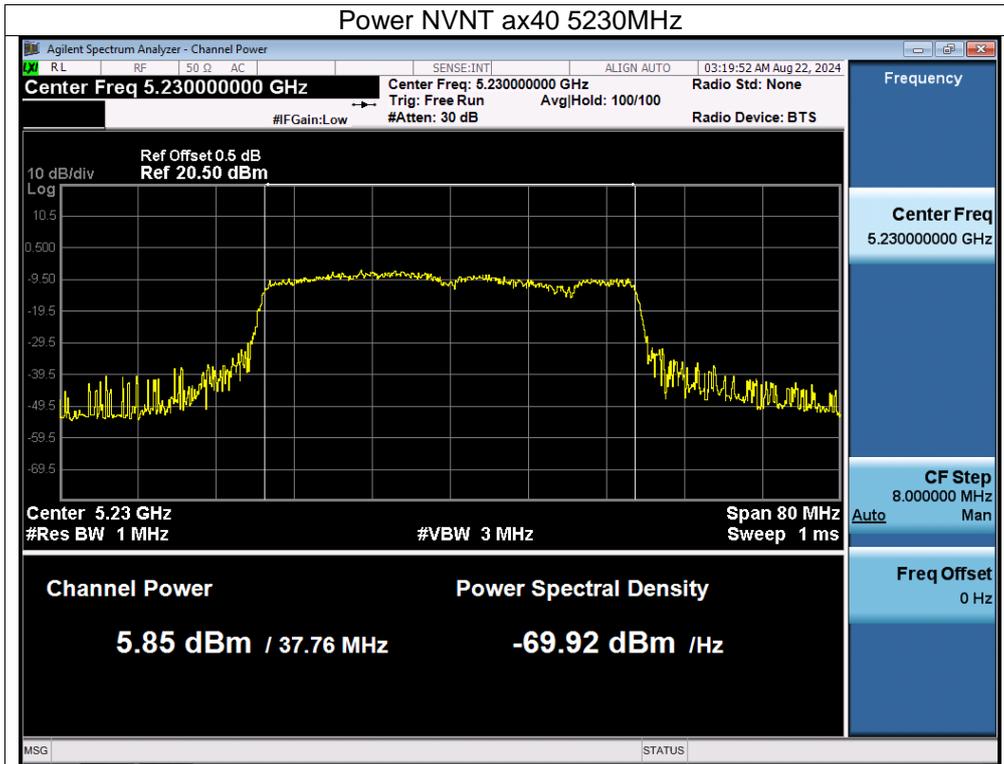


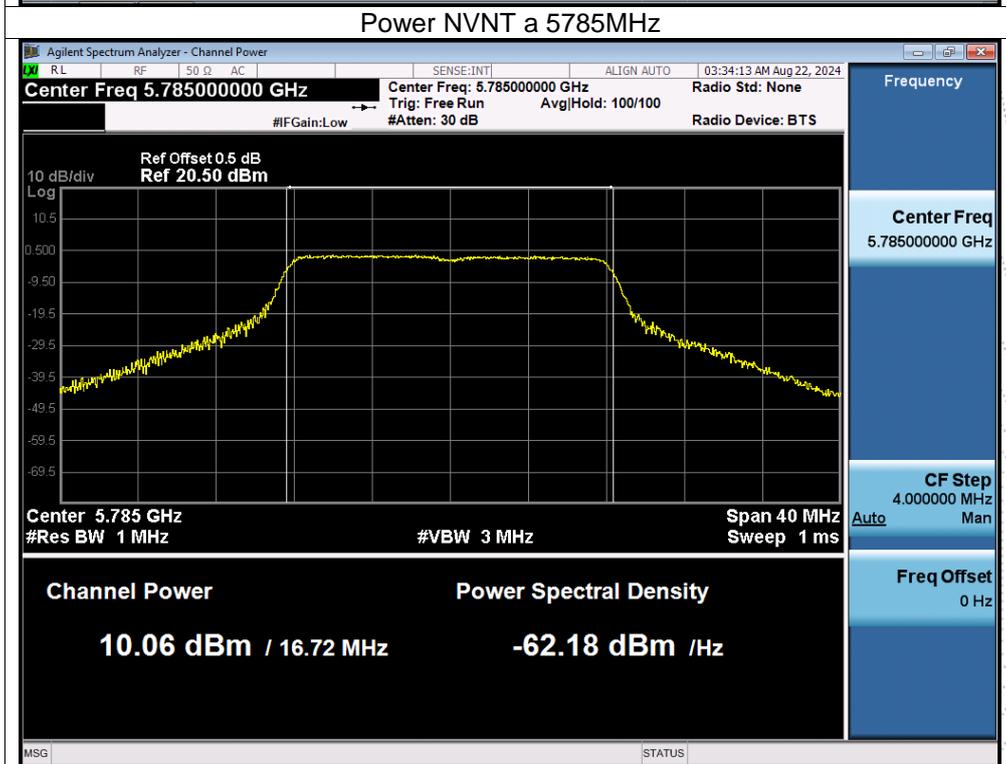
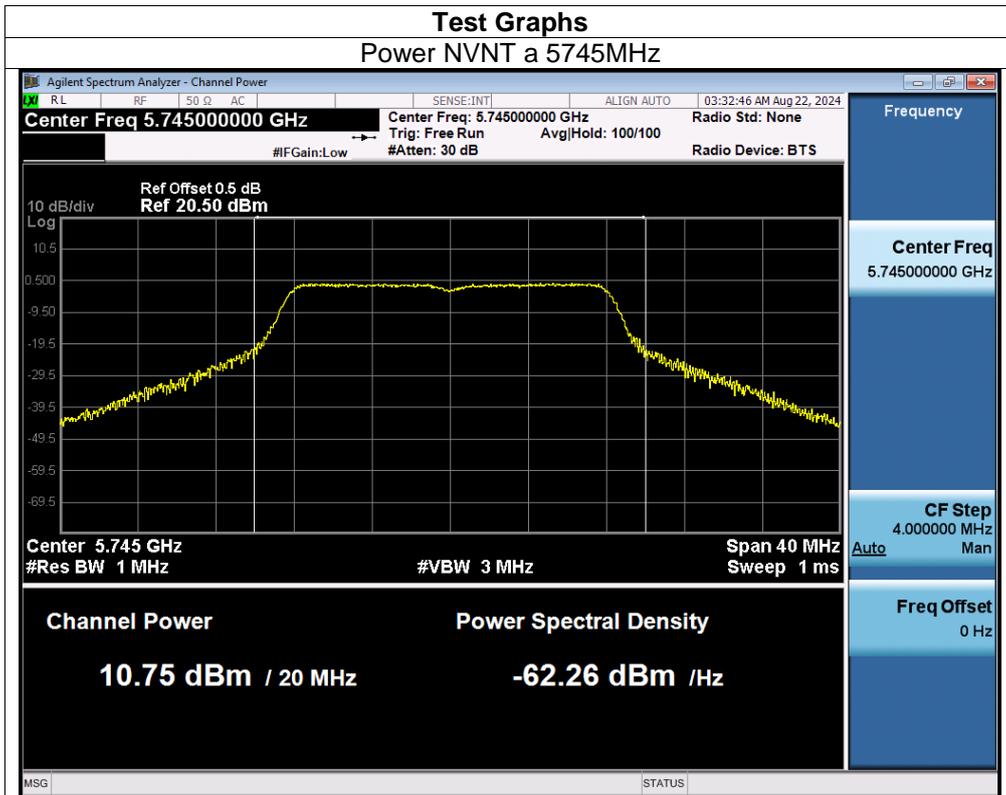


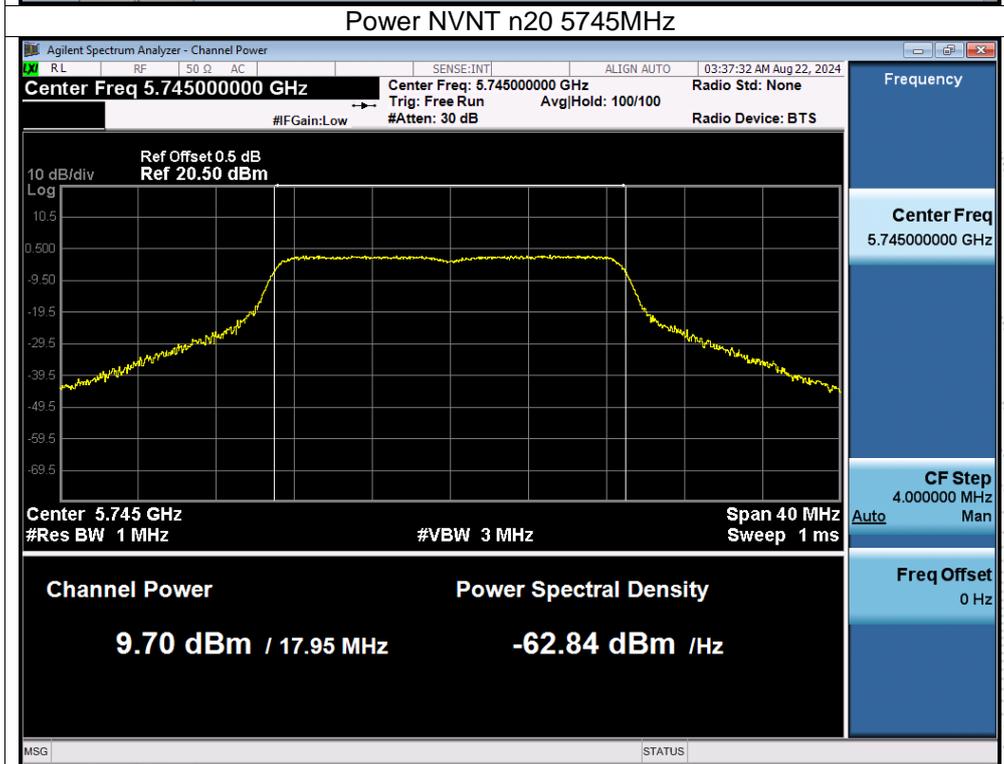
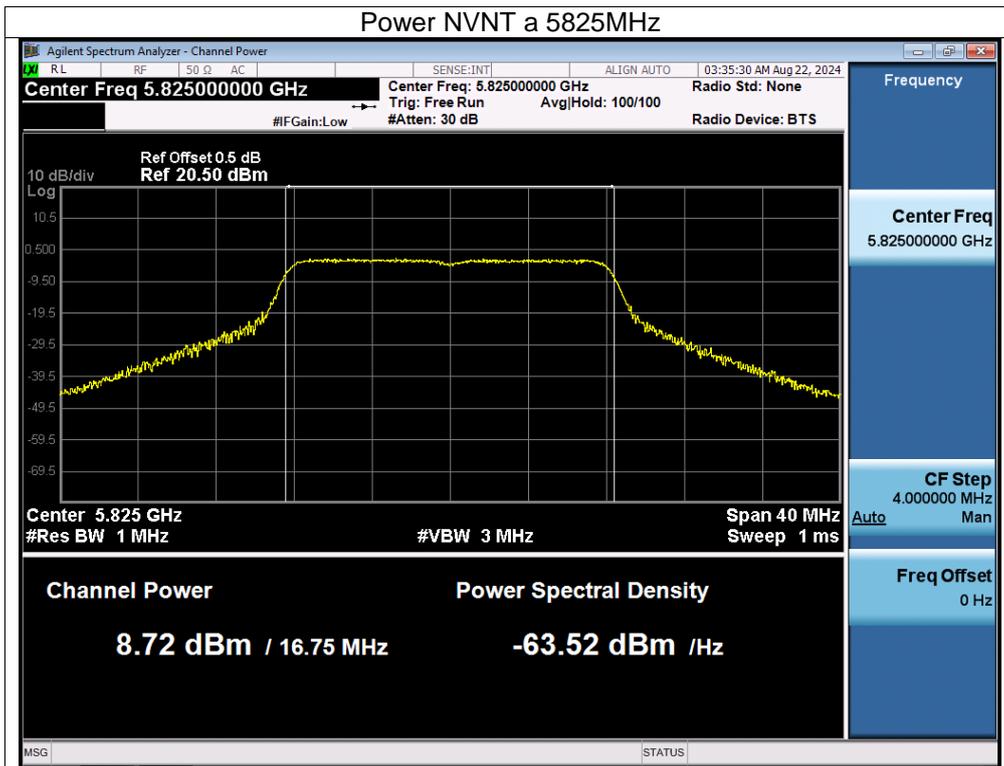


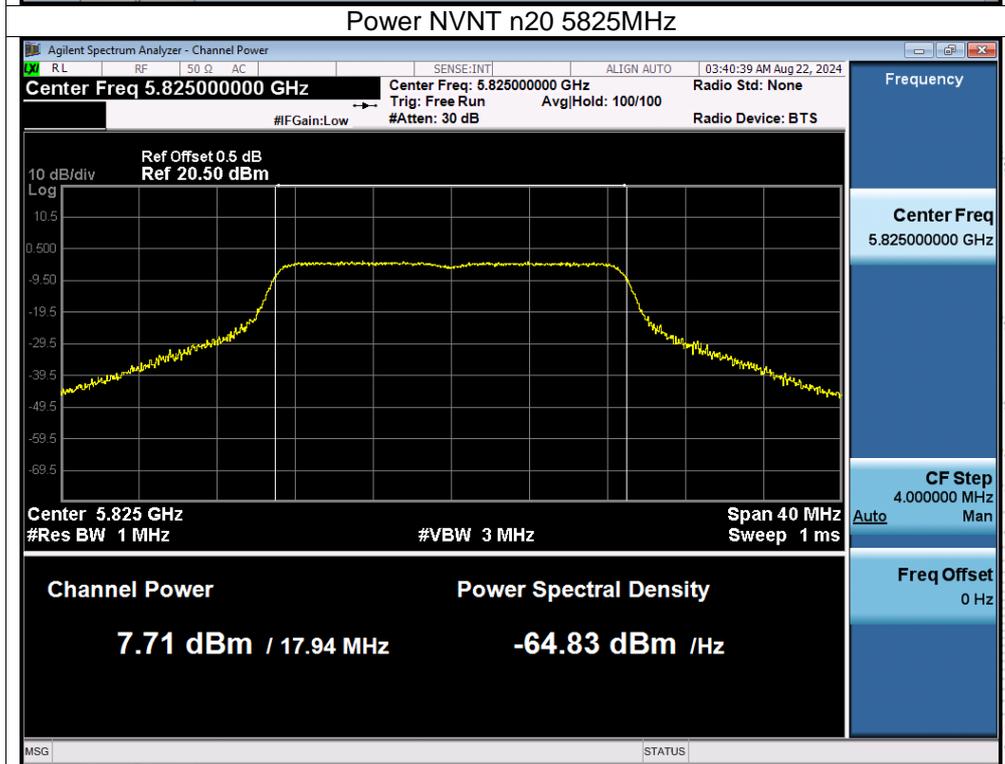
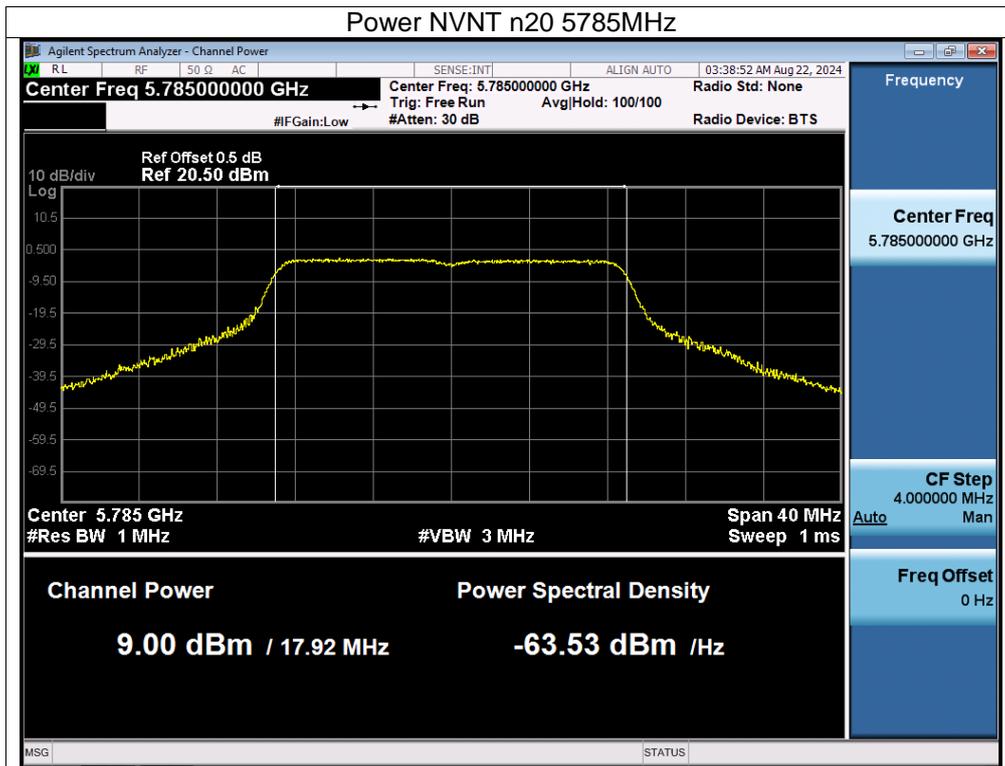


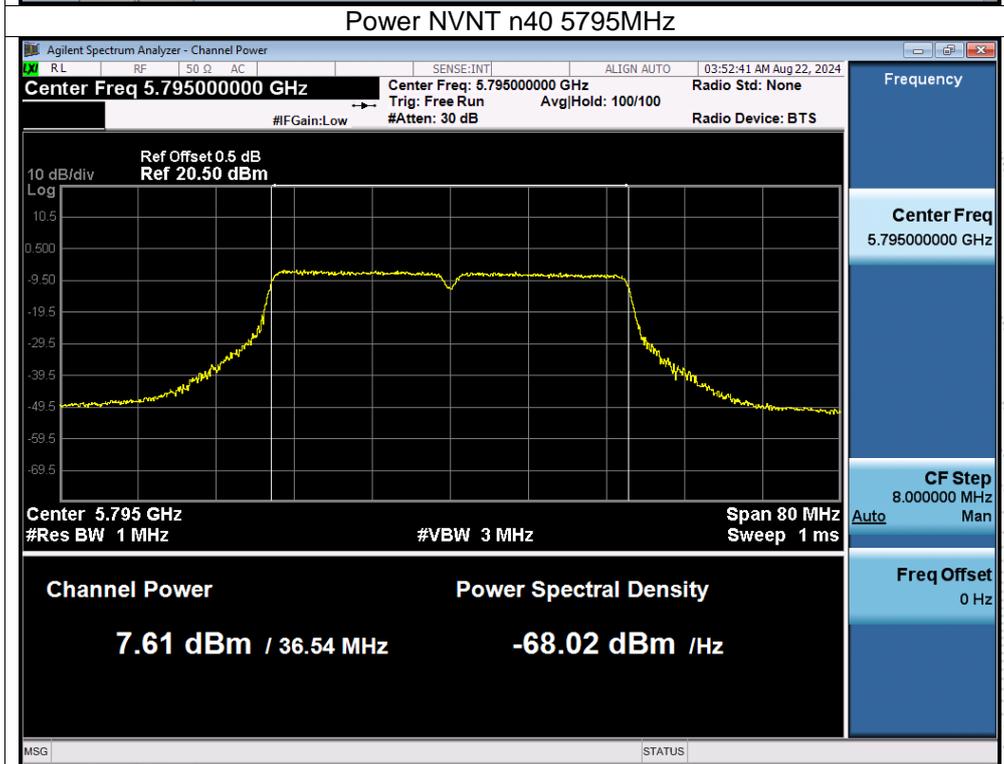
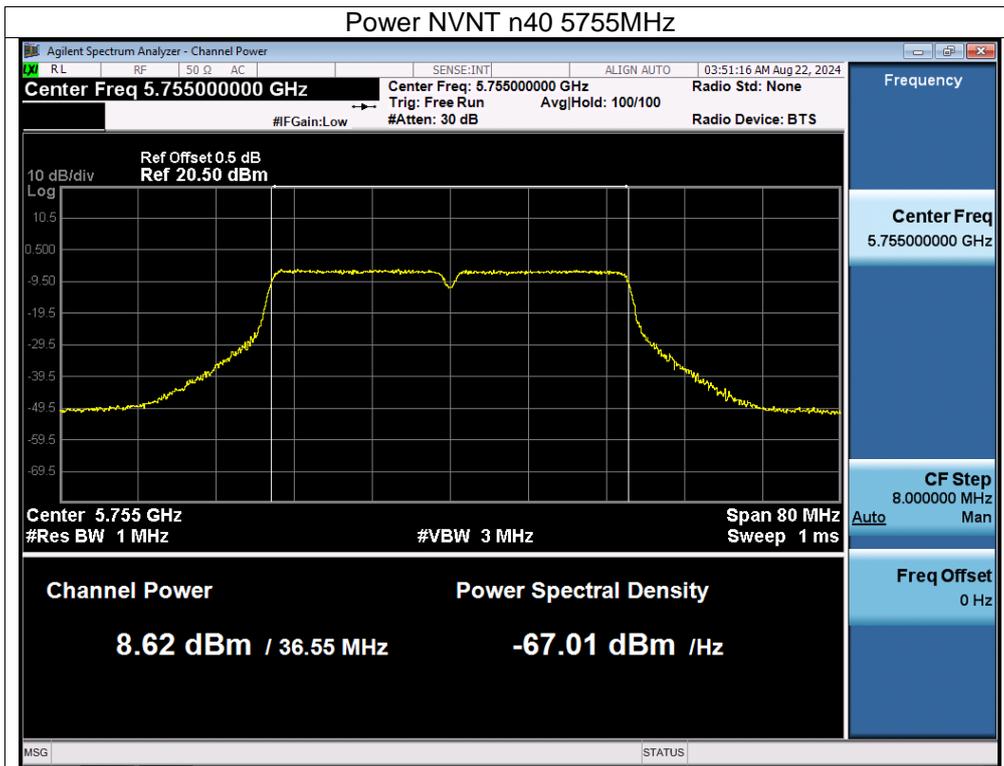


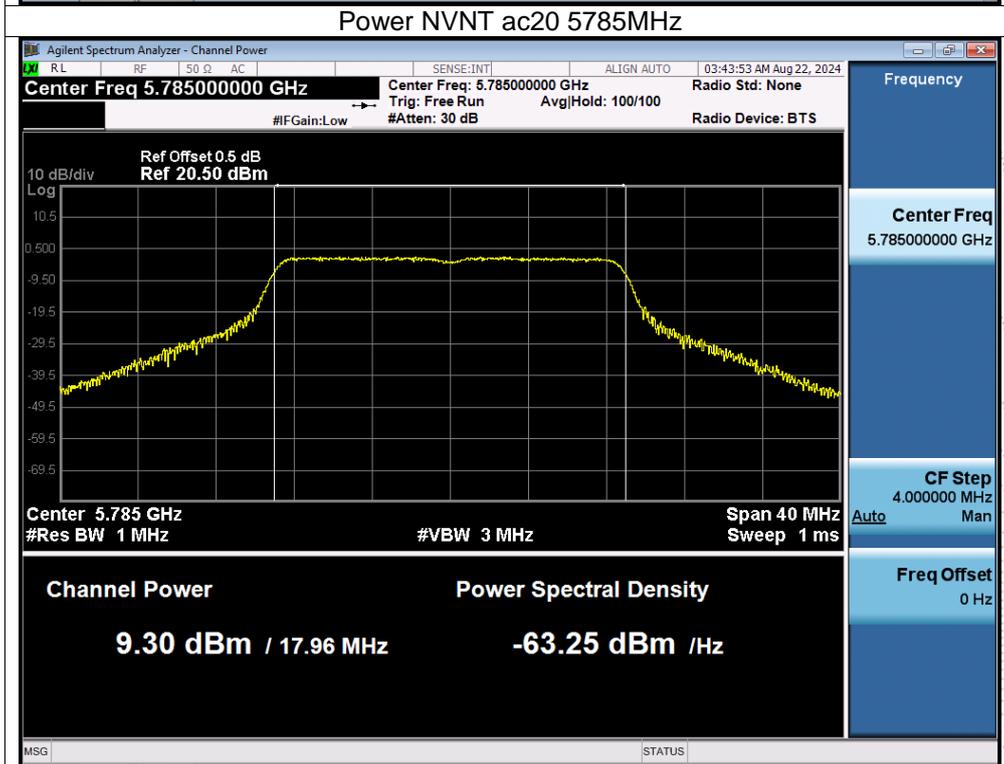
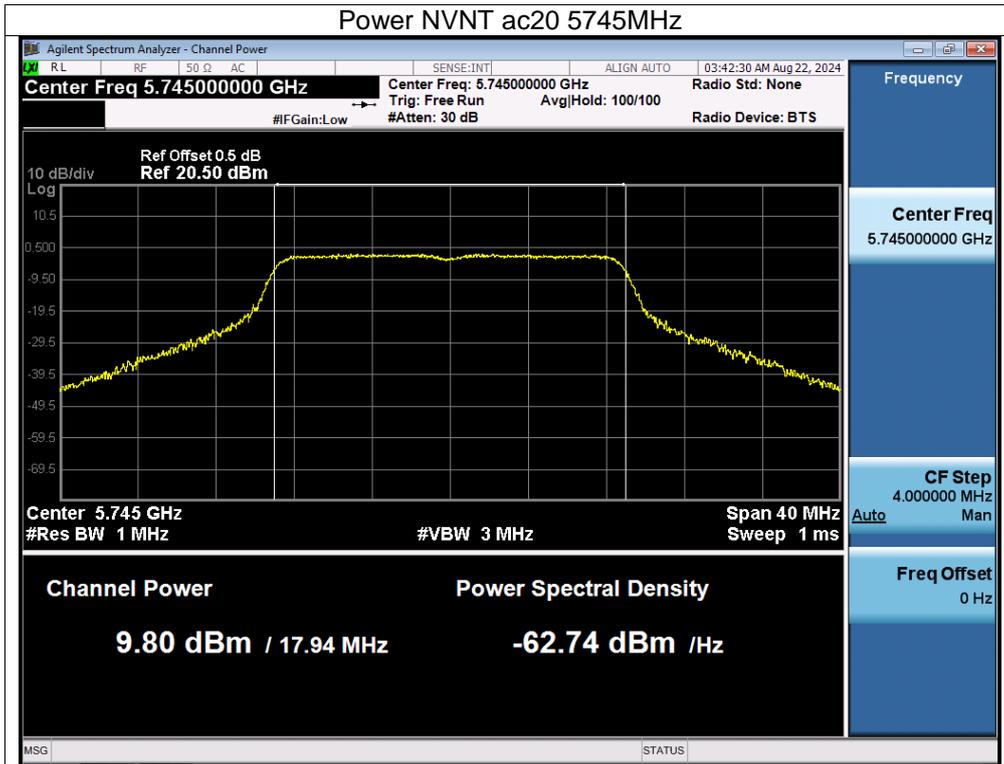


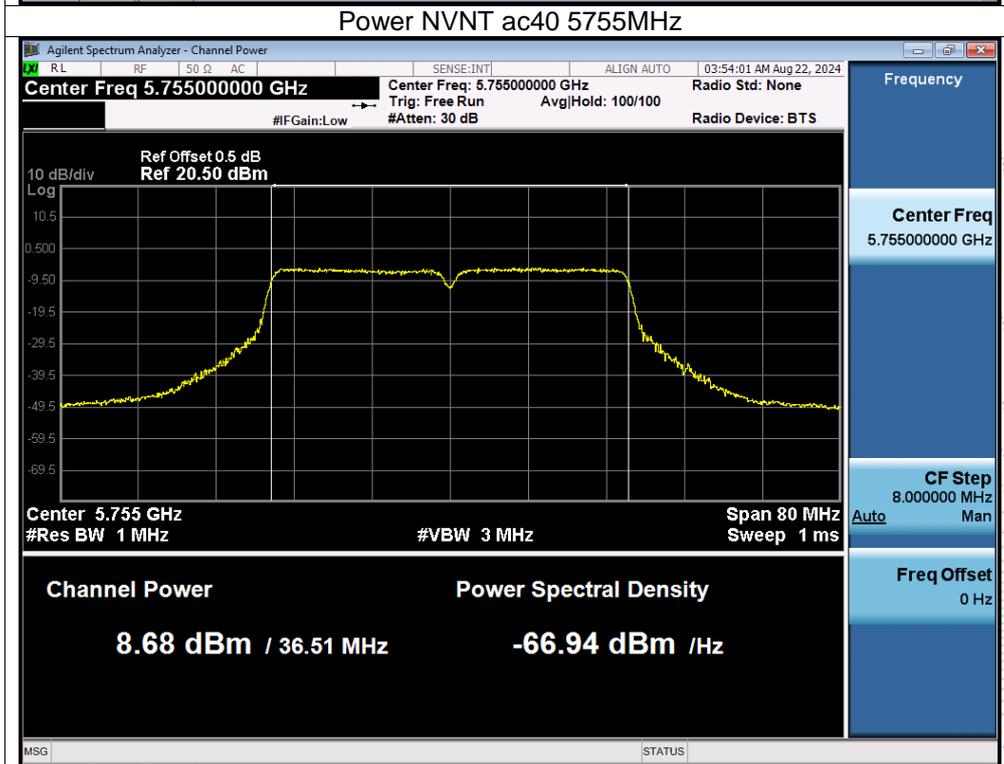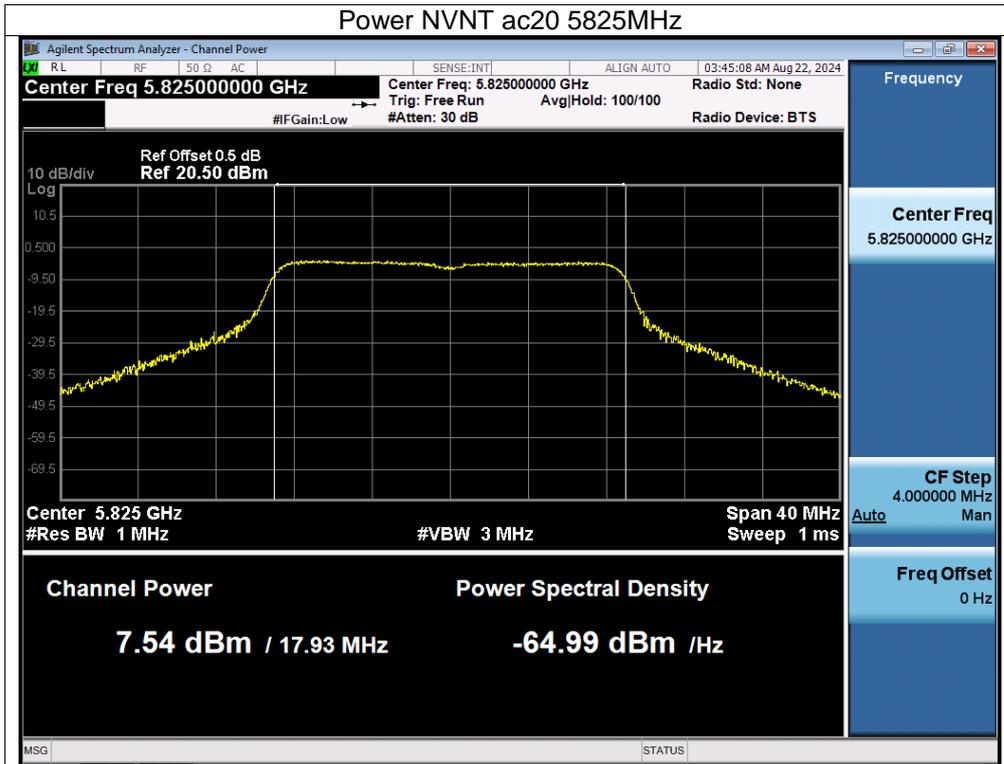

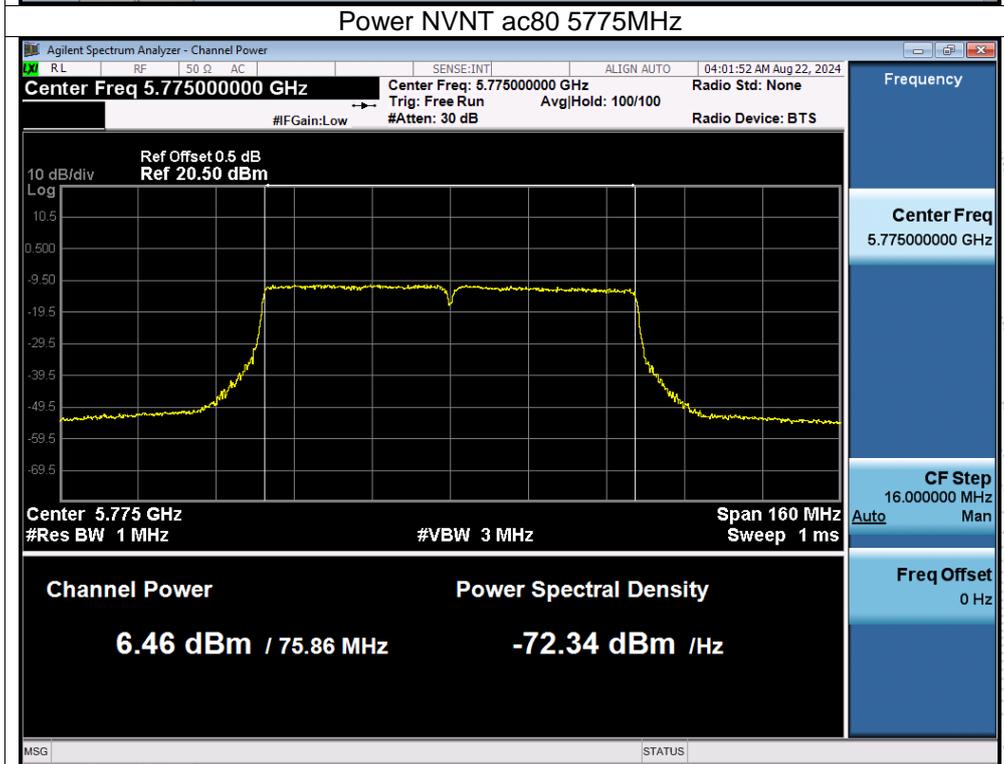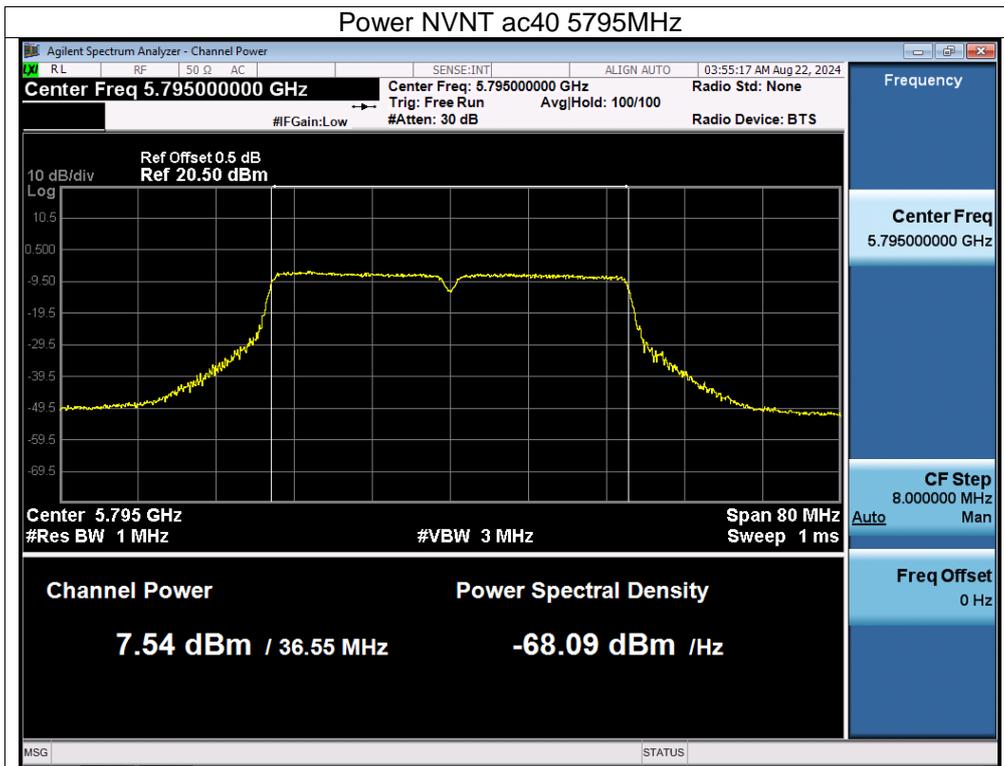

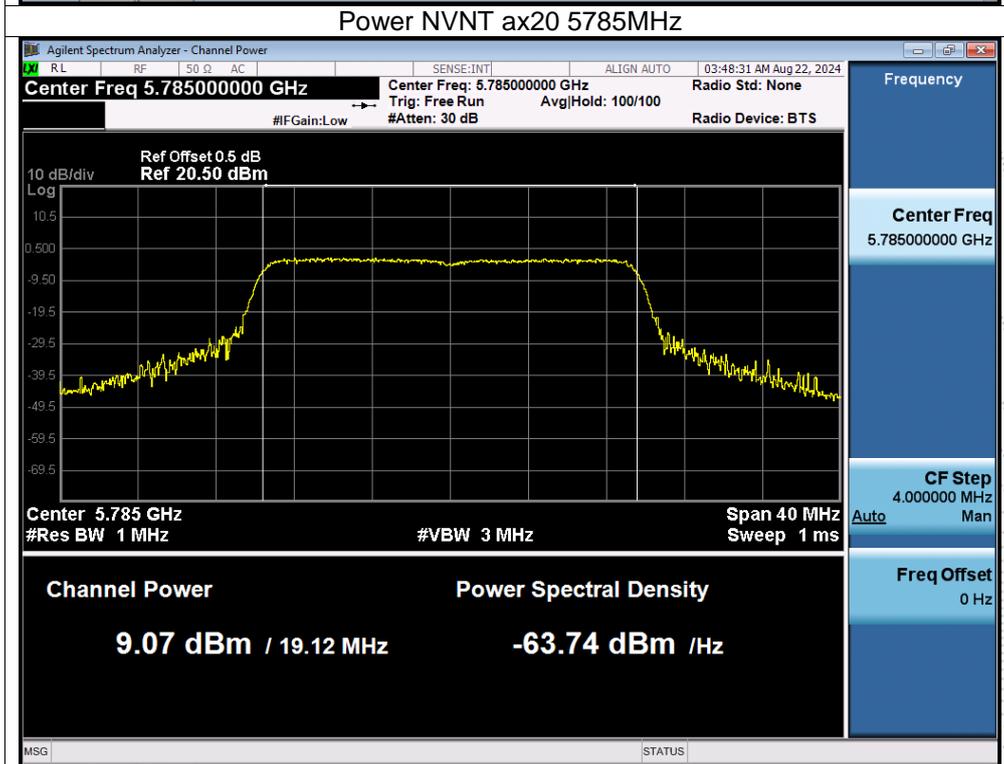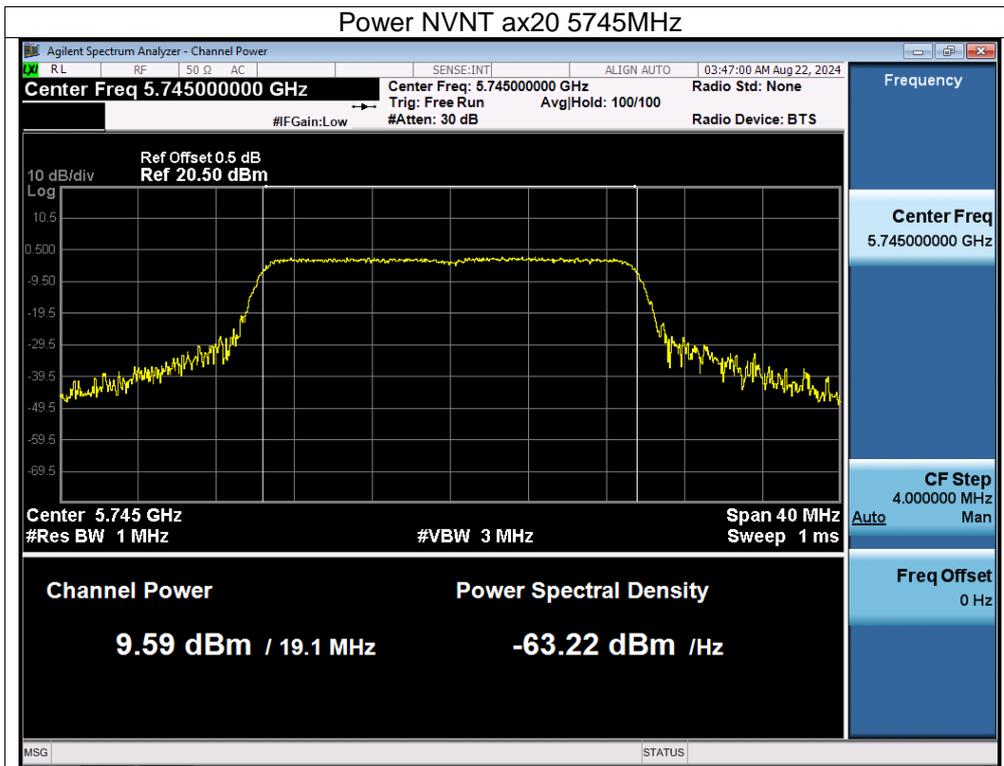

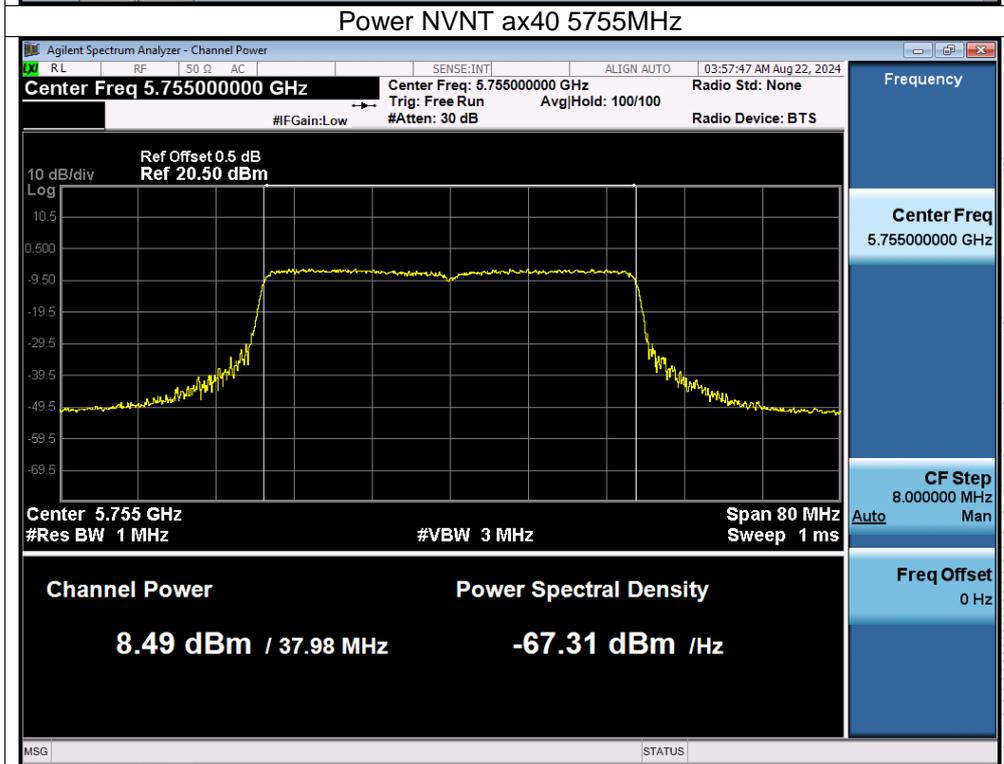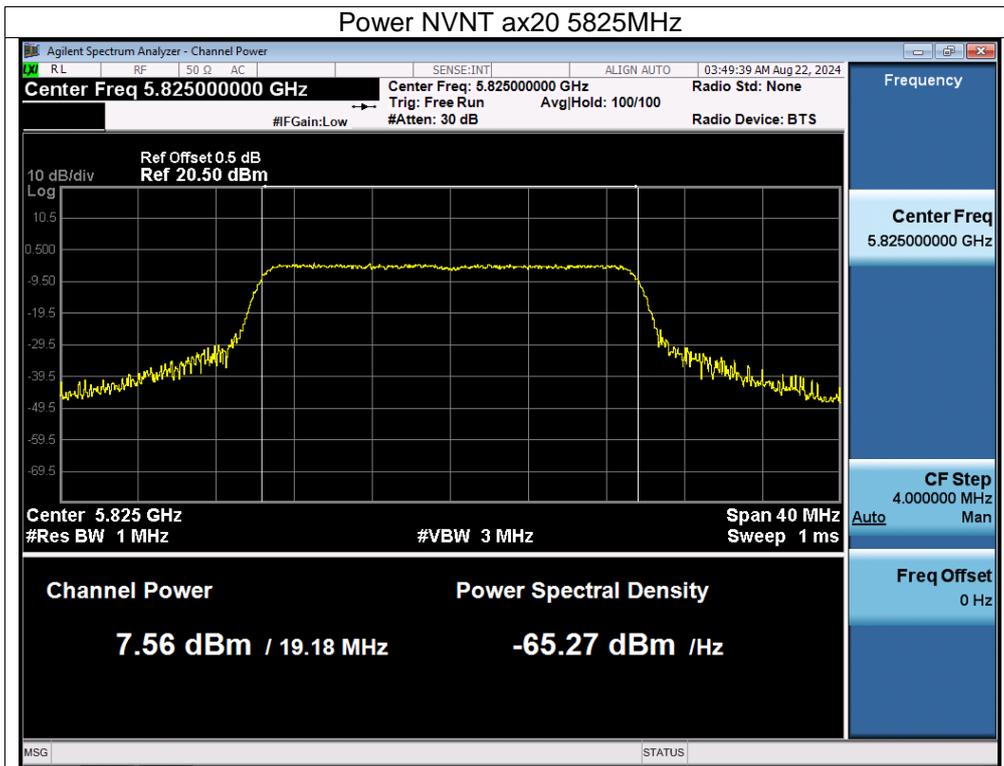

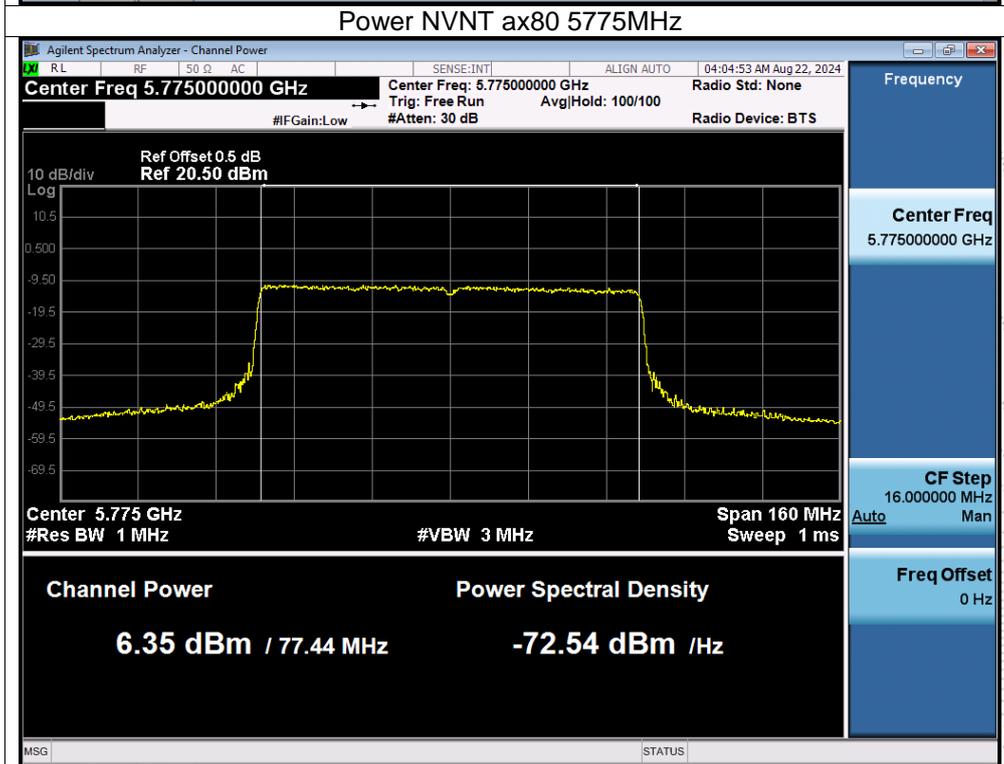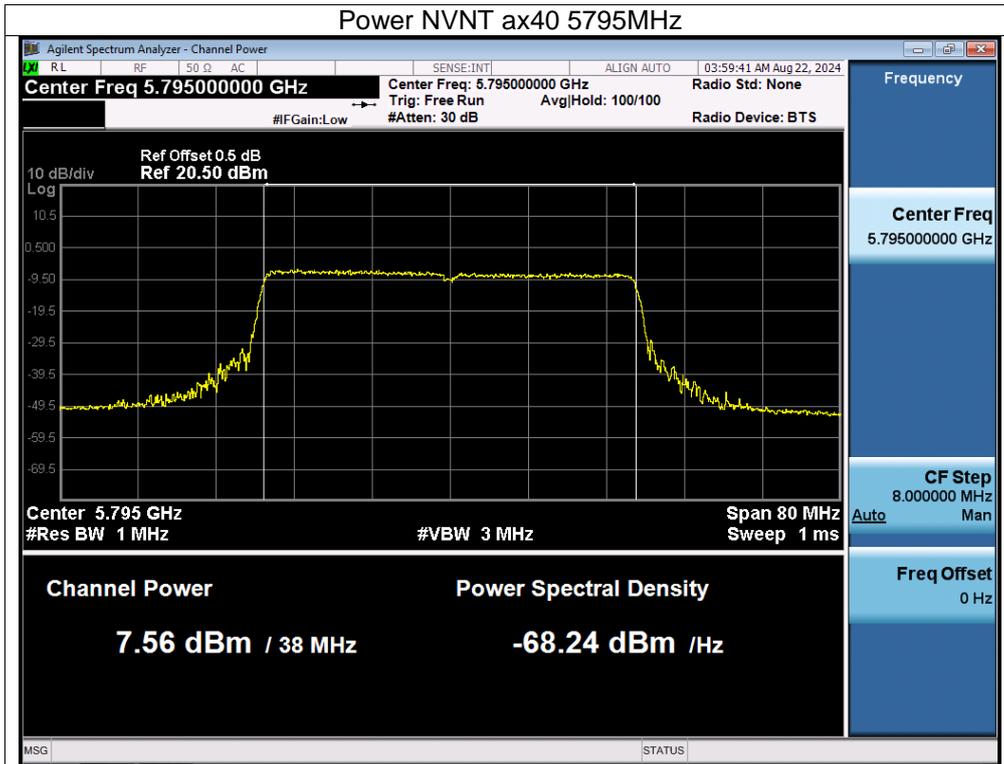

## 11. Out Of Band Emissions

### 11.1 Block Diagram Of Test Setup



### 11.2 Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(2) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


### 11.3 Test Procedure



1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



### 11.4 EUT Operating Conditions



The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data



## 11.5 Test Result

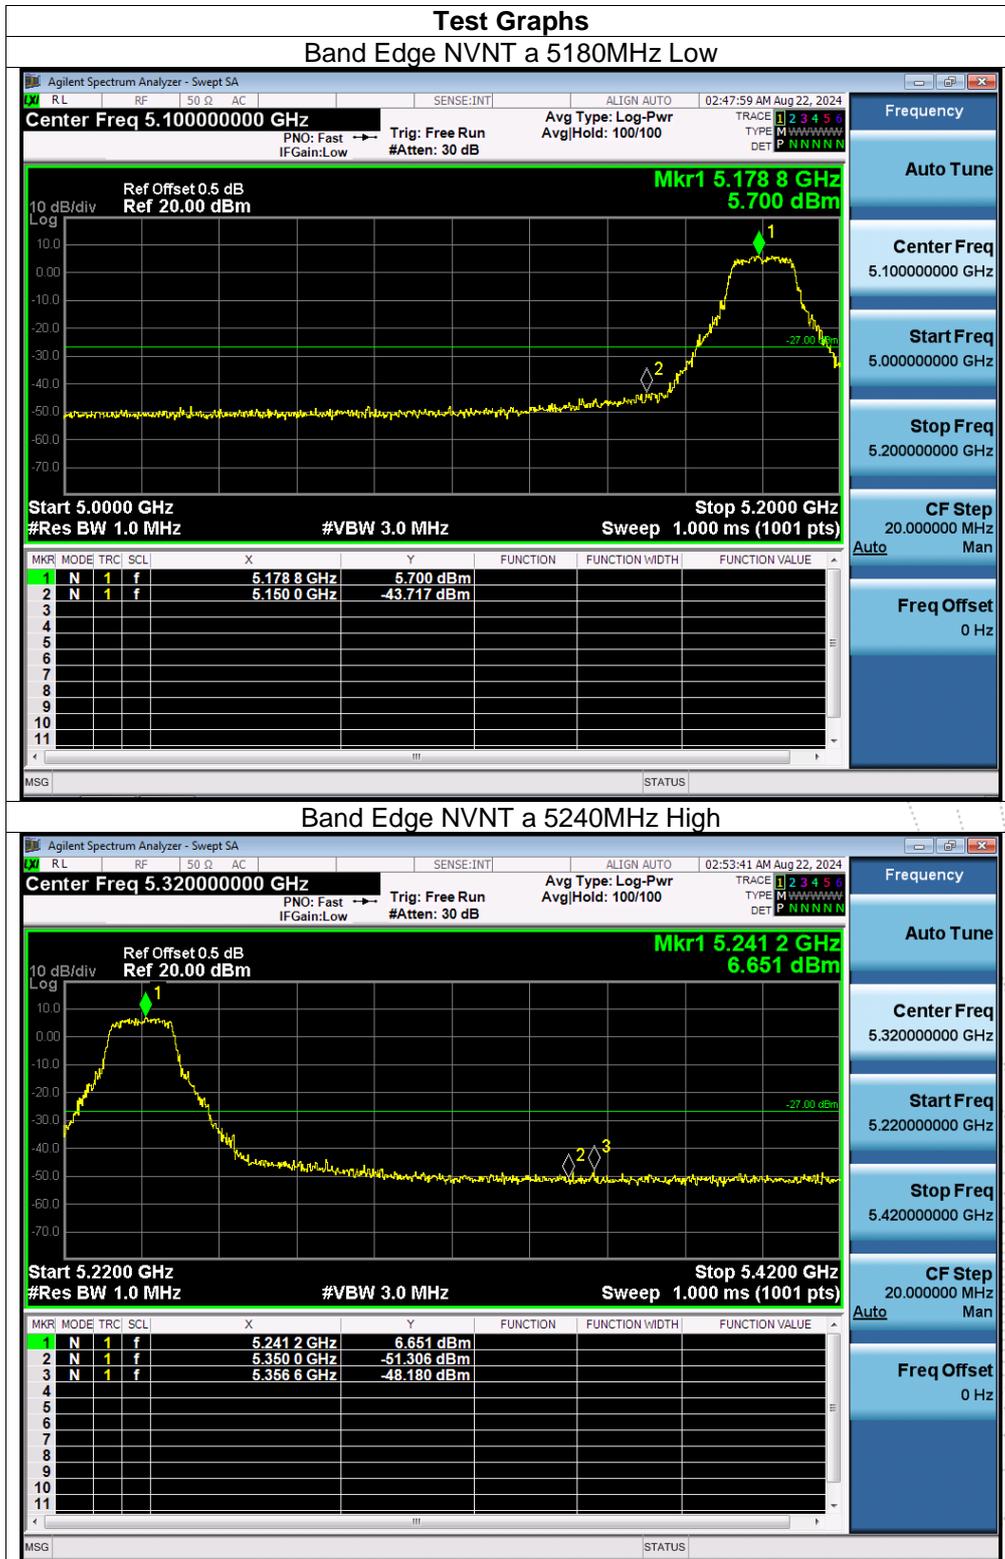


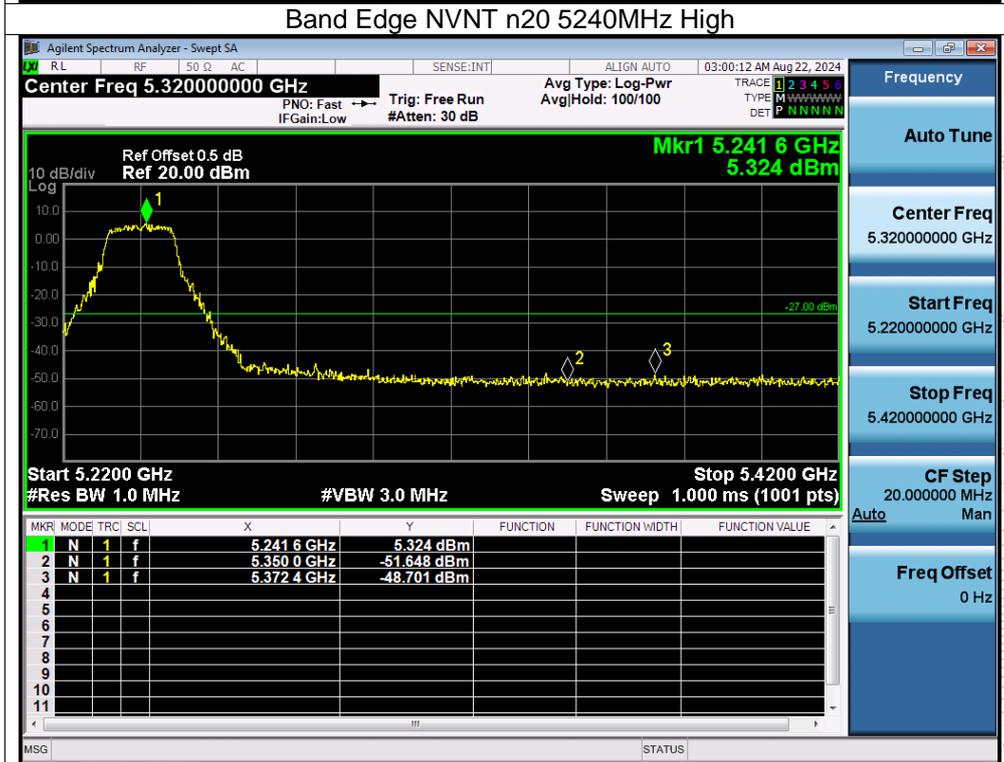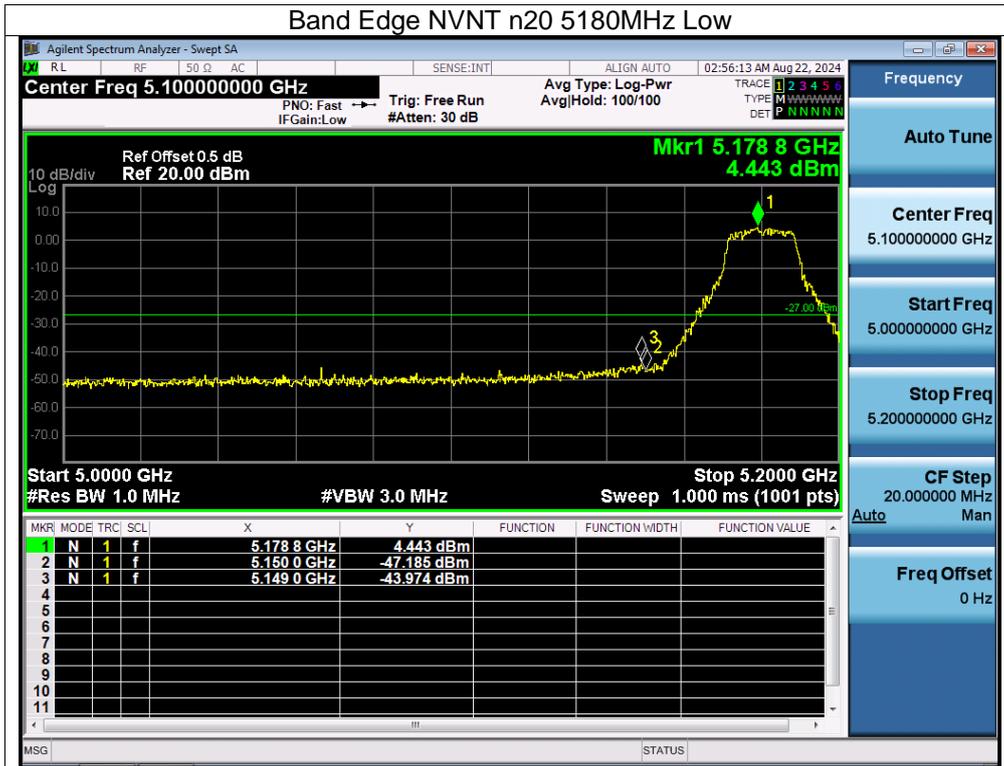


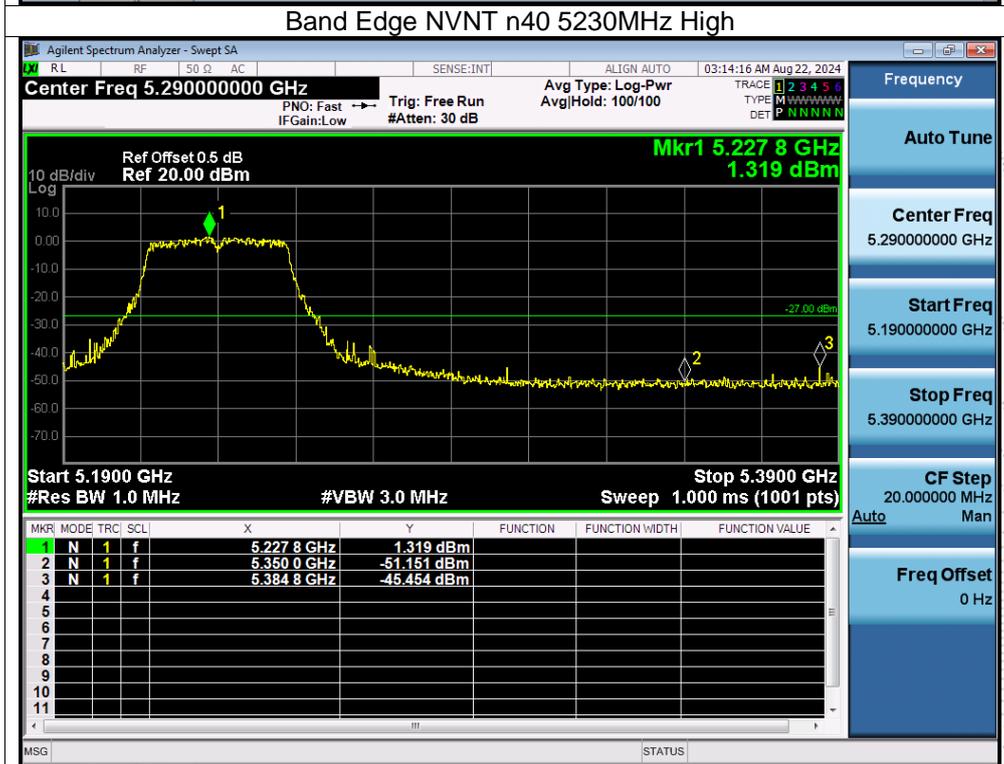
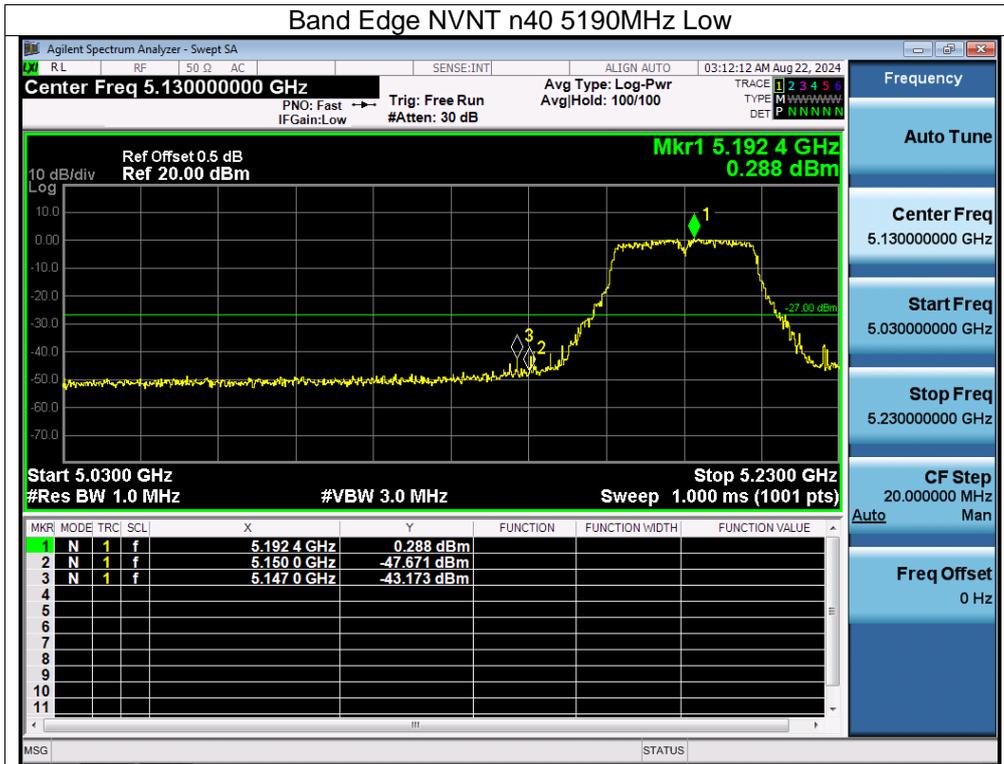


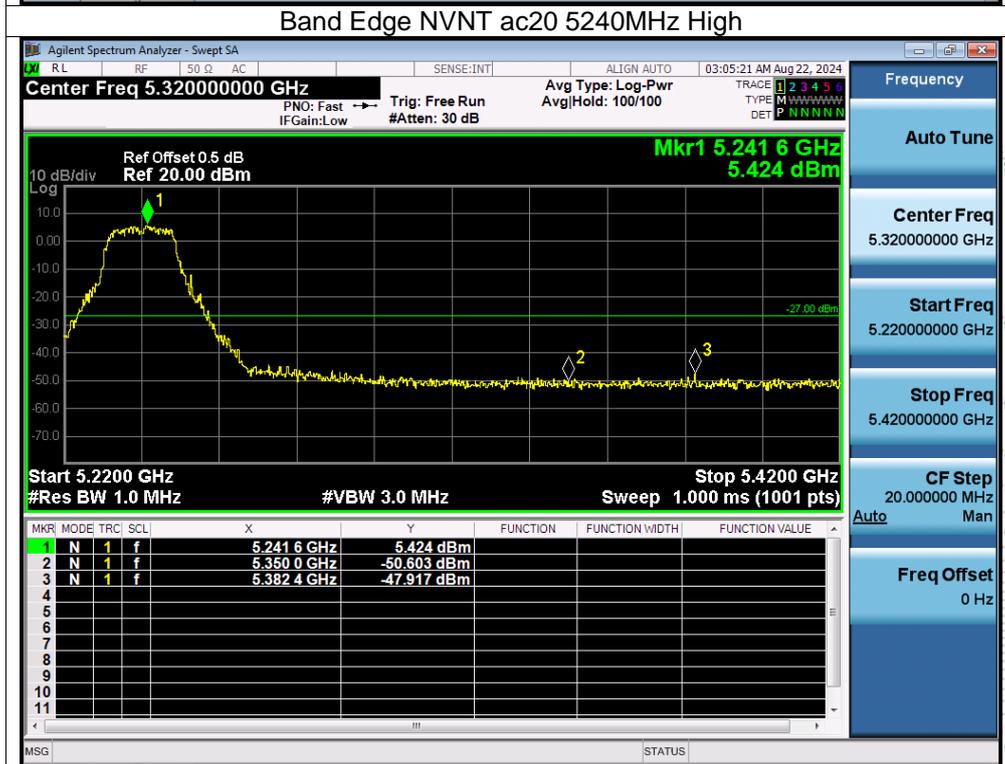
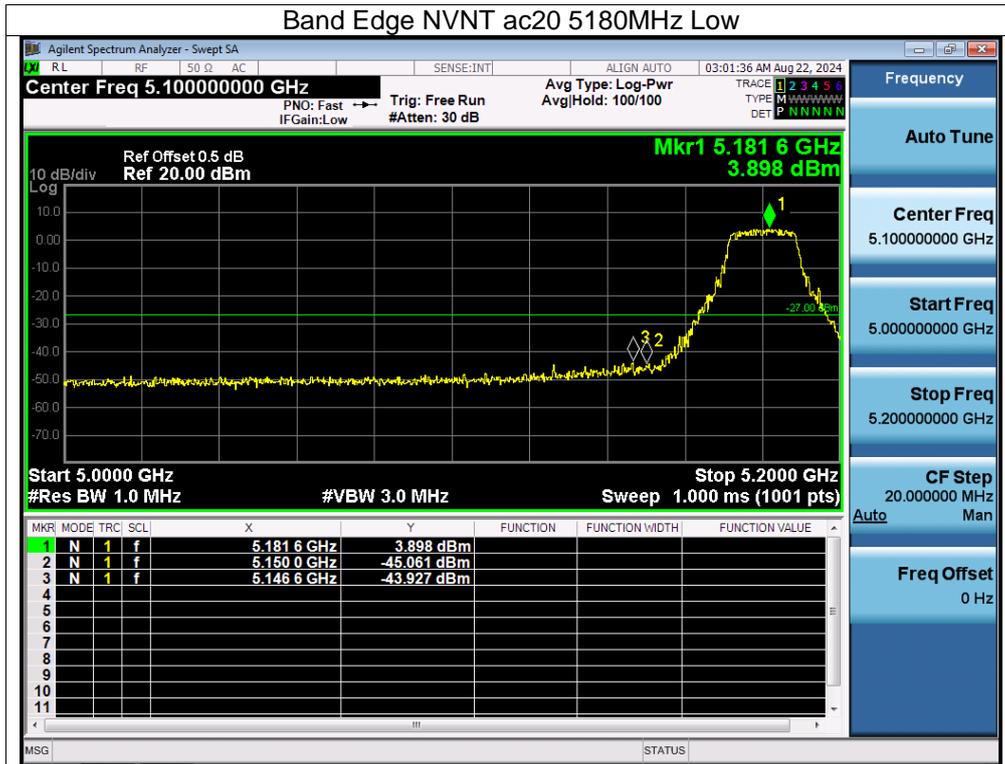


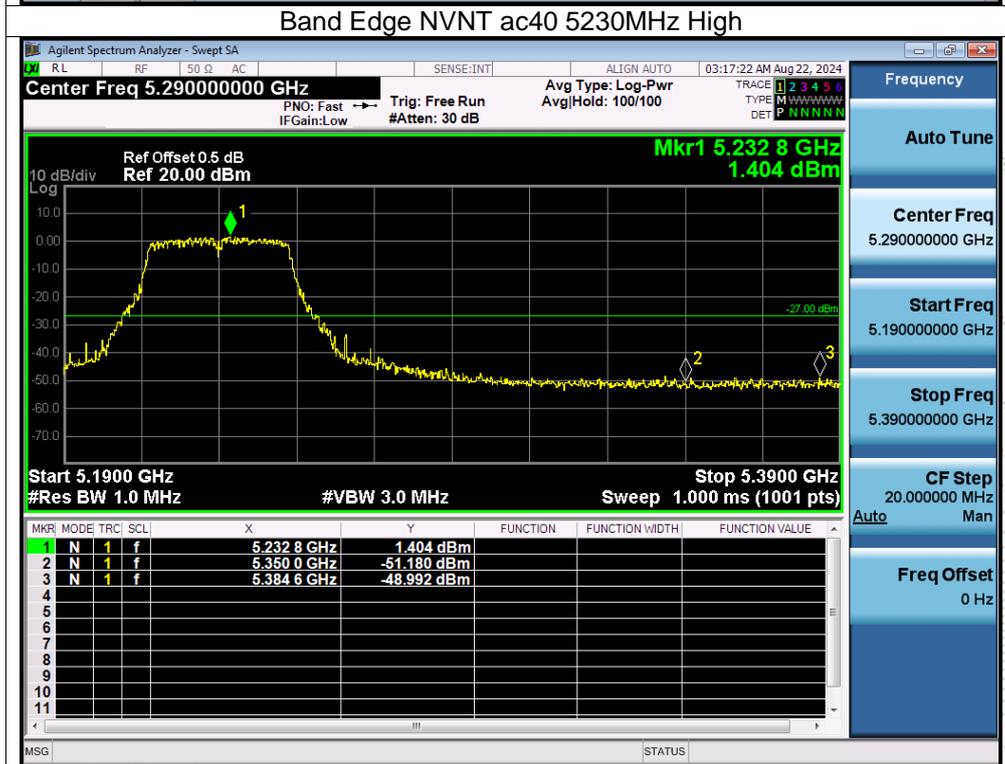
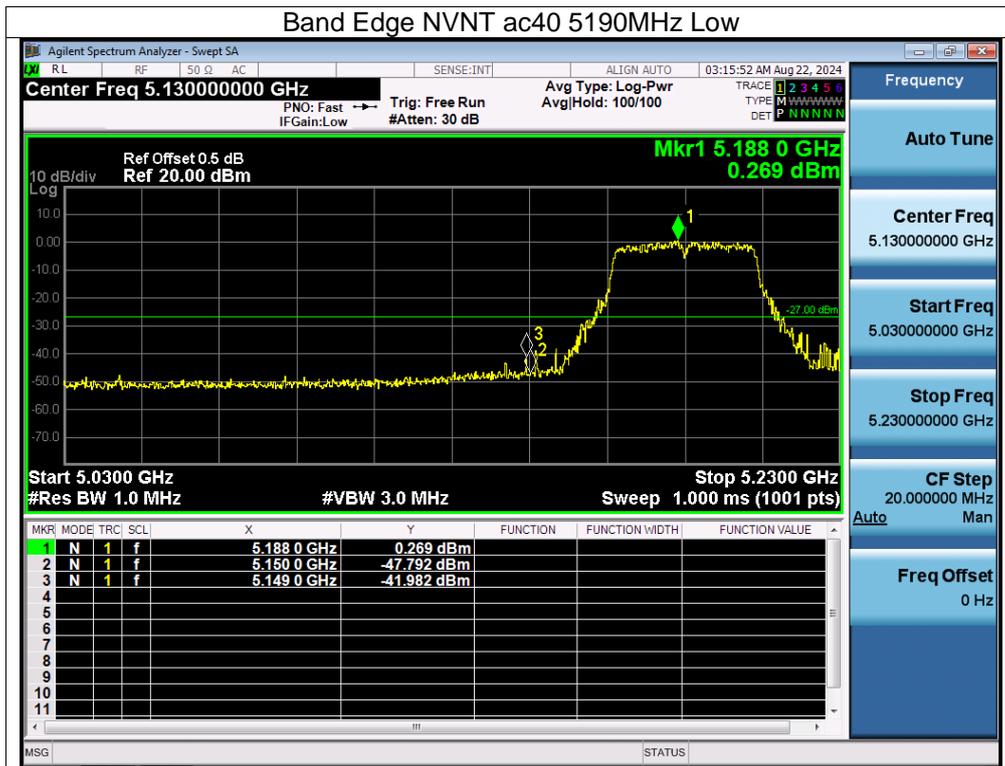


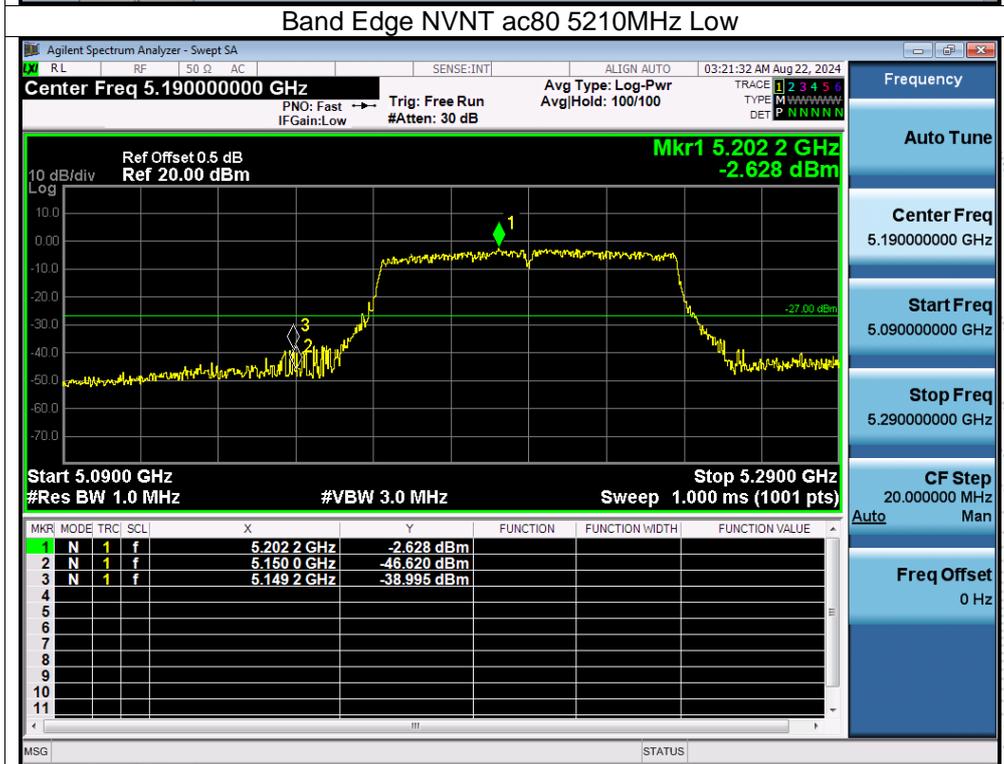


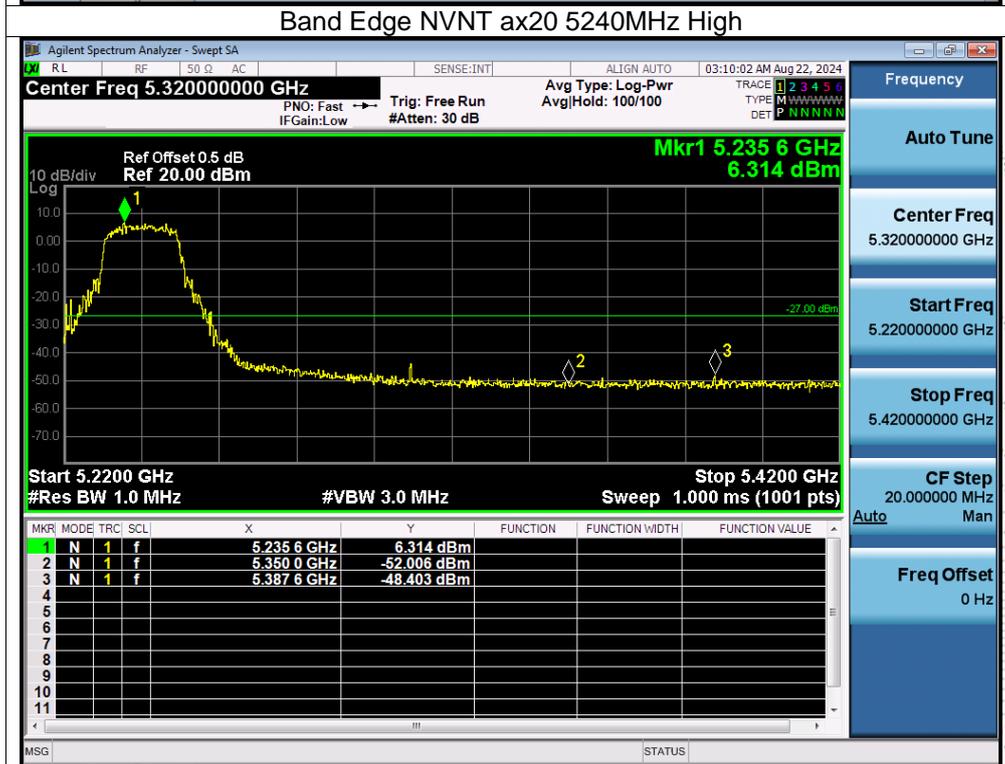

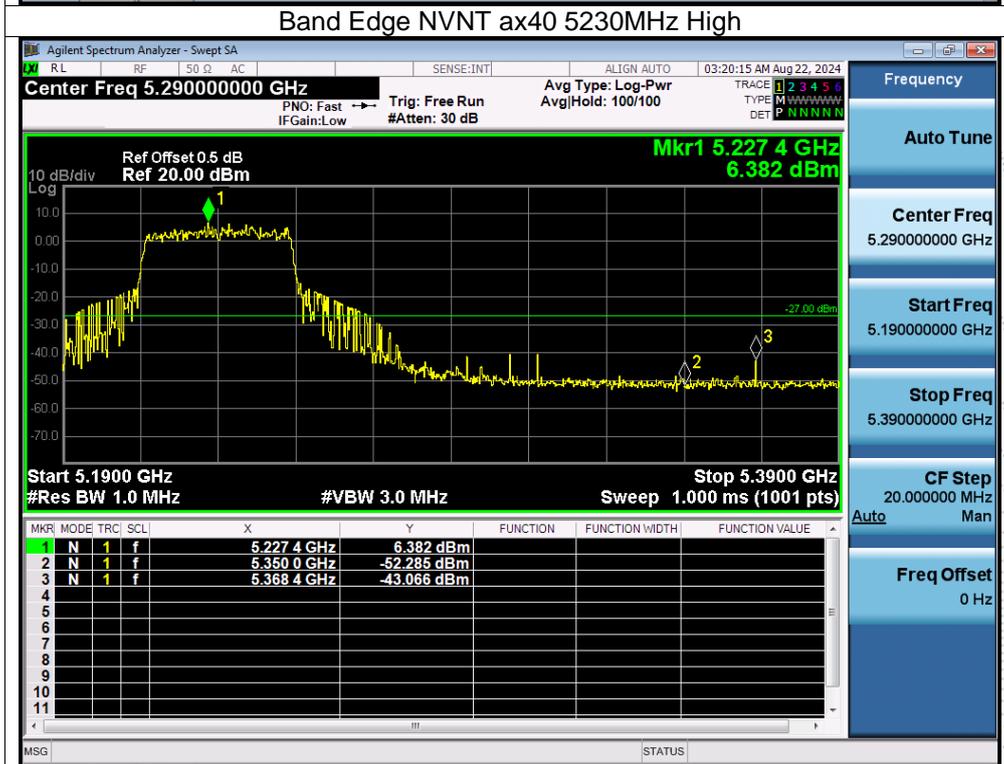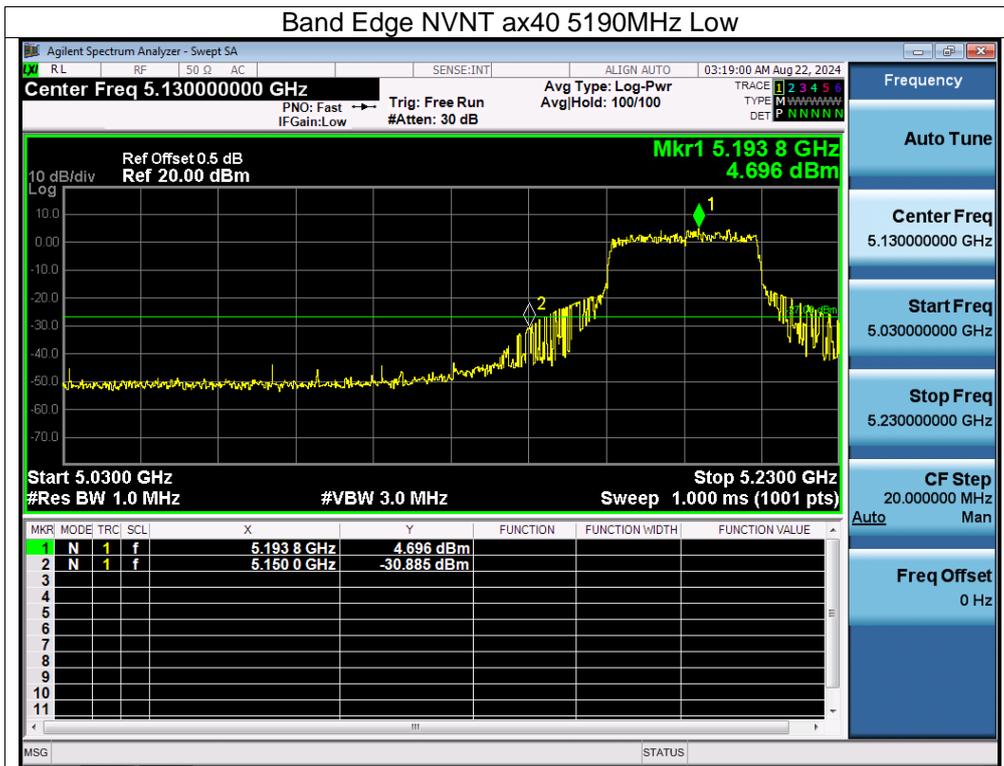

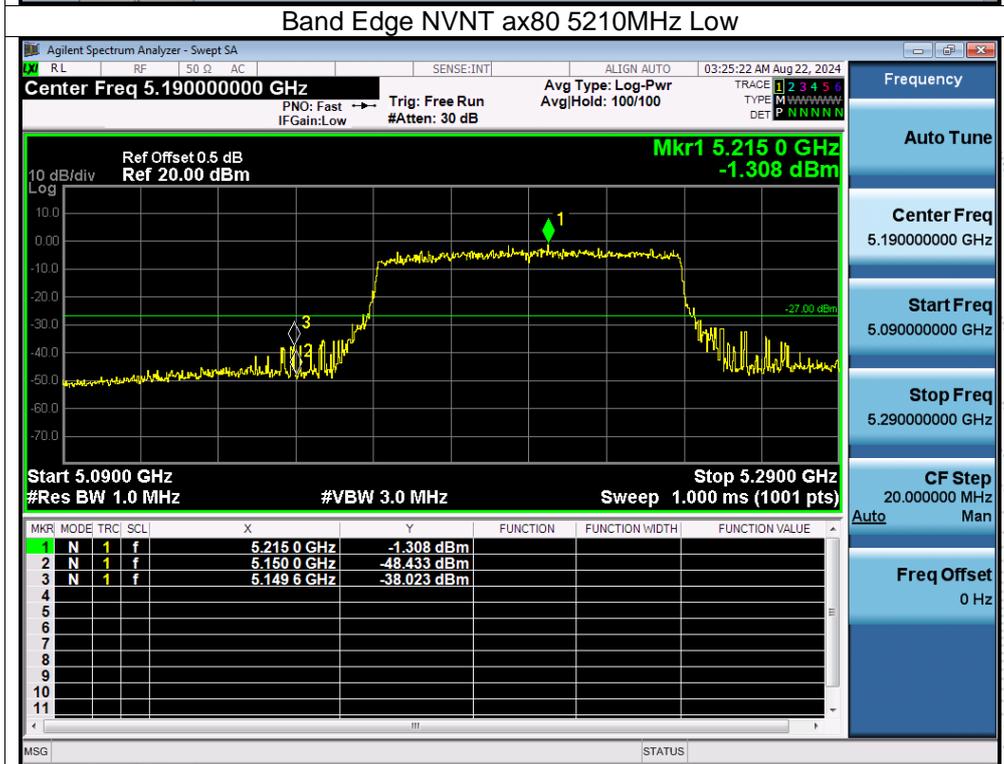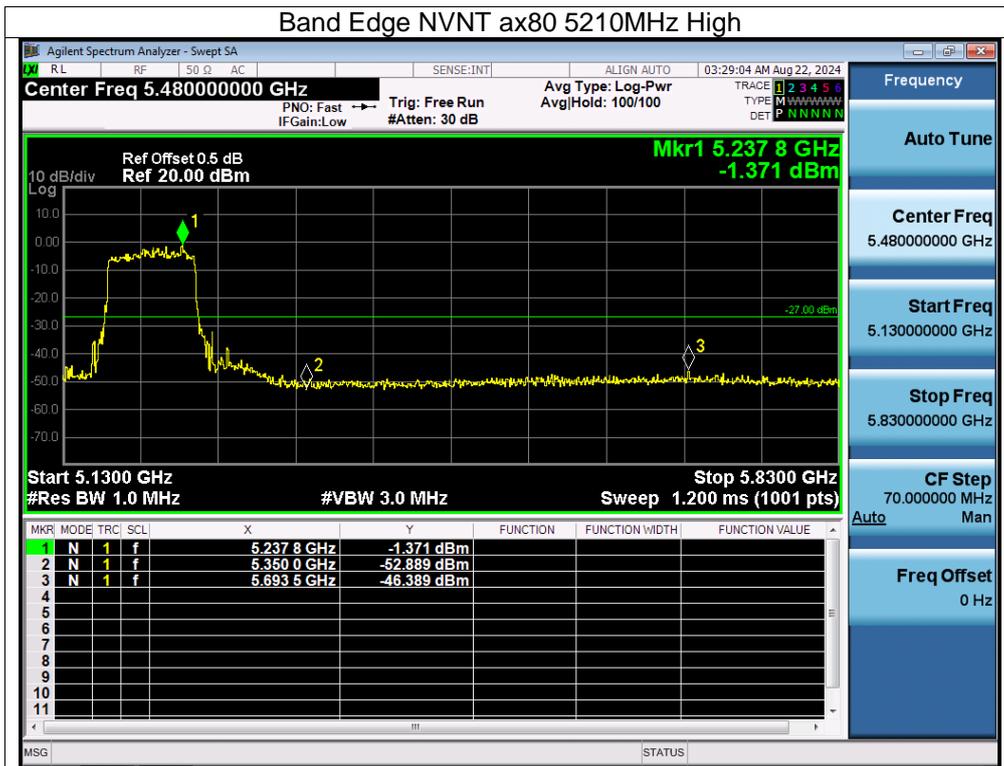

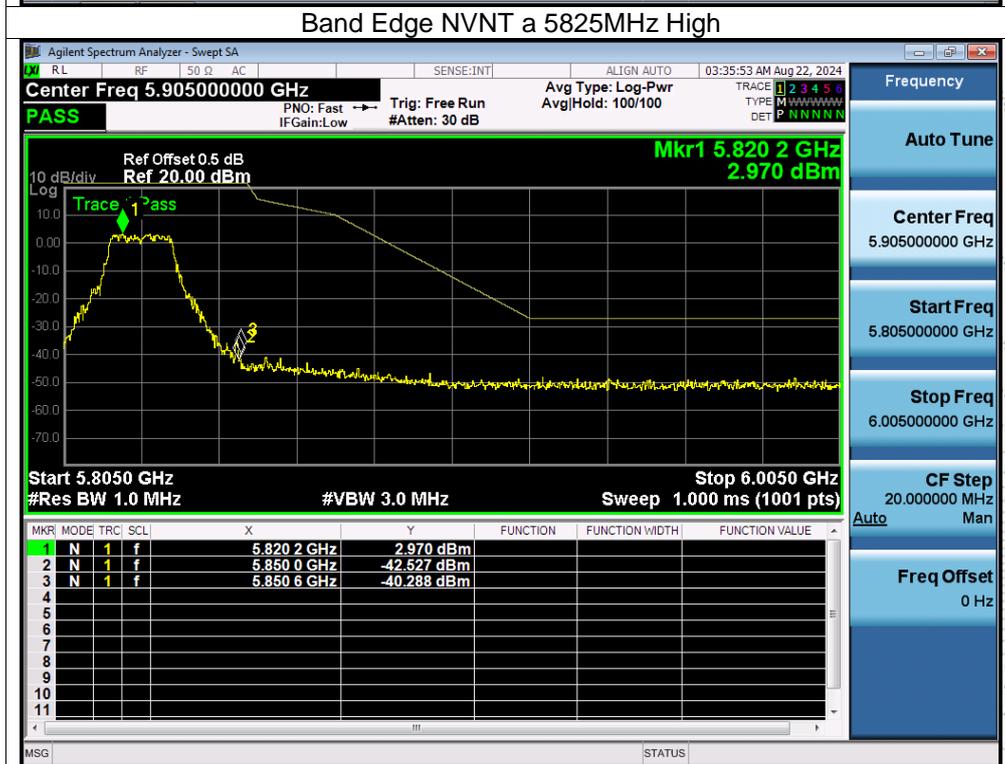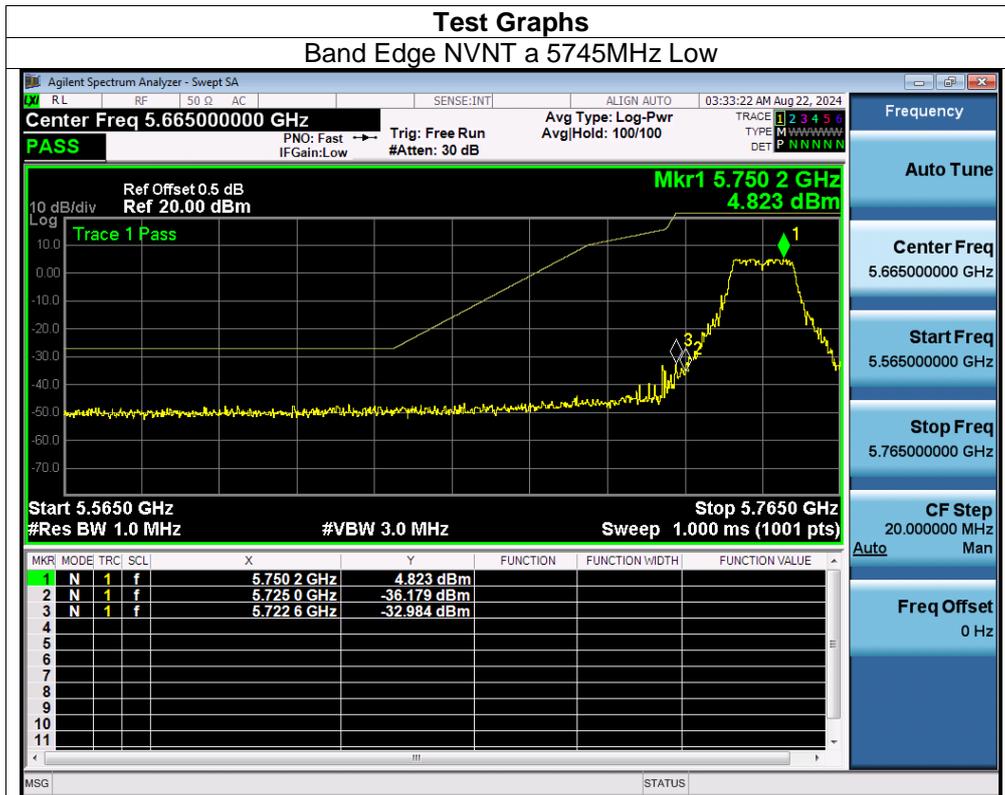


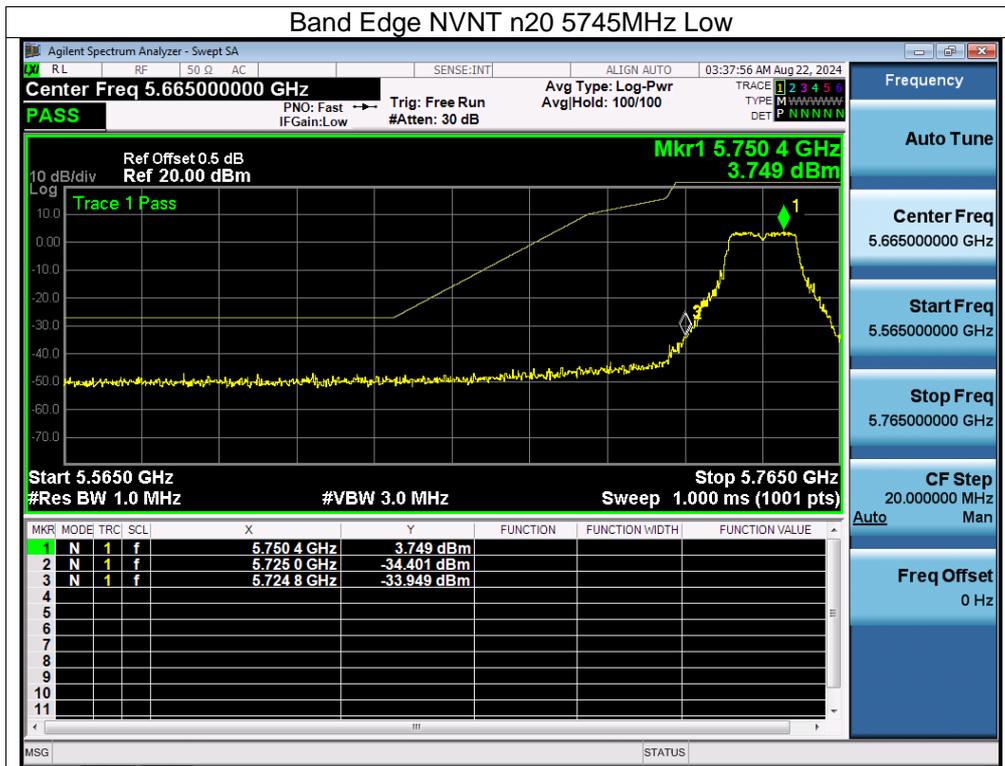










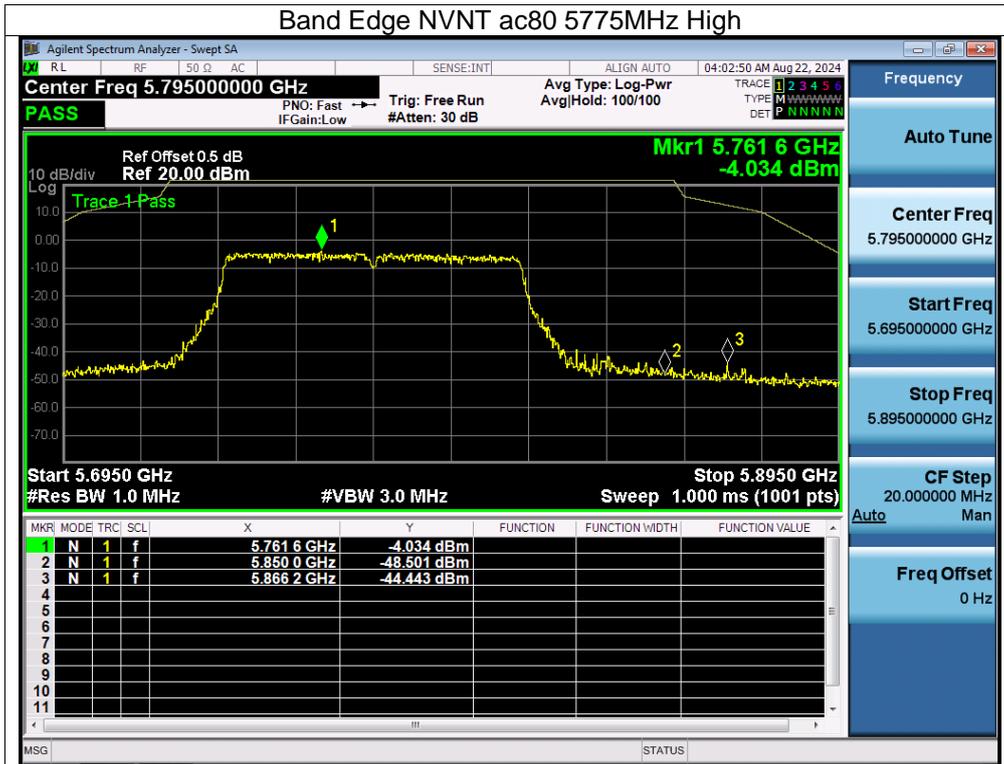

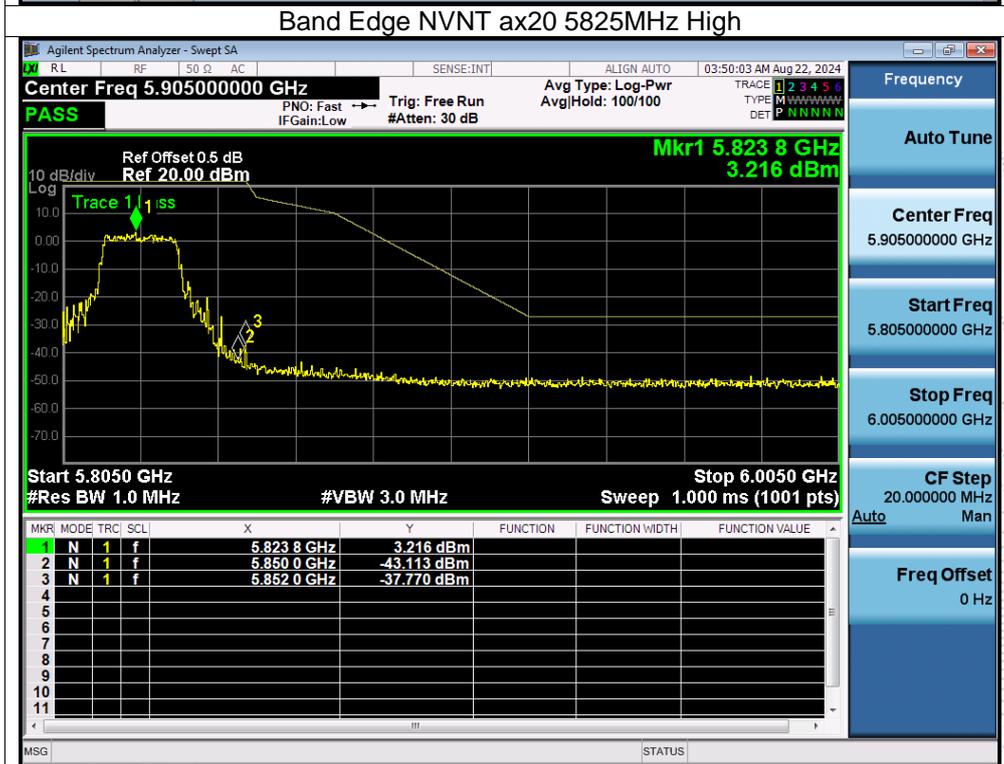



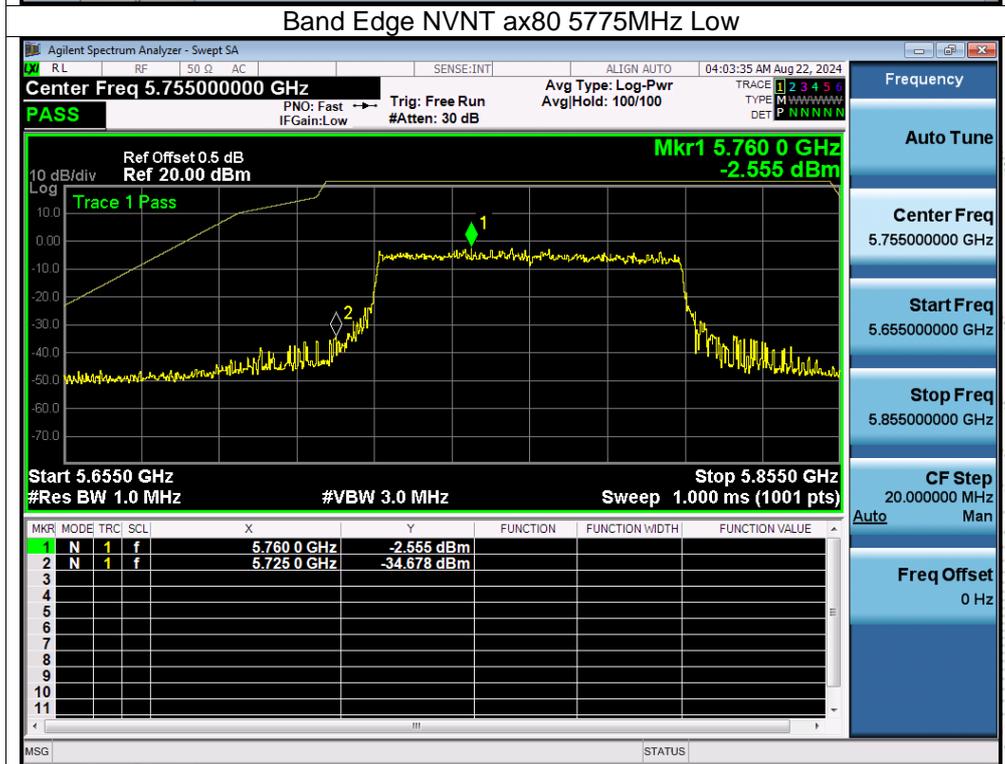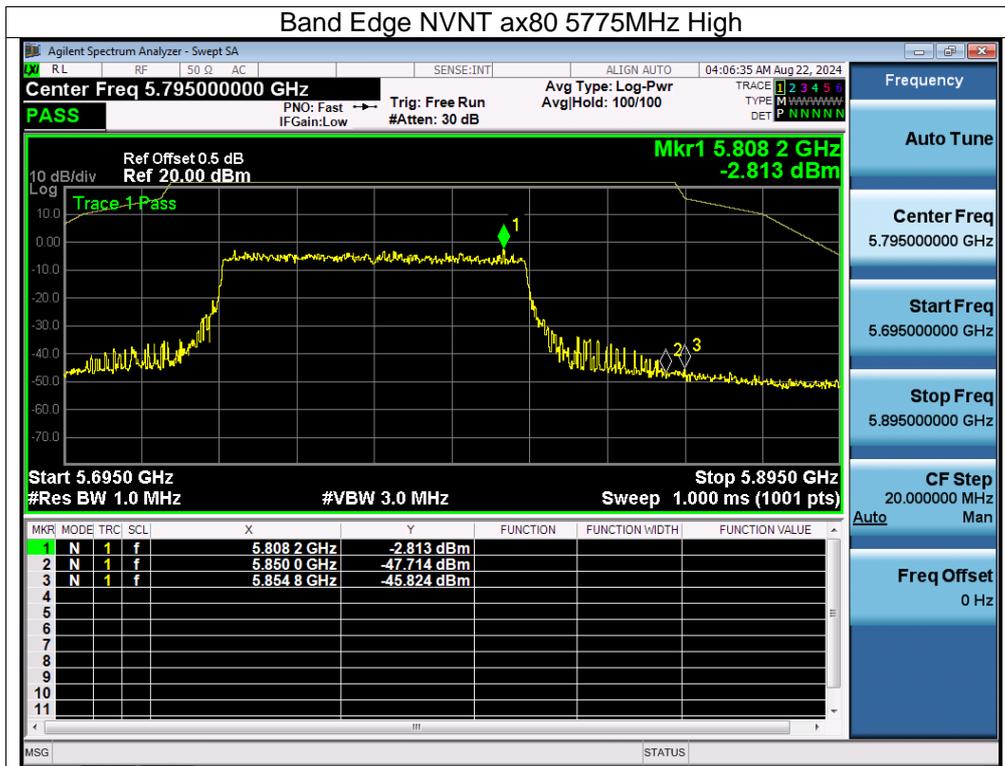

## 12. Spurious RF Conducted Emissions

### 12.1 Block Diagram Of Test Setup



### 12.2 Limit

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge..



### 12.3 Test Procedure



1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



### 12.4 Test Result



Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.



About: 26.5GHz-40GHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

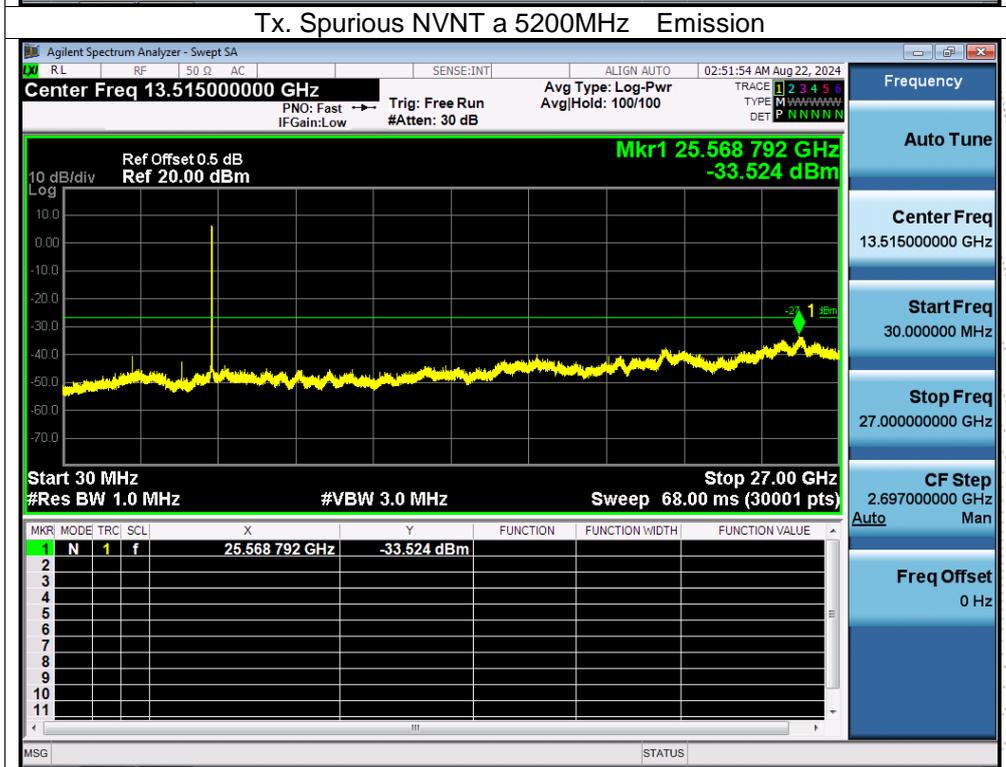
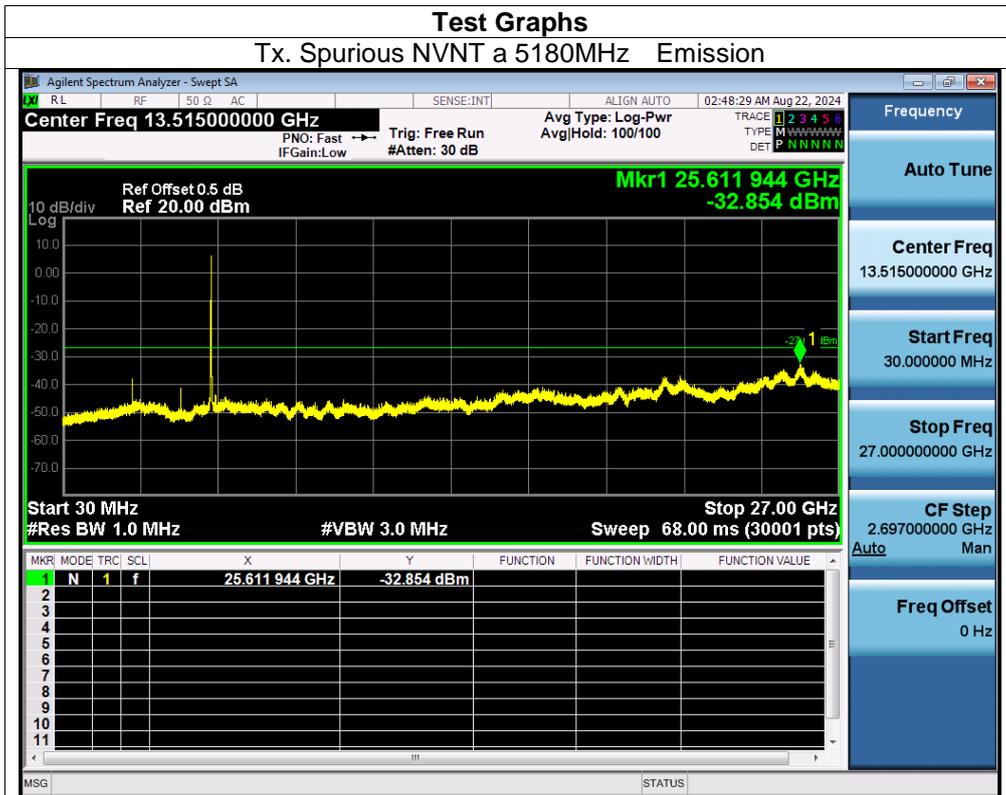


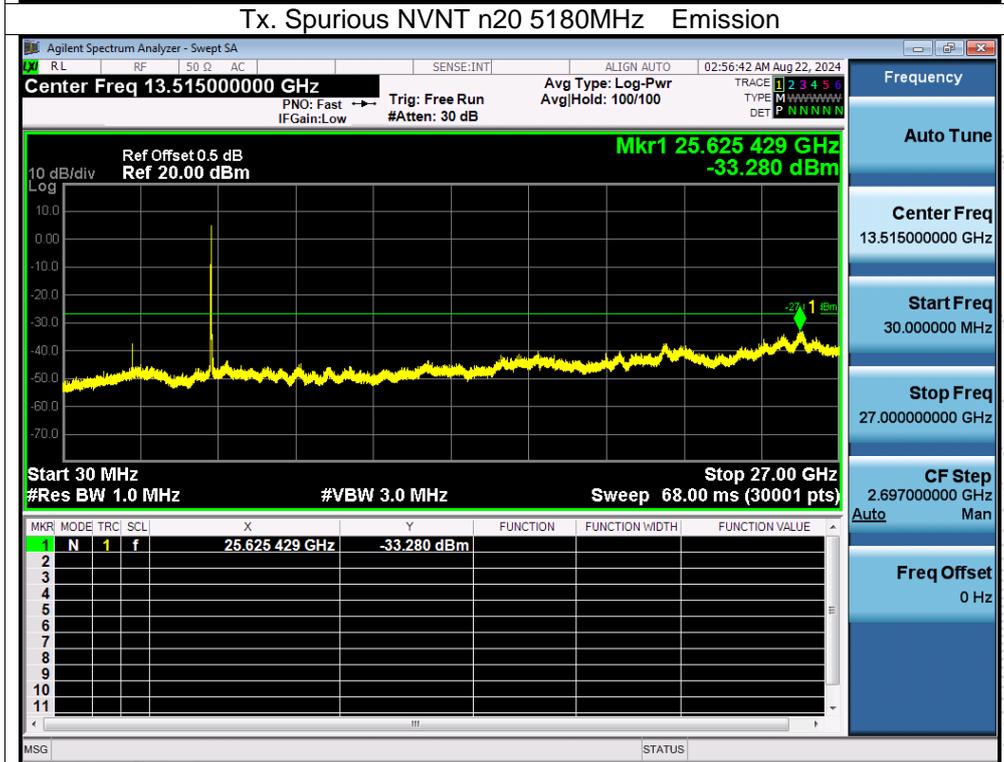
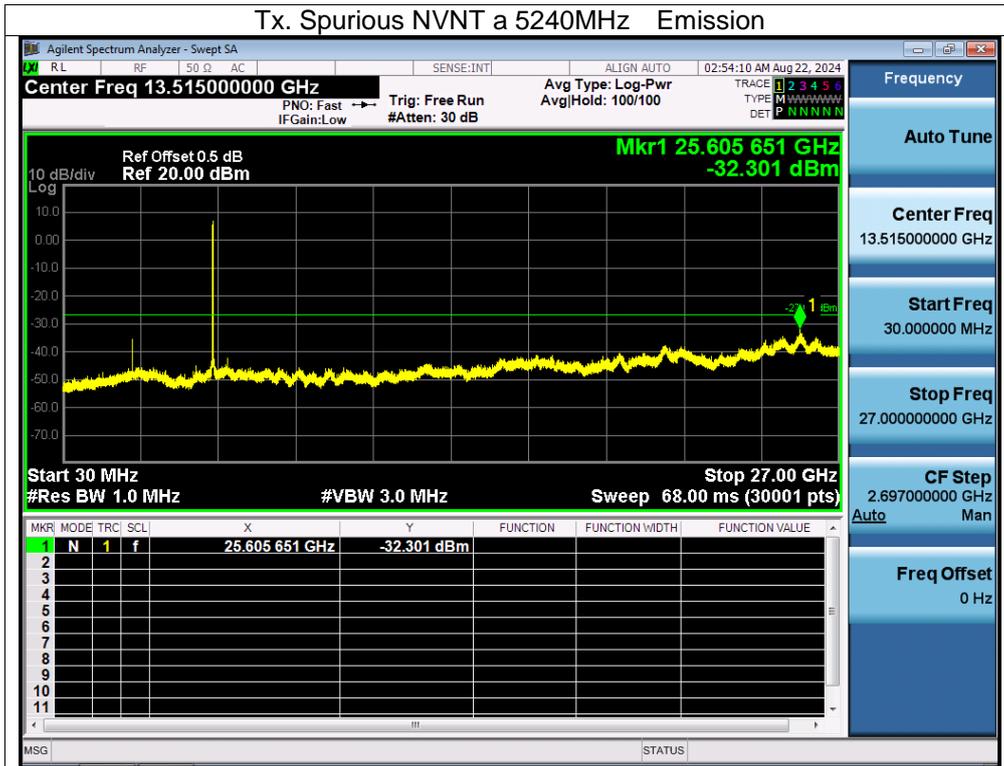


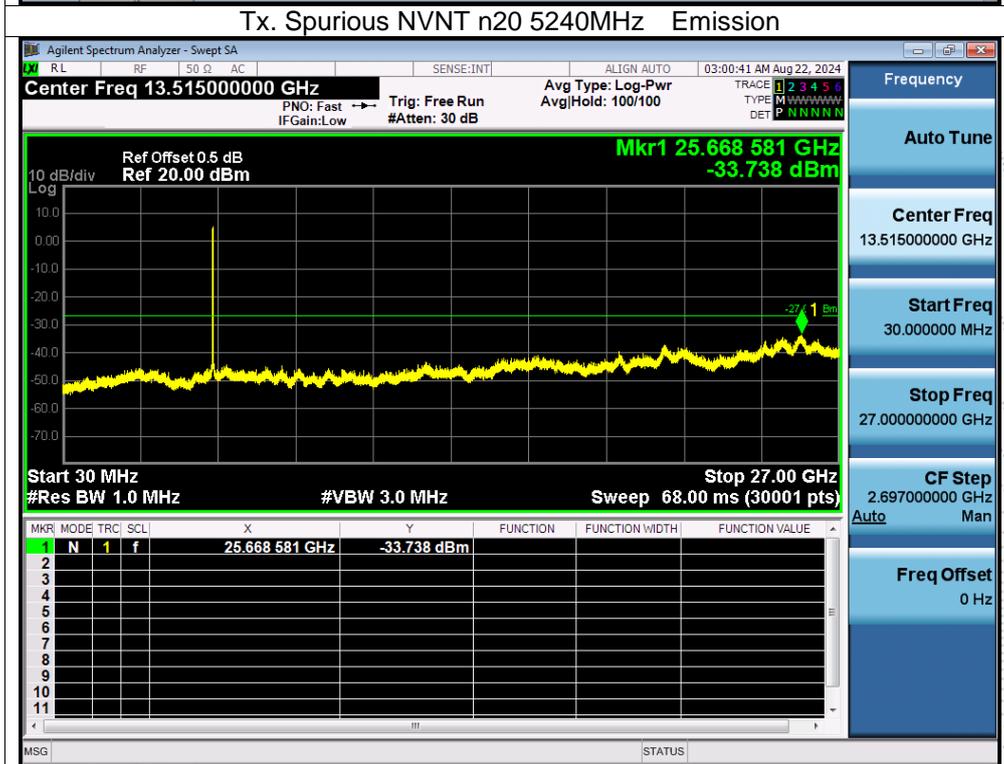
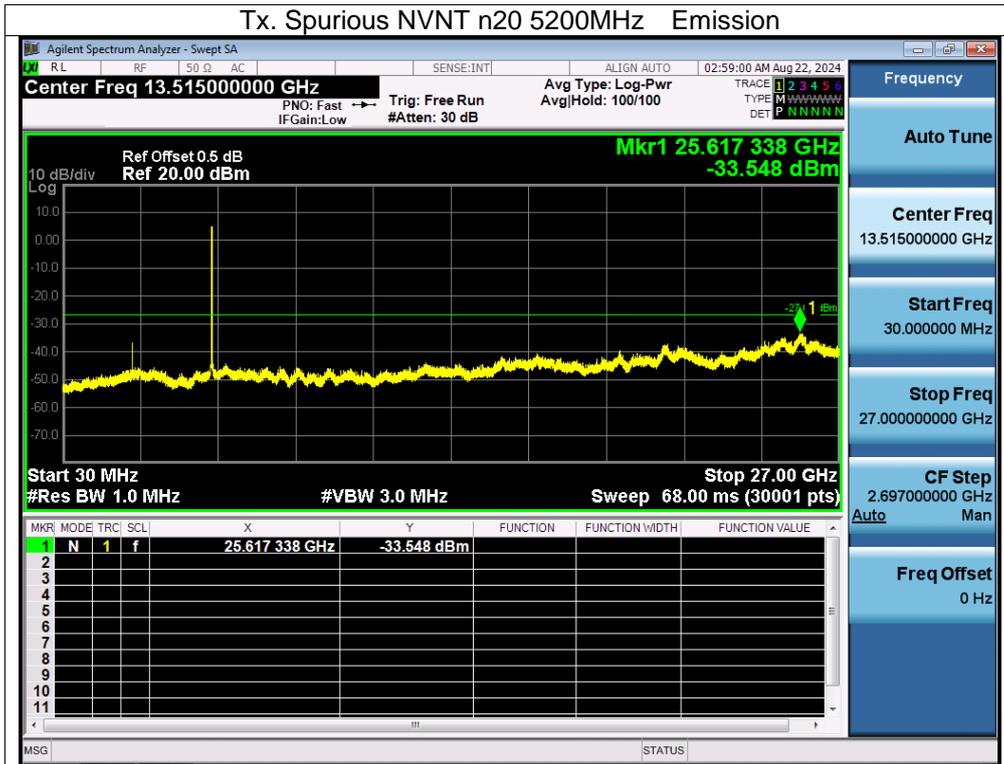


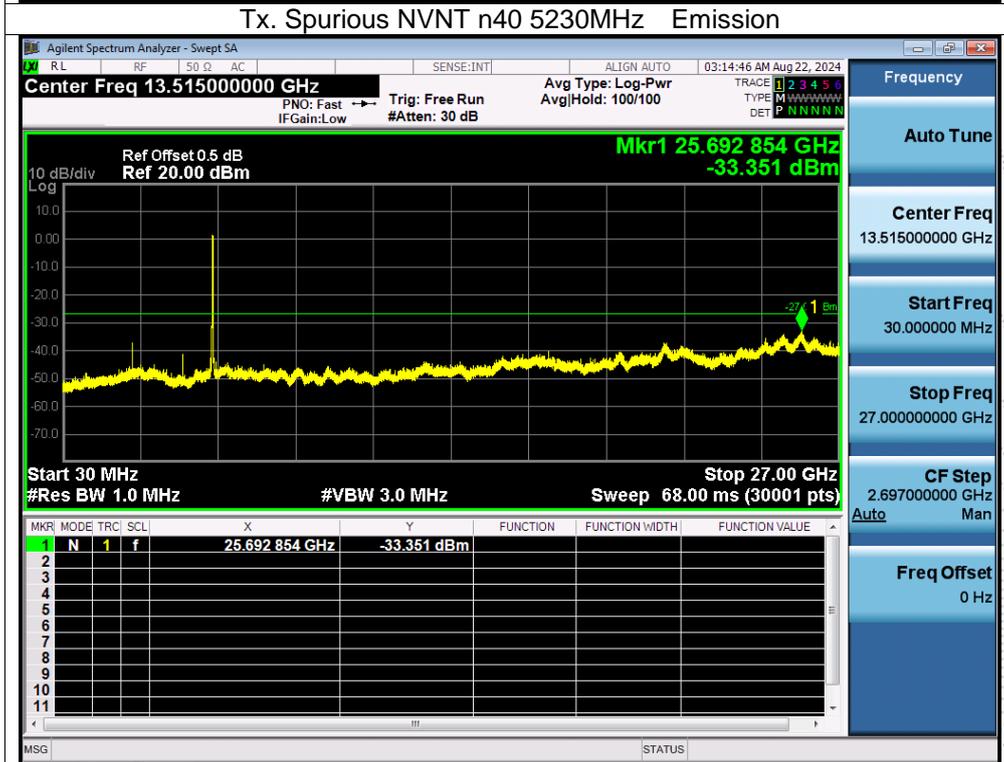
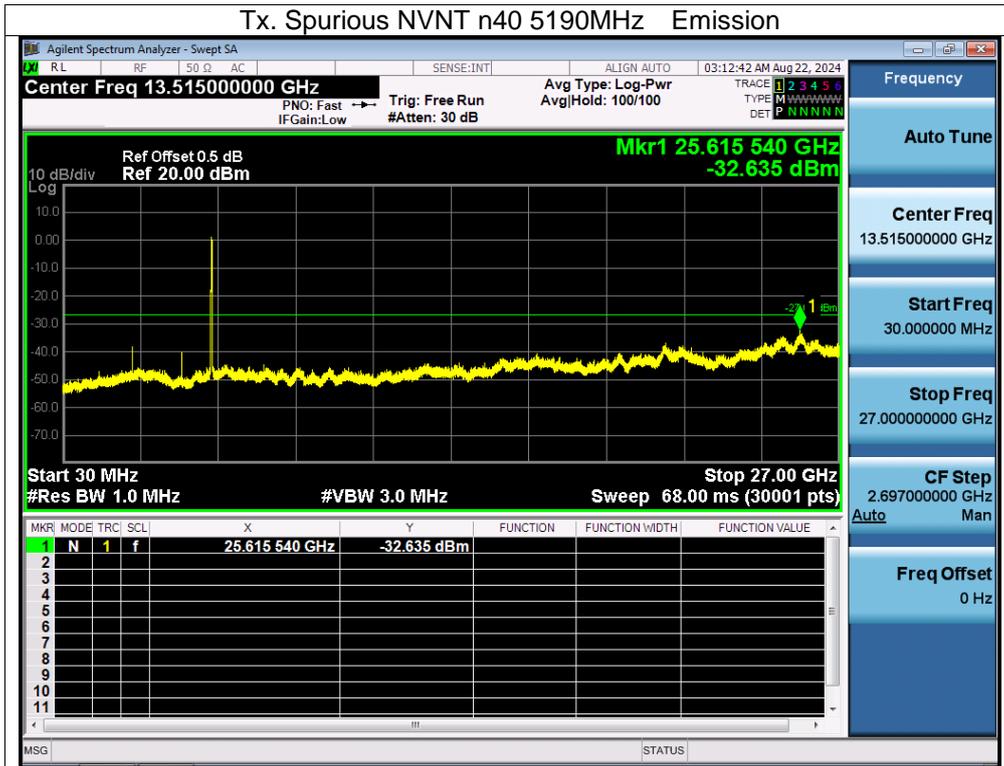


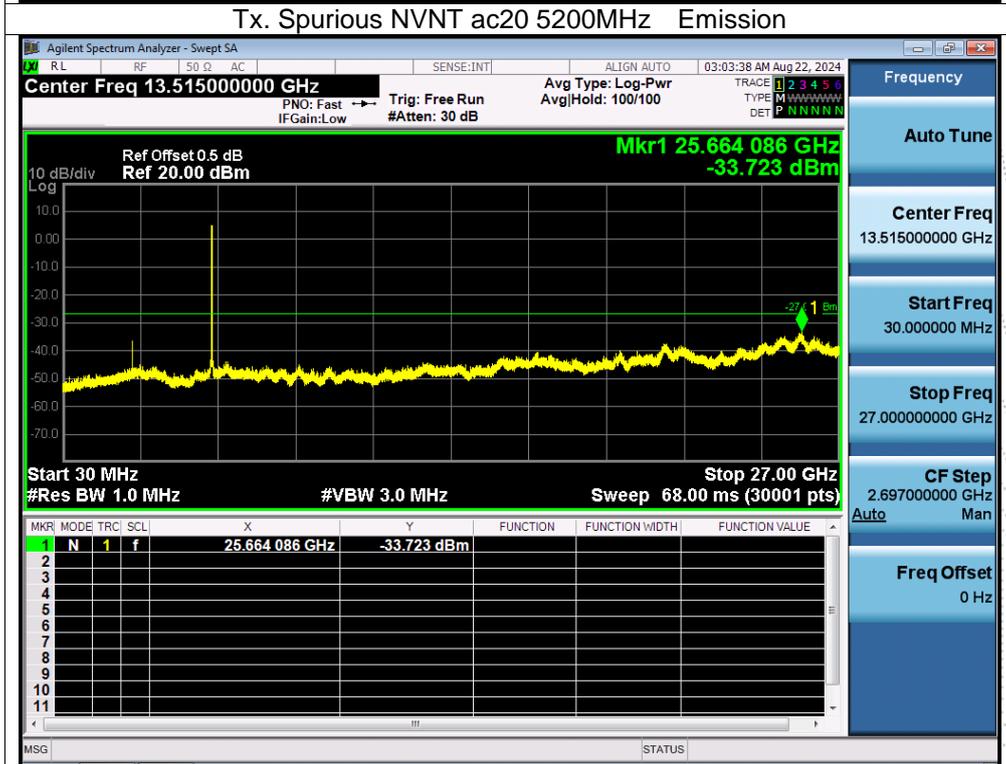
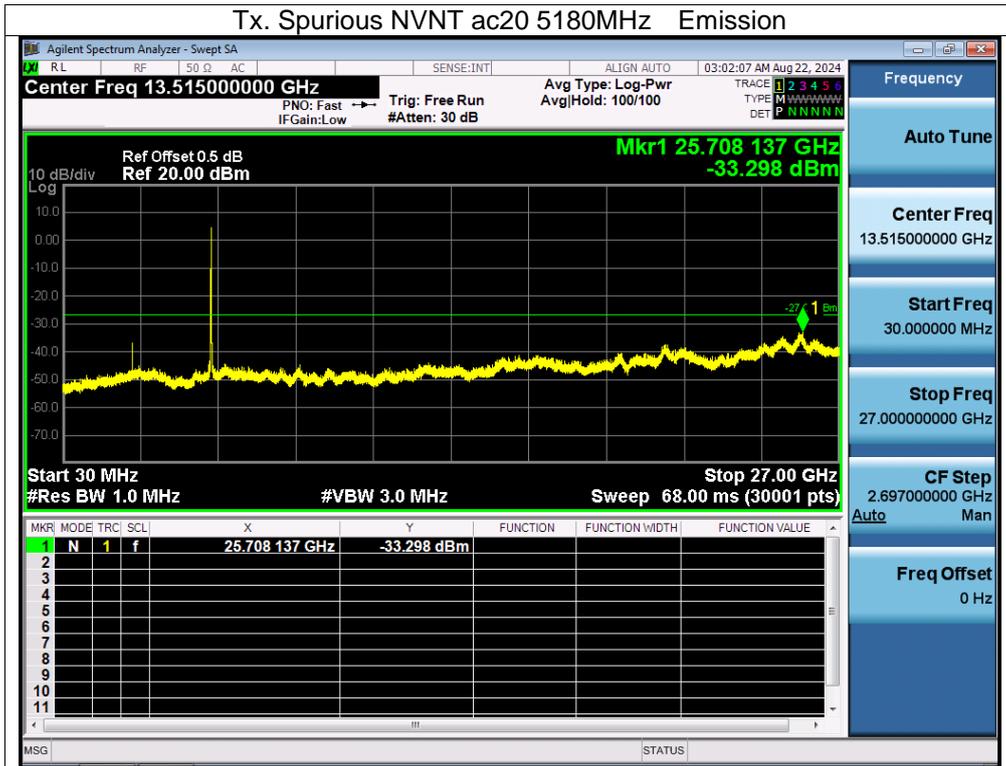


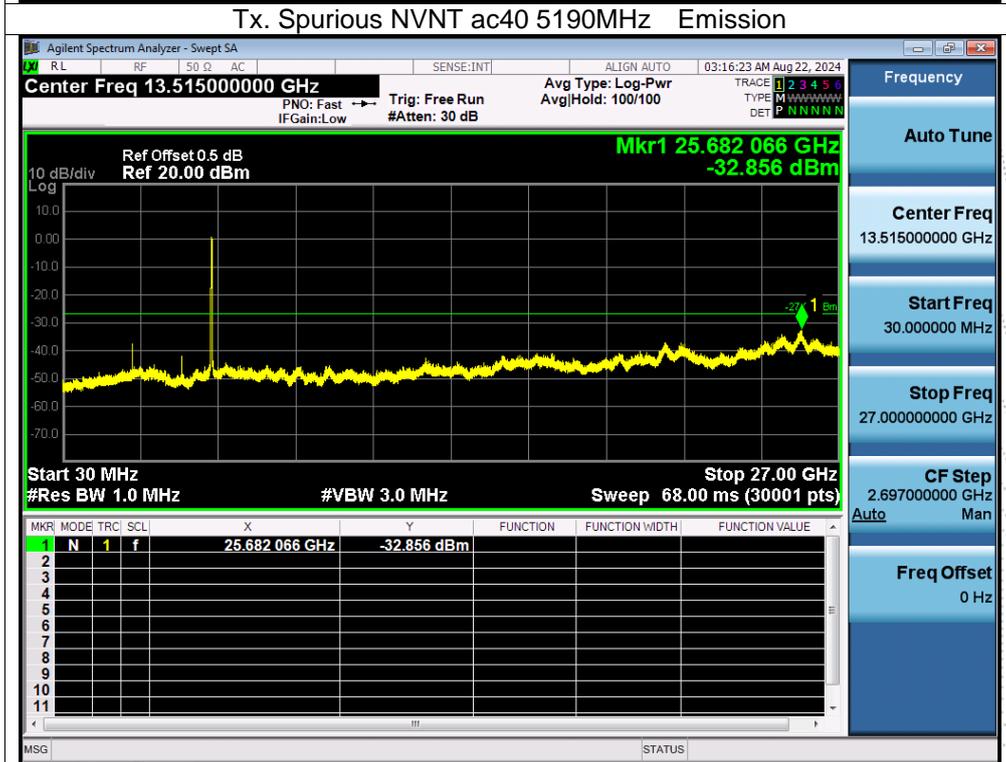
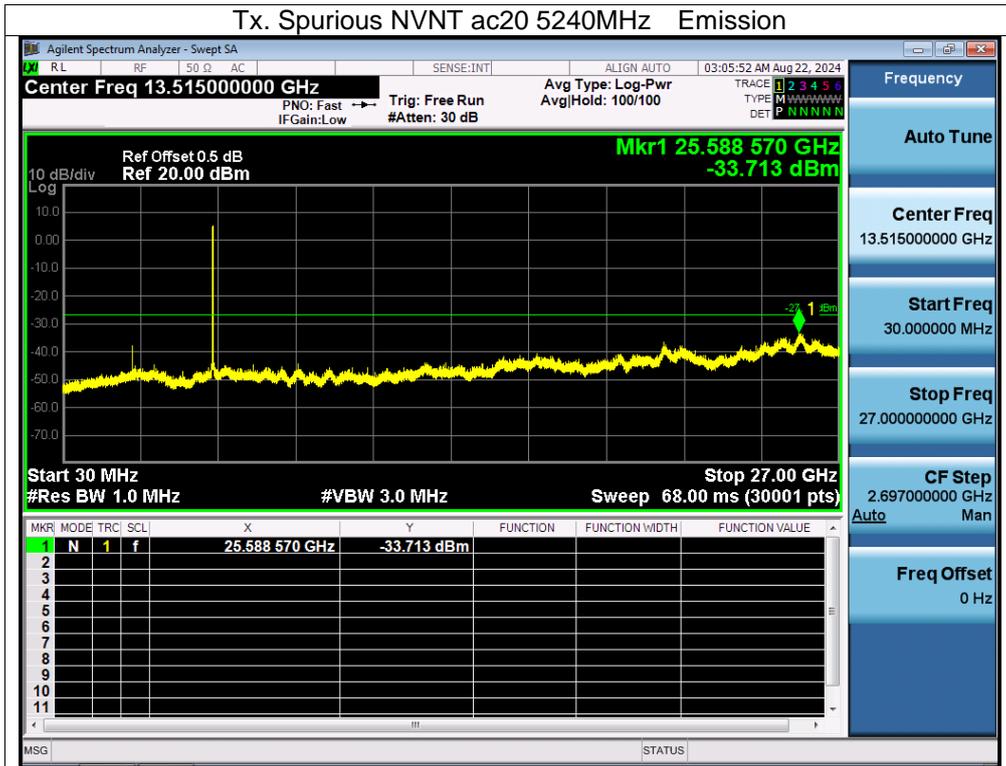


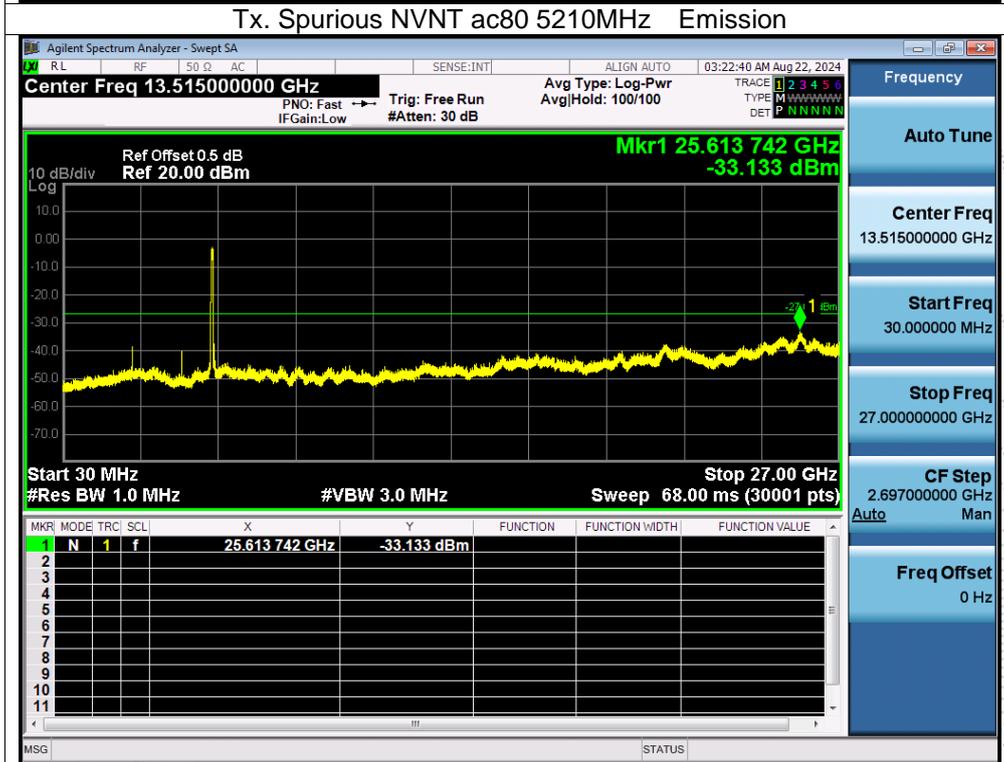
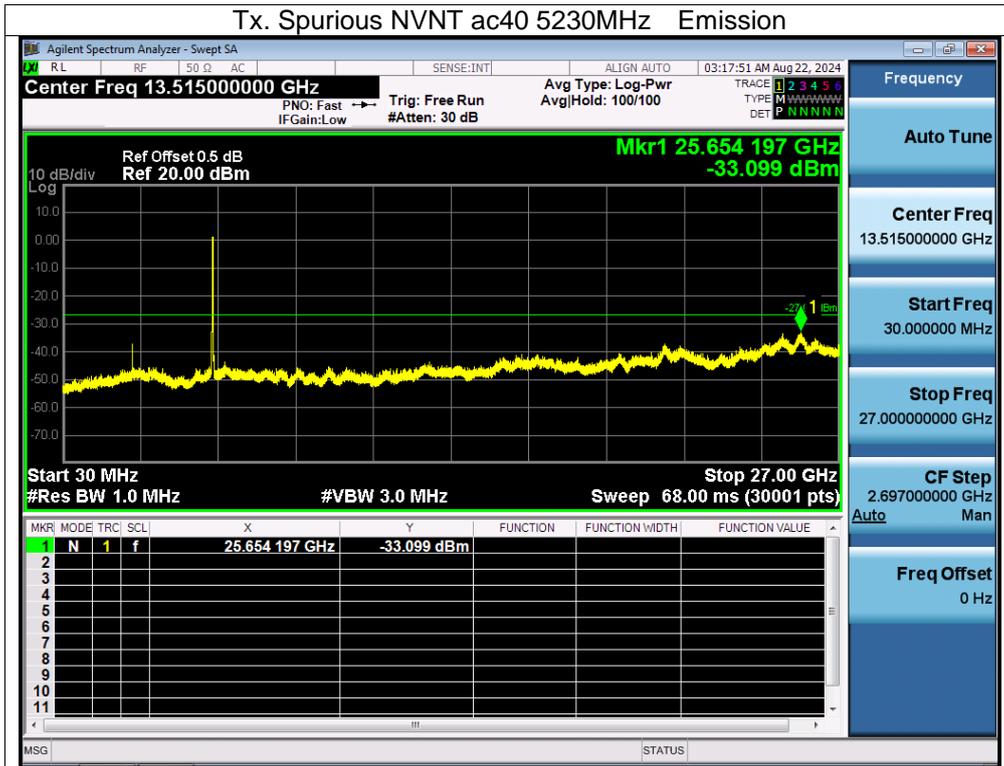


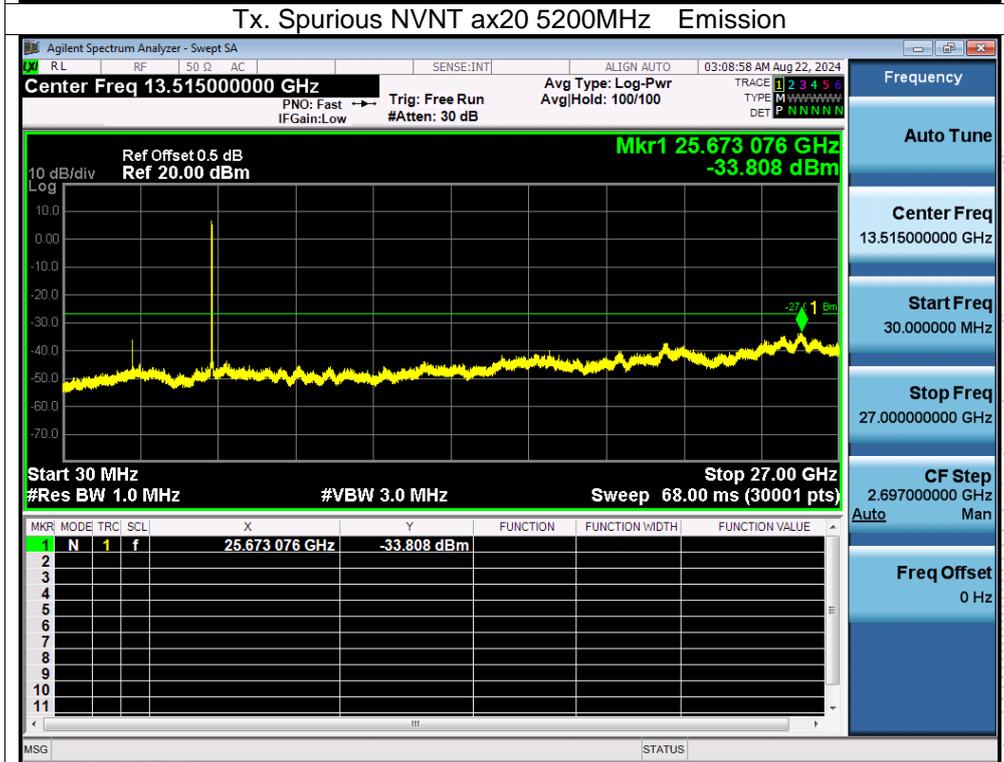
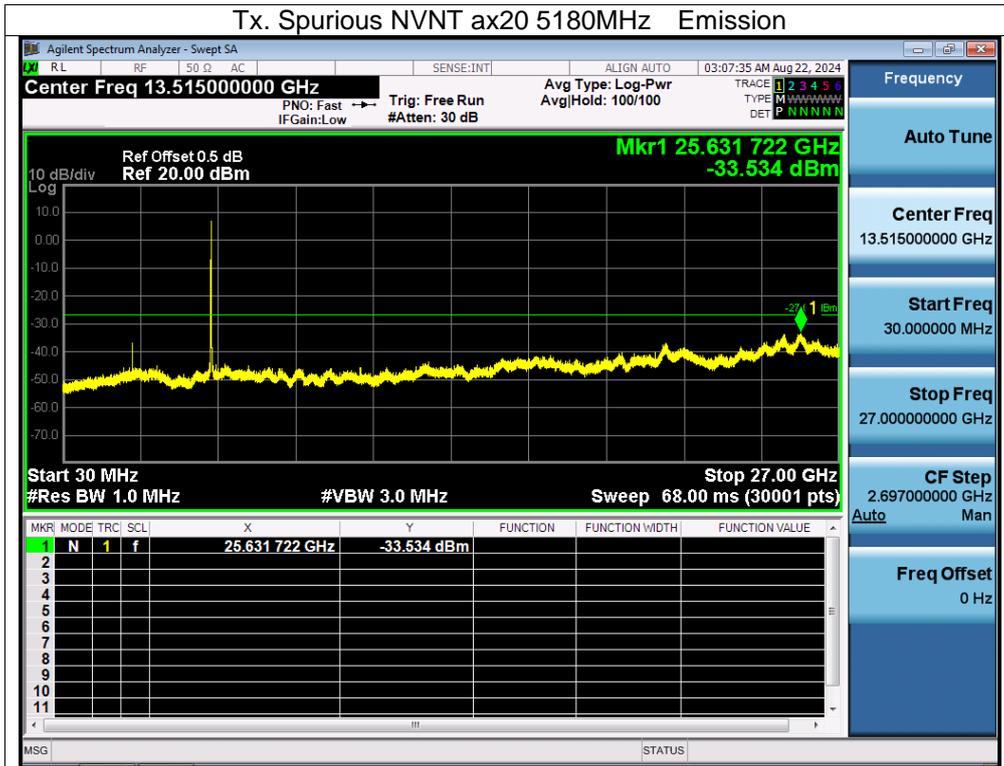


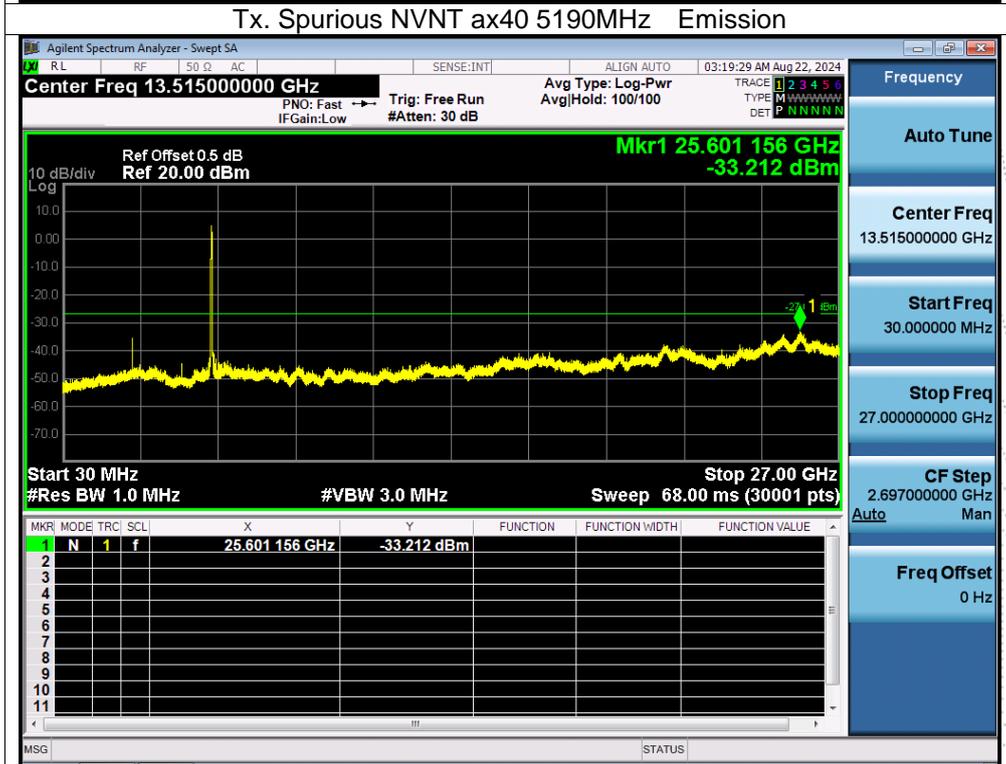
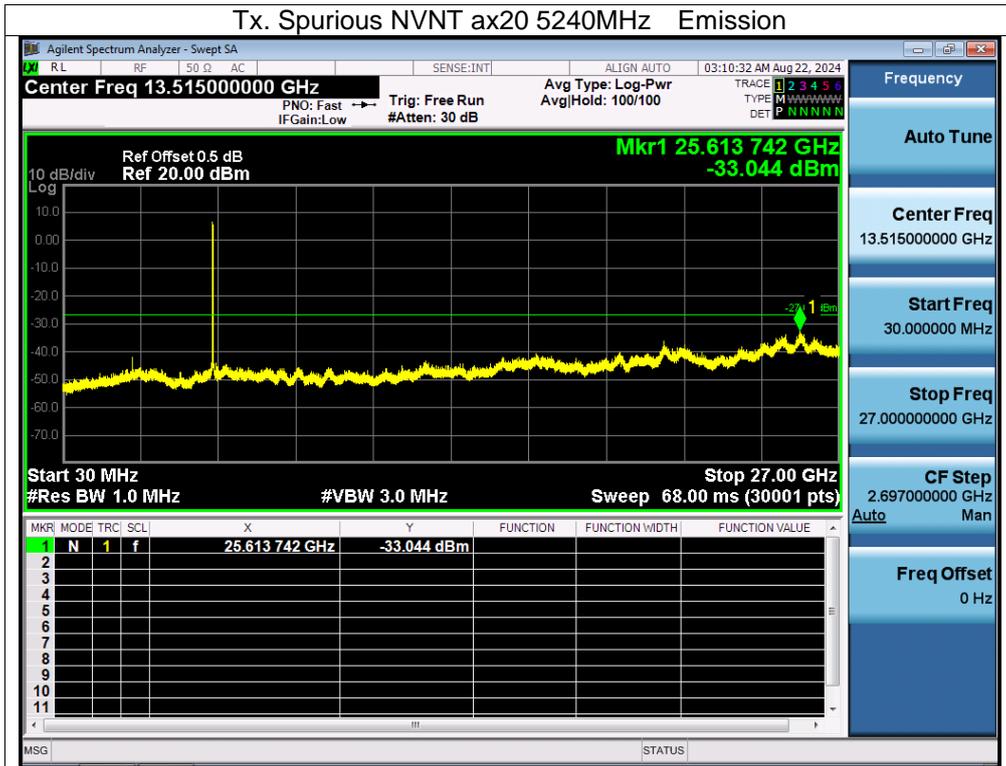


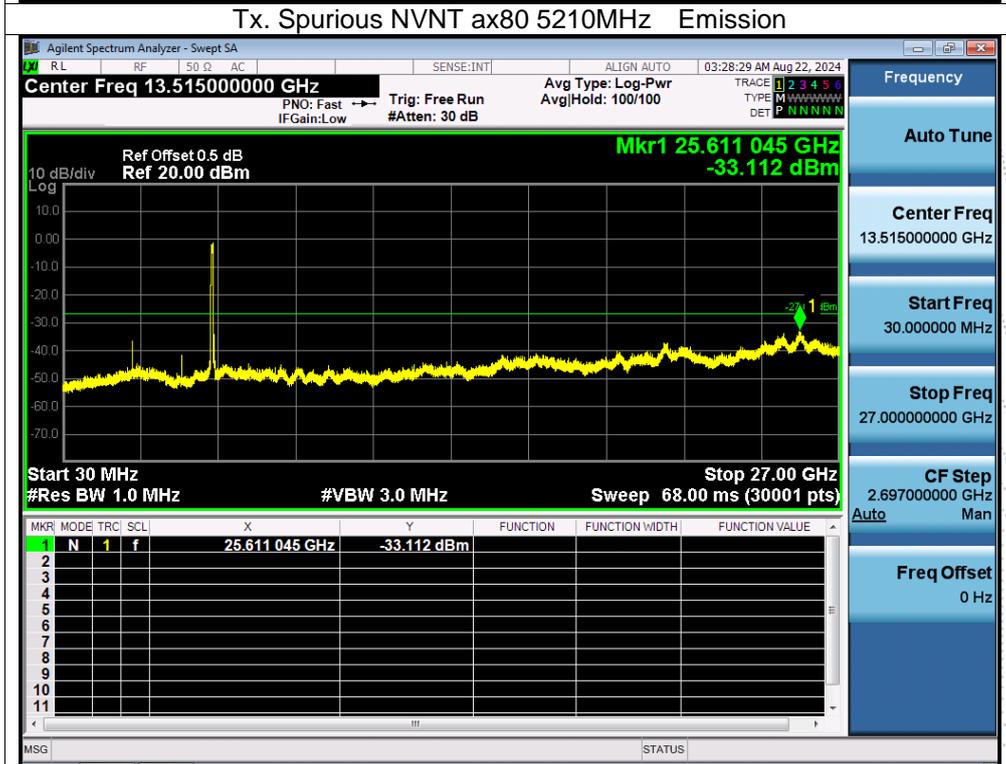
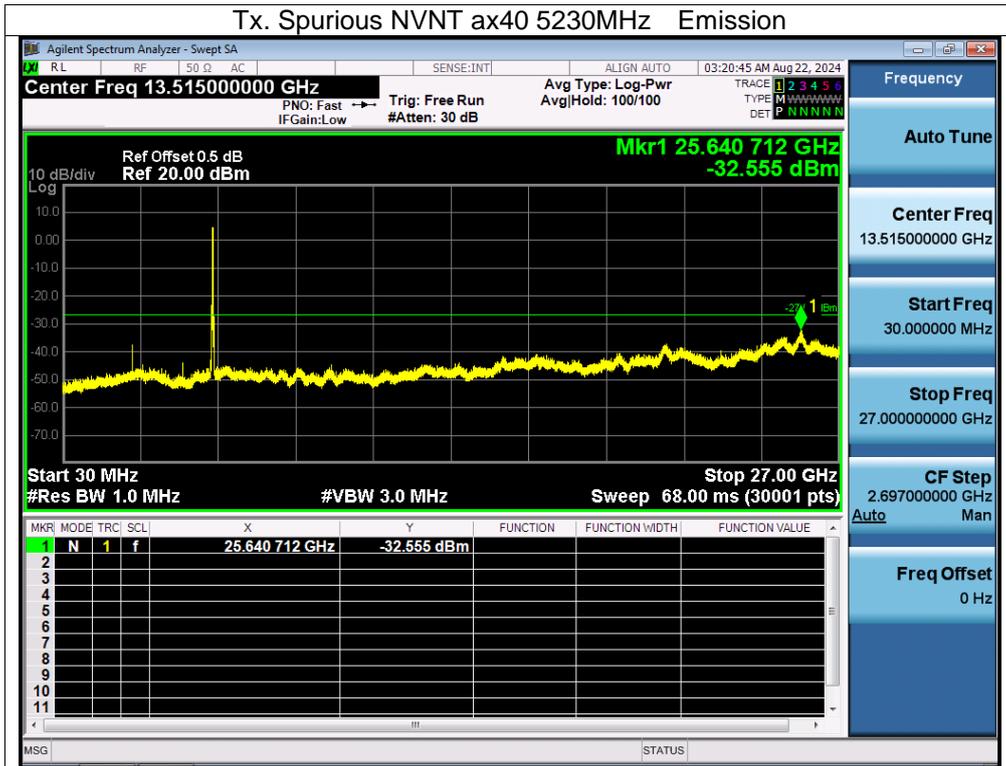


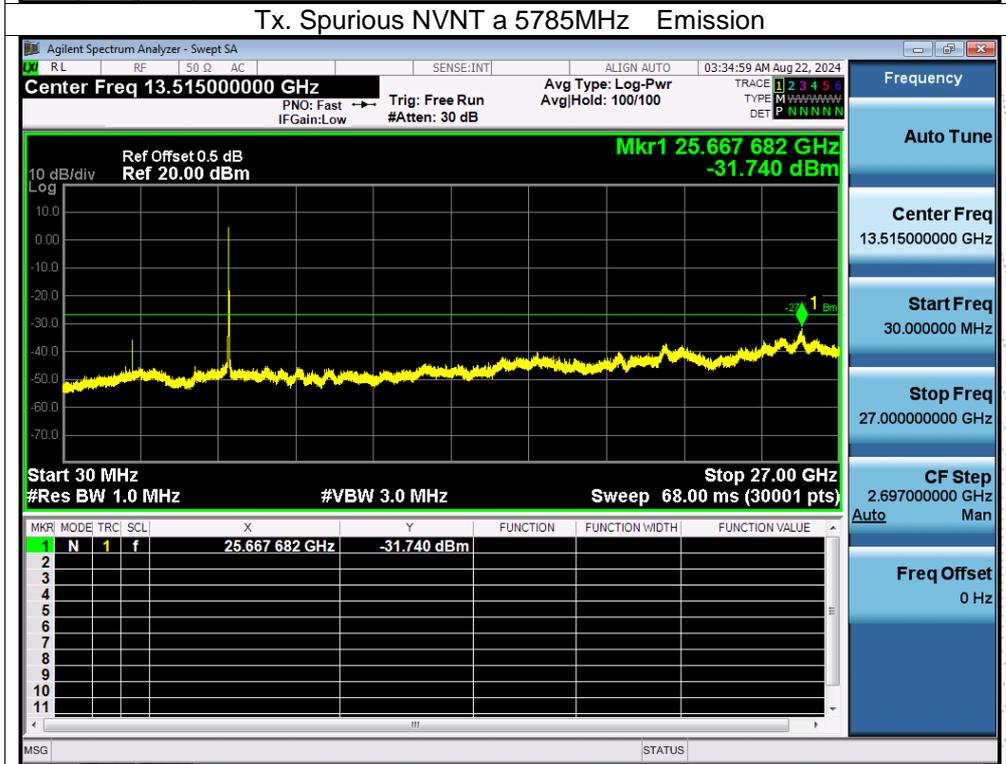
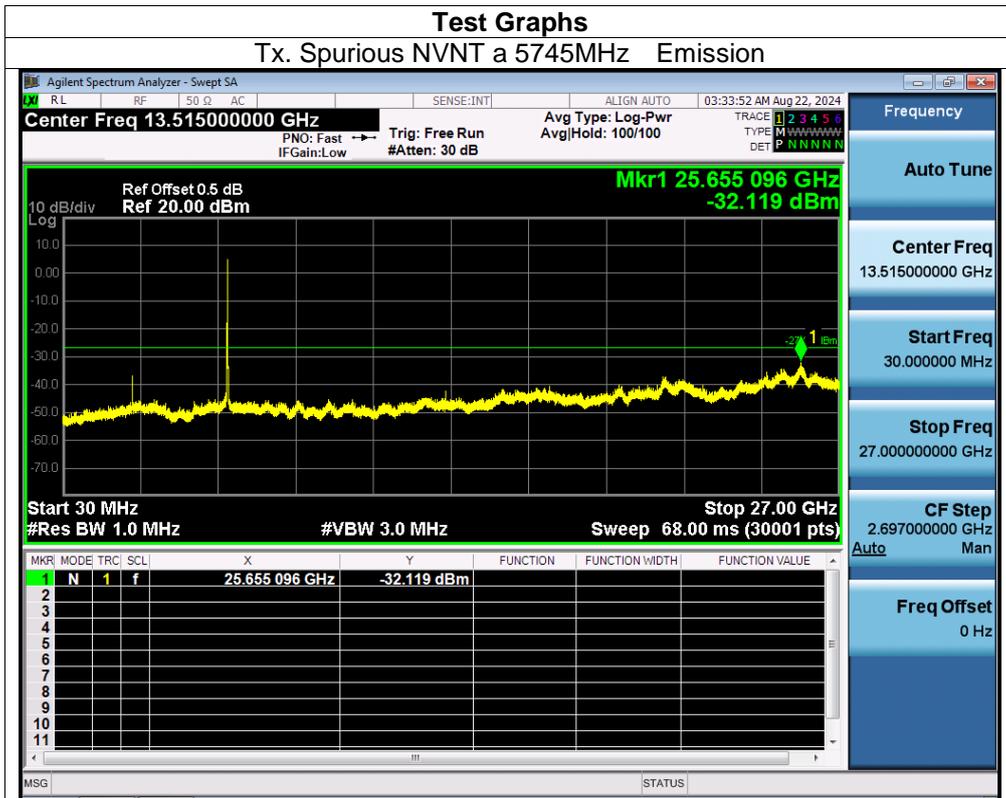


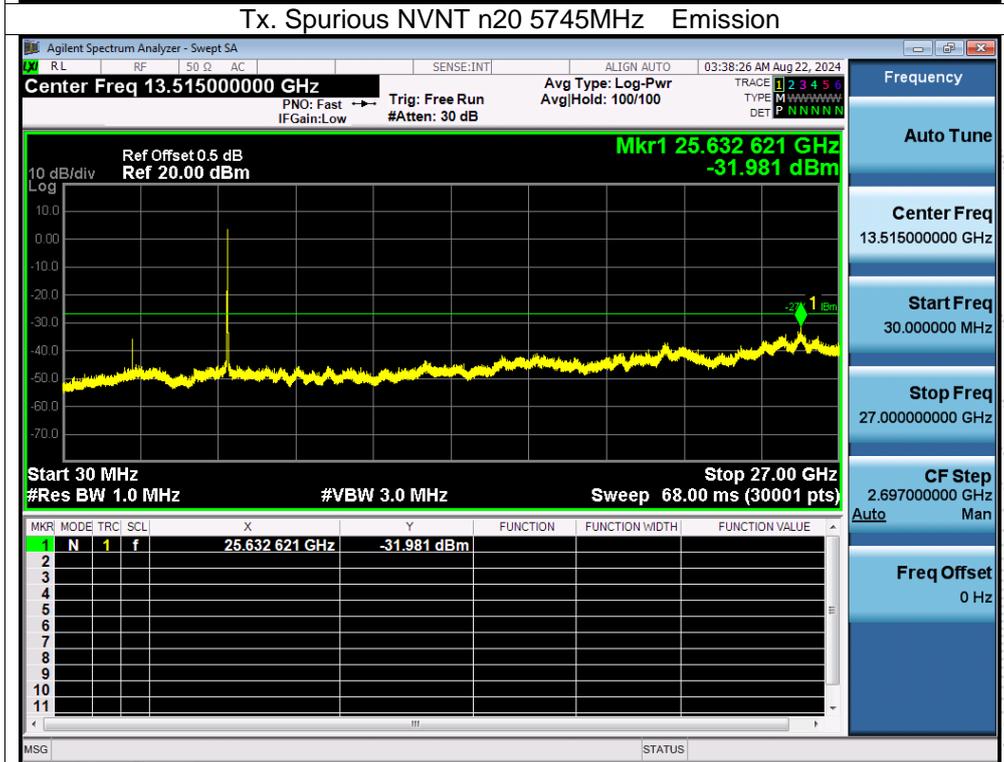
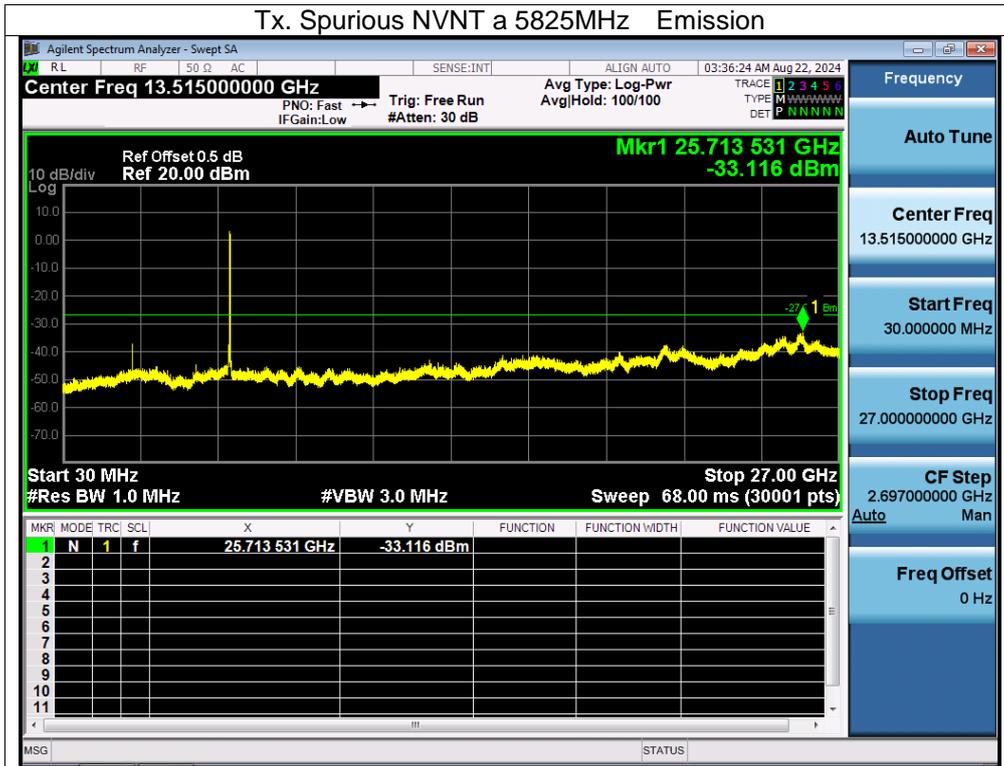


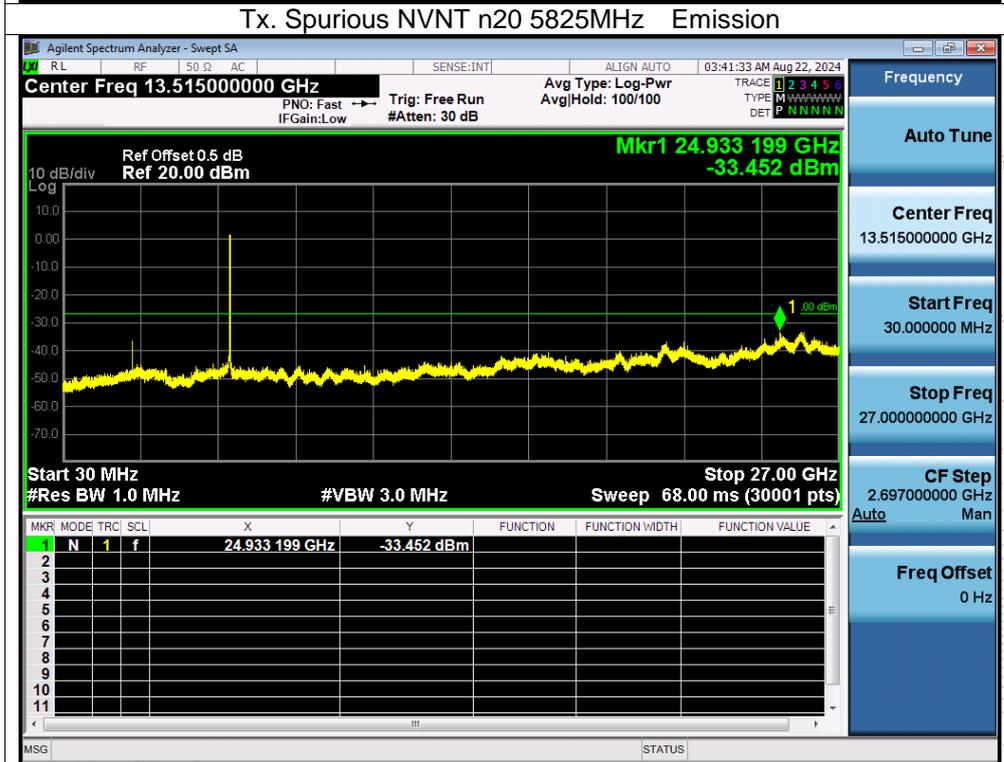
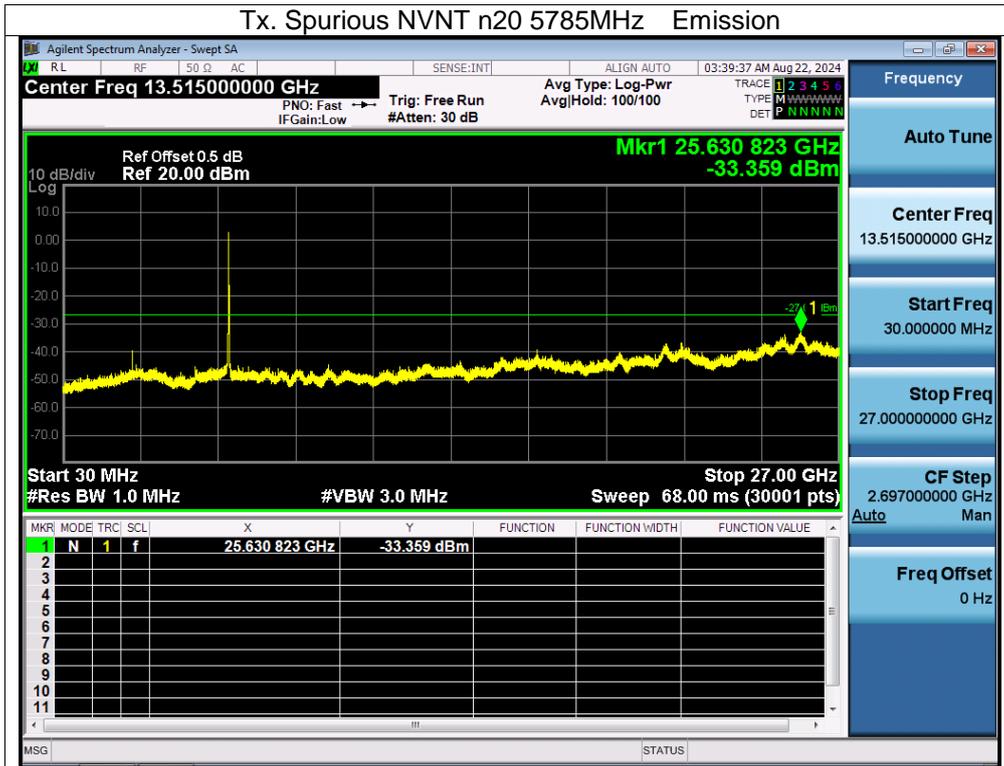


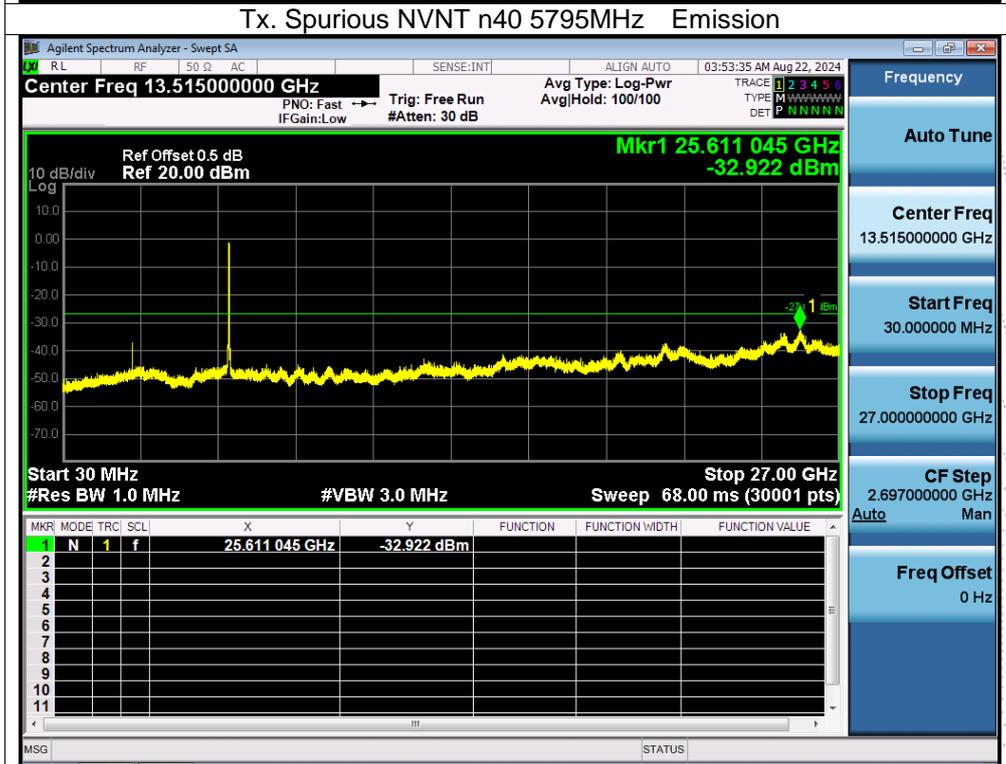
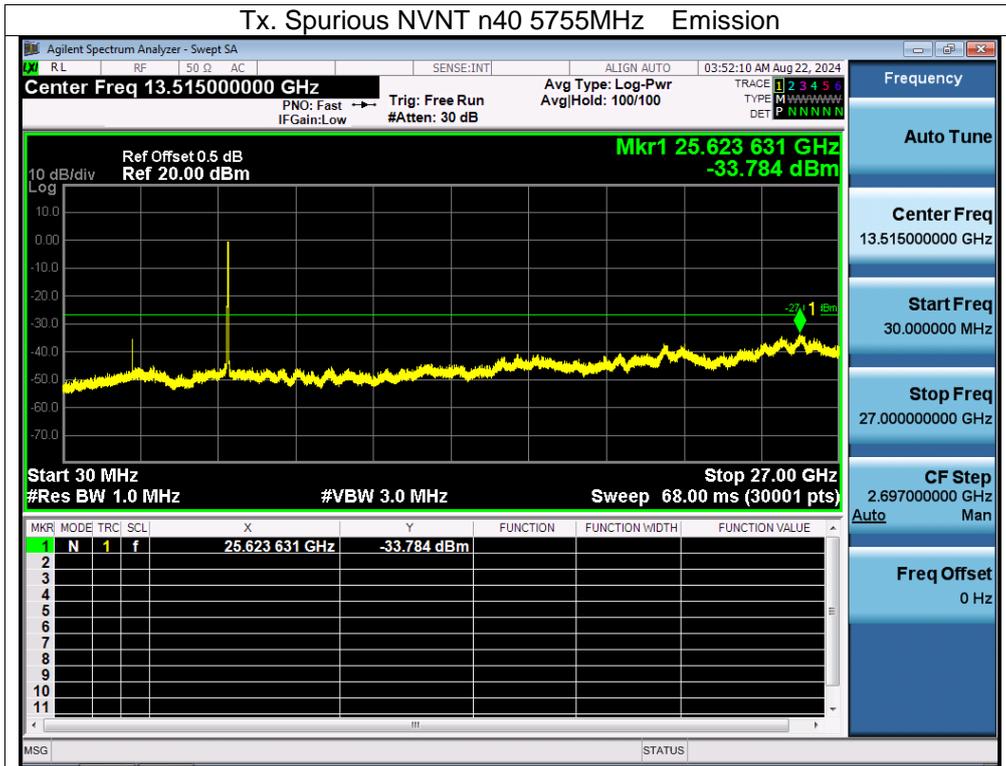


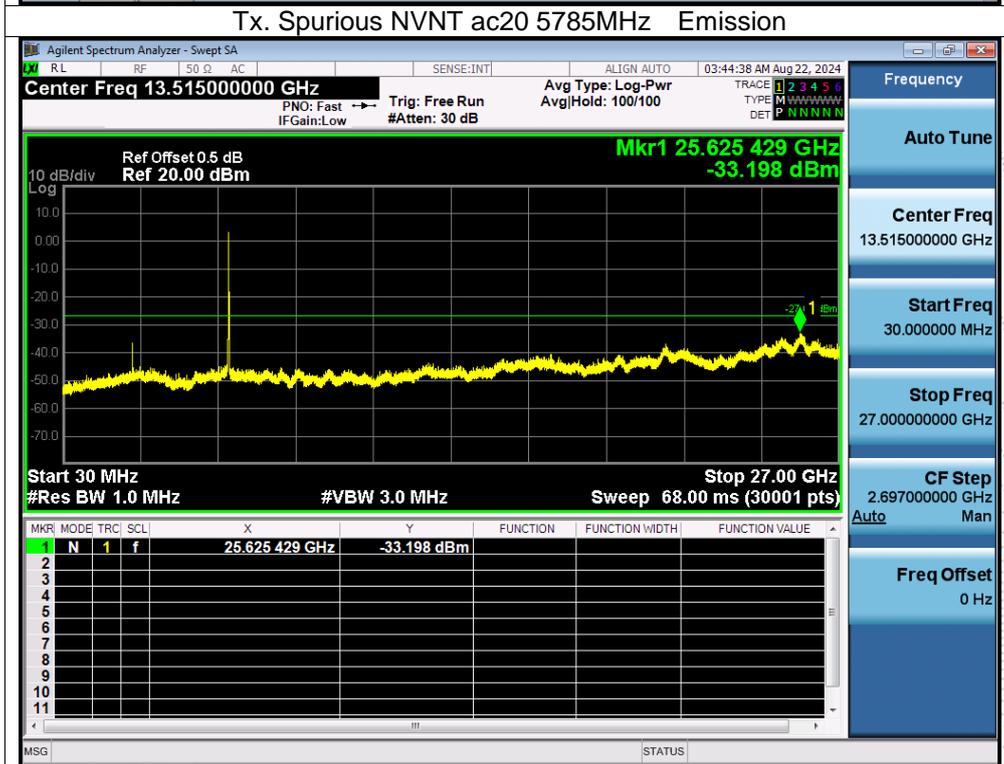
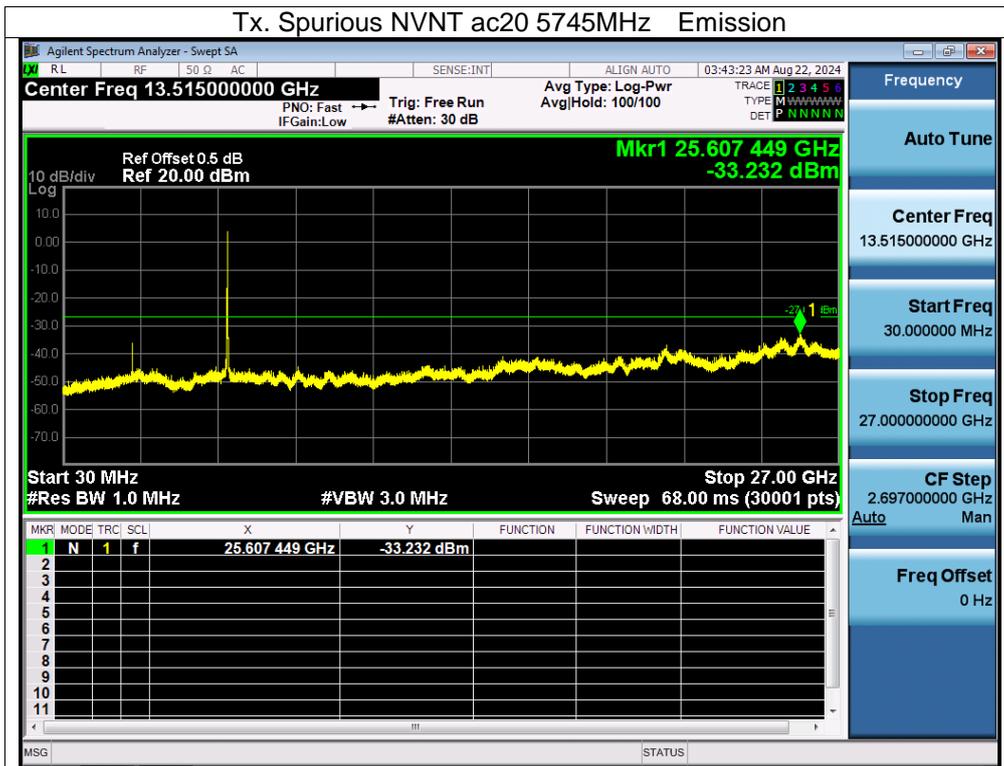


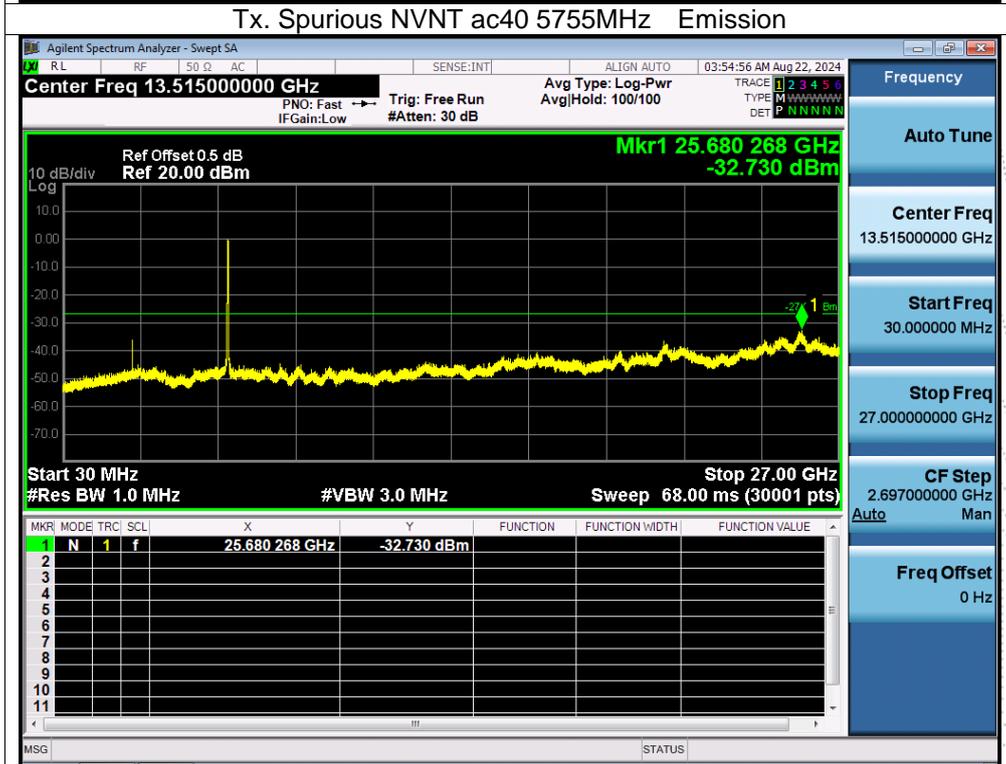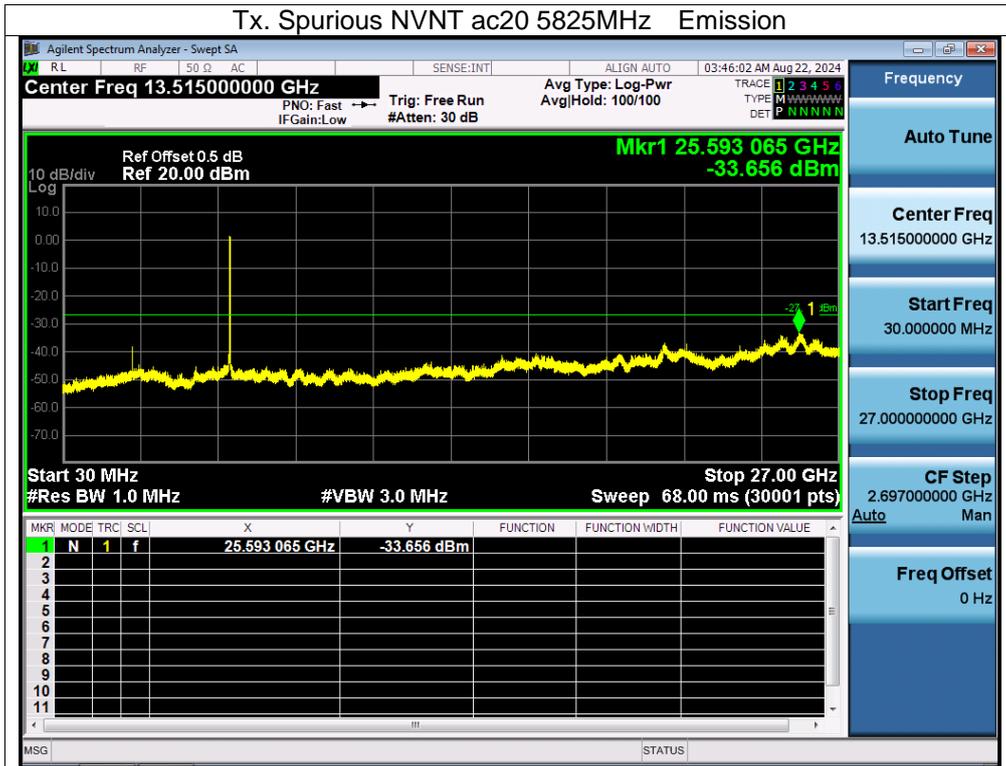

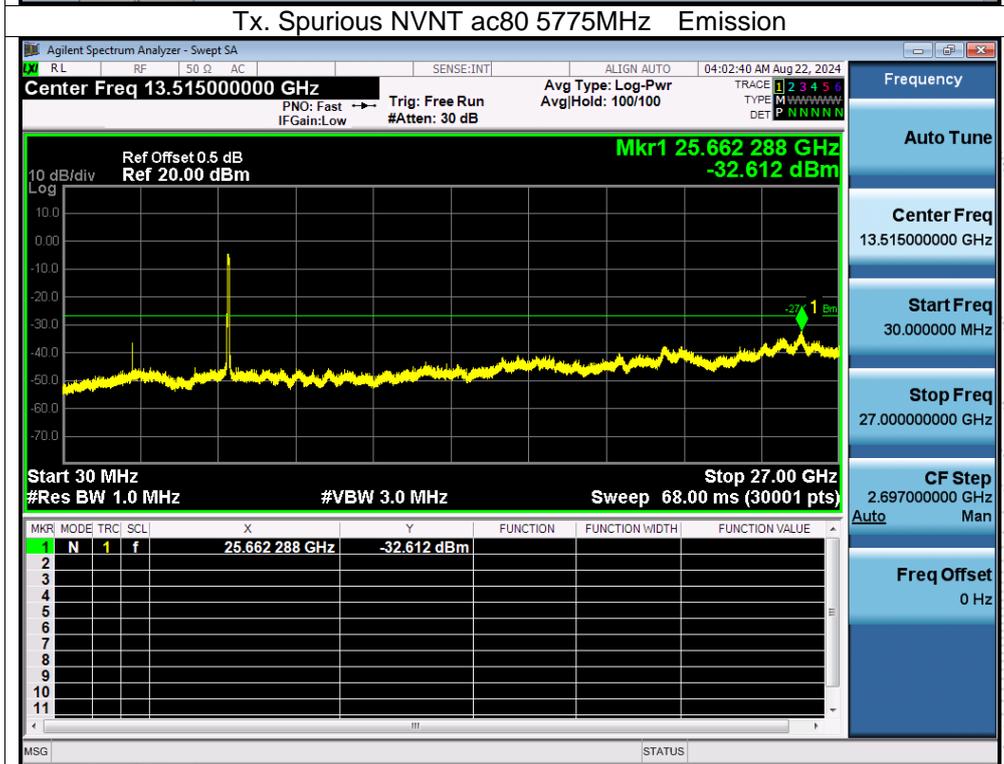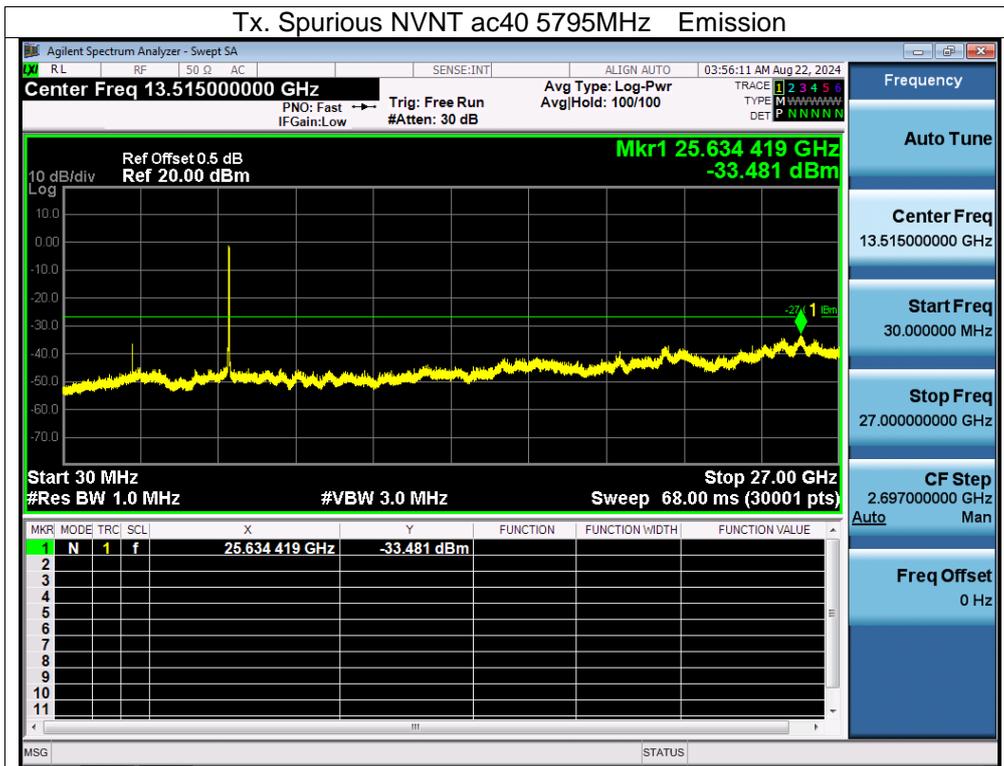

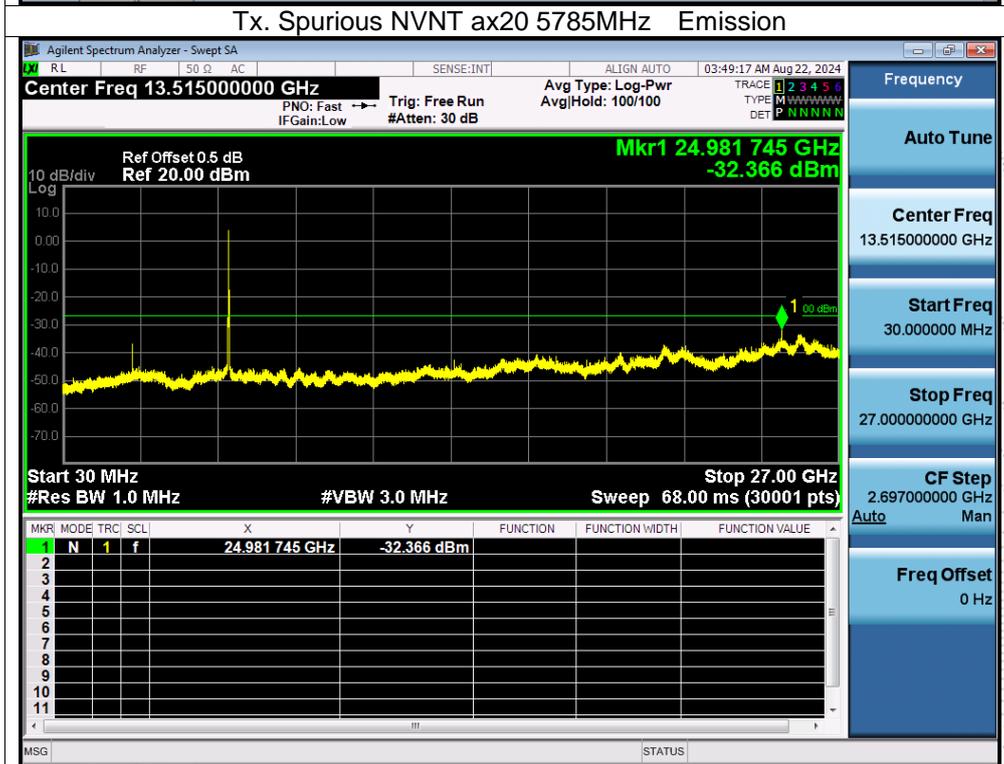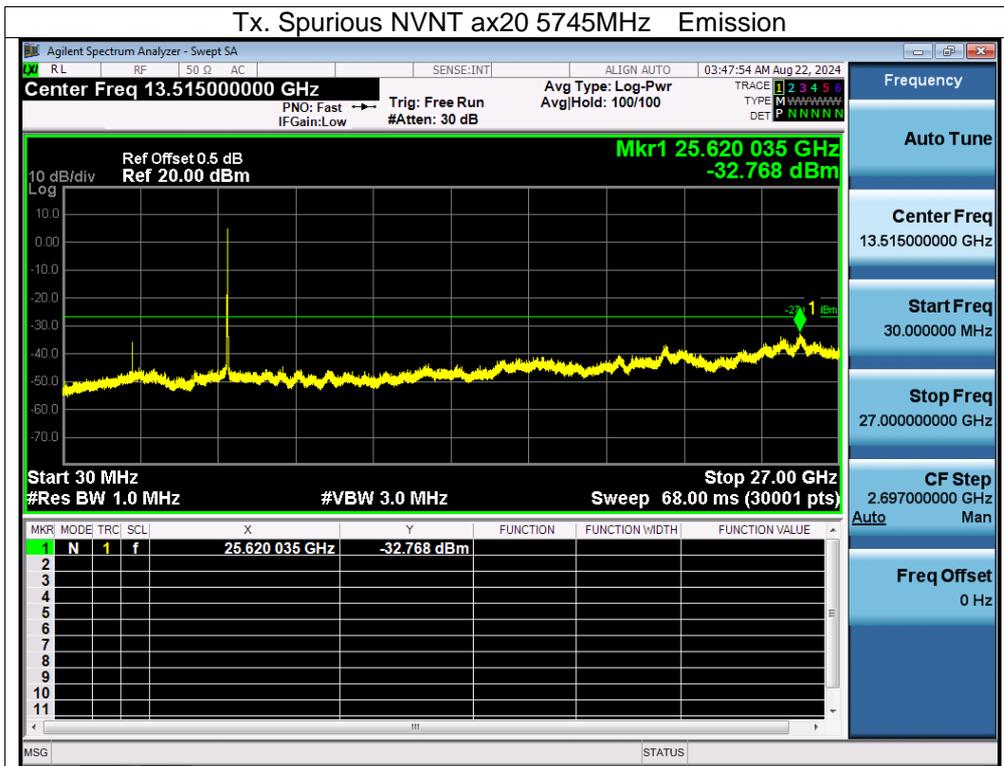

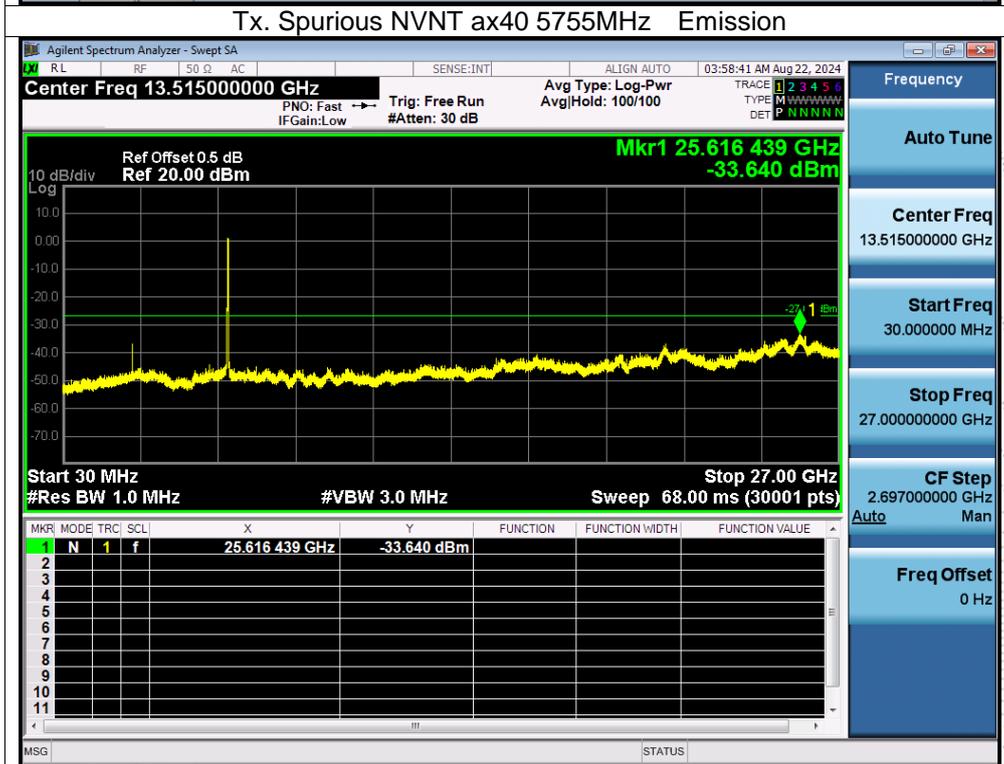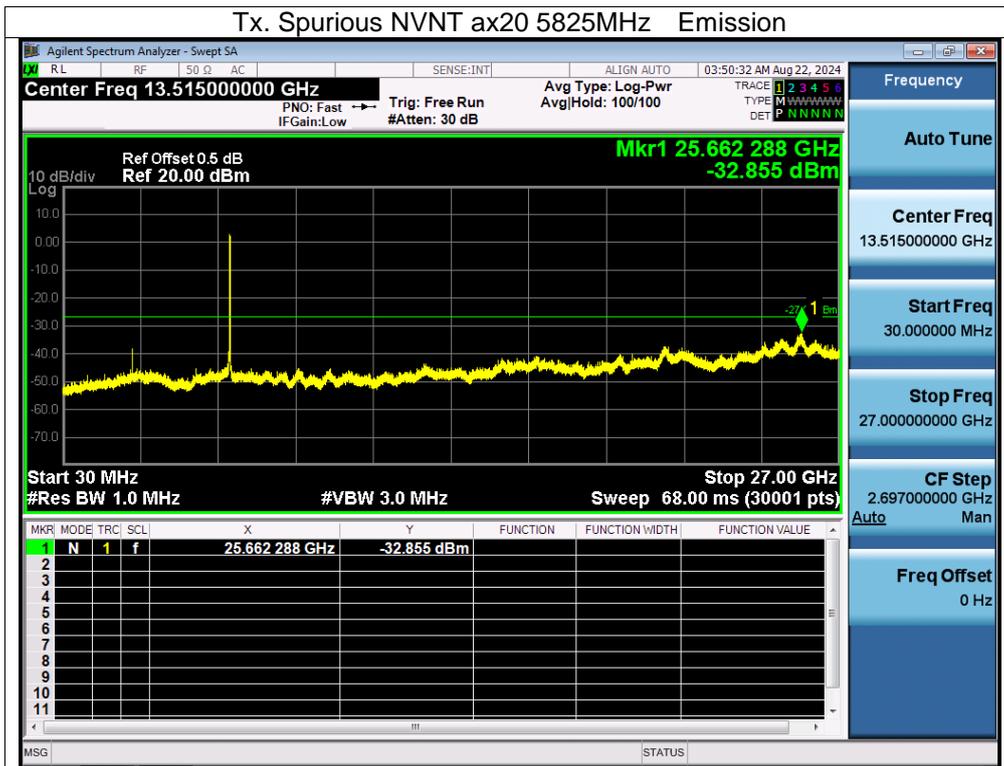

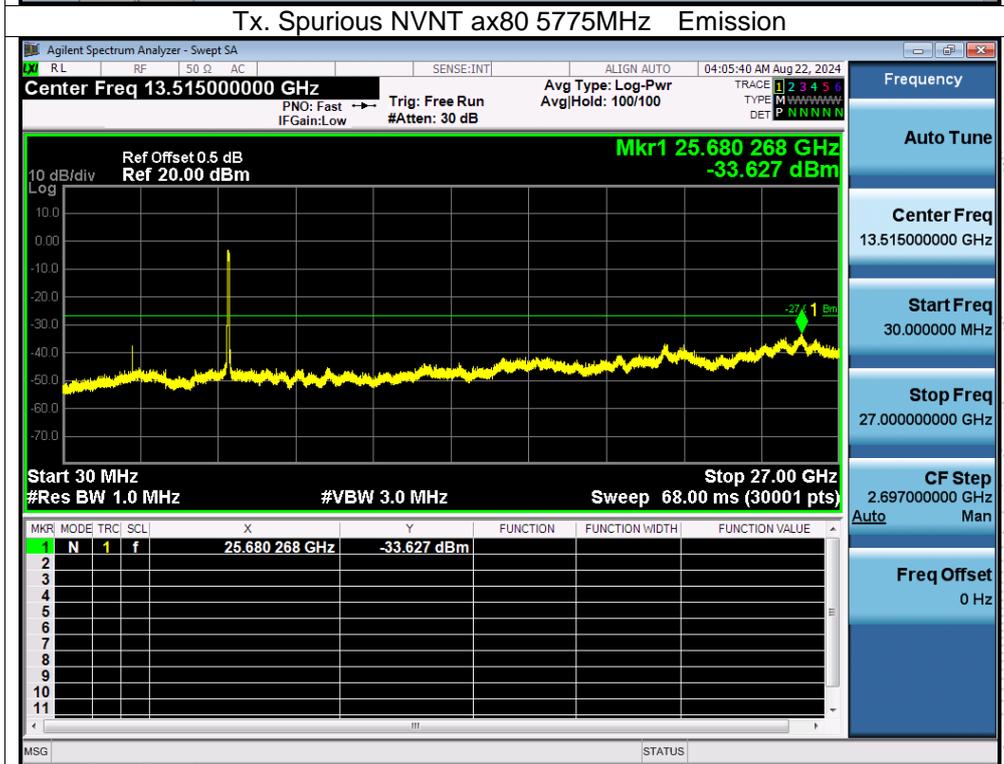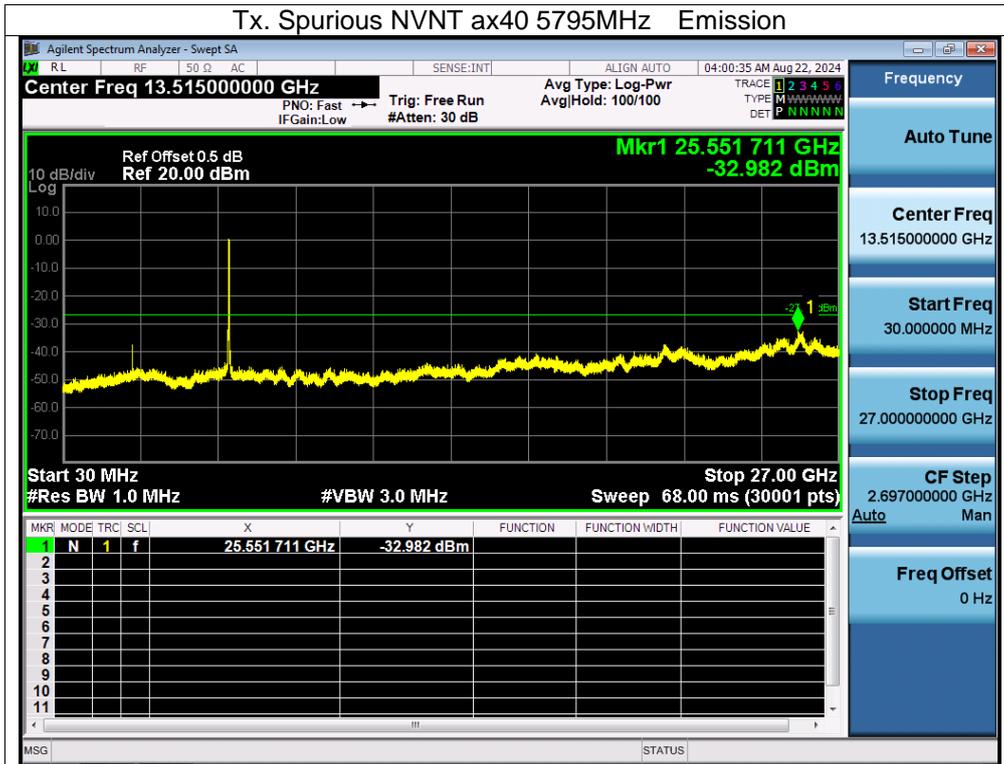

### 13. Frequency Stability Measurement

#### 13.1 Block Diagram Of Test Setup



#### 13.2 Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification)..

#### 13.3 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and he limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $-20^\circ\text{C} \sim 70^\circ\text{C}$ .

## 13.4 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 5V
Test Mode:	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

## Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5180.0051	5180	0.0051	0.9846
		V max (V)	5.75	5180.0020	5180	0.0020	0.3861
		V min (V)	4.25	5180.0118	5180	0.0118	2.2780
Limits				5150-5250 MHz			
Result				Complies			

## Temperature vs. Frequency Stability


TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5180.0022	5180	0.0022	0.4247
		T (°C)	-10	5180.0120	5180	0.0120	2.3166
		T (°C)	0	5180.0055	5180	0.0055	1.0618
		T (°C)	10	5180.0074	5180	0.0074	1.4286
		T (°C)	20	5180.0088	5180	0.0088	1.6988
		T (°C)	30	5180.0126	5180	0.0126	2.4324
		T (°C)	40	5180.0103	5180	0.0103	1.9884
		T (°C)	50	5180.0005	5180	0.0005	0.0965
		T (°C)	60	5180.0121	5180	0.0121	2.3359
		T (°C)	70	5180.0005	5180	0.0005	0.0965
Limits				5150-5250 MHz			
Result				Complies			

## Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5200.0072	5200	0.0072	1.3846
		V max (V)	5.75	5200.0023	5200	0.0023	0.4423
		V min (V)	4.25	5200.0019	5200	0.0019	0.3654
Limits				5150-5250 MHz			
Result				Complies			

## Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5200.00550	5200	0.00550	1.0577
		T (°C)	-10	5200.00270	5200	0.00270	0.5192
		T (°C)	0	5200.01250	5200	0.01250	2.4038
		T (°C)	10	5200.01190	5200	0.01190	2.2885
		T (°C)	20	5200.00530	5200	0.00530	1.0192
		T (°C)	30	5200.01070	5200	0.01070	2.0577
		T (°C)	40	5200.00110	5200	0.00110	0.2115
		T (°C)	50	5200.00690	5200	0.00690	1.3269
		T (°C)	60	5200.00750	5200	0.00750	1.4423
		T (°C)	70	5200.00140	5200	0.00140	0.2692
Limits				5150-5250 MHz			
Result				Complies			

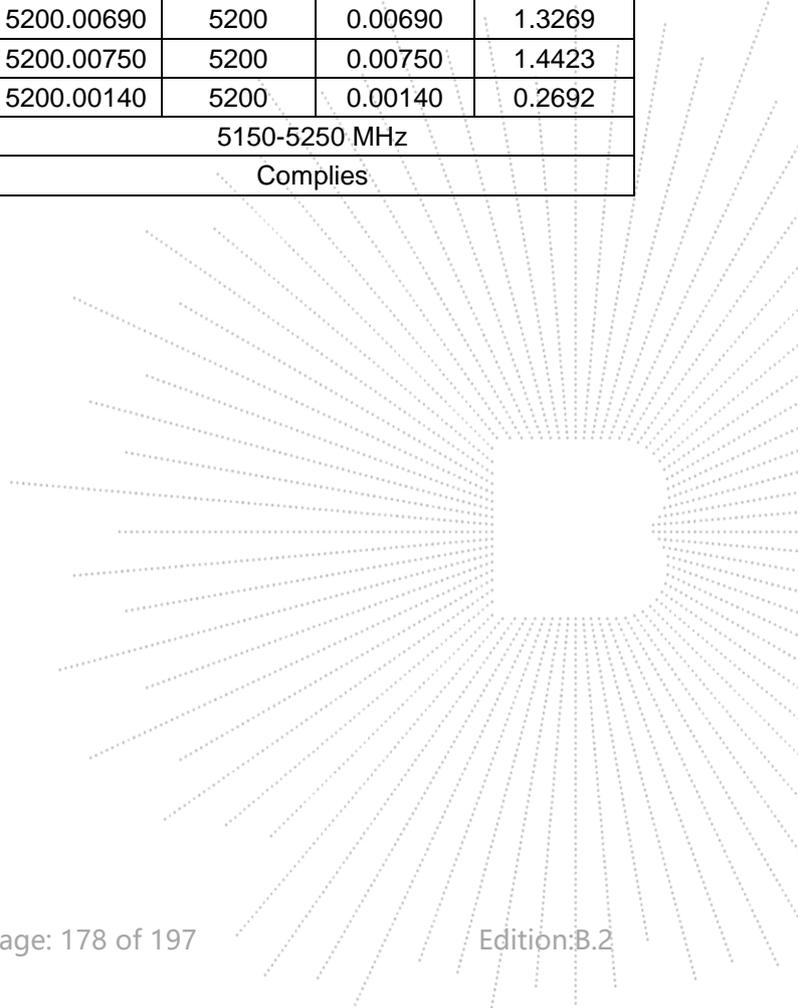


## Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5240.0092	5240	0.0092	1.7557
		V max (V)	5.75	5240.0083	5240	0.0083	1.5840
		V min (V)	4.25	5240.0118	5240	0.0118	2.2519
Limits				5150-5250 MHz			
Result				Complies			

## Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5240.0123	5240	0.0123	2.3473
		T (°C)	-10	5240.0052	5240	0.0052	0.9924
		T (°C)	0	5240.0034	5240	0.0034	0.6489
		T (°C)	10	5240.0132	5240	0.0132	2.5191
		T (°C)	20	5240.0118	5240	0.0118	2.2519
		T (°C)	30	5240.0044	5240	0.0044	0.8397
		T (°C)	40	5240.0094	5240	0.0094	1.7939
		T (°C)	50	5240.0079	5240	0.0079	1.5076
		T (°C)	60	5240.0084	5240	0.0084	1.6031
		T (°C)	70	5240.0069	5240	0.0069	1.3168
Limits				5150-5250 MHz			
Result				Complies			

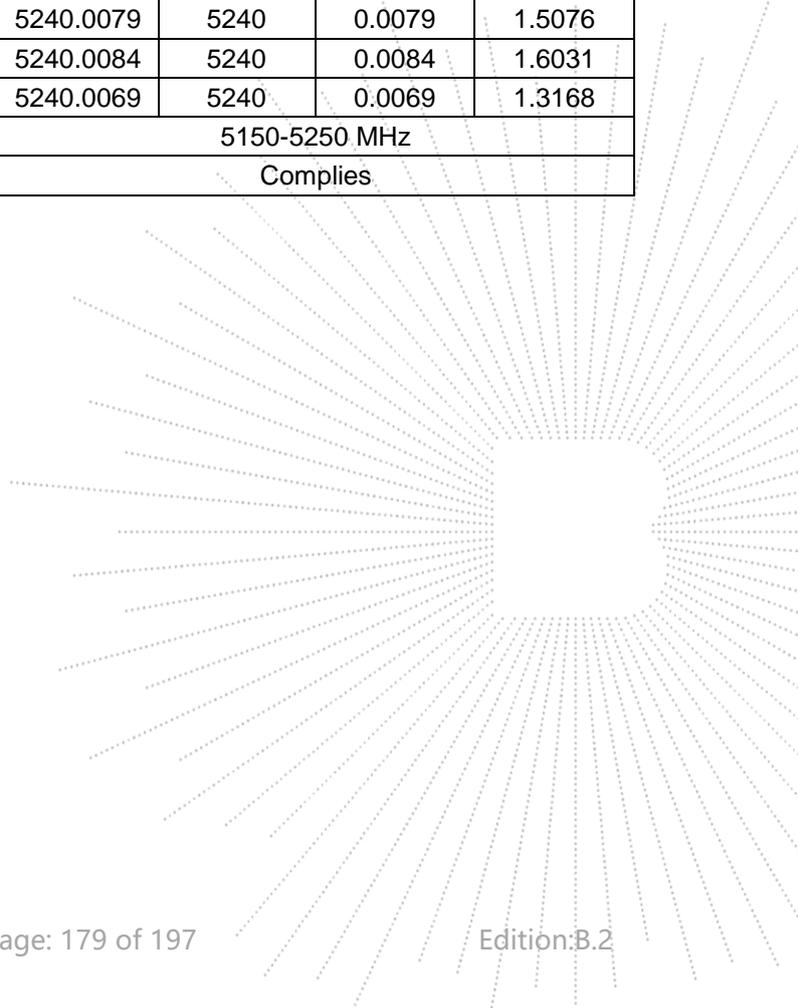

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 5V
Test Mode:	TX (5.8G) Mode Frequency U-NII-3 (5745-5825MHz)		

## Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5745.00840	5745	0.00840	1.4621
		V max (V)	5.75	5745.01110	5745	0.01110	1.9321
		V min (V)	4.25	5745.01050	5745	0.01050	1.8277
Limits				5725-5850 MHz			
Result				Complies			

## Temperature vs. Frequency Stability


TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5745.01010	5745	0.01010	1.7581
		T (°C)	-10	5745.00390	5745	0.00390	0.6789
		T (°C)	0	5745.00090	5745	0.00090	0.1567
		T (°C)	10	5745.00380	5745	0.00380	0.6614
		T (°C)	20	5745.00450	5745	0.00450	0.7833
		T (°C)	30	5745.00570	5745	0.00570	0.9922
		T (°C)	40	5745.01260	5745	0.01260	2.1932
		T (°C)	50	5745.00170	5745	0.00170	0.2959
		T (°C)	60	5745.00660	5745	0.00660	1.1488
		T (°C)	70	5745.01050	5745	0.01050	1.8277
Limits				5725-5850 MHz			
Result				Complies			

## Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5785.00960	5785	0.00960	1.6595
		V max (V)	5.75	5785.00950	5785	0.00950	1.6422
		V min (V)	4.25	5785.00590	5785	0.00590	1.0199
Limits				5725-5850 MHz			
Result				Complies			

## Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5785.01130	5785	0.01130	1.9533
		T (°C)	-10	5785.00620	5785	0.00620	1.0717
		T (°C)	0	5785.00800	5785	0.00800	1.3829
		T (°C)	10	5785.00580	5785	0.00580	1.0026
		T (°C)	20	5785.01250	5785	0.01250	2.1608
		T (°C)	30	5785.01220	5785	0.01220	2.1089
		T (°C)	40	5785.00180	5785	0.00180	0.3111
		T (°C)	50	5785.00910	5785	0.00910	1.5730
		T (°C)	60	5785.00770	5785	0.00770	1.3310
		T (°C)	70	5785.00750	5785	0.00750	1.2965
Limits				5725-5850 MHz			
Result				Complies			

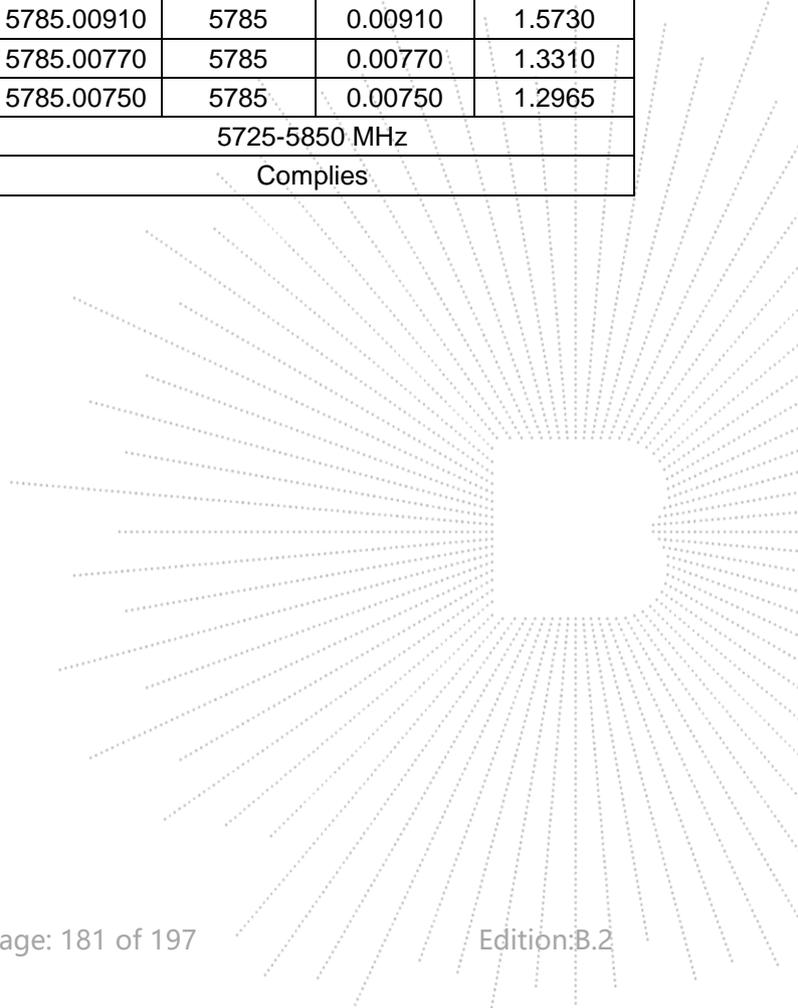


## Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5825.00290	5825	0.00290	0.4979
		V max (V)	5.75	5825.00250	5825	0.00250	0.4292
		V min (V)	4.25	5825.00320	5825	0.00320	0.5494
Limits				5725-5850 MHz			
Result				Complies			

## Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5825.00560	5825	0.00560	0.9614
		T (°C)	-10	5825.00900	5825	0.00900	1.5451
		T (°C)	0	5825.00610	5825	0.00610	1.0472
		T (°C)	10	5825.00680	5825	0.00680	1.1674
		T (°C)	20	5825.00070	5825	0.00070	0.1202
		T (°C)	30	5825.00110	5825	0.00110	0.1888
		T (°C)	40	5825.00930	5825	0.00930	1.5966
		T (°C)	50	5825.00690	5825	0.00690	1.1845
		T (°C)	60	5825.00130	5825	0.00130	0.2232
		T (°C)	70	5825.00170	5825	0.00170	0.2918
Limits				5725-5850 MHz			
Result				Complies			

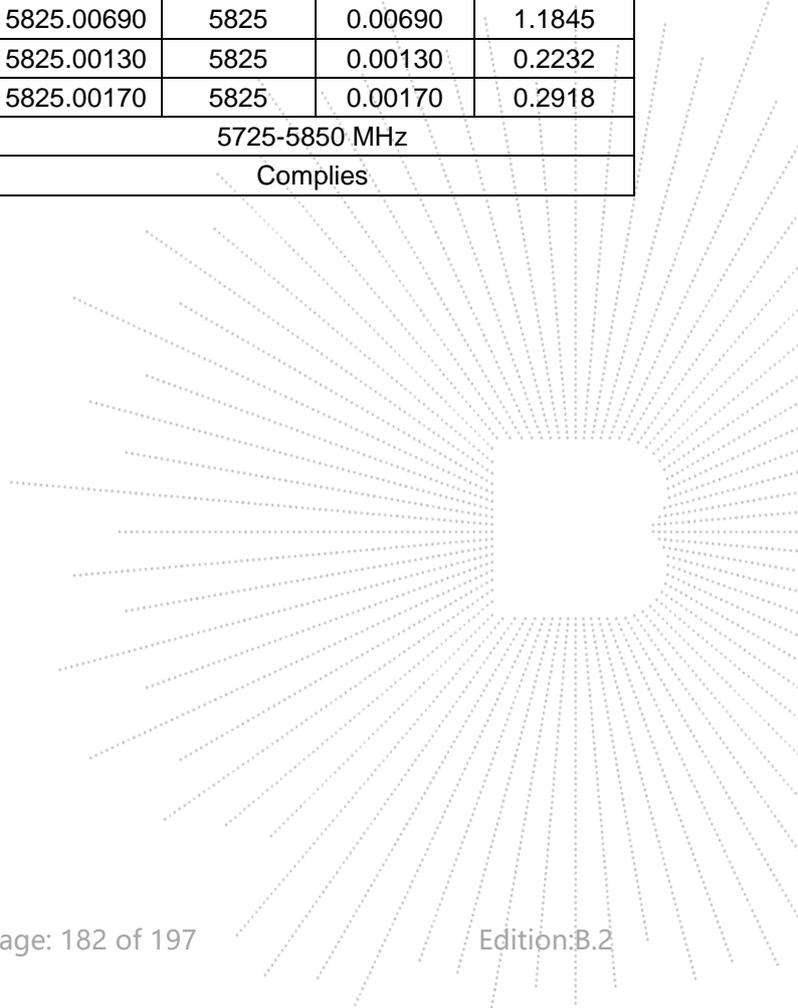

## 14. Duty Cycle Of Test Signal

### 14.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

### 14.2 Formula

Duty Cycle =  $T_{on} / (T_{on} + T_{off})$



### 14.3 Test Procedure



1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak



### 14.4 Test Result



#### 5.1G

Condition	Mode	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5180	0
NVNT	n20	5180	0
NVNT	n40	5190	0
NVNT	ac20	5180	0
NVNT	ac40	5190	0
NVNT	ac80	5210	0
NVNT	ax20	5180	0
NVNT	ax40	5190	0

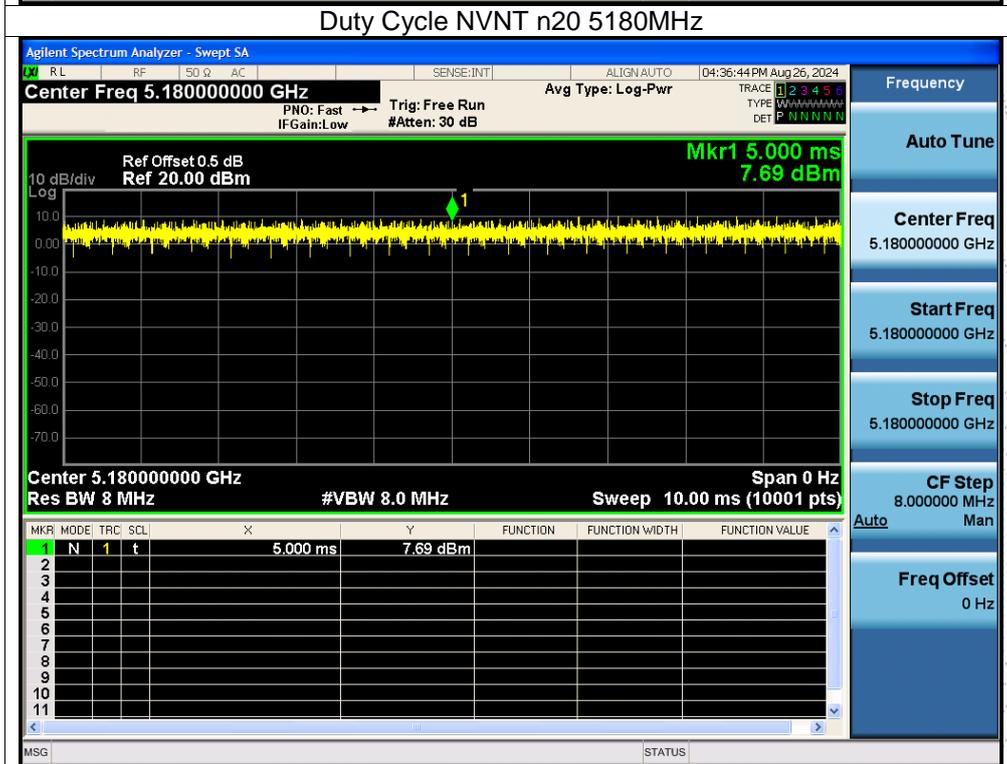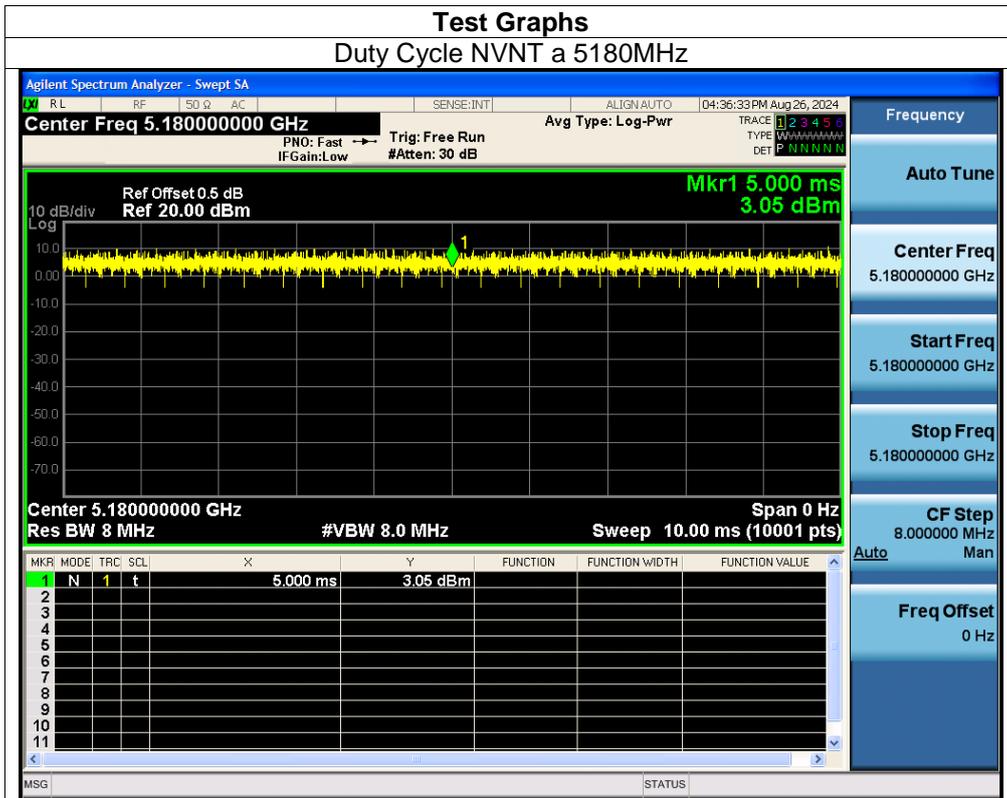

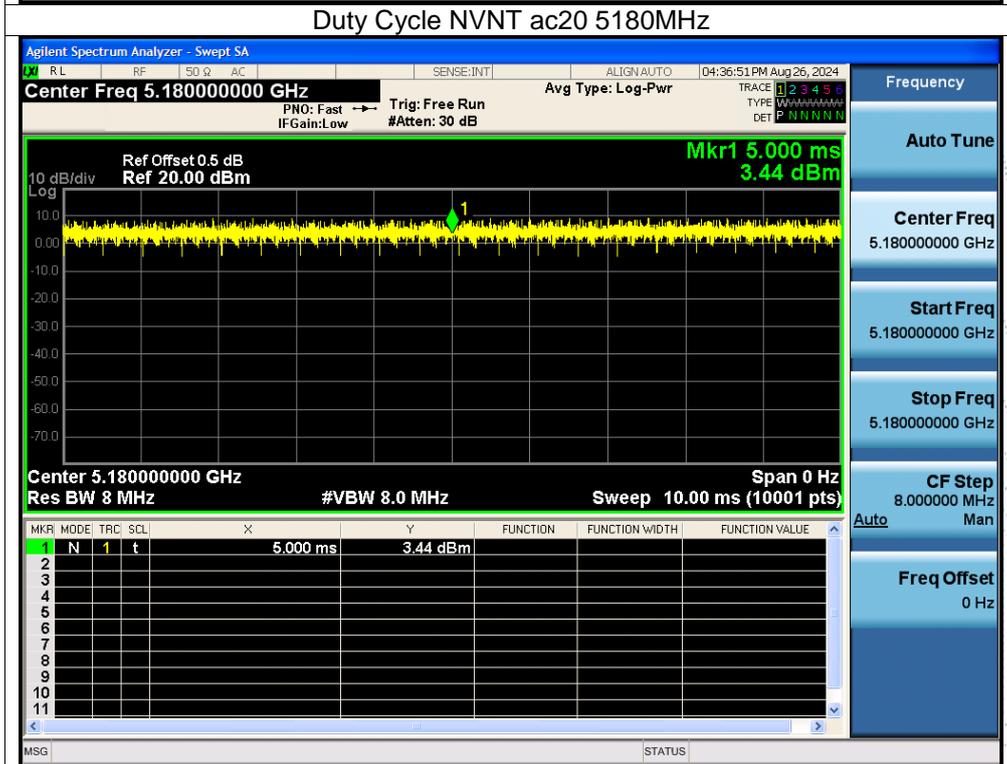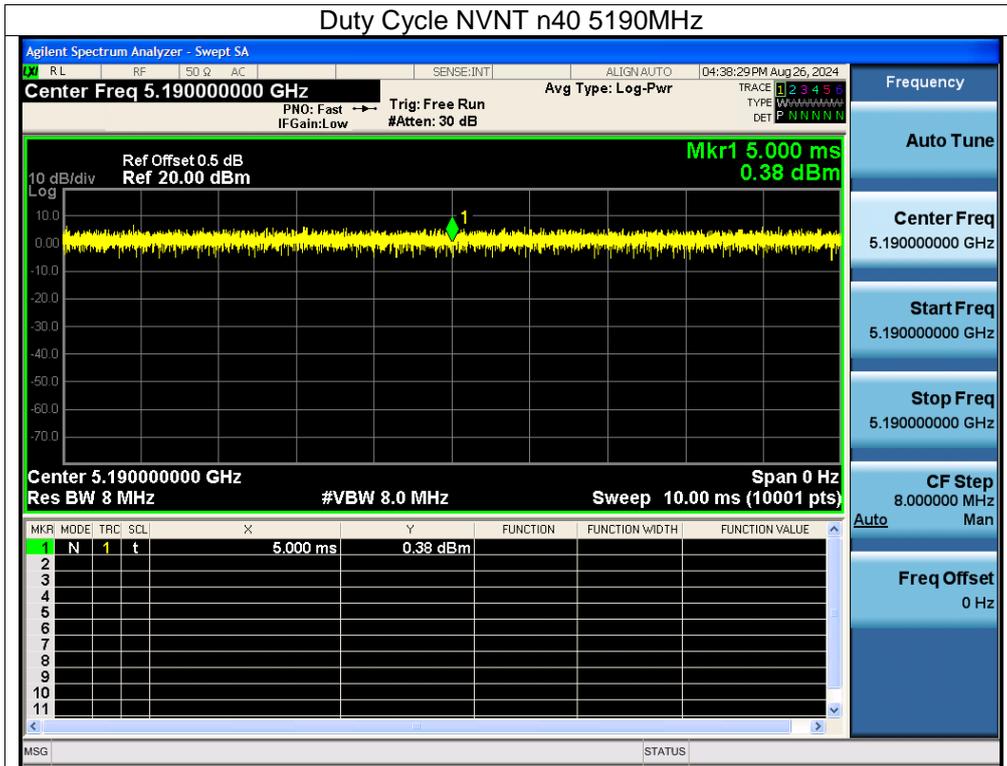


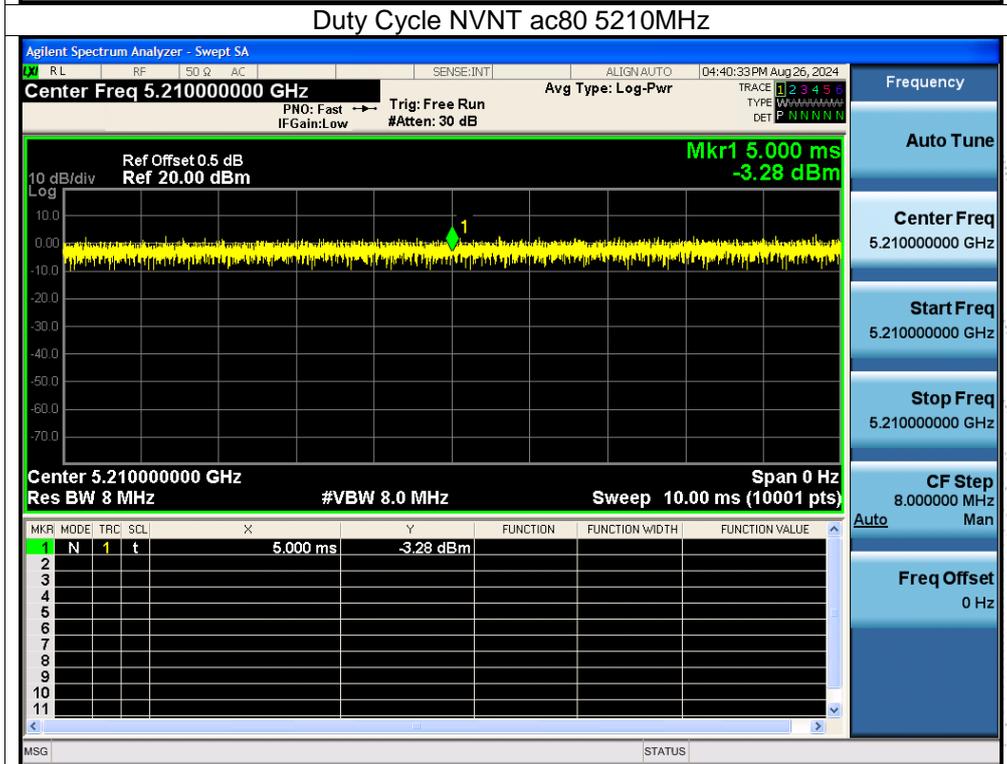
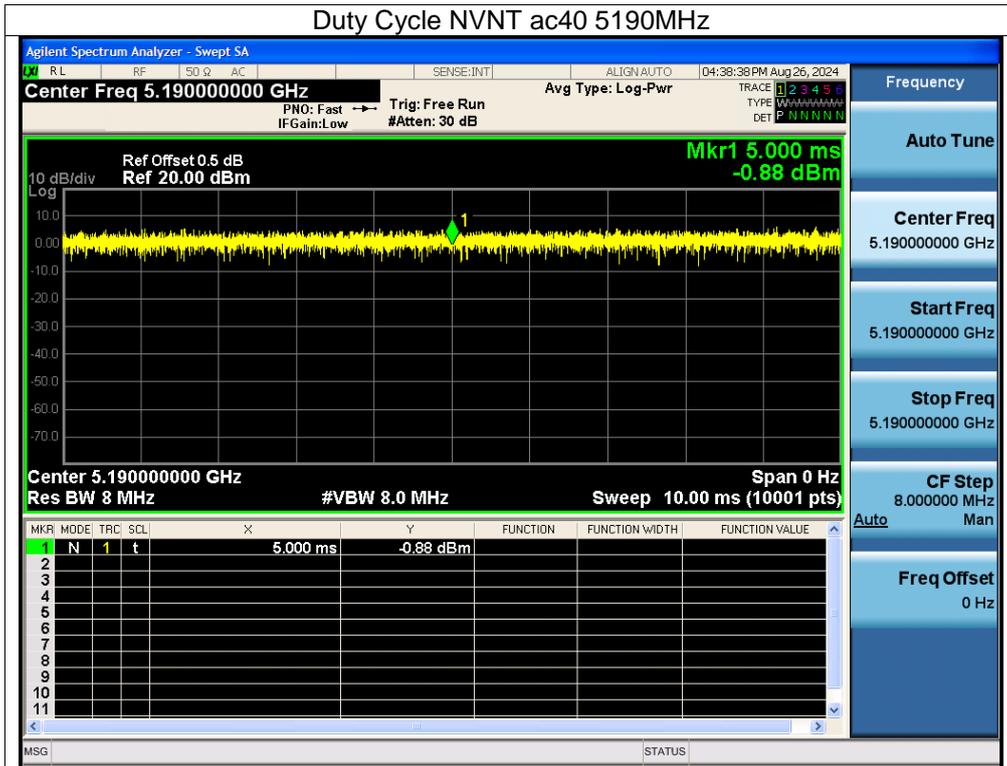


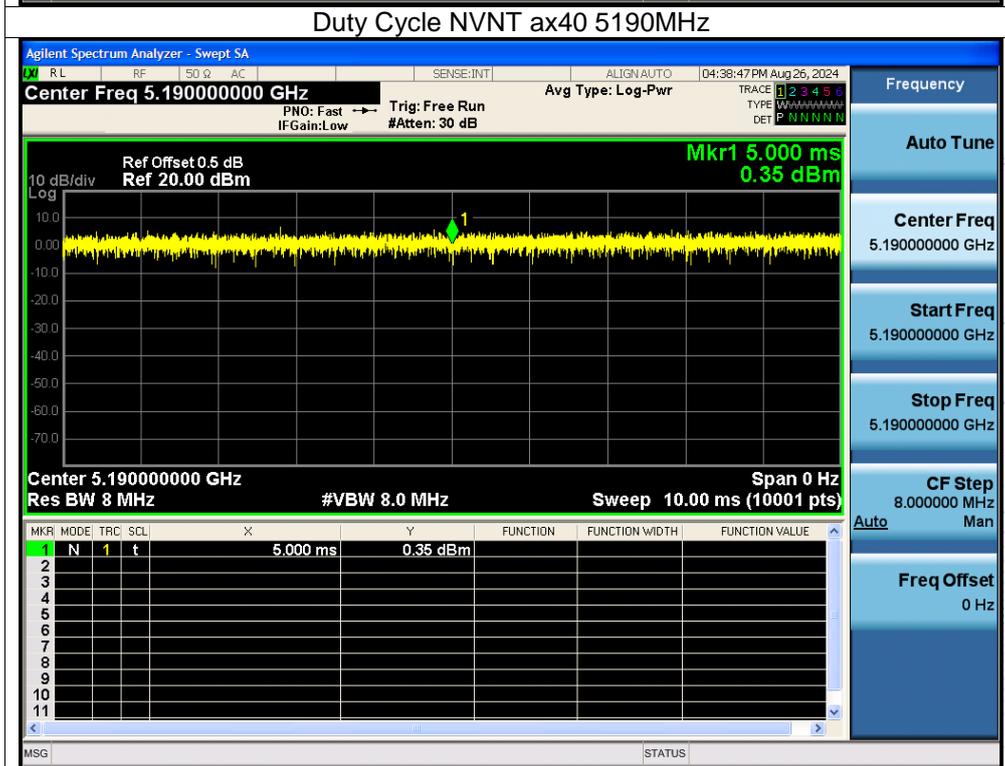
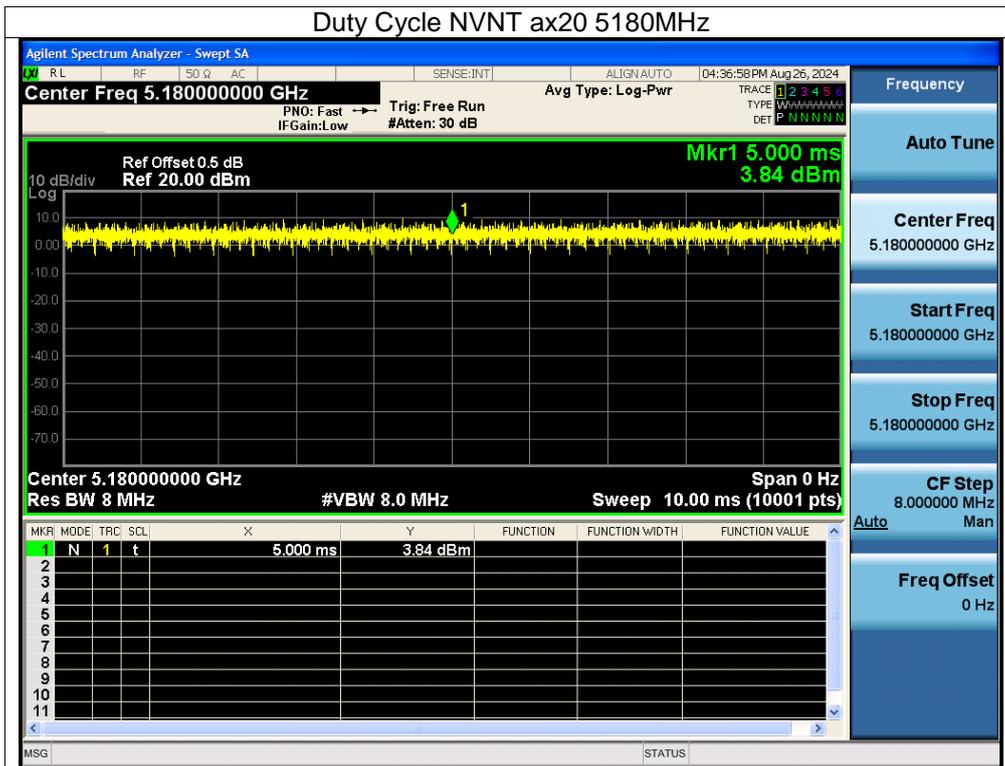




## 5.8G



<b>Condition</b>	<b>Mode</b>	<b>Duty Cycle (%)</b>	<b>Correction Factor (dB)</b>
NVNT	a	100	0
NVNT	n20	100	0
NVNT	n40	100	0
NVNT	ac20	100	0
NVNT	ac40	100	0
NVNT	ac80	100	0
NVNT	ax20	100	0
NVNT	ax40	100	0

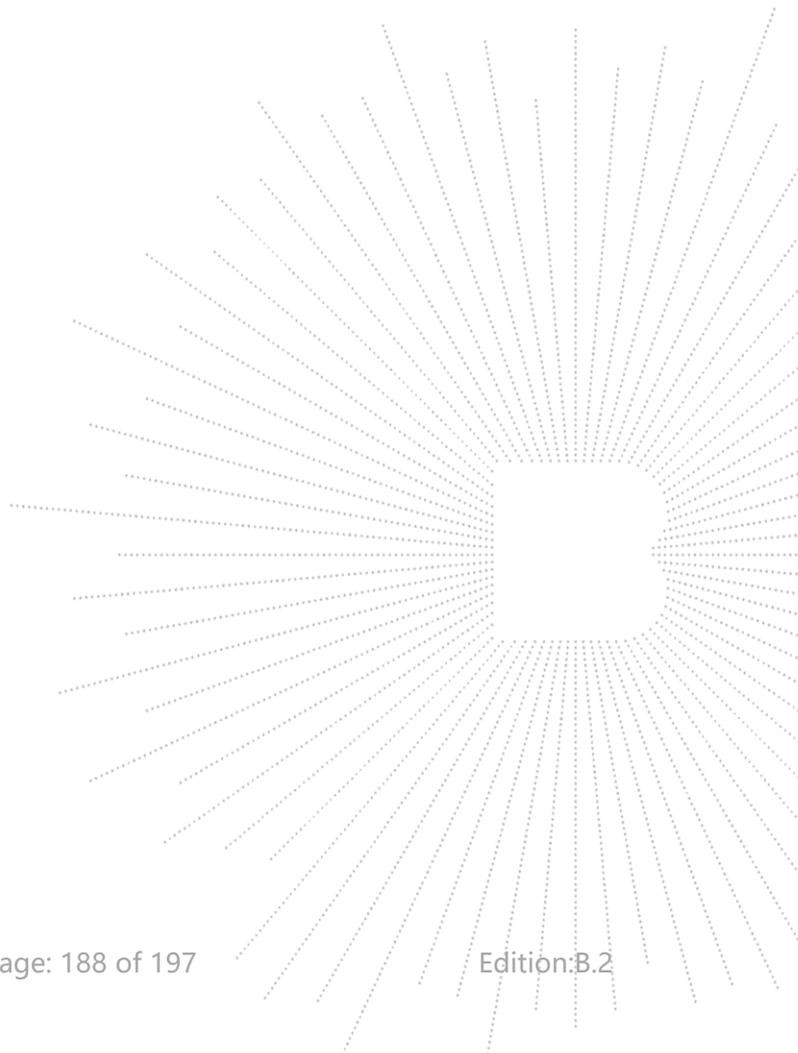

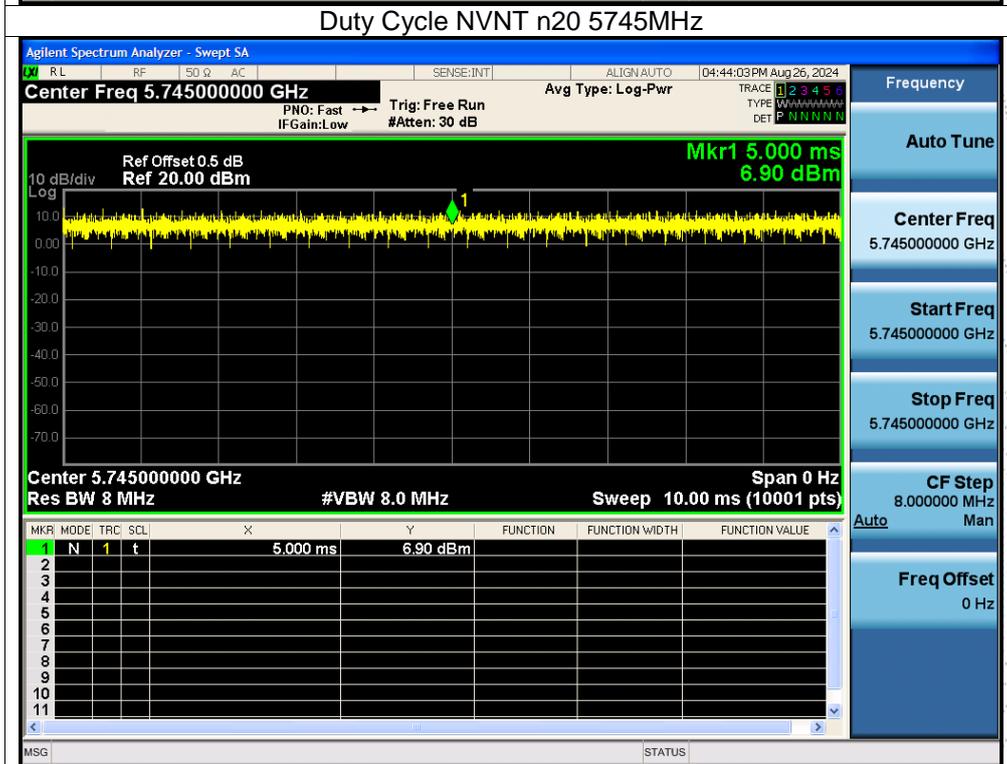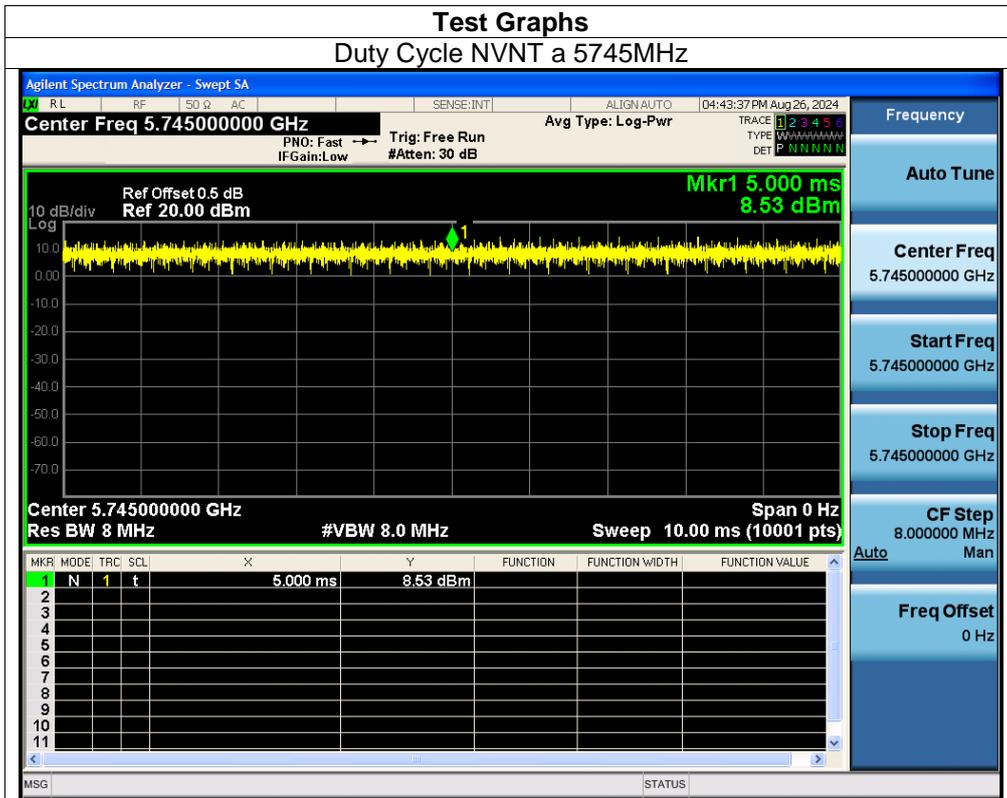

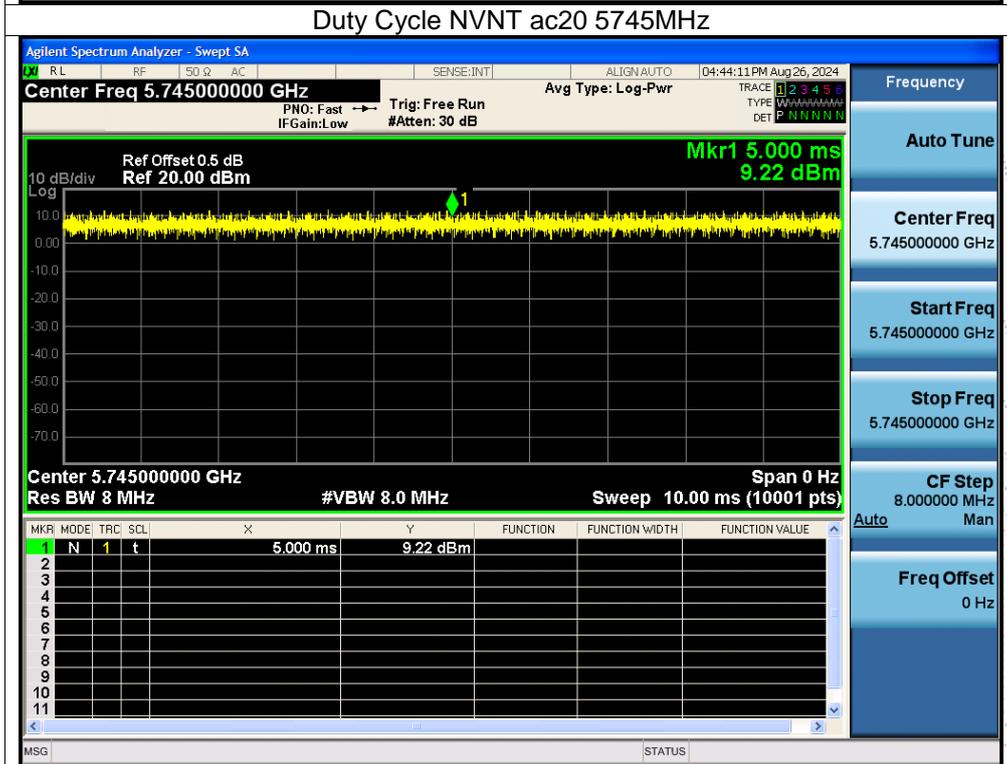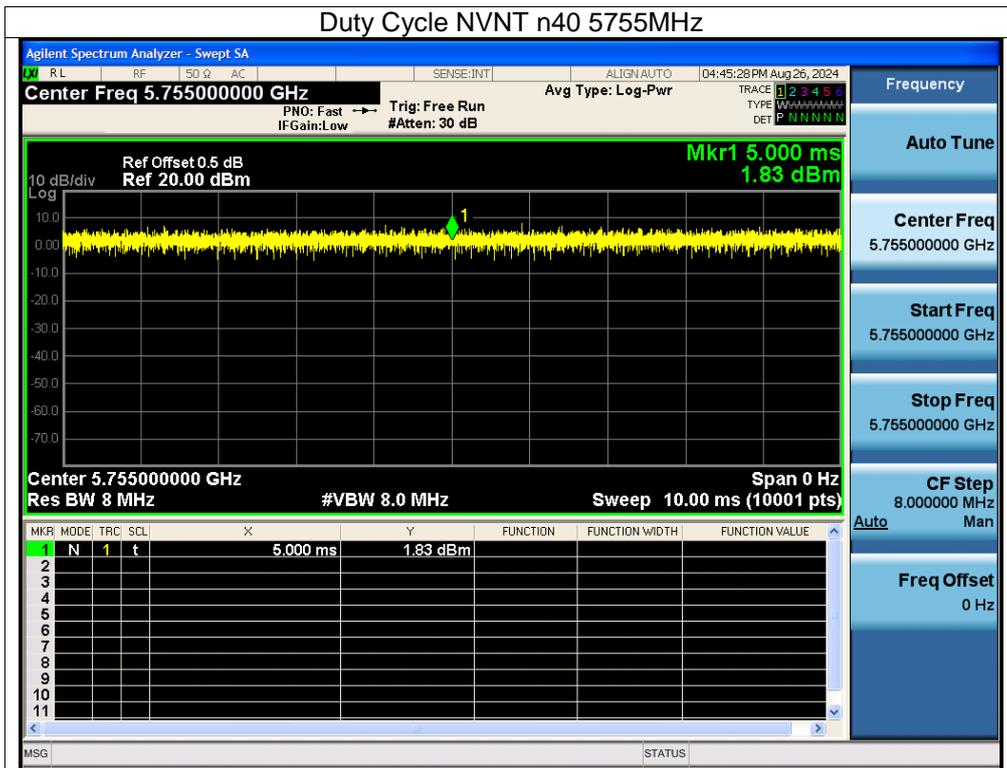

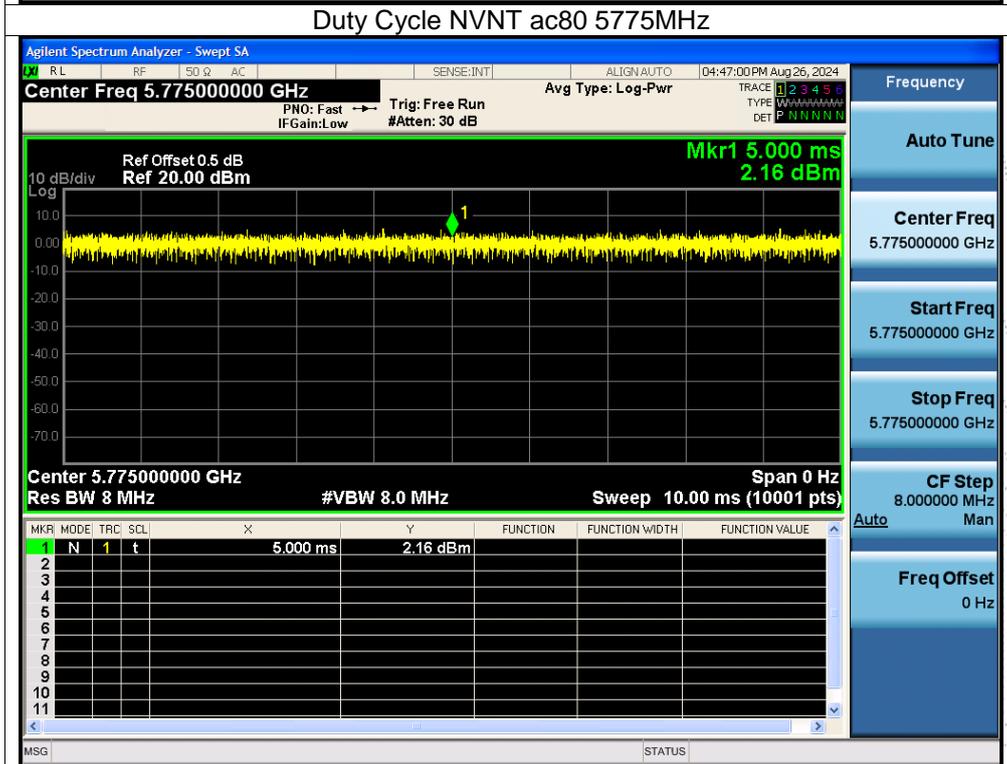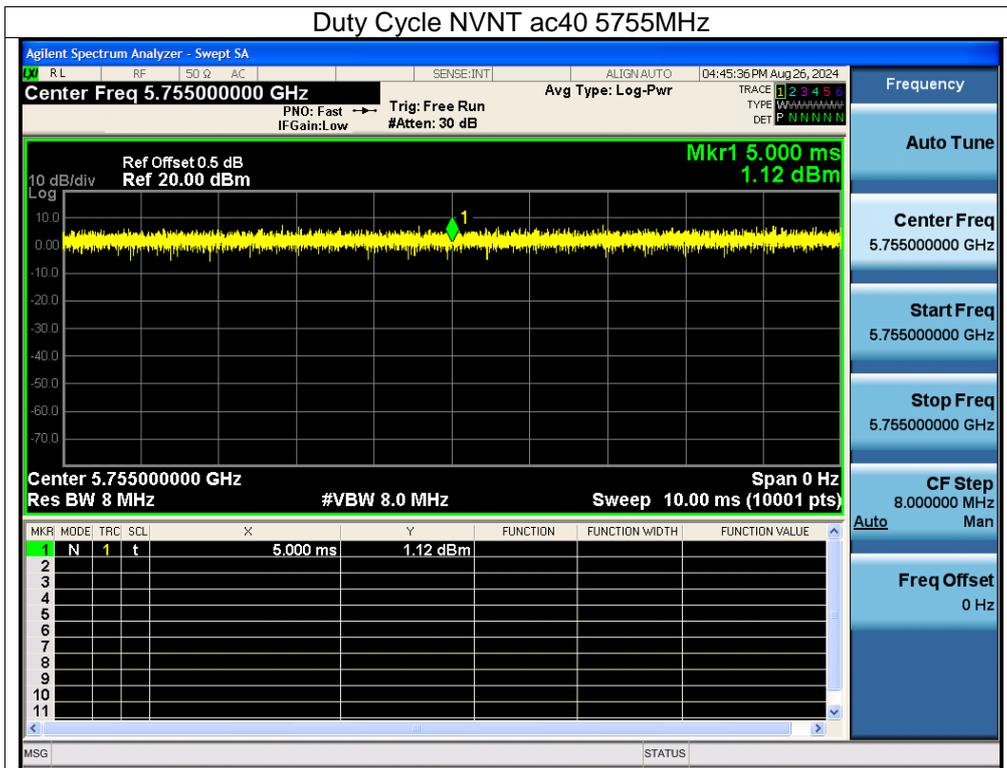

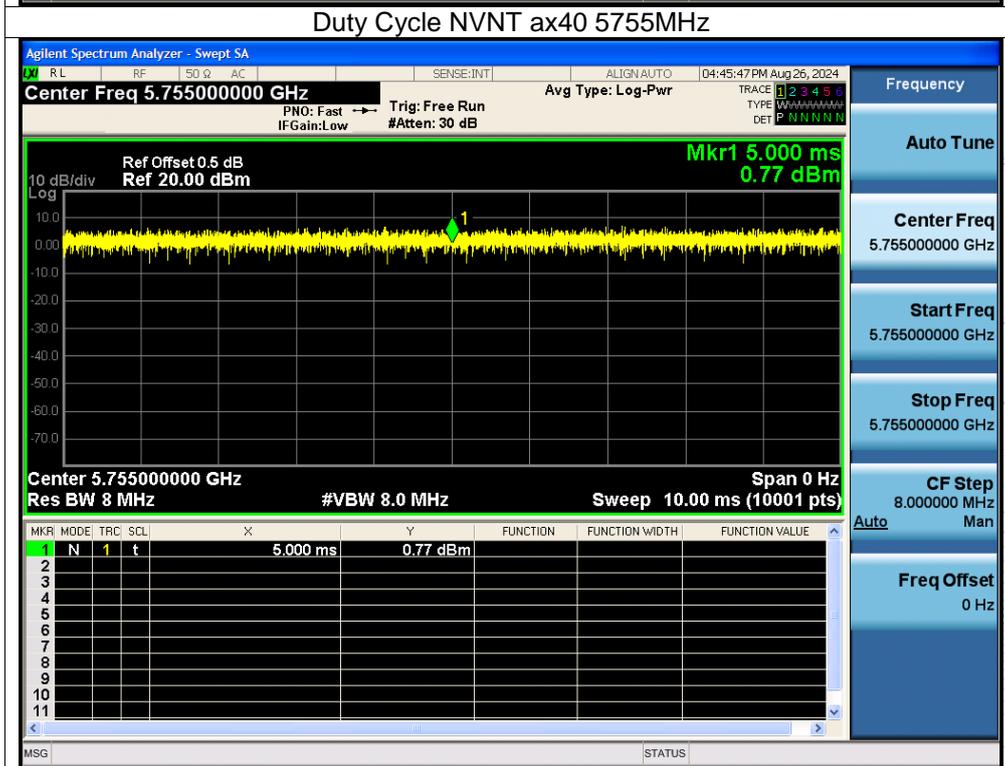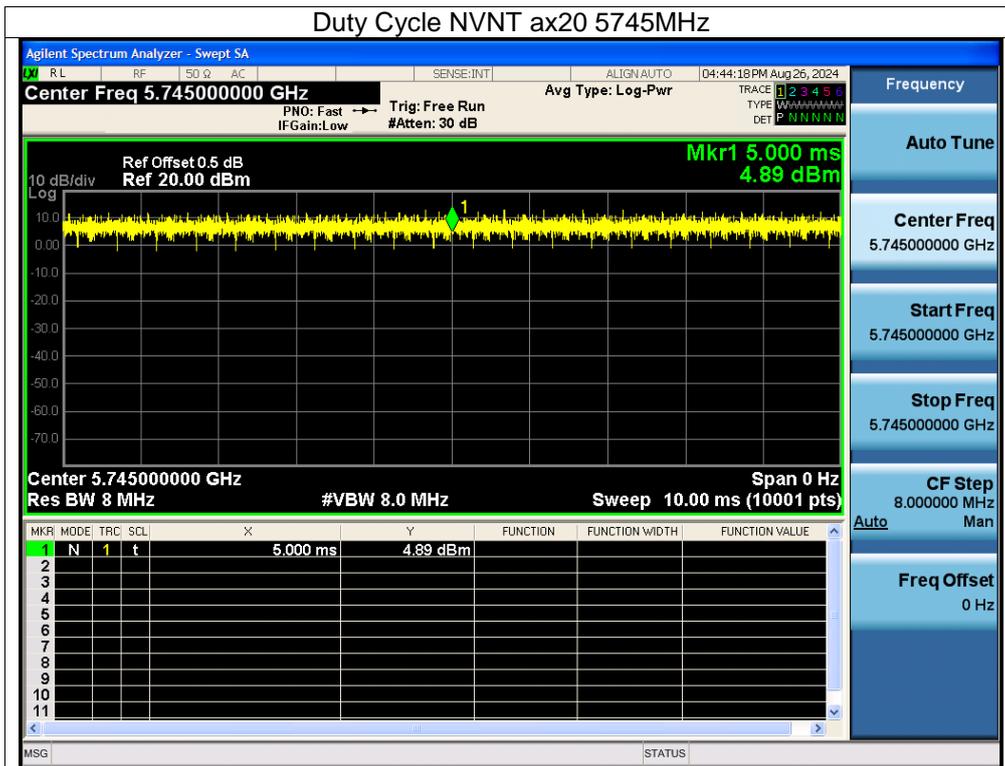


## 15. Antenna Requirement

### 15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


### 15.2 Test Result

The EUT antenna is FPC antenna, The IPEX antenna connector is adopted.

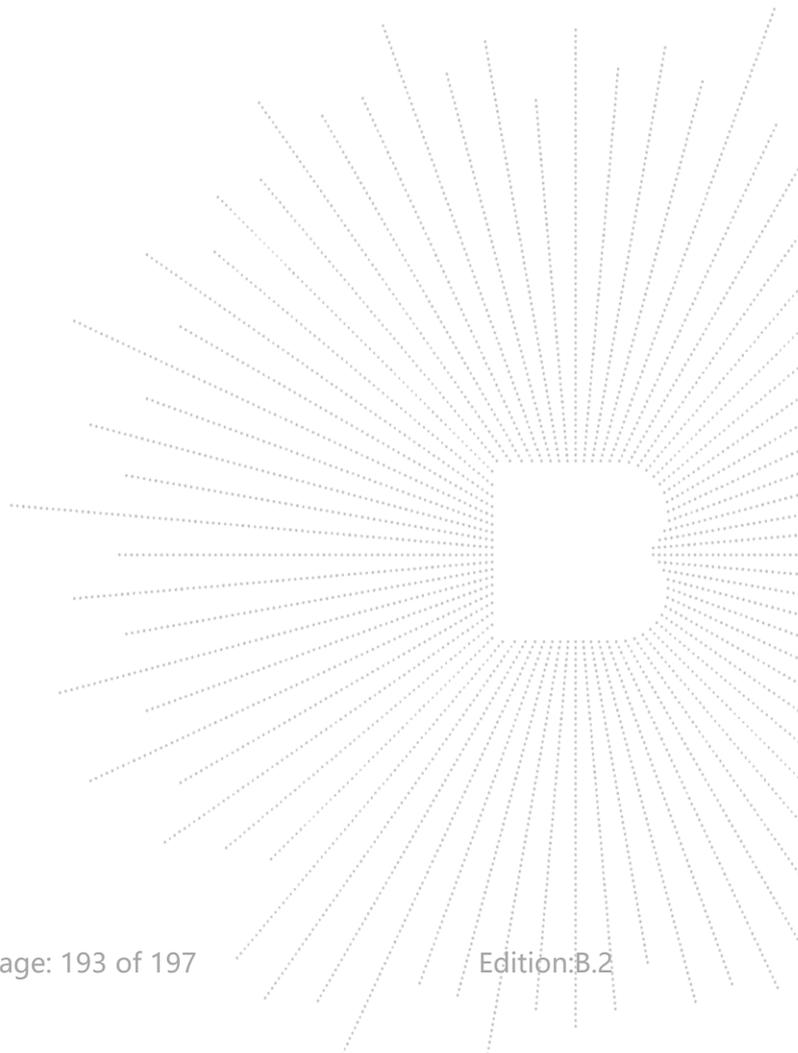


### 16. EUT Photographs

EUT Photo 1

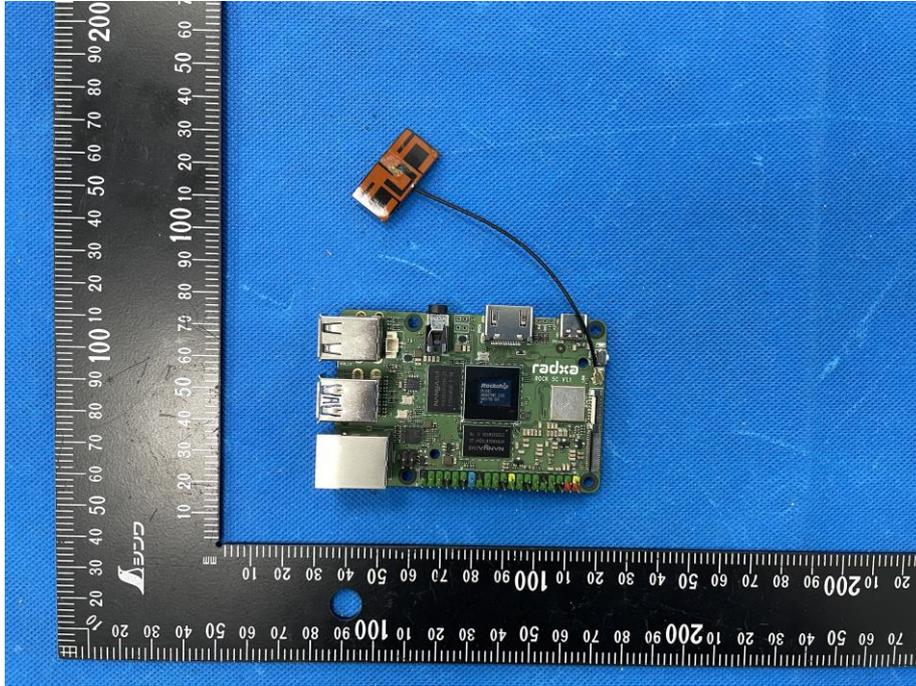

EUT Photo 2

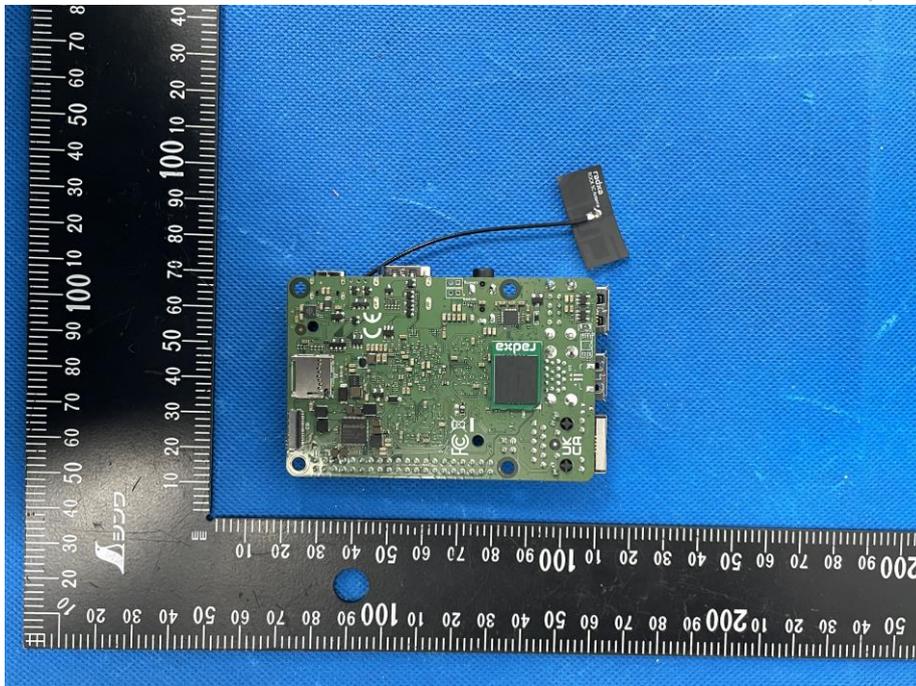


NOTE: Appendix-Photographs Of EUT Constructional Details.


## 17. EUT Test Setup Photographs

### Conducted Emissions Photo



### Radiated Measurement Photos

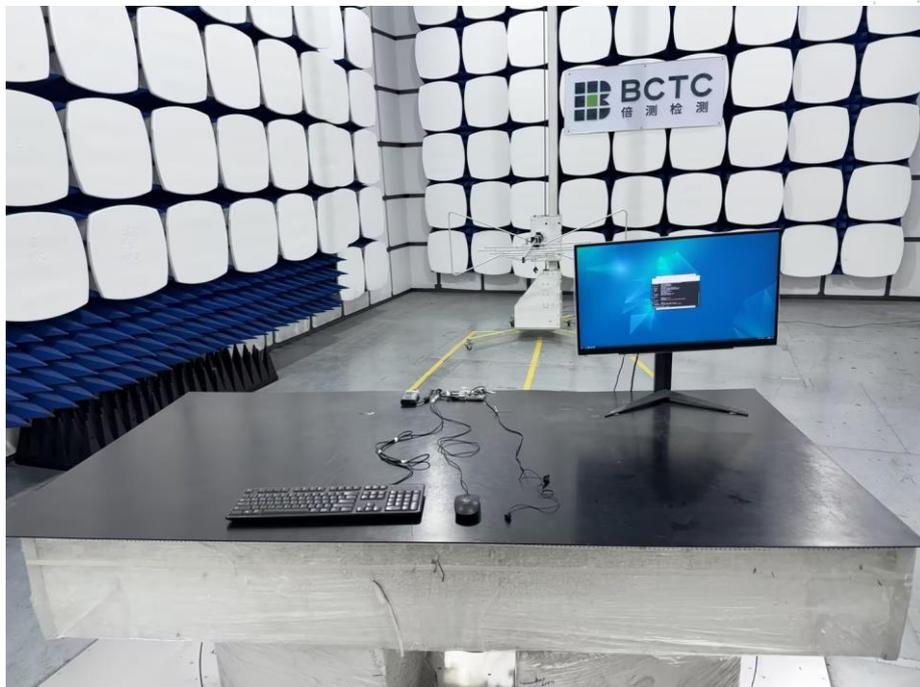

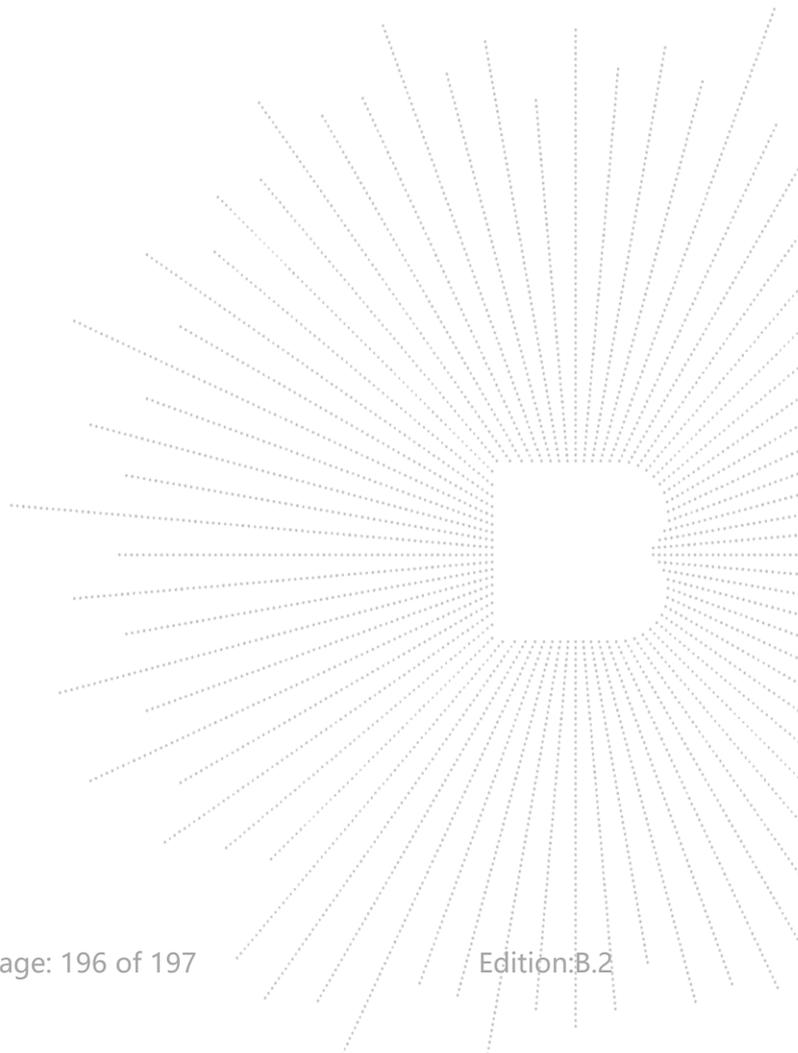

**STATEMENT**

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

**Address:**

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

Complaint/Advice E-mail: [advice@bctc-lab.com.cn](mailto:advice@bctc-lab.com.cn)

\*\*\*\*\* END \*\*\*\*\*

