
Radxa ROCK 5C Product Brief

8K Credit Card-Sized Single Board Computer

Revision 1.6

2026-09-04



Radxa Computer



Contents

1	Revision Control Table	2
2	Introduction	3
2.1	Radxa ROCK 5C Lite	3
2.1.1	V1.1	3
2.1.2	V2.1	4
2.2	Radxa ROCK 5C	5
2.2.1	V1.1	5
2.2.2	V2.1	6
3	Features	7
3.1	Hardware	7
3.2	Interfaces	7
3.3	Software	8
4	Mechanical Specification	9
4.1	V2.1	9
5	Electrical Specification	10
5.1	Power Requirements	10
5.2	GPIO Voltage	10
6	Operating Conditions	10
7	Peripherals	11
7.1	GPIO Interface	11
7.1.1	GPIO Alternate Functions	11
7.2	Network	12
7.3	eMMC Socket	12
7.4	Camera and Display Interfaces	12
7.5	USB	12
7.6	HDMI Output	13
7.7	Audio Jack	13
7.8	FPC Connector	13
7.9	Fan Connector	13
8	Availability	13
9	Support	13

1 Revision Control Table

Version	Date	Changes from previous version
1.0	2024-03-24	First version
1.1	2024-06-25	Added Wireless Info
1.2	2025-03-13	Fix GPIO Alt Function Table
1.3	2025-04-25	Change PDF fonts to avoid CJK characters
1.4	2026-06-26	Update availability information
1.5	2026-09-04	Update ROCK 5C V2.1 product image and parameters
1.6	2026-09-04	Add V2.1 mechanical dimensions drawing and 5C Lite V2.1 product image


2 Introduction

The Radxa ROCK 5C is a Single Board Computer (SBC) in a compact form factor packed with a wide range of class-leading functionality, features and expansion options. The ROCK 5C is an ideal choice for makers, IoT enthusiasts, hobbyists, gamers, PC users and everyone who need an extremely highly specified platform with outstanding performance and reliability.


Radxa ROCK 5C offers two versions: one is the Radxa ROCK 5C Lite based on RK3582, and the other is based on RK3588S2.

2.1 Radxa ROCK 5C Lite

2.1.1 V1.1

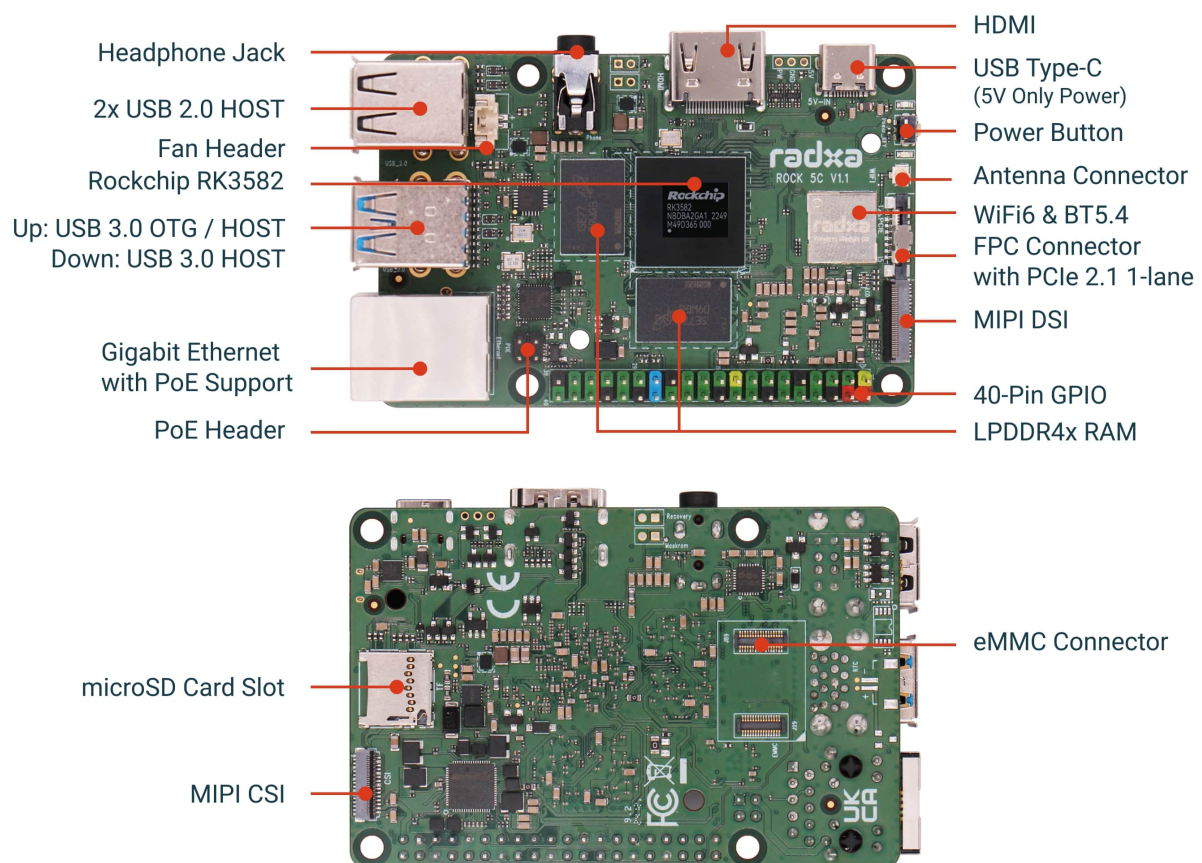


2.1.2 V2.1

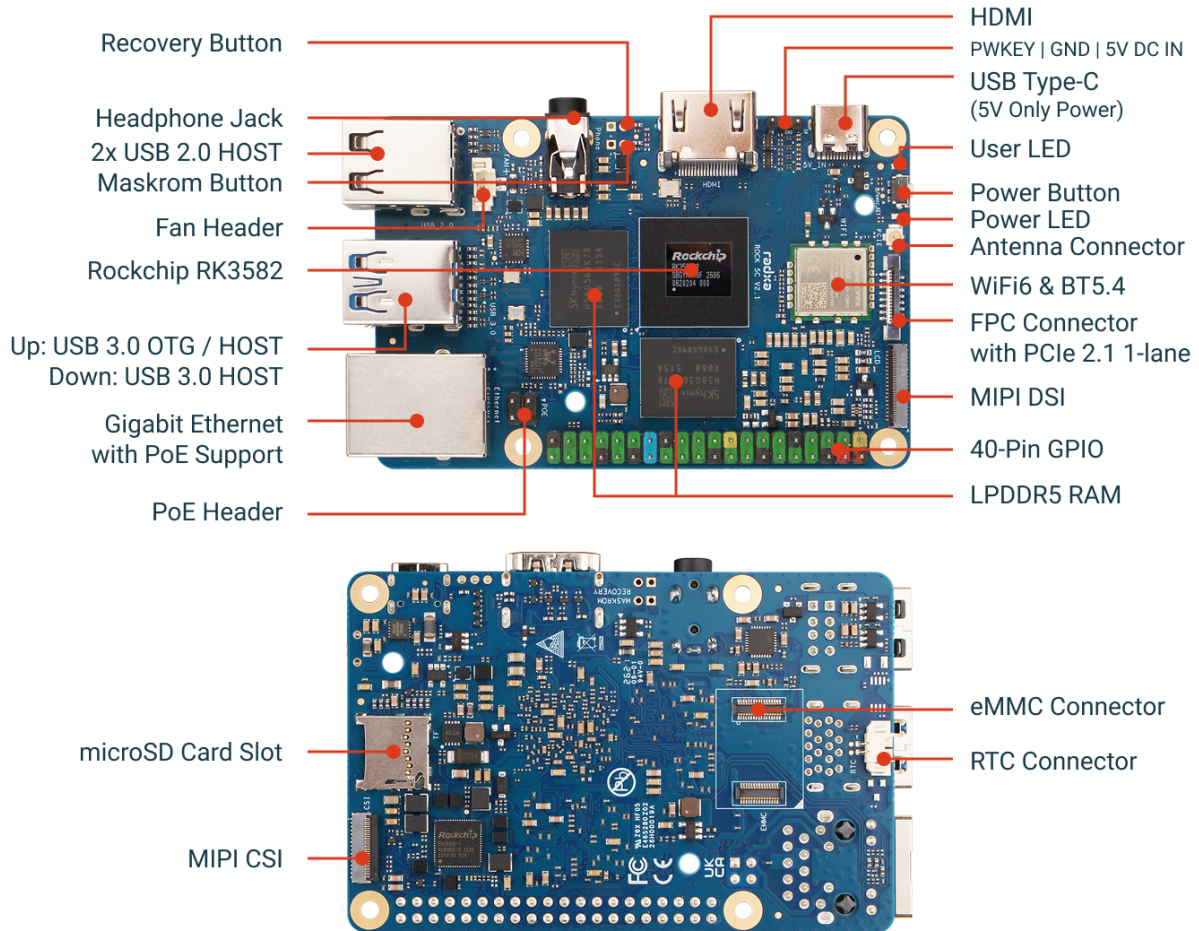


2.2 Radxa ROCK 5C

2.2.1 V1.1

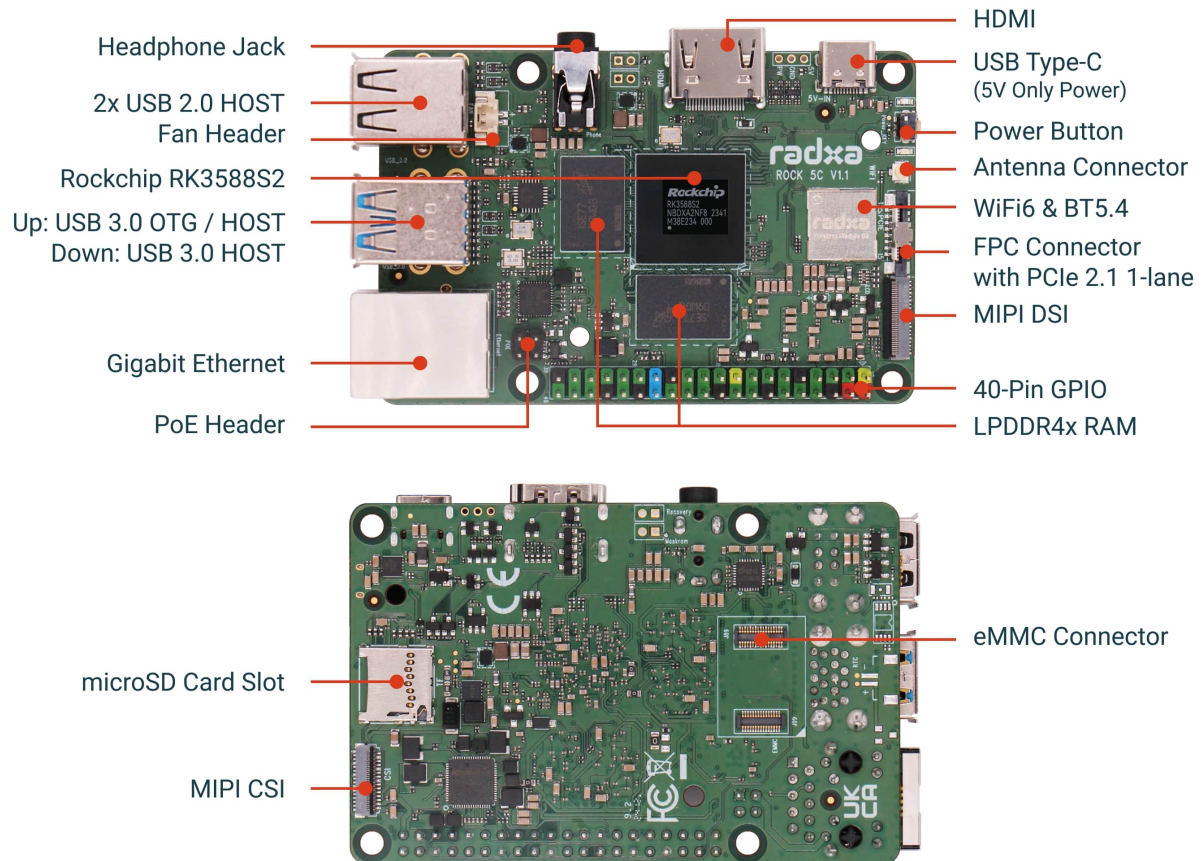

2.2.2 V2.1

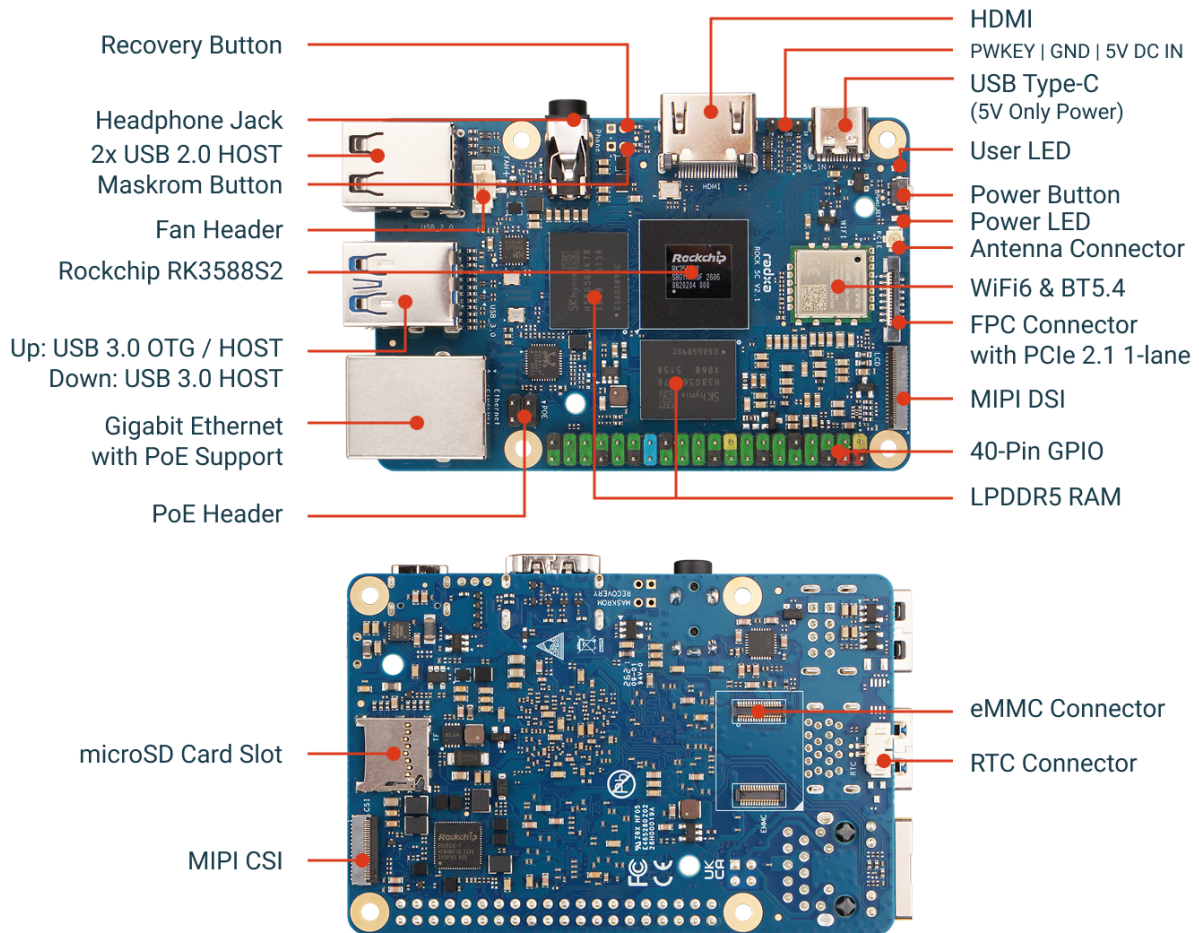

Note: The actual board layout or components location may change during the time but the main connectors type and location will remain the same

3 Features

3.1 Hardware

	ROCK 5C (V1.1 / V2.1)	ROCK 5C Lite (V1.1 / V2.1)
SoC	Rockchip RK3588S2	Rockchip RK3582
CPU	Quad Cortex®-A76 and Quad Cortex®-A55	Dual Cortex®-A76 and Quad Cortex®-A55
GPU	Arm Mali-G610MC4	N/A
NPU	6TOPs@INT8	5TOPs@INT8
Memory	V1.1: LPDDR4x up to 32GB V2.1: LPDDR5 up to 32GB	V1.1: LPDDR4x up to 16GB V2.1: LPDDR5 up to 16GB
Wireless	IEEE 802.11 a/b/g/n/ac/ax (WiFi 6) and Bluetooth 5.4 with BLE 1x External Antenna Connector	
Multimedia	H.265 and VP9 decoder by 8K@60fps H.264 decoder by 8K@30fps AV1 decoder by 4K@60fps H.264 and H.265 encoder by 8K@30fps	H.264 and H.265 encoder by 4K@60fps

3.2 Interfaces

- 1x eMMC Connector
- 1x microSD Card Slot
- 1x Headphone Jack with Microphone Input
- 1x HDMI 2.1 supporting up to 8K
- 1x MIPI DSI supporting up to 2K
- 1x 4-lane MIPI CSI or 2x 2-lane MIPI CSI
- 2x USB 2.0 Type-A HOST ports
- 1x USB 3.0 Type-A HOST port
- 1x USB 3.0 Type-A OTG / HOST port
- 1x Gigabit Ethernet port with PoE support(Additional PoE HAT Required)
- 1x FPC Connector with PCIe 2.1 1-lane
- 1x IEEE 802.11 a/b/g/n/ac/ax (WiFi 6) and BT 5.4 with BLE with External Antenna Connector
- 1x 2-Pin 1.25mm Fan Header
- 1x Power Button
- 40-Pin 0.1" (2.54mm) header supporting a wide range of interface options:
 - Up to 5 x UART(2x with flow control)
 - Up to 3 x SPI bus
 - Up to 6 x I2C bus
 - Up to 1 x PCM/I2S


- Up to 2 x SPDIF
- Up to 7 x PWM
- Up to 1 x CAN
- Up to 1 x ADC
- Up to 27 x GPIO
- 2 x 5V DC power in/out
- 2 x 3.3V power out

3.3 Software

- ArmV8 Instruction Set
- Debian/Ubuntu Linux support
- Android 12 support
- Hardware access/control library for Linux/Android

4 Mechanical Specification

4.1 V2.1

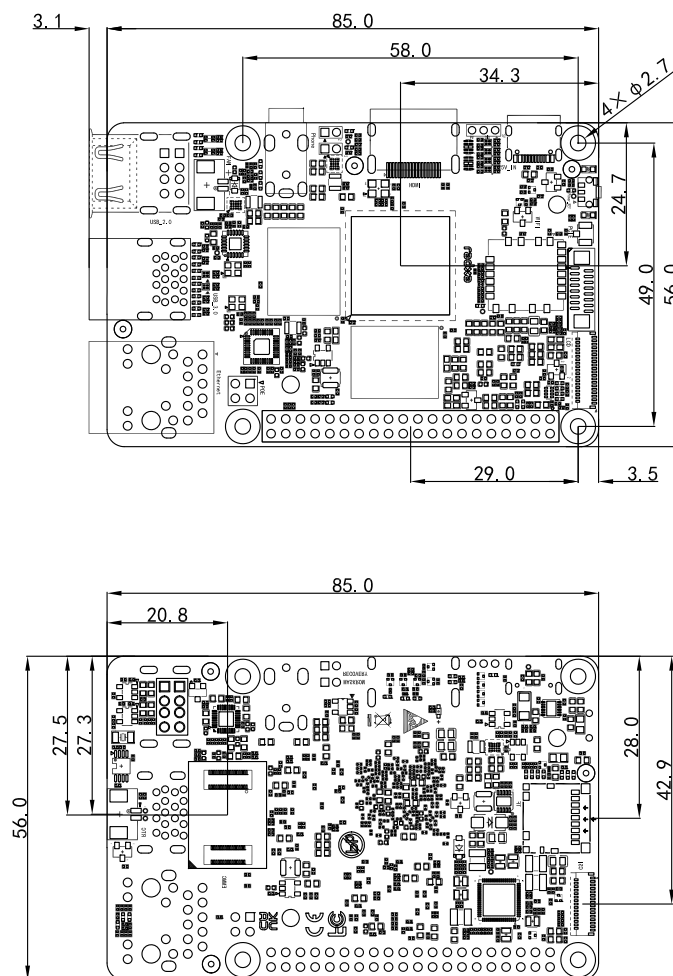

Note: The V2.1 board dimensions are shown above (overall: 85.0 mm × 56.0 mm, mounting holes: 4 × Ø2.7 mm). The V1.1 dimension drawing will be added in a future

revision. For final mechanical design (e.g., enclosures), please verify with the latest production files.

5 Electrical Specification

5.1 Power Requirements

The ROCK 5C supports various power supply technologies including smart power adapter as well as fixed voltage:

- Power adapter with fixed voltage in 5V range on the USB Type-C port
- 5V Power applied to the GPIO PIN 2 & 4

The recommended power source should be able to produce, at least, 10W without power consuming devices on USB 3 or 25W with full USB ports and PCIe 2.1 load.

5.2 GPIO Voltage

GPIO	Voltage Level	Tolerance
All GPIO	3.3V	3.63V
SARADC_IN5	3.3V	3.3V

6 Operating Conditions

The ROCK 5C has been designed to operate between 0°C to 50°C.

This temperature range was defined based on typical usage where the efficient use of Arm big.LITTLE technology can automatically select which processor core to utilise for a given task, the result of which is minimal heat generation and responsive user experience.

The ROCK 5C is built on a high-performance mobile chipset which is designed to operate for extended durations on batteries with efficiency at its core. As with all electronic devices heat is a by-product of operation which increases with performance and workload; during basic use cases such as web browsing, editing text or listening to music the SoC will automatically select the smallest processors available or dedicated hardware accelerators to reduce heat generation thus reserving the higher performance processors and thermal window for demanding tasks as and when required.

The SoC (RK3582 / RK3588S2) is specified to limit its maximum internal temperature to 80°C before throttling the clock speeds to maintain reliability within the allowed temperature range. If the ROCK 5C is intended to be used continuously in high performance applications, it may be necessary to use external cooling methods (for example, heat sink, fan, etc.) which will allow the SoC to continue running at maximum clock speed indefinitely below its predefined 80°C peak temperature limiter.

7 Peripherals

7.1 GPIO Interface

The ROCK 5C offers a 40 pin GPIO expansion header which provides extensive compatibility with a wide range of accessories developed for the SBC market.

7.1.1 GPIO Alternate Functions

Pin#	Function1	Function2	Function3	Function4	Function5	Function6	Function7
1	+3.3V						
3	GPIO1_D7	UART1_CTSN_M1	I2C8_SDA_M2	PWM15_IR_M3			
5	GPIO1_D6	UART1_RTSN_M1	I2C8_SCL_M2	PWM14_M2			
7	GPIO1_B3	UART4_TX_M2					
9	GND						
11	GPIO4_B3	UART8_CTSN_M0	I2C7_SDA_M3	PWM15_IR_M1		I2S1_SDO2_M0	
13	GPIO4_B2	UART8_RTSN_M0	I2C7_SCL_M3	PWM14_M1		I2S1_SDO1_M0	SPI0_CS0_M1
15	GPIO4_B4	UART9_TX_M1		PWM11_IR_M1	SPDIF0_TX_M1	I2S1_SDO3_M0	
17	+3.3V						
19	GPIO1_A1	UART6_TX_M1	I2C2_SCL_M4				SPI4_MOSI_M2
21	GPIO1_A0	UART6_RX_M1	I2C2_SDA_M4				SPI4_MISO_M2
23	GPIO1_A2	UART6_RTSN_M1	I2C4_SDA_M3	PWM0_M2			SPI4_CLK_M2
25	GND						
27	GPIO0_C7	UART1_RTSN_M2	I2C6_SDA_M0	PWM6_M0		I2S1_SDI2_M1	SPI0_MISO_M0
29	GPIO1_B2	UART4_RX_M2					SPI0_MOSI_M2
31	GPIO1_B1						SPI0_MISO_M2
33	GPIO1_B4	UART7_RX_M2					SPI0_CS0_M2
35	GPIO4_A0	UART9_RTSN_M1				I2S1_MCLK_M0	SPI0_MISO_M1
37	SARADC_VIN2						
39	GND						

Pin#	Function1	Function2	Function3	Function4	Function5	Function6	Function7
2	+5.0V						
4	+5.0V						
6	GND						
8	GPIO0_B5	UART2_TX_M0	I2C1_SCL_M0			I2S1_MCLK_M1	
10	GPIO0_B6	UART2_RX_M0	I2C1_SDA_M0			I2S1_SCLK_M1	
12	GPIO4_A1	UART9_CTSN_M1				I2S1_SCLK_M0	SPI0_MOSI_M1
14	GND						

Pin#	Function1	Function2	Function3	Function4	Function5	Function6	Function7
16	GPIO1_A5						SPI2_MOSI_M0
18	GPIO1_B0						SPI2_CS1_M0
20	GND						
22	GPIO1_B5	UART7_TX_M2					SPI0_CS1_M2
24	GPIO1_A3	UART6_CTSN_M1	I2C4_SCL_M3	PWM1_M2			SPI4_CS0_M2
26	GPIO1_A4						SPI2_MISO_M0
28	GPIO0_D0	UART1_CTSN_M2	I2C6_SCL_M0	PWM7_IR_M0		I2S1_SDI3_M1	SPI3_MISO_M2
30	GND						
32	GPIO4_B0	UART8_TX_M0	I2C6_SDA_M3			I2S1_SDI3_M0	SPI2_CS1_M1
34	GND						
36	GPIO4_A2					I2S1_LRCK_M0	SPI0_CLK_M1
38	GPIO4_A5	UART3_TX_M2	I2C3_SDA_M2			I2S1_SDI0_M0	
40	GPIO4_B1	UART8_RX_M0	I2C6_SCL_M3		SPDIF1_TX_M1	I2S1_SDO0_M0	SPI0_CS1_M1

7.2 Network

ROCK 5C offers a 10/100/1000Mbps RJ45 connector for wired networking. With additional PoE module/HAT, ROCK 5C can be powered by ethernet cable via RJ45 port by a PoE capable switch/router.

7.3 eMMC Socket

ROCK 5C offers a high speed eMMC socket for eMMC modules which can be used for OS and data storage. The eMMC socket is compatible with readily available industrial pinout and form factor hardware.

It is worth noting that the eMMC module shall be larger than 8GB and there is not maximum size limitation.

7.4 Camera and Display Interfaces

The ROCK 5C has one four-lane(can be split into 2x two-lane) MIPI CSI Camera and one four-lane MIPI DSI Display connector. These connectors are designed for Radxa Camera and Display accessories and also backwards compatible with standard industrial camera and display peripherals with adapter FPC cables by Radxa.

7.5 USB

The ROCK 5C has two USB2 HOST, one USB3 HOST and one USB3 OTG/HOST type-A connectors. The power output across these ports is 2.8A in aggregate over the four connectors.

7.6 HDMI Output

The ROCK 5C has one Standard HDMI output ports, both support CEC and HDMI 2.1 with resolutions of 8Kp60.

7.7 Audio Jack

The ROCK 5C supports high quality analogue audio output via a 4-ring 3.5mm headphone jack. The analog audio output can drive 32 Ohm headphones directly. The audio jack also supports microphone input as default.

7.8 FPC Connector

The ROCK 5C offers a FPC connector providing PCIe 2.1 one-lane signal, supporting expansion of SSD, SATA, 2.5G Ethernet ports and other devices, This requires additional expansion board / HAT.

7.9 Fan Connector

The ROCK 5C has a 2pin 1.25mm header that enables users to connect a 5V fan (or other peripheral). The fan can be PWM controlled without speed feedback.

8 Availability

Radxa guarantees availability of the ROCK 5C until at least September 2032.

9 Support

For support please see the hardware documentation section of the [Radxa Wiki](#) website and post questions to the [Radxa forum](#).

