

# TEST REPORT

Report No.: BCTC2210671499-1E

---

Applicant: OKdo Technology Limited

---

Product Name: ROCK Pi 4/ROCK 4

---

Model/Type Ref.: ROCK 4C Plus

---

Tested Date: 2022-10-21 to 2022-12-06

---

Issued Date: 2022-12-06

---


**Shenzhen BCTC Testing Co., Ltd.**



# IC: 29530-ROCK4CPLUS

Product Name: ROCK Pi 4/ROCK 4  
Trademark: N/A  
Model/Type Ref.: ROCK 4C Plus  
Prepared For: OKdo Technology Limited  
Address: 5th Floor, 2 Pancras Square, King's Cross, London N1C 4AG, United Kingdom  
Manufacturer: OKdo Technology Limited  
Address: 5th Floor, 2 Pancras Square, King's Cross, London N1C 4AG, United Kingdom  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: 2022-10-21  
Sample tested Date: 2022-10-21 to 2022-12-06  
Issue Date: 2022-12-06  
Report No.: BCTC2210671499-1E  
Test Standards: RSS-247 Issue 2: February 2017  
RSS-Gen Issue 5: Amendment 2 (February 2021)  
558074 D01 15.247 Meas Guidance v05r02  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is Bluetooth Classic radio test report.

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table Of Content

|   | Page |
|---|------|
| Test Report Declaration   |      |
| 1. Version .....  | 5    |
| 2. Test Summary .....   | 6    |
| 3. Measurement Uncertainty .....  | 7    |
| 4. Product Information And Test Setup .....                                   | 8    |
| 4.1 Product Information.....  | 8    |
| 4.2 Test Setup Configuration .....  | 8    |
| 4.3 Support Equipment .....   | 8    |
| 4.4 Channel List .....  | 10   |
| 4.5 Test Mode .....   | 10   |
| 4.6 Table Of Parameters Of Text Software Setting.....                         | 10   |
| 5. Test Facility And Test Instrument Used.....                                | 11   |
| 5.1 Test Facility.....  | 11   |
| 5.2 Test Instrument Used.....   | 11   |
| 6. Conducted Emissions.....   | 13   |
| 6.1 Block Diagram Of Test Setup.....  | 13   |
| 6.2 Limit .....   | 13   |
| 6.3 Test Procedure .....  | 13   |
| 6.4 EUT Operating Conditions .....  | 13   |
| 6.5 Test Result.....  | 14   |
| 7. Radiated Emissions.....  | 16   |
| 7.1 Block Diagram Of Test Setup.....  | 16   |
| 7.2 Limit .....   | 17   |
| 7.3 Test Procedure .....  | 18   |
| 7.4 EUT Operating Conditions .....  | 19   |
| 7.5 Test Result.....  | 19   |
| 8. Radiated Band Emission Measurement And Restricted Bands Of Operation ..... | 25   |
| 8.1 Block Diagram Of Test Setup.....  | 25   |
| 8.2 Limit .....   | 25   |
| 8.3 Test Procedure .....  | 26   |
| 8.4 EUT Operating Conditions .....  | 26   |
| 8.5 Test Result.....  | 27   |
| 9. Conducted Emission .....   | 28   |
| 9.1 Block Diagram Of Test Setup.....  | 28   |
| 9.2 Limit .....   | 28   |
| 9.3 Test Procedure .....  | 28   |
| 9.4 Test Result.....  | 29   |
| 10. 20 DB Bandwidth.....  | 50   |
| 10.1 Block Diagram Of Test Setup.....   | 50   |
| 10.2 Limit .....  | 50   |
| 10.3 Test Procedure .....   | 50   |
| 10.4 Test Result.....   | 51   |
| 11. Maximum Peak Output Power.....  | 62   |
| 11.1 Block Diagram Of Test Setup.....   | 62   |


|      |                                  |    |
|------|----------------------------------|----|
| 11.2 | Limit .....                      | 62 |
| 11.3 | Test Procedure .....             | 62 |
| 11.4 | Test Result.....                 | 63 |
| 12.  | Hopping Channel Separation ..... | 69 |
| 12.1 | Block Diagram Of Test Setup..... | 69 |
| 12.2 | Limit .....                      | 69 |
| 12.3 | Test Procedure .....             | 69 |
| 12.4 | Test Result.....                 | 69 |
| 13.  | Number Of Hopping Frequency..... | 75 |
| 13.1 | Block Diagram Of Test Setup..... | 75 |
| 13.2 | Limit .....                      | 75 |
| 13.3 | Test Procedure .....             | 75 |
| 13.4 | Test Result.....                 | 76 |
| 14.  | Dwell Time.....                  | 78 |
| 14.1 | Block Diagram Of Test Setup..... | 78 |
| 14.2 | Limit .....                      | 78 |
| 14.3 | Test Procedure .....             | 78 |
| 14.4 | Test Result.....                 | 78 |
| 15.  | Antenna Requirement .....        | 84 |
| 15.1 | Limit .....                      | 84 |
| 15.2 | Test Result.....                 | 84 |
| 16.  | EUT Photographs.....             | 85 |
| 17.  | EUT Test Setup Photographs.....  | 86 |

(Note: N/A Means Not Applicable)

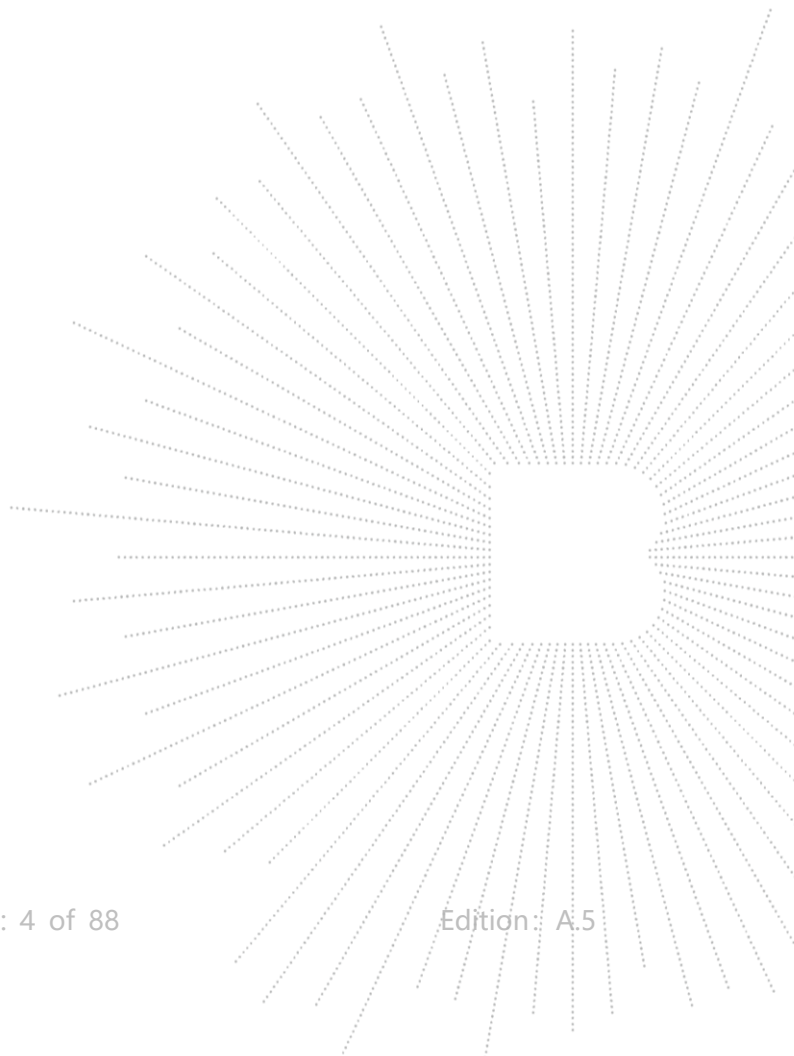

**1. Version**


| <b>Report No.</b> | <b>Issue Date</b> | <b>Description</b> | <b>Approved</b> |
|-------------------|-------------------|--------------------|-----------------|
| BCTC2210671499-1E | 2022-12-06        | Original           | Valid           |
|                   |                   |                    |                 |

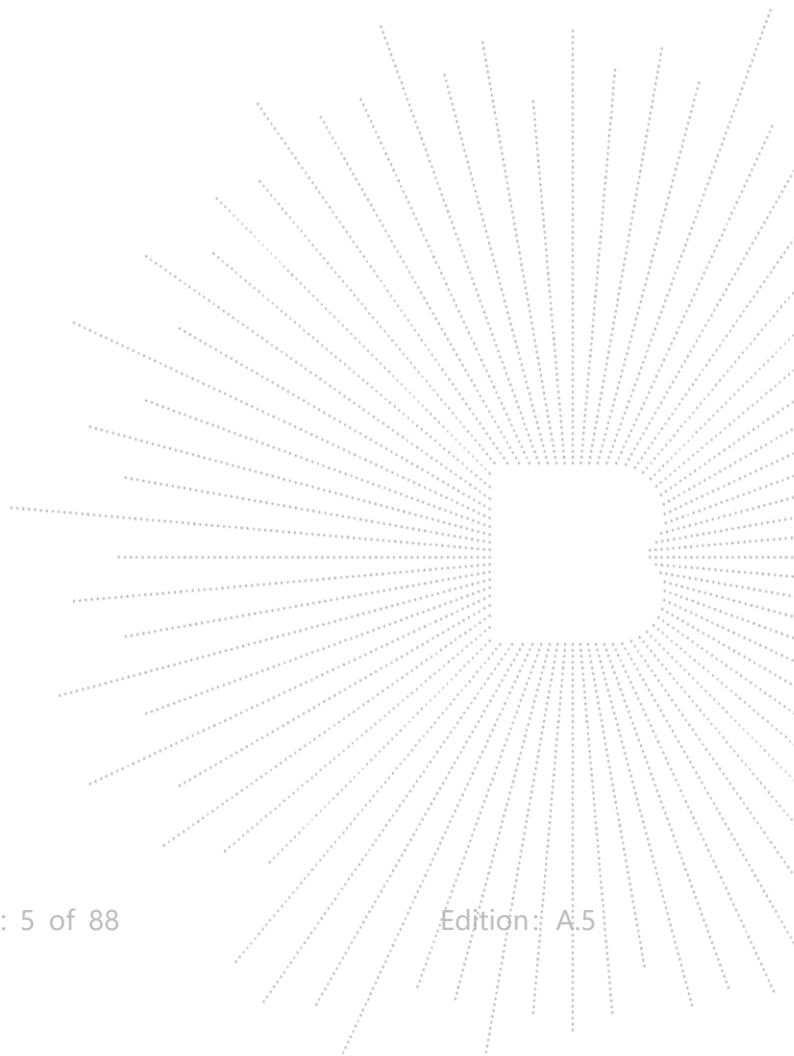

## 2. Test Summary

The Product has been tested according to the following specifications:


| No. | Test Parameter                              | Clause No   | Results |
|-----|---|---|---------|
| 1   | Conducted emission AC power port            | RSS-GEN 8.8   | PASS    |
| 2   | Conducted peak output power for FHSS        | RSS-247 Clause 5.4(b)   | PASS    |
| 3   | 99% Occupied Bandwidth                      | RSS-GEN 6.7   | PASS    |
| 4   | Hopping channel separation                  | RSS-247 Clause 5.1(b)   | PASS    |
| 5   | Number of hopping frequencies               | RSS-247 Clause 5.1(d)   | PASS    |
| 6   | Dwell Time                                  | RSS-247 Clause 5.1(d)   | PASS    |
| 7   | Spurious RF conducted emissions             | RSS-247 Clause 5.5<br>RSS-GEN 8.10                                  | PASS    |
| 8   | Band edge                                   | RSS-247 Clause 5.5  | PASS    |
| 9   | Spurious radiated emissions for transmitter | RSS-247 Clause 5.5 &<br>RSS-GEN 6.13<br>RSS-GEN 8.9<br>RSS-GEN 8.10 | PASS    |
| 10  | Antenna Requirement                         | RSS-GEN 6.8   | PASS    |

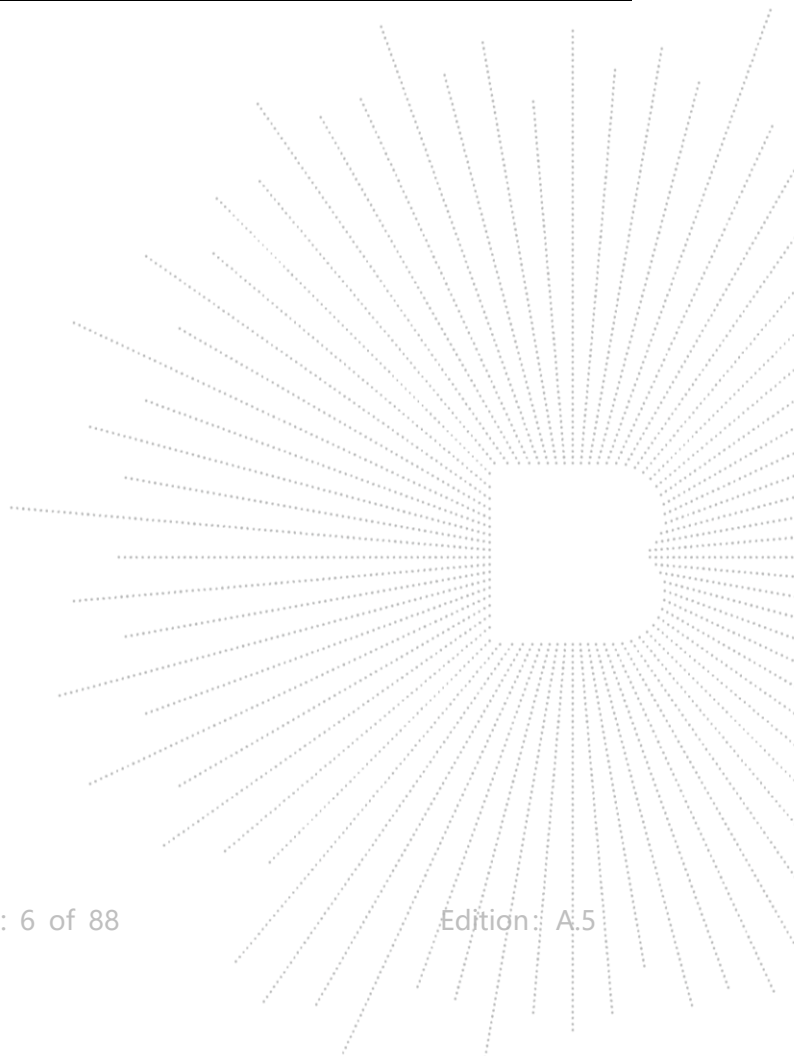

### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

| No. | Item   | Uncertainty |
|-----|--|-------------|
| 1   | 3m chamber Radiated spurious emission(30MHz-1GHz)  | U=4.3dB     |
| 2   | 3m chamber Radiated spurious emission(1GHz-18GHz)  | U=4.5dB     |
| 3   | 3m chamber Radiated spurious emission(18GHz-40GHz) | U=3.34dB    |
| 4   | Conducted Adjacent channel power                   | U=1.38dB    |
| 5   | Conducted output power uncertainty Above 1G        | U=1.576dB   |
| 6   | Conducted output power uncertainty below 1G        | U=1.28dB    |
| 7   | humidity uncertainty                               | U=5.3%      |
| 8   | Temperature uncertainty                            | U=0.59°C    |

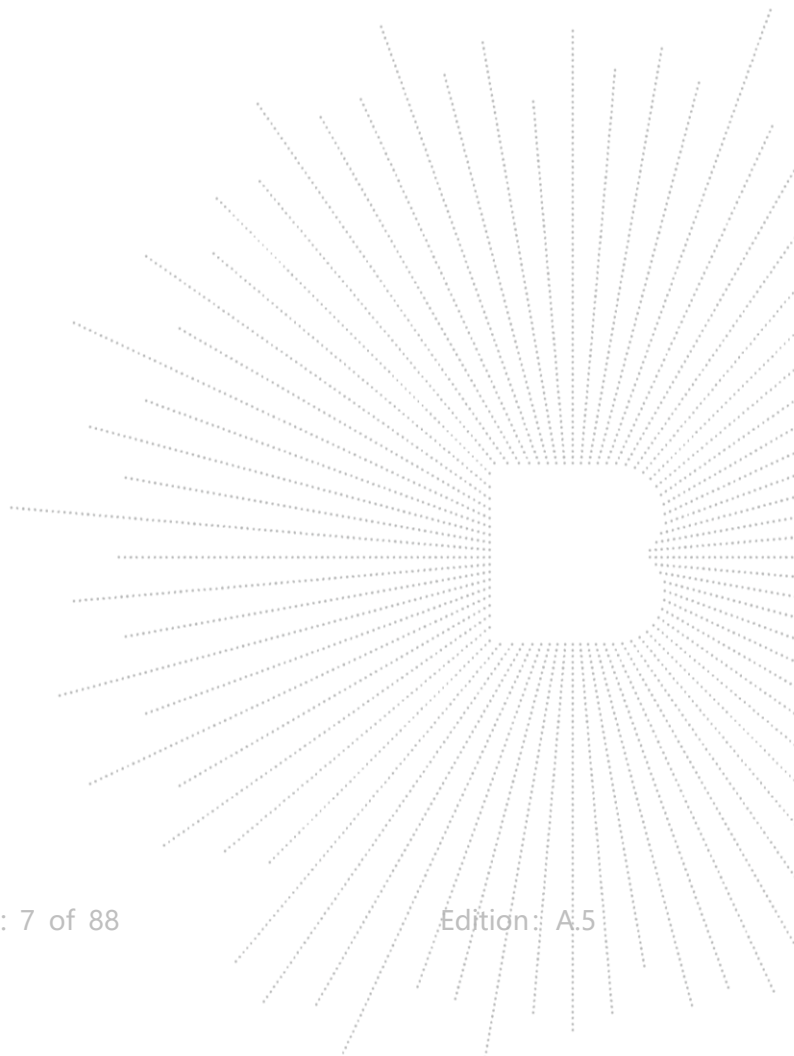

## 4. Product Information And Test Setup


### 4.1 Product Information

|                       |                            |
|-----------------------|----------------------------|
| Model/Type Ref.:      | ROCK 4C Plus               |
| Model Differences:    | N/A                        |
| Bluetooth Version:    | 5.0                        |
| Hardware Version:     | V1.0                       |
| Software Version:     | V1.0                       |
| Operation Frequency:  | 2402-2480MHz               |
| Type of Modulation:   | GFSK, $\pi/4$ DQPSK, 8DPSK |
| Number Of Channel     | 79CH                       |
| Antenna installation: | FPC antenna                |
| Antenna Gain:         | -7.23 dBi                  |
| Ratings:              | DC 5V from adapter         |


### 4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



### 4.3 Support Equipment

| No. | Device Type      | Brand | Model        | Series No. | Note      |
|-----|------------------|-------|--------------|------------|-----------|
| E-1 | ROCK Pi 4/ROCK 4 | N/A   | ROCK 4C Plus | N/A        | EUT       |
| E-2 | Adapter          | N/A   | BCTC001      | N/A        | Auxiliary |
| E-3 | Mouse            | N/A   | N/A          | N/A        | Auxiliary |
| E-4 | Keyboard         | N/A   | N/A          | N/A        | Auxiliary |
| E-5 | earphone         | N/A   | N/A          | N/A        | Auxiliary |
| E-6 | Router           | N/A   | N/A          | N/A        | Auxiliary |

| Item | Shielded Type | Ferrite Core | Length | Note                |
|------|---------------|--------------|--------|---------------------|
| C-1  | NO            | NO           | 1M     | DC cable unshielded |


**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during



the test.

2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

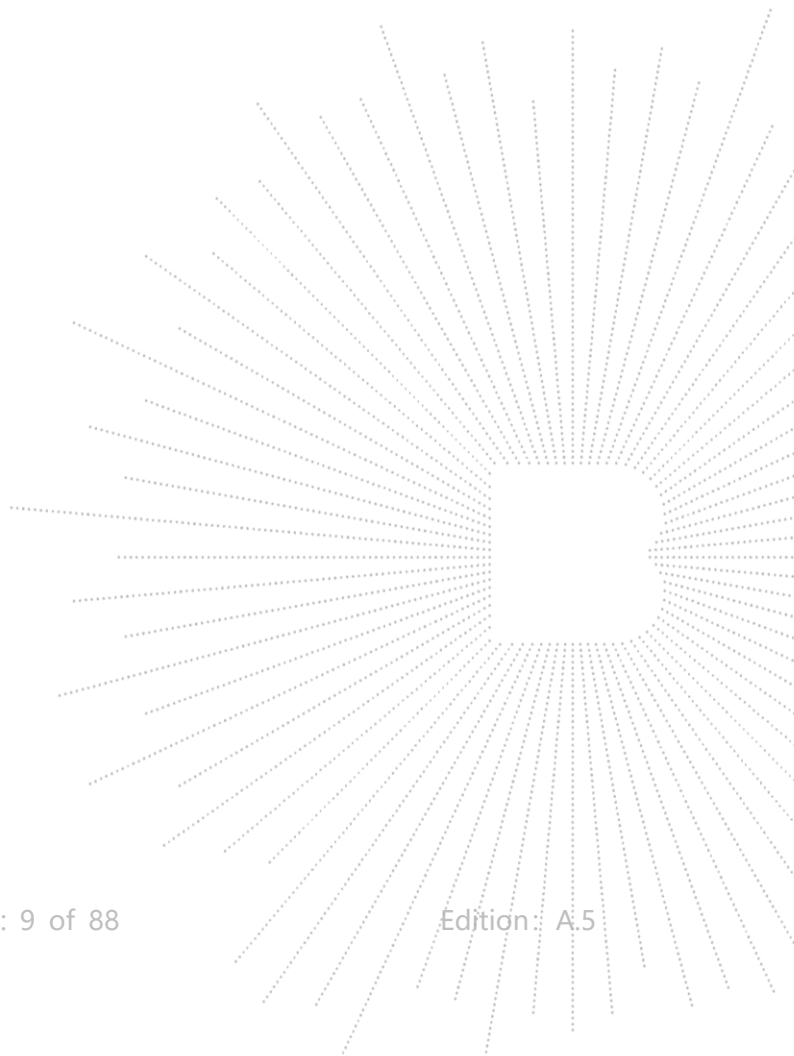

#### 4.4 Channel List

| CH | Frequency (MHz) | CH | Frequency (MHz) | CH | Frequency (MHz) | CH | Frequency (MHz) |
|----|-----------------|----|-----------------|----|-----------------|----|-----------------|
| 0  | 2402            | 1  | 2403            | 2  | 2404            | 3  | 2405            |
| 4  | 2406            | 5  | 2407            | 6  | 2408            | 7  | 2409            |
| 8  | 2410            | 9  | 2411            | 10 | 2412            | 11 | 2413            |
| 12 | 2414            | 13 | 2415            | 14 | 2416            | 15 | 2417            |
| 16 | 2418            | 17 | 2419            | 18 | 2420            | 19 | 2421            |
| 20 | 2422            | 21 | 2423            | 22 | 2424            | 23 | 2425            |
| 24 | 2426            | 25 | 2427            | 26 | 2428            | 27 | 2429            |
| 28 | 2430            | 29 | 2431            | 30 | 2432            | 31 | 2433            |
| 32 | 2434            | 33 | 2435            | 34 | 2436            | 35 | 2437            |
| 36 | 2438            | 37 | 2439            | 38 | 2440            | 39 | 2441            |
| 40 | 2442            | 41 | 2443            | 42 | 2444            | 43 | 2445            |
| 44 | 2446            | 45 | 2447            | 46 | 2448            | 47 | 2449            |
| 48 | 2450            | 49 | 2451            | 50 | 2452            | 51 | 2453            |
| 52 | 2454            | 53 | 2455            | 54 | 2456            | 55 | 2457            |
| 56 | 2458            | 57 | 2459            | 58 | 2460            | 59 | 2461            |
| 60 | 2462            | 61 | 2463            | 62 | 2464            | 63 | 2465            |
| 64 | 2466            | 65 | 2467            | 66 | 2468            | 67 | 2469            |
| 68 | 2470            | 69 | 2471            | 70 | 2472            | 71 | 2473            |
| 72 | 2474            | 73 | 2475            | 74 | 2476            | 75 | 2477            |
| 76 | 2478            | 77 | 2479            | 78 | 2480            | 79 | /               |

#### 4.5 Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Test Mode | Test mode                        | Low channel | Middle channel | High channel |
|-----------|----------------------------------|-------------|----------------|--------------|
| 1         | Transmitting(GFSK)               | 2402MHz     | 2441MHz        | 2480MHz      |
| 2         | Transmitting( $\pi/4$ DQPSK)     | 2402MHz     | 2441MHz        | 2480MHz      |
| 3         | Transmitting(8DPSK)              | 2402MHz     | 2441MHz        | 2480MHz      |
| 4         | Charging(conducted emission)     |             |                |              |
| 5         | Transmitting (Radiated emission) |             |                |              |

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test

#### 4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

| Test software Version | CMD      |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 2402 MHz | 2441 MHz | 2480 MHz |
| Parameters            | DEF      | DEF      | DEF      |

## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards. FCC Test Firm Registration Number: 712850  
IC Registered No.: 23583

### 5.2 Test Instrument Used


| Conducted Emissions Test |              |                 |                |              |              |
|--------------------------|--------------|-----------------|----------------|--------------|--------------|
| Equipment                | Manufacturer | Model#          | Serial#        | Last Cal.    | Next Cal.    |
| Receiver                 | R&S          | ESR3            | 102075         | May 24, 2022 | May 23, 2023 |
| LISN                     | R&S          | ENV216          | 101375         | May 24, 2022 | May 23, 2023 |
| Software                 | Frad         | EZ-EMC          | EMC-CON<br>3A1 | \            | \            |
| Attenuator               | \            | 10dB<br>DC-6GHz | 1650           | May 24, 2022 | May 23, 2023 |

| RF Conducted Test                     |              |        |            |              |              |
|---------------------------------------|--------------|--------|------------|--------------|--------------|
| Equipment                             | Manufacturer | Model# | Serial#    | Last Cal.    | Next Cal.    |
| Power Metter                          | Keysight     | E4419  | \          | May 24, 2022 | May 23, 2023 |
| Power Sensor<br>(AV)                  | Keysight     | E9300A | \          | May 24, 2022 | May 23, 2023 |
| Signal<br>Analyzer20kHz-<br>z-26.5GHz | Keysight     | N9020A | MY49100060 | May 24, 2022 | May 23, 2023 |
| Spectrum<br>Analyzer9kHz-<br>40GHz    | R&S          | FSP40  | \          | May 24, 2022 | May 23, 2023 |

| <b>Radiated Emissions Test (966 Chamber01)</b> |                     |                      |                |                  |                  |
|--|---------------------|----------------------|----------------|------------------|------------------|
| <b>Equipment</b>                               | <b>Manufacturer</b> | <b>Model#</b>        | <b>Serial#</b> | <b>Last Cal.</b> | <b>Next Cal.</b> |
| 966 chamber                                    | ChengYu             | 966 Room             | 966            | Jun. 06. 2020    | Jun. 05, 2023    |
| Receiver                                       | R&S                 | ESR3                 | 102075         | May 24, 2022     | May 23, 2023     |
| Receiver                                       | R&S                 | ESRP                 | 101154         | May 24, 2022     | May 23, 2023     |
| Amplifier                                      | SKET                | LAPA_01G18<br>G-45dB | \              | May 24, 2022     | May 23, 2023     |
| Amplifier                                      | Schwarzbeck         | BBV9744              | 9744-0037      | May 24, 2022     | May 23, 2023     |
| TRILOG<br>Broadband<br>Antenna                 | Schwarzbeck         | VULB9163             | 942            | May 26, 2022     | May 25, 2023     |
| Horn Antenna                                   | Schwarzbeck         | BBHA9120D            | 1541           | Jun. 06, 2022    | Jun. 05, 2023    |
| Horn<br>Antenna(18G<br>Hz-40GHz)               | Schwarzbeck         | BBHA9170             | 00822          | Jun. 06, 2022    | Jun. 05, 2023    |
| Amplifier(18G<br>Hz-40GHz)                     | MITEQ               | TTA1840-35-<br>HG    | 2034381        | May 26, 2022     | May 25, 2023     |
| Loop<br>Antenna(9KHz<br>-30MHz)                | Schwarzbeck         | FMZB1519B            | 00014          | May 26, 2022     | May 25, 2023     |
| Power Metter                                   | Keysight            | E4419                | \              | May 26, 2022     | May 25, 2023     |
| Power Sensor<br>(AV)                           | Keysight            | E9300A               | \              | May 26, 2022     | May 25, 2023     |
| Signal<br>Analyzer20kH<br>z-26.5GHz            | Keysight            | N9020A               | MY49100060     | May 26, 2022     | May 25, 2023     |
| Spectrum<br>Analyzer9kHz-<br>40GHz             | R&S                 | FSP40                | \              | May 26, 2022     | May 25, 2023     |
| Software                                       | Frad                | EZ-EMC               | FA-03A2 RE     | \                | \                |

## 6. Conducted Emissions

### 6.1 Block Diagram Of Test Setup

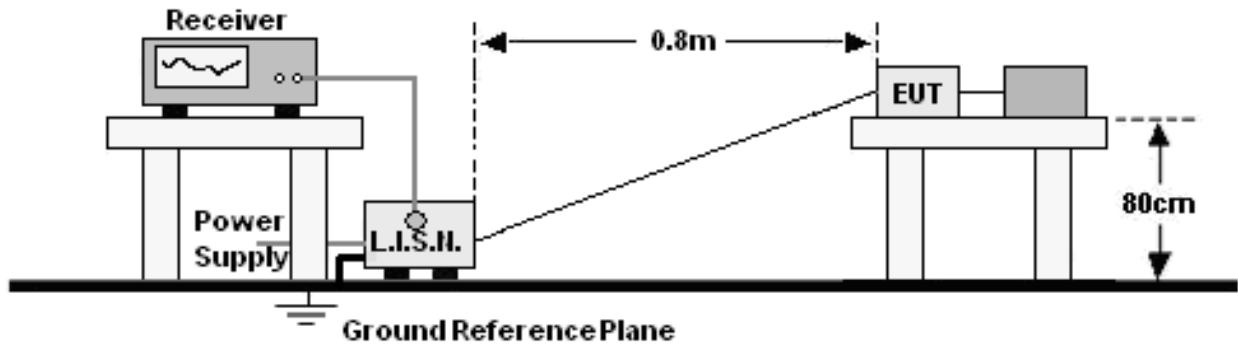

### 6.2 Limit

| FREQUENCY (MHz) | Limit (dBuV) |           |
|-----------------|--------------|-----------|
|                 | Quas-peak    | Average   |
| 0.15 -0.5       | 66 - 56 *    | 56 - 46 * |
| 0.50 -5.0       | 56.00        | 46.00     |
| 5.0 -30.0       | 60.00        | 50.00     |

Notes:  
 1. \*Decreasing linearly with logarithm of frequency.  
 2. The lower limit shall apply at the transition frequencies.

### 6.3 Test Procedure

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

### 6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 6.5 Test Result

|              |        |                    |             |
|--------------|--------|--------------------|-------------|
| Temperature: | 26 °C  | Relative Humidity: | 54%         |
| Pressure:    | 101KPa | Phase :            | L           |
| Test Mode:   | Mode 1 | Test Voltage :     | AC120V/60Hz |

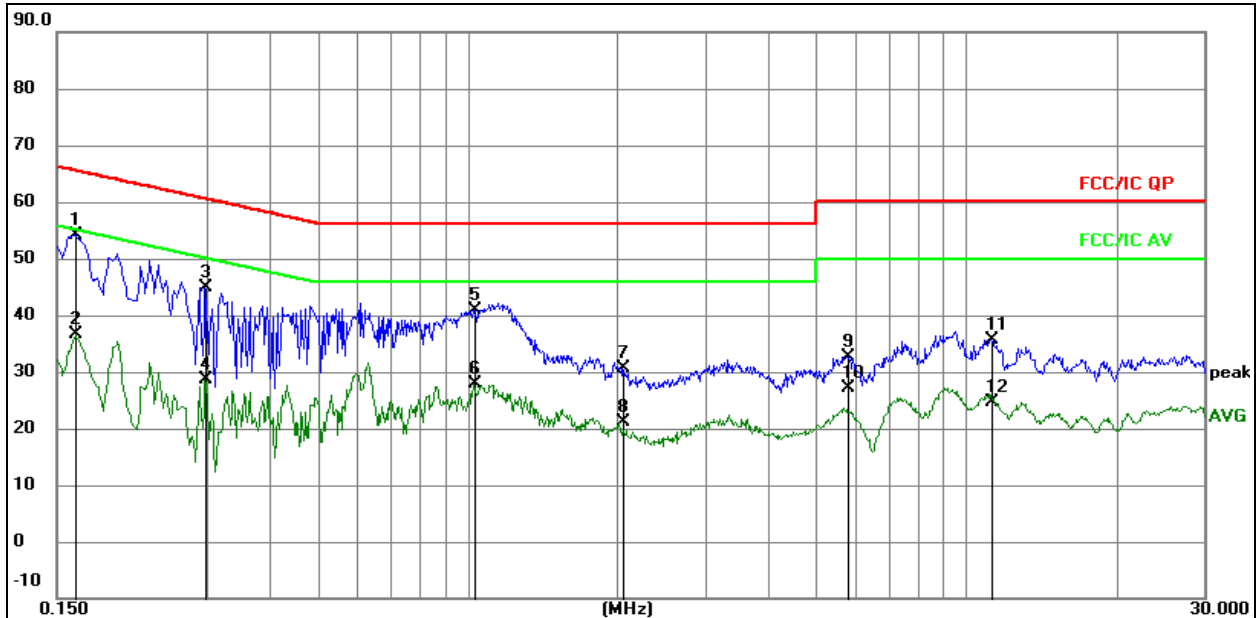


### Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

| No. | Mk. | Freq.<br>MHz | Reading<br>Level | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   | *   | 0.1635       | 34.42            | 19.71                   | 54.13                    | 65.28         | -11.15     | QP       |
| 2   |     | 0.1635       | 16.89            | 19.71                   | 36.60                    | 55.28         | -18.68     | AVG      |
| 3   |     | 0.2985       | 25.21            | 19.77                   | 44.98                    | 60.28         | -15.30     | QP       |
| 4   |     | 0.2985       | 8.84             | 19.77                   | 28.61                    | 50.28         | -21.67     | AVG      |
| 5   |     | 1.0275       | 21.09            | 19.76                   | 40.85                    | 56.00         | -15.15     | QP       |
| 6   |     | 1.0275       | 8.18             | 19.76                   | 27.94                    | 46.00         | -18.06     | AVG      |
| 7   |     | 2.0535       | 10.78            | 19.89                   | 30.67                    | 56.00         | -25.33     | QP       |
| 8   |     | 2.0535       | 1.23             | 19.89                   | 21.12                    | 46.00         | -24.88     | AVG      |
| 9   |     | 5.7930       | 12.60            | 20.15                   | 32.75                    | 60.00         | -27.25     | QP       |
| 10  |     | 5.7930       | 6.99             | 20.15                   | 27.14                    | 50.00         | -22.86     | AVG      |
| 11  |     | 11.2470      | 15.41            | 20.28                   | 35.69                    | 60.00         | -24.31     | QP       |
| 12  |     | 11.2470      | 4.23             | 20.28                   | 24.51                    | 50.00         | -25.49     | AVG      |

|              |        |                    |             |
|--------------|--------|--------------------|-------------|
| Temperature: | 26 °C  | Relative Humidity: | 54%         |
| Pressure:    | 101KPa | Phase :            | N           |
| Test Mode:   | Mode 1 | Test Voltage :     | AC120V/60Hz |

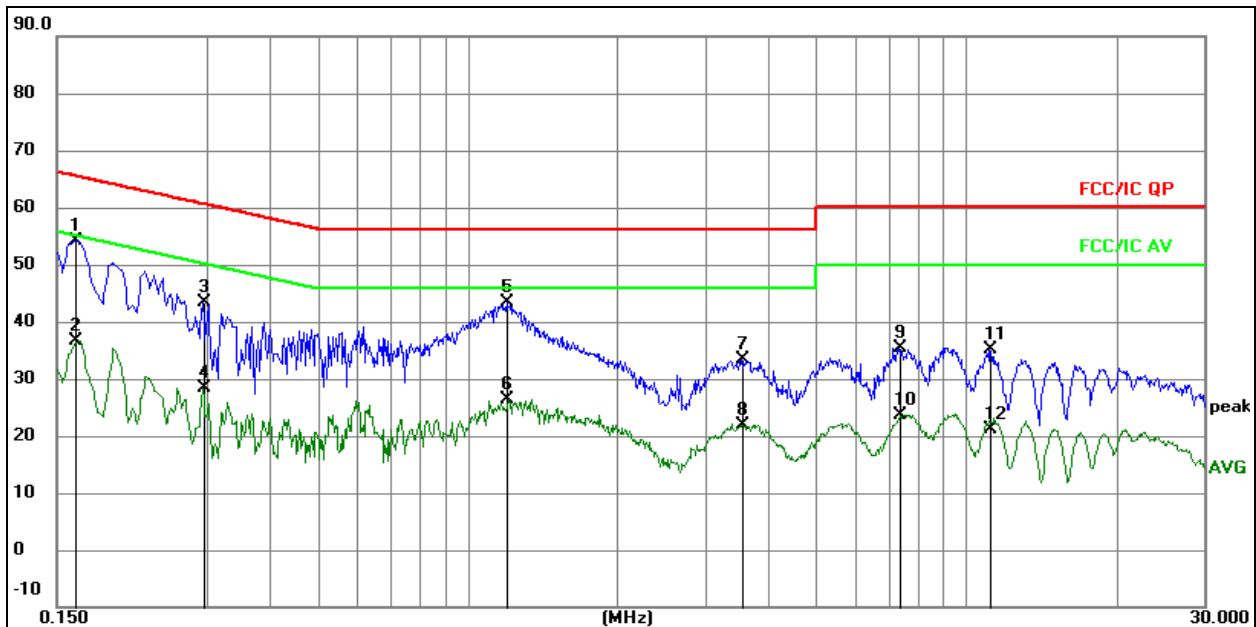
**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit


| No. | Mk. | Freq.<br>MHz | Reading<br>Level | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   | *   | 0.1635       | 34.43            | 19.71                   | 54.14                    | 65.28         | -11.14     | QP       |
| 2   |     | 0.1635       | 16.95            | 19.71                   | 36.66                    | 55.28         | -18.62     | AVG      |
| 3   |     | 0.2940       | 23.70            | 19.77                   | 43.47                    | 60.41         | -16.94     | QP       |
| 4   |     | 0.2940       | 8.61             | 19.77                   | 28.38                    | 50.41         | -22.03     | AVG      |
| 5   |     | 1.1985       | 23.56            | 19.78                   | 43.34                    | 56.00         | -12.66     | QP       |
| 6   |     | 1.1985       | 6.53             | 19.78                   | 26.31                    | 46.00         | -19.69     | AVG      |
| 7   |     | 3.5475       | 13.44            | 20.05                   | 33.49                    | 56.00         | -22.51     | QP       |
| 8   |     | 3.5475       | 1.82             | 20.05                   | 21.87                    | 46.00         | -24.13     | AVG      |
| 9   |     | 7.3545       | 15.31            | 20.19                   | 35.50                    | 60.00         | -24.50     | QP       |
| 10  |     | 7.3545       | 3.48             | 20.19                   | 23.67                    | 50.00         | -26.33     | AVG      |
| 11  |     | 11.1840      | 14.93            | 20.28                   | 35.21                    | 60.00         | -24.79     | QP       |
| 12  |     | 11.1840      | 0.80             | 20.28                   | 21.08                    | 50.00         | -28.92     | AVG      |




## 7. Radiated Emissions

### 7.1 Block Diagram Of Test Setup

(A) Radiated Emission Test-Up Frequency Below 30MHz

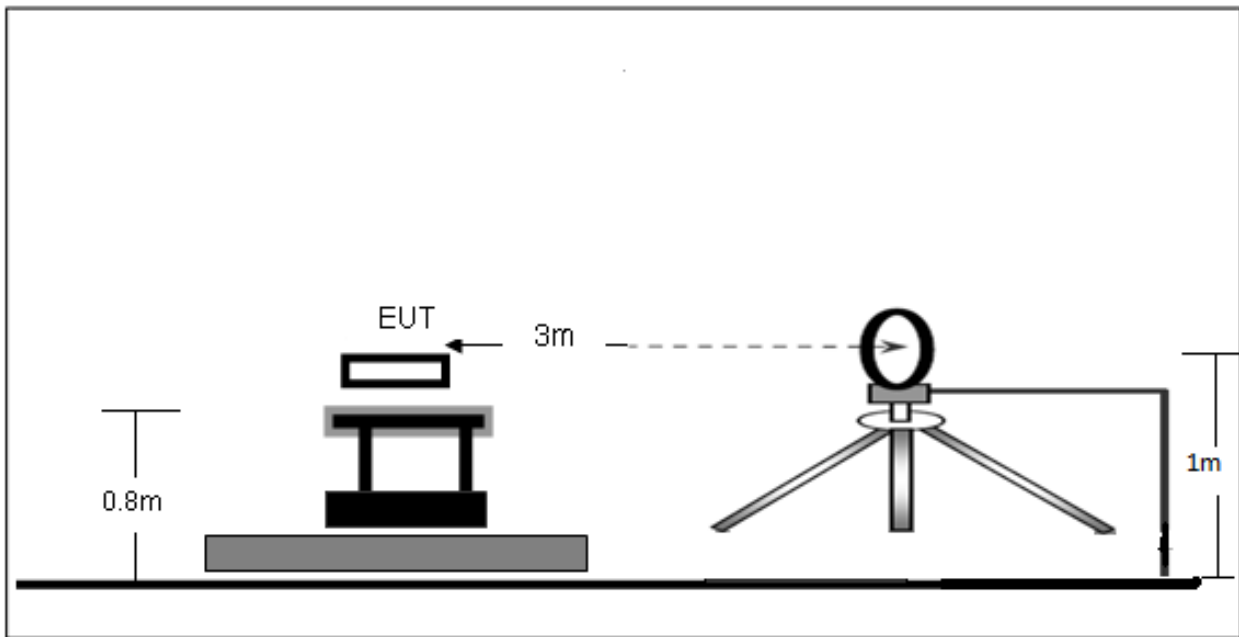


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

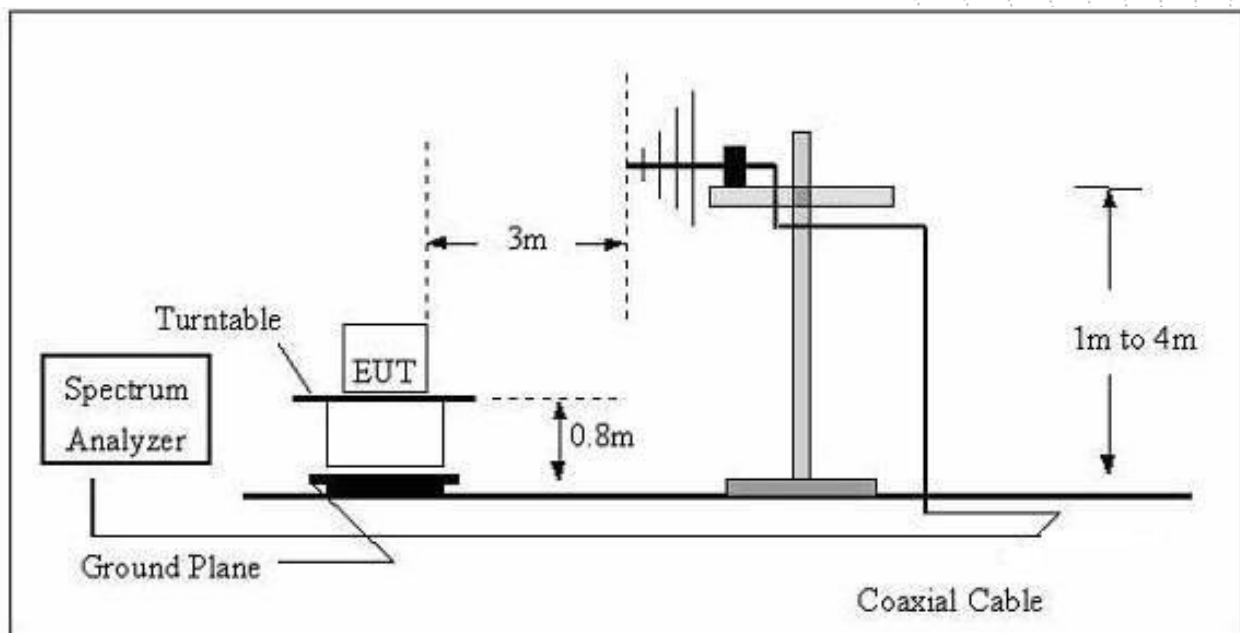



## (C) Radiated Emission Test-Up Frequency Above 1GHz

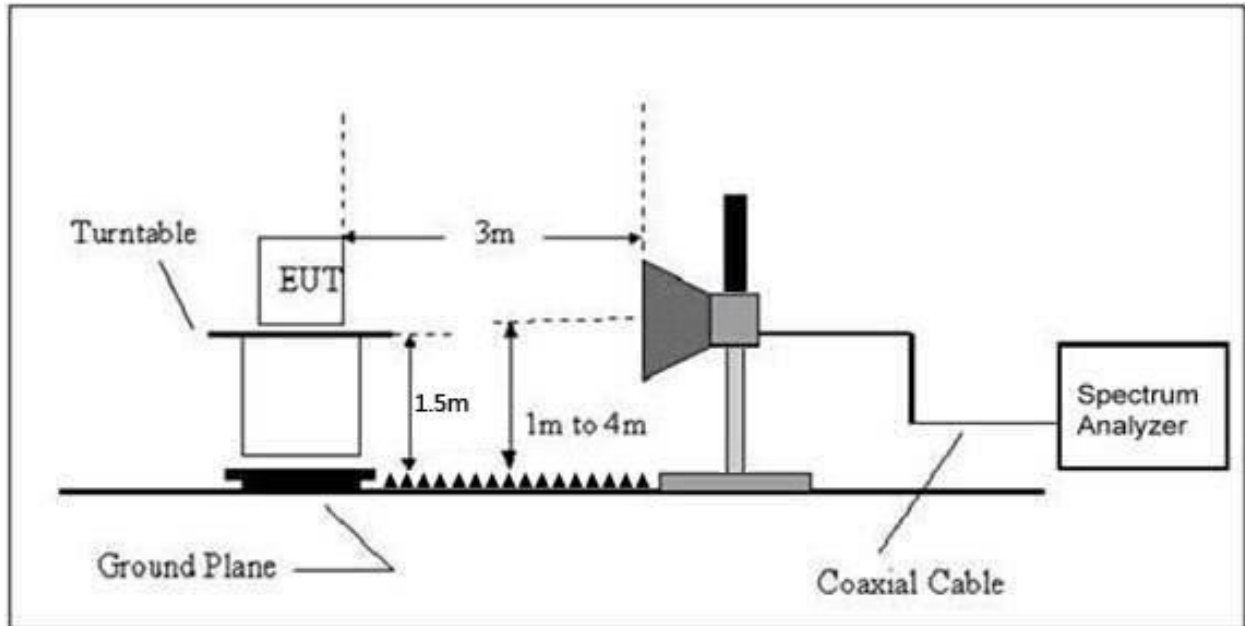

## 7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on RSS-GEN 8.9, then the RSS-GEN 8.9 limit in the table below has to be followed.

| Frequency (MHz) | Field Strength uV/m | Distance (m) | Field Strength Limit at 3m Distance |                                      |
|-----------------|---------------------|--------------|-------------------------------------|--------------------------------------|
|                 |                     |              | uV/m                                | dBuV/m                               |
| 0.009 ~ 0.490   | 2400/F(kHz)         | 300          | 10000 * 2400/F(kHz)                 | 20log <sup>(2400/F(kHz))</sup> + 80  |
| 0.490 ~ 1.705   | 24000/F(kHz)        | 30           | 100 * 24000/F(kHz)                  | 20log <sup>(24000/F(kHz))</sup> + 40 |
| 1.705 ~ 30      | 30                  | 30           | 100 * 30                            | 20log <sup>(30)</sup> + 40           |
| 30 ~ 88         | 100                 | 3            | 100                                 | 20log <sup>(100)</sup>               |
| 88 ~ 216        | 150                 | 3            | 150                                 | 20log <sup>(150)</sup>               |
| 216 ~ 960       | 200                 | 3            | 200                                 | 20log <sup>(200)</sup>               |
| Above 960       | 500                 | 3            | 500                                 | 20log <sup>(500)</sup>               |

## LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

## Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

## FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

| Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz) | Range (MHz)   |
|---|---|
| Below 1.705   | 30  |
| 1.705 – 108   | 1000  |
| 108 – 500   | 2000  |
| 500 – 1000  | 5000  |
| Above 1000  | 5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower |

## 7.3 Test Procedure

| Receiver Parameter | Setting           |
|--------------------|-------------------|
| Attenuation        | Auto              |
| 9kHz~150kHz        | RBW 200Hz for QP  |
| 150kHz~30MHz       | RBW 9kHz for QP   |
| 30MHz~1000MHz      | RBW 120kHz for QP |

| Spectrum Parameter | Setting  |
|--------------------|--|
| 1-25GHz            | RBW 1 MHz /VBW 1 MHz for Peak,<br>RBW 1 MHz / VBW 10Hz for Average |

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Above 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

## 7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 7.5 Test Result

Below 30MHz

|              |        |                    |             |
|--------------|--------|--------------------|-------------|
| Temperature: | 26°C   | Relative Humidity: | 24%         |
| Pressure:    | 101KPa | Test Voltage:      | AC120V/60Hz |
| Test Mode:   | Mode 1 | Polarization :     | --          |

| Freq. | Reading  | Limit    | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB)   | P/F   |
| --    | --       | --       | --     | PASS  |
| --    | --       | --       | --     | PASS  |

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance/test distance})(\text{dB})$ ;

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz


|              |        |                    |             |
|--------------|--------|--------------------|-------------|
| Temperature: | 26 °C  | Relative Humidity: | 54%         |
| Pressure:    | 101KPa | Phase :            | Horizontal  |
| Test Mode:   | Mode 1 | Test Voltage:      | AC120V/60Hz |

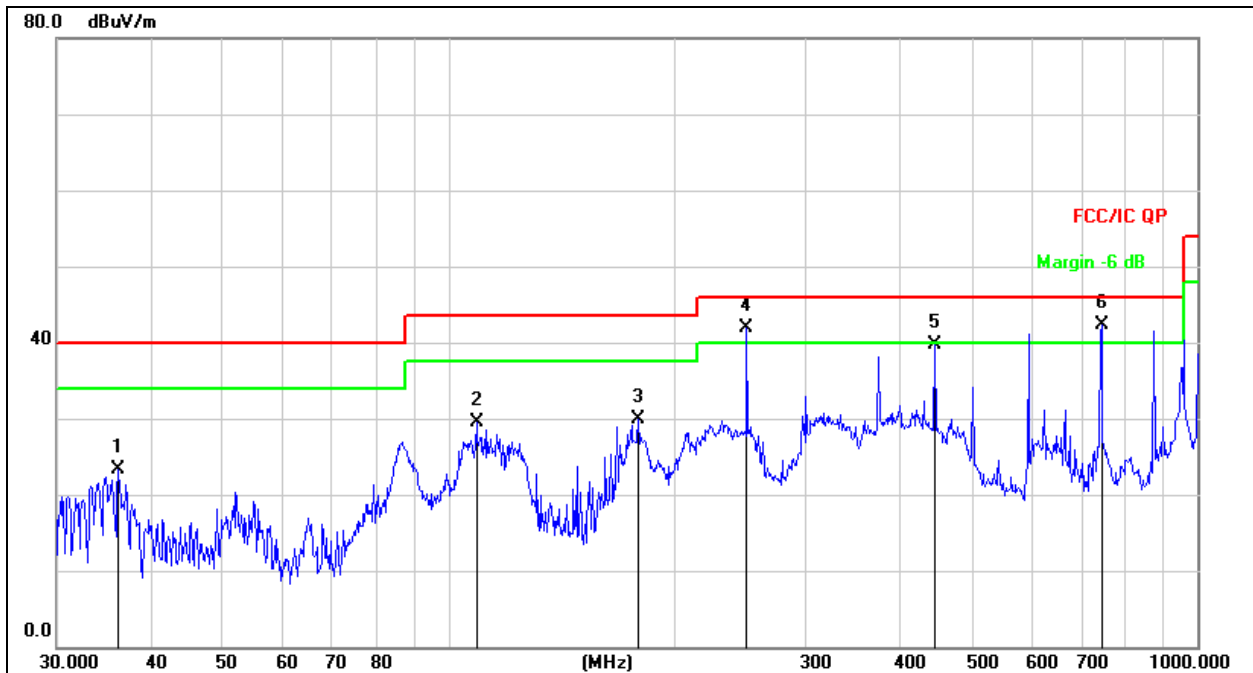

Remark:  
 1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
 2. Measurement=Reading Level+ Correct Factor  
 3. Over=Measurement-Limit

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dB/m  | dB     |          |
| 1   |     | 36.2541  | 40.65         | -17.34         | 23.31       | 40.00 | -16.69 | QP       |
| 2   |     | 109.0286 | 47.79         | -18.35         | 29.44       | 43.50 | -14.06 | QP       |
| 3   |     | 179.3863 | 48.84         | -18.89         | 29.95       | 43.50 | -13.55 | QP       |
| 4   | !   | 250.3012 | 57.65         | -15.82         | 41.83       | 46.00 | -4.17  | QP       |
| 5   |     | 446.4141 | 51.27         | -11.54         | 39.73       | 46.00 | -6.27  | QP       |
| 6   | *   | 744.8661 | 48.71         | -6.45          | 42.26       | 46.00 | -3.74  | QP       |

|              |        |                    |             |
|--------------|--------|--------------------|-------------|
| Temperature: | 26 °C  | Relative Humidity: | 54%         |
| Pressure:    | 101KPa | Phase :            | Vertical    |
| Test Mode:   | Mode 1 | Test Voltage:      | AC120V/60Hz |

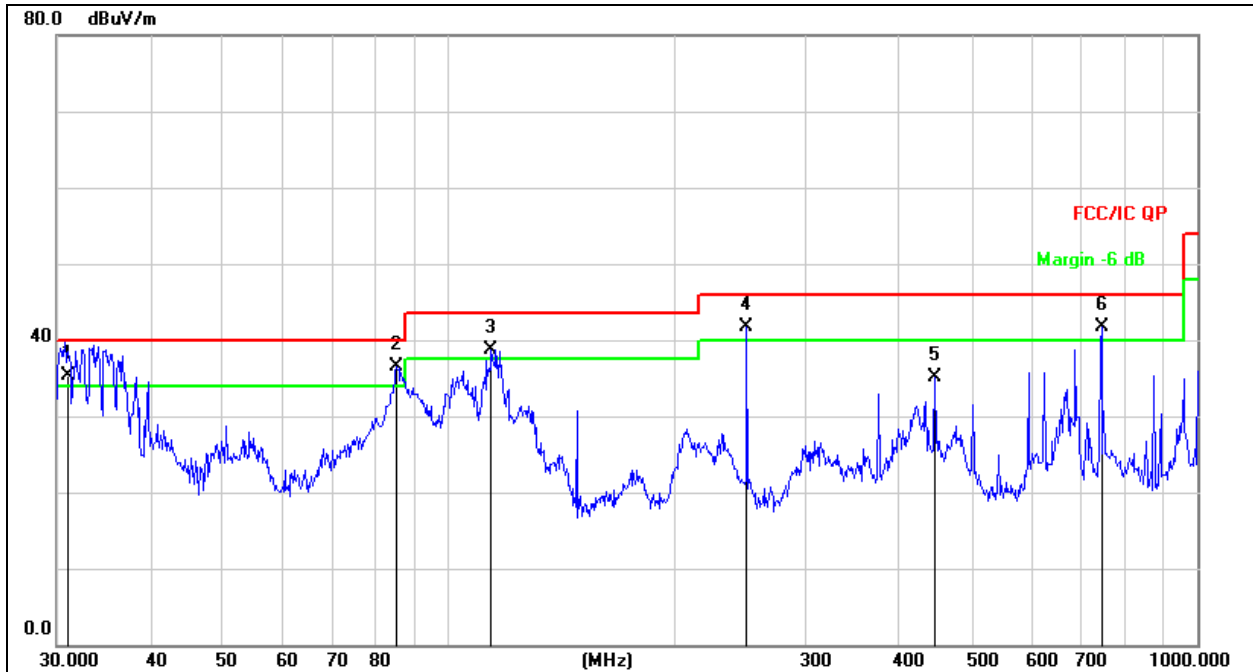

- Remark:
1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
  2. Measurement=Reading Level+ Correct Factor
  3. Over=Measurement-Limit

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dB/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1   | !   | 31.1150      | 53.59                    | -18.19                  | 35.40                      | 40.00         | -4.60      | QP       |
| 2   | *   | 85.2980      | 56.86                    | -20.33                  | 36.53                      | 40.00         | -3.47      | QP       |
| 3   | !   | 114.1137     | 57.42                    | -18.69                  | 38.73                      | 43.50         | -4.77      | QP       |
| 4   | !   | 250.3012     | 57.50                    | -15.82                  | 41.68                      | 46.00         | -4.32      | QP       |
| 5   |     | 446.4141     | 46.62                    | -11.54                  | 35.08                      | 46.00         | -10.92     | QP       |
| 6   | !   | 744.8661     | 48.17                    | -6.45                   | 41.72                      | 46.00         | -4.28      | QP       |

Between 1GHz – 25GHz

| Polar<br>(H/V)      | Frequency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits       | Over   | Detector<br>Type |
|---------------------|-----------|------------------|-------------------|------------------|--------------|--------|------------------|
|                     | (MHz)     | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/<br>m) | (dB)   |                  |
| GFSK Low channel    |           |                  |                   |                  |              |        |                  |
| V                   | 4804.00   | 53.37            | -0.43             | 52.94            | 74.00        | -21.06 | PK               |
| V                   | 4804.00   | 44.22            | -0.43             | 43.79            | 54.00        | -10.21 | AV               |
| V                   | 7206.00   | 43.39            | 8.31              | 51.70            | 74.00        | -22.30 | PK               |
| V                   | 7206.00   | 33.17            | 8.31              | 41.48            | 54.00        | -12.52 | AV               |
| H                   | 4804.00   | 49.61            | -0.43             | 49.18            | 74.00        | -24.82 | PK               |
| H                   | 4804.00   | 38.81            | -0.43             | 38.38            | 54.00        | -15.62 | AV               |
| H                   | 7206.00   | 41.05            | 8.31              | 49.36            | 74.00        | -24.64 | PK               |
| H                   | 7206.00   | 32.69            | 8.31              | 41.00            | 54.00        | -13.00 | AV               |
| GFSK Middle channel |           |                  |                   |                  |              |        |                  |
| V                   | 4882.00   | 50.33            | -0.38             | 49.95            | 74.00        | -24.05 | PK               |
| V                   | 4882.00   | 41.87            | -0.38             | 41.49            | 54.00        | -12.51 | AV               |
| V                   | 7323.00   | 42.80            | 8.83              | 51.63            | 74.00        | -22.37 | PK               |
| V                   | 7323.00   | 33.28            | 8.83              | 42.11            | 54.00        | -11.89 | AV               |
| H                   | 4882.00   | 49.14            | -0.38             | 48.76            | 74.00        | -25.24 | PK               |
| H                   | 4882.00   | 38.21            | -0.38             | 37.83            | 54.00        | -16.17 | AV               |
| H                   | 7323.00   | 41.49            | 8.83              | 50.32            | 74.00        | -23.68 | PK               |
| H                   | 7323.00   | 34.39            | 8.83              | 43.22            | 54.00        | -10.78 | AV               |
| GFSK High channel   |           |                  |                   |                  |              |        |                  |
| V                   | 4960.00   | 52.18            | -0.32             | 51.86            | 74.00        | -22.14 | PK               |
| V                   | 4960.00   | 42.01            | -0.32             | 41.69            | 54.00        | -12.31 | AV               |
| V                   | 7440.00   | 44.21            | 9.35              | 53.56            | 74.00        | -20.44 | PK               |
| V                   | 7440.00   | 33.56            | 9.35              | 42.91            | 54.00        | -11.09 | AV               |
| H                   | 4960.00   | 50.71            | -0.32             | 50.39            | 74.00        | -23.61 | PK               |
| H                   | 4960.00   | 41.66            | -0.32             | 41.34            | 54.00        | -12.66 | AV               |
| H                   | 7440.00   | 42.81            | 9.35              | 52.16            | 74.00        | -21.84 | PK               |
| H                   | 7440.00   | 35.59            | 9.35              | 44.94            | 54.00        | -9.06  | AV               |

**Remark:**

1. Emission Level = Meter Reading + Factor,  
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
 Over = Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



| Polar (H/V)                  | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
|                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| $\pi$ /4DQPSK Low channel    |           |               |                |             |          |        |               |
| V                            | 4804.00   | 54.31         | -0.43          | 53.88       | 74.00    | -20.12 | PK            |
| V                            | 4804.00   | 43.51         | -0.43          | 43.08       | 54.00    | -10.92 | AV            |
| V                            | 7206.00   | 44.55         | 8.31           | 52.86       | 74.00    | -21.14 | PK            |
| V                            | 7206.00   | 34.53         | 8.31           | 42.84       | 54.00    | -11.16 | AV            |
| H                            | 4804.00   | 49.96         | -0.43          | 49.53       | 74.00    | -24.47 | PK            |
| H                            | 4804.00   | 39.45         | -0.43          | 39.02       | 54.00    | -14.98 | AV            |
| H                            | 7206.00   | 42.54         | 8.31           | 50.85       | 74.00    | -23.15 | PK            |
| H                            | 7206.00   | 35.10         | 8.31           | 43.41       | 54.00    | -10.59 | AV            |
| $\pi$ /4DQPSK Middle channel |           |               |                |             |          |        |               |
| V                            | 4882.00   | 52.61         | -0.38          | 52.23       | 74.00    | -21.77 | PK            |
| V                            | 4882.00   | 45.43         | -0.38          | 45.05       | 54.00    | -8.95  | AV            |
| V                            | 7323.00   | 43.77         | 8.83           | 52.60       | 74.00    | -21.40 | PK            |
| V                            | 7323.00   | 34.62         | 8.83           | 43.45       | 54.00    | -10.55 | AV            |
| H                            | 4882.00   | 49.85         | -0.38          | 49.47       | 74.00    | -24.53 | PK            |
| H                            | 4882.00   | 40.25         | -0.38          | 39.87       | 54.00    | -14.13 | AV            |
| H                            | 7323.00   | 41.00         | 8.83           | 49.83       | 74.00    | -24.17 | PK            |
| H                            | 7323.00   | 32.35         | 8.83           | 41.18       | 54.00    | -12.82 | AV            |
| $\pi$ /4DQPSK High channel   |           |               |                |             |          |        |               |
| V                            | 4960.00   | 55.34         | -0.32          | 55.02       | 74.00    | -18.98 | PK            |
| V                            | 4960.00   | 45.47         | -0.32          | 45.15       | 54.00    | -8.85  | AV            |
| V                            | 7440.00   | 48.93         | 9.35           | 58.28       | 74.00    | -15.72 | PK            |
| V                            | 7440.00   | 39.56         | 9.35           | 48.91       | 54.00    | -5.09  | AV            |
| H                            | 4960.00   | 52.43         | -0.32          | 52.11       | 74.00    | -21.89 | PK            |
| H                            | 4960.00   | 42.08         | -0.32          | 41.76       | 54.00    | -12.24 | AV            |
| H                            | 7440.00   | 47.02         | 9.35           | 56.37       | 74.00    | -17.63 | PK            |
| H                            | 7440.00   | 38.37         | 9.35           | 47.72       | 54.00    | -6.28  | AV            |

**Remark:**

1. Emission Level = Meter Reading + Factor,  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
Over = Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

| Polar (H/V)          | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|----------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
|                      | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| 8DPSK Low channel    |           |               |                |             |          |        |               |
| V                    | 4804.00   | 52.15         | -0.43          | 51.72       | 74.00    | -22.28 | PK            |
| V                    | 4804.00   | 42.50         | -0.43          | 42.07       | 54.00    | -11.93 | AV            |
| V                    | 7206.00   | 43.10         | 8.31           | 51.41       | 74.00    | -22.59 | PK            |
| V                    | 7206.00   | 33.78         | 8.31           | 42.09       | 54.00    | -11.91 | AV            |
| H                    | 4804.00   | 47.68         | -0.43          | 47.25       | 74.00    | -26.75 | PK            |
| H                    | 4804.00   | 37.96         | -0.43          | 37.53       | 54.00    | -16.47 | AV            |
| H                    | 7206.00   | 40.40         | 8.31           | 48.71       | 74.00    | -25.29 | PK            |
| H                    | 7206.00   | 31.52         | 8.31           | 39.83       | 54.00    | -14.17 | AV            |
| 8DPSK Middle channel |           |               |                |             |          |        |               |
| V                    | 4882.00   | 49.42         | -0.38          | 49.04       | 74.00    | -24.96 | PK            |
| V                    | 4882.00   | 41.90         | -0.38          | 41.52       | 54.00    | -12.48 | AV            |
| V                    | 7323.00   | 40.37         | 8.83           | 49.20       | 74.00    | -24.80 | PK            |
| V                    | 7323.00   | 31.88         | 8.83           | 40.71       | 54.00    | -13.29 | AV            |
| H                    | 4882.00   | 45.41         | -0.38          | 45.03       | 74.00    | -28.97 | PK            |
| H                    | 4882.00   | 34.74         | -0.38          | 34.36       | 54.00    | -19.64 | AV            |
| H                    | 7323.00   | 37.74         | 8.83           | 46.57       | 74.00    | -27.43 | PK            |
| H                    | 7323.00   | 28.88         | 8.83           | 37.71       | 54.00    | -16.29 | AV            |
| 8DPSK High channel   |           |               |                |             |          |        |               |
| V                    | 4960.00   | 51.12         | -0.32          | 50.80       | 74.00    | -23.20 | PK            |
| V                    | 4960.00   | 42.41         | -0.32          | 42.09       | 54.00    | -11.91 | AV            |
| V                    | 7440.00   | 44.18         | 9.35           | 53.53       | 74.00    | -20.47 | PK            |
| V                    | 7440.00   | 35.12         | 9.35           | 44.47       | 54.00    | -9.53  | AV            |
| H                    | 4960.00   | 49.68         | -0.32          | 49.36       | 74.00    | -24.64 | PK            |
| H                    | 4960.00   | 39.57         | -0.32          | 39.25       | 54.00    | -14.75 | AV            |
| H                    | 7440.00   | 41.78         | 9.35           | 51.13       | 74.00    | -22.87 | PK            |
| H                    | 7440.00   | 34.74         | 9.35           | 44.09       | 54.00    | -9.91  | AV            |

**Remark:**


1. Emission Level = Meter Reading + Factor,  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
Over= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 8. Radiated Band Emission Measurement And Restricted Bands Of Operation

### 8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

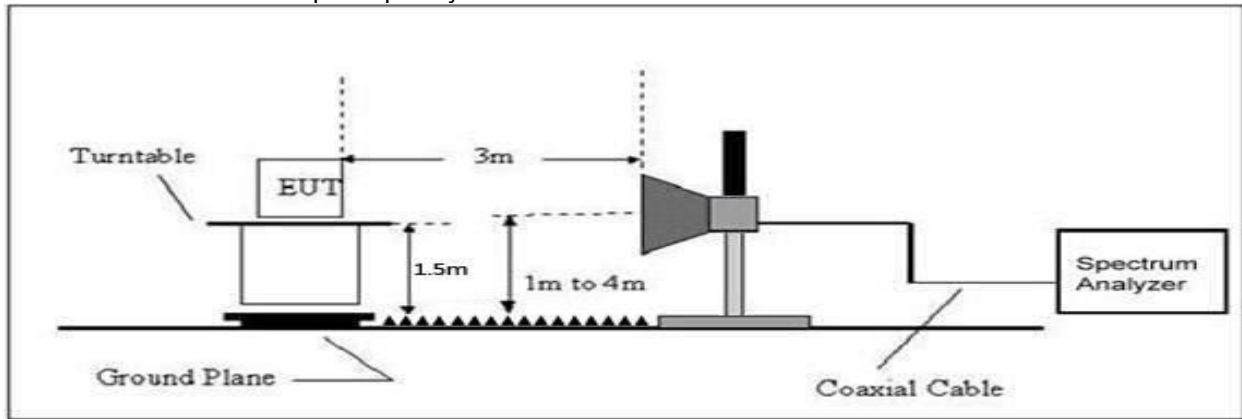

### 8.2 Limit

RSS-GEN, RSS-247 5.5

Table 7 – Restricted frequency bands\*

| MHz                 | MHz                   | GHz           |
|---------------------|-----------------------|---------------|
| 0.090 - 0.110       | 149.9 - 150.05        | 9.0 - 9.2     |
| 0.495 - 0.505       | 156.52475 - 156.52525 | 9.3 - 9.5     |
| 2.1735 - 2.1905     | 156.7 - 156.9         | 10.6 - 12.7   |
| 3.020 - 3.026       | 162.0125 - 167.17     | 13.25 - 13.4  |
| 4.125 - 4.128       | 167.72 - 173.2        | 14.47 - 14.5  |
| 4.17725 - 4.17775   | 240 - 285             | 15.35 - 16.2  |
| 4.20725 - 4.20775   | 322 - 335.4           | 17.7 - 21.4   |
| 5.677 - 5.683       | 399.9 - 410           | 22.01 - 23.12 |
| 6.215 - 6.218       | 608 - 614             | 23.6 - 24.0   |
| 6.26775 - 6.26825   | 960 - 1427            | 31.2 - 31.8   |
| 6.31175 - 6.31225   | 1435 - 1626.5         | 36.43 - 36.5  |
| 8.291 - 8.294       | 1645.5 - 1646.5       | Above 38.6    |
| 8.362 - 8.366       | 1660 - 1710           |               |
| 8.37625 - 8.38675   | 1718.8 - 1722.2       |               |
| 8.41425 - 8.41475   | 2200 - 2300           |               |
| 12.29 - 12.293      | 2310 - 2390           |               |
| 12.51975 - 12.52025 | 2483.5 - 2500         |               |
| 12.57675 - 12.57725 | 2655 - 2900           |               |
| 13.36 - 13.41       | 3260 - 3267           |               |
| 16.42 - 16.423      | 3332 - 3339           |               |
| 16.69475 - 16.69525 | 3345.8 - 3358         |               |
| 16.80425 - 16.80475 | 3500 - 4400           |               |
| 25.5 - 25.67        | 4500 - 5150           |               |
| 37.5 - 38.25        | 5350 - 5460           |               |
| 73 - 74.6           | 7250 - 7750           |               |
| 74.8 - 75.2         | 8025 - 8500           |               |
| 108 - 138           | --                    |               |

\* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

## LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY<br>(MHz) | Limit (dBuV/m) (at 3M) |         |
|--------------------|------------------------|---------|
|                    | PEAK                   | AVERAGE |
| Above 1000         | 74                     | 54      |

## Notes:

- (1)The limit for radiated test was performed according to RSS-GEN.
- (2)The tighter limit applies at the band edges.
- (3)Emission level (dBuV/m)=20log Emission level (uV/m).

### 8.3 Test Procedure

| Receiver Parameter                    | Setting  |
|---------------------------------------|--|
| Attenuation                           | Auto   |
| Start Frequency                       | 2300MHz  |
| Stop Frequency                        | 2520   |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

Above 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel.

## Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 8.5 Test Result

|                      | Polar (H/V)          | Frequency (MHz)     | Reading Level (dBuV/m) | Correct Factor (dB) | Measurement (dBuV/m) | Limits (dBuV/m) |       | Result |      |
|----------------------|----------------------|---------------------|------------------------|---------------------|----------------------|-----------------|-------|--------|------|
|                      |                      |                     |                        |                     | PK                   | PK              | AV    |        |      |
| GFSK                 | Low Channel 2402MHz  |                     |                        |                     |                      |                 |       |        |      |
|                      | H                    | 2390.00             | 53.72                  | -6.70               | 47.02                | 74.00           | 54.00 | PASS   |      |
|                      | H                    | 2400.00             | 56.86                  | -6.71               | 50.15                | 74.00           | 54.00 | PASS   |      |
|                      | V                    | 2390.00             | 54.16                  | -6.70               | 47.46                | 74.00           | 54.00 | PASS   |      |
|                      | V                    | 2400.00             | 58.89                  | -6.71               | 52.18                | 74.00           | 54.00 | PASS   |      |
|                      | High Channel 2480MHz |                     |                        |                     |                      |                 |       |        |      |
|                      | H                    | 2483.50             | 57.64                  | -6.79               | 50.85                | 74.00           | 54.00 | PASS   |      |
|                      | H                    | 2500.00             | 51.37                  | -6.81               | 44.56                | 74.00           | 54.00 | PASS   |      |
|                      | V                    | 2483.50             | 58.24                  | -6.79               | 51.45                | 74.00           | 54.00 | PASS   |      |
|                      | V                    | 2500.00             | 53.39                  | -6.81               | 46.58                | 74.00           | 54.00 | PASS   |      |
|                      | $\pi/4$ DQPSK        | Low Channel 2402MHz |                        |                     |                      |                 |       |        |      |
|                      |                      | H                   | 2390.00                | 53.79               | -6.70                | 47.09           | 74.00 | 54.00  | PASS |
| H                    |                      | 2400.00             | 58.17                  | -6.71               | 51.46                | 74.00           | 54.00 | PASS   |      |
| V                    |                      | 2390.00             | 53.54                  | -6.70               | 46.84                | 74.00           | 54.00 | PASS   |      |
| V                    |                      | 2400.00             | 58.25                  | -6.71               | 51.54                | 74.00           | 54.00 | PASS   |      |
| High Channel 2480MHz |                      |                     |                        |                     |                      |                 |       |        |      |
| H                    |                      | 2483.50             | 56.13                  | -6.79               | 49.34                | 2483.50         | 56.60 | -6.79  |      |
| H                    |                      | 2500.00             | 52.15                  | -6.81               | 45.34                | 2500.00         | 51.76 | -6.81  |      |
| V                    |                      | 2483.50             | 57.93                  | -6.79               | 51.14                | 2483.50         | 56.25 | -6.79  |      |
| V                    |                      | 2500.00             | 55.40                  | -6.81               | 48.59                | 2500.00         | 52.41 | -6.81  |      |
| 8DPSK                |                      | Low Channel 2402MHz |                        |                     |                      |                 |       |        |      |
|                      |                      | H                   | 2390.00                | 53.22               | -6.70                | 46.52           | 74.00 | 54.00  | PASS |
|                      | H                    | 2400.00             | 57.83                  | -6.71               | 51.12                | 74.00           | 54.00 | PASS   |      |
|                      | V                    | 2390.00             | 53.15                  | -6.70               | 46.45                | 74.00           | 54.00 | PASS   |      |
|                      | V                    | 2400.00             | 57.69                  | -6.71               | 50.98                | 74.00           | 54.00 | PASS   |      |
|                      | High Channel 2480MHz |                     |                        |                     |                      |                 |       |        |      |
|                      | H                    | 2483.50             | 56.22                  | -6.79               | 49.43                | 74.00           | 54.00 | PASS   |      |
|                      | H                    | 2500.00             | 52.25                  | -6.81               | 45.44                | 74.00           | 54.00 | PASS   |      |
|                      | V                    | 2483.50             | 57.21                  | -6.79               | 50.42                | 74.00           | 54.00 | PASS   |      |
|                      | V                    | 2500.00             | 54.29                  | -6.81               | 47.48                | 74.00           | 54.00 | PASS   |      |

**Remark:**

- Emission Level = Meter Reading + Factor,  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
Over= Emission Level – Limit
- If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
- In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 9. Conducted Emission

### 9.1 Block Diagram Of Test Setup




### 9.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section RSS-247 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.



### 9.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
Below 30MHz:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold  
Above 30MHz:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold


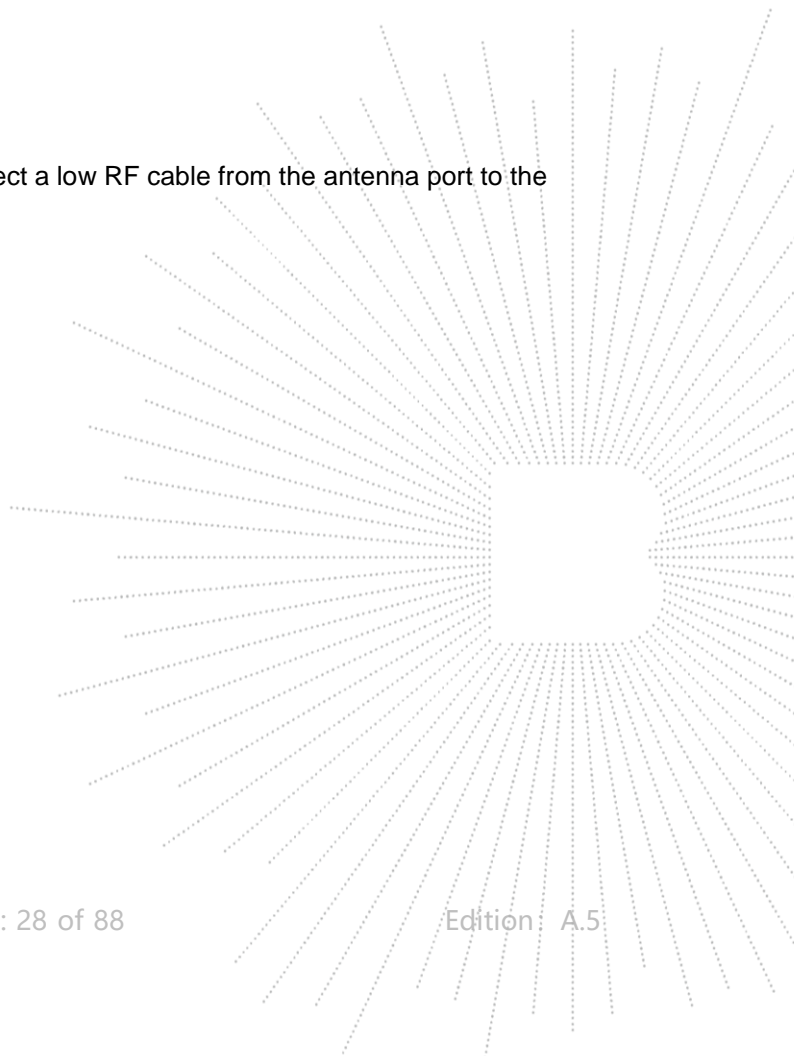




## 9.4 Test Result

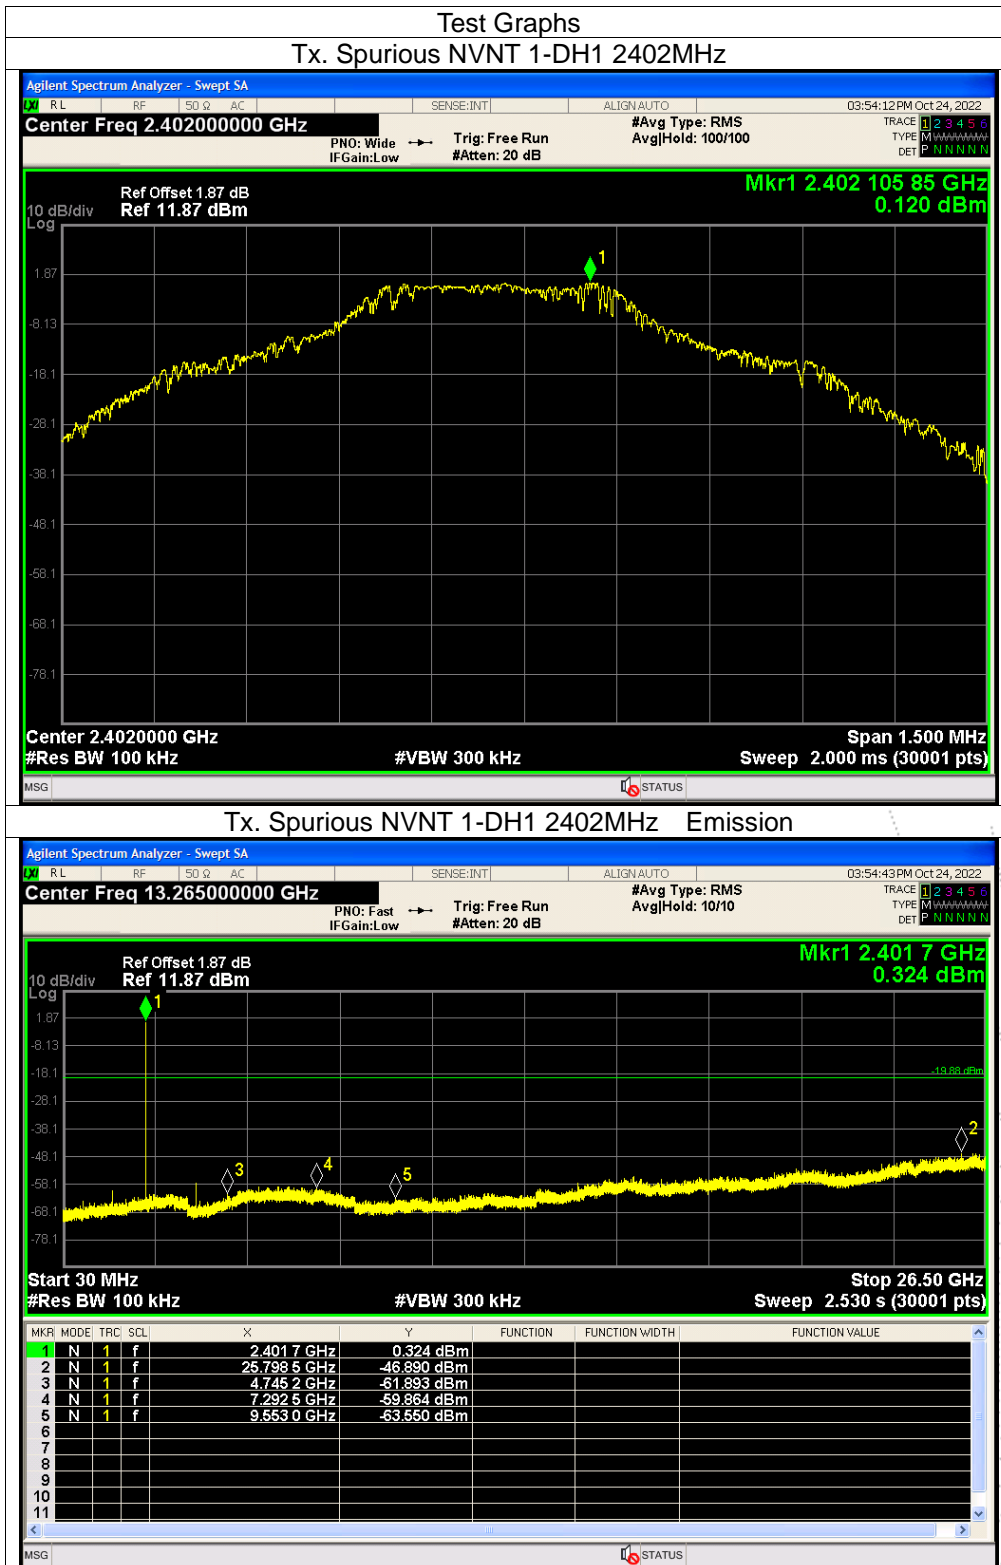

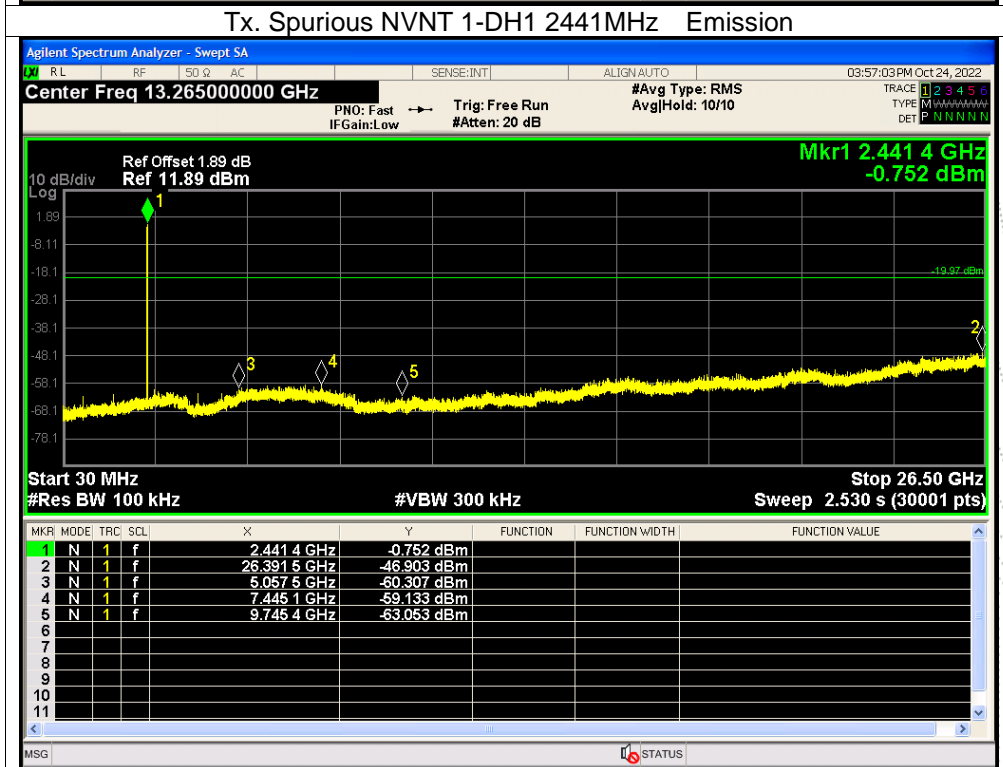
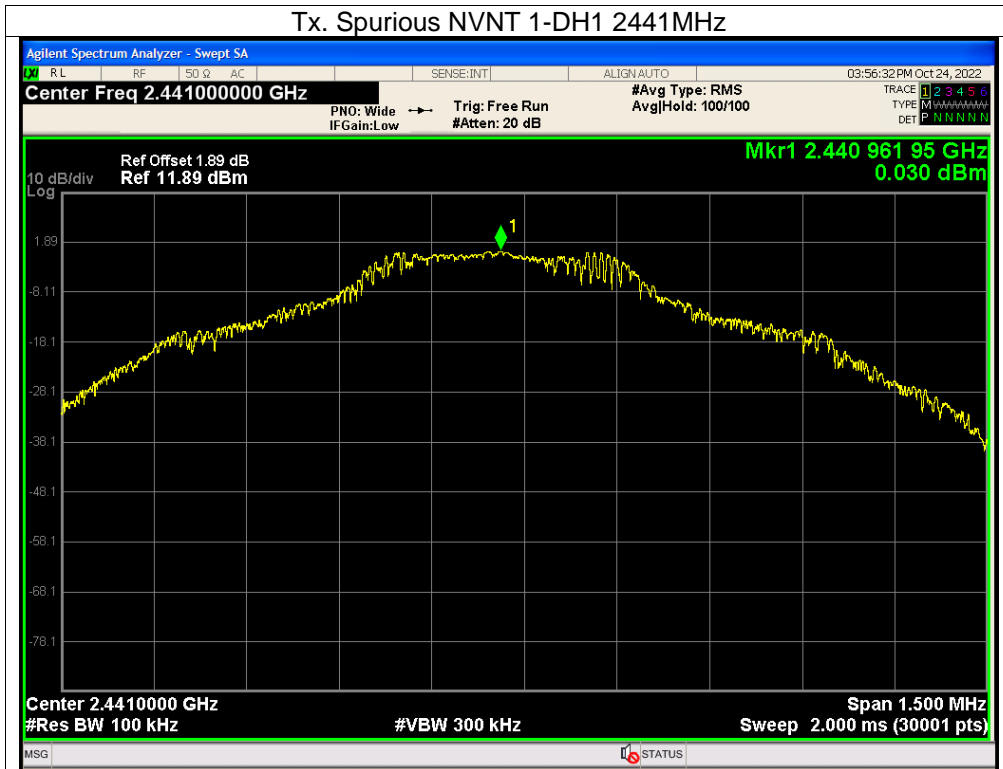






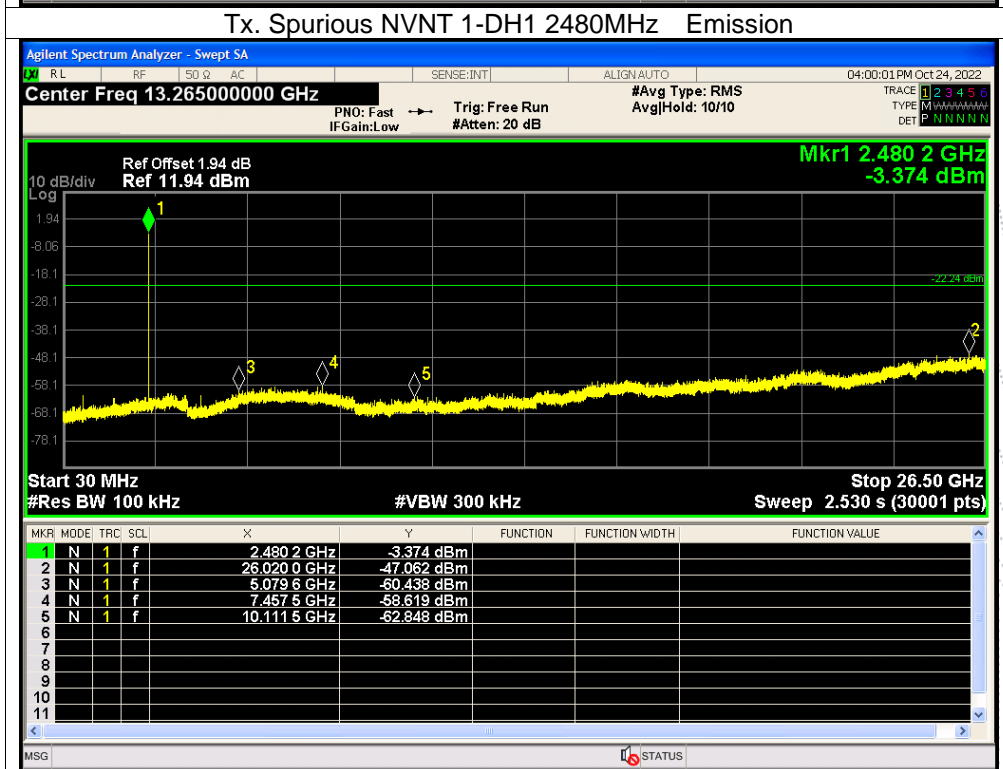
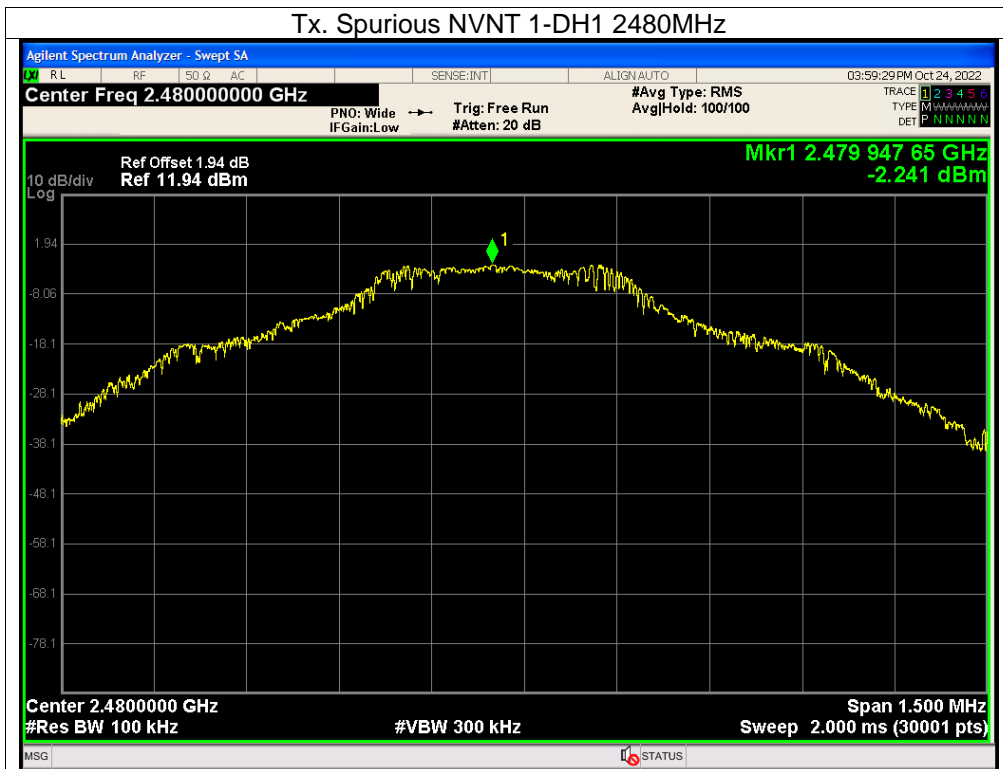


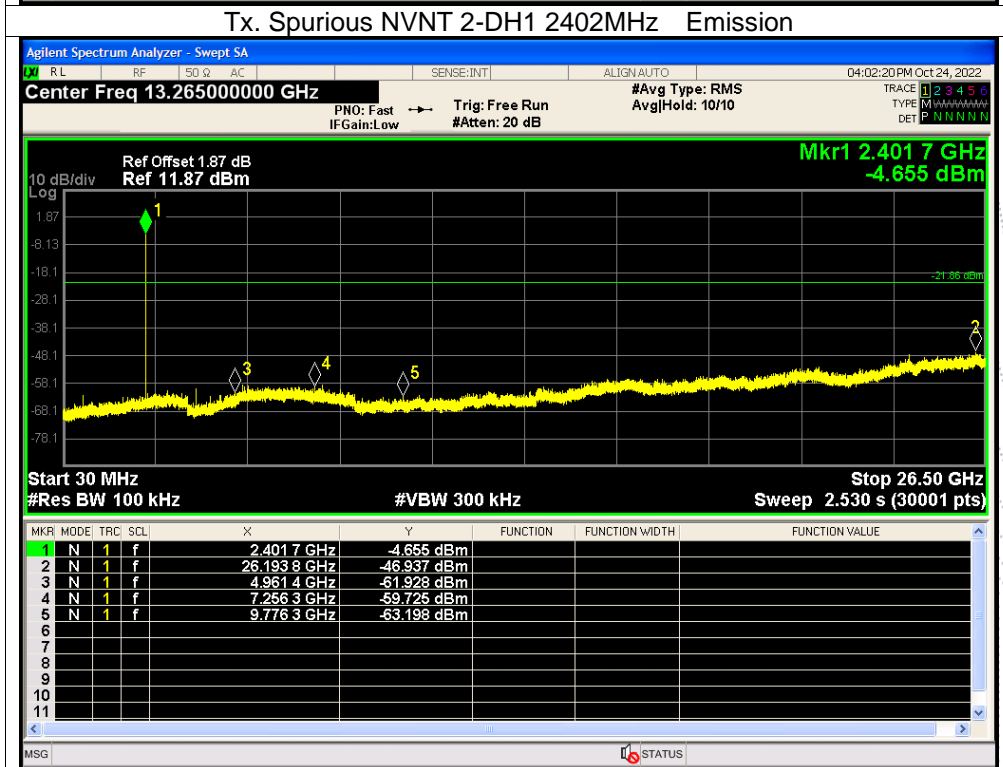
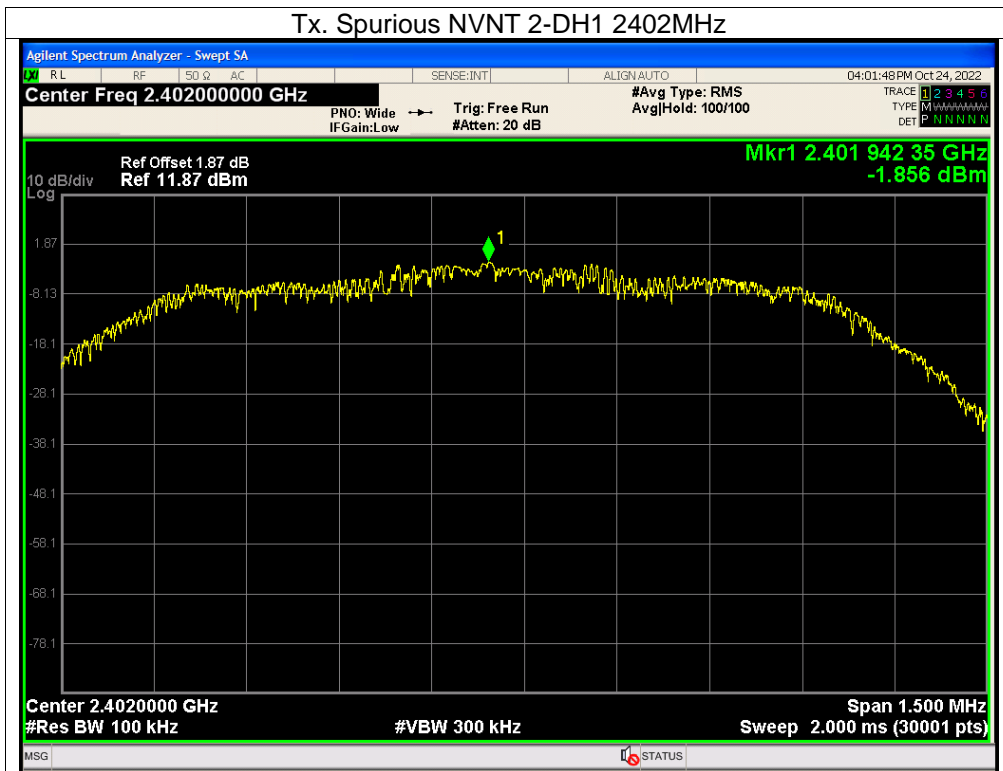






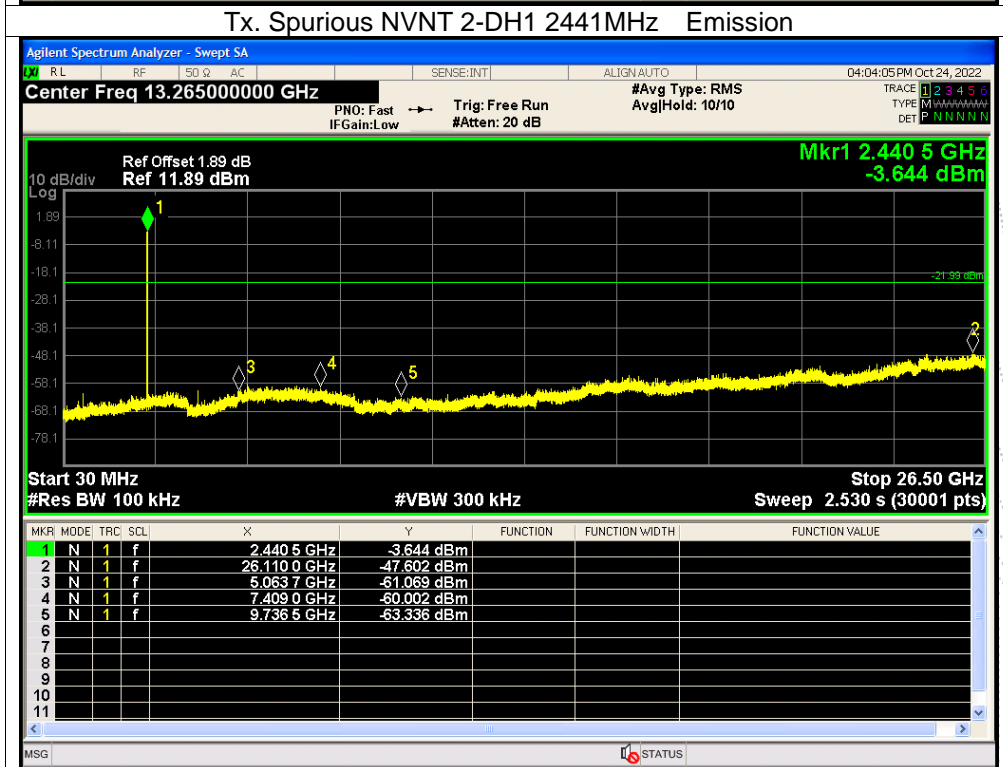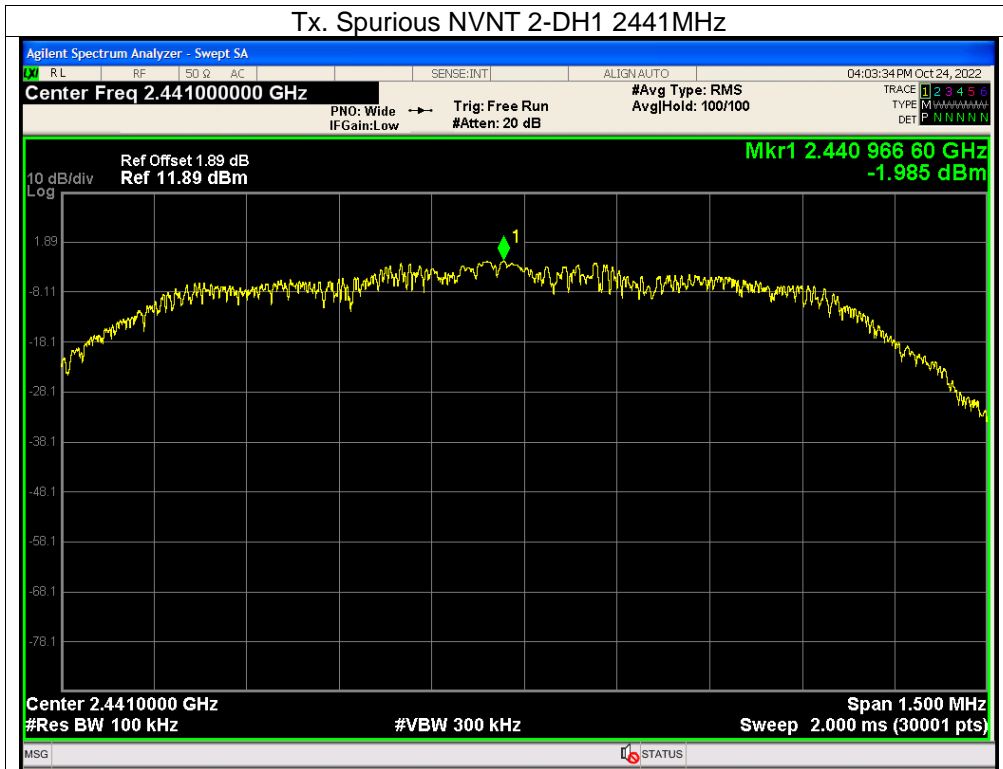


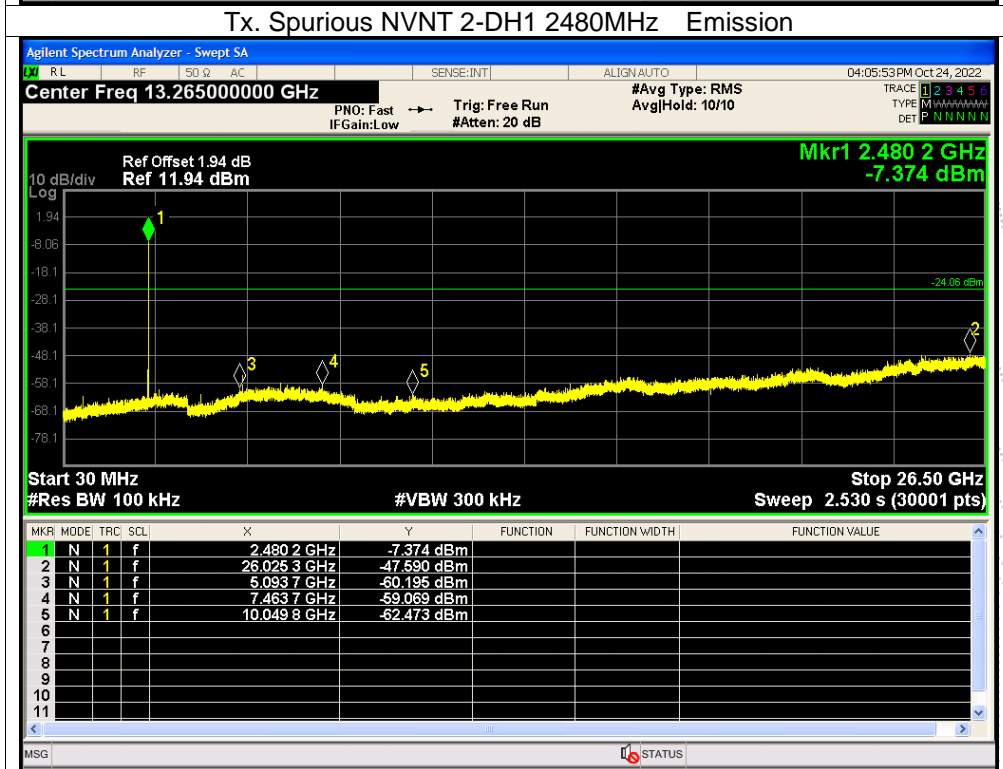
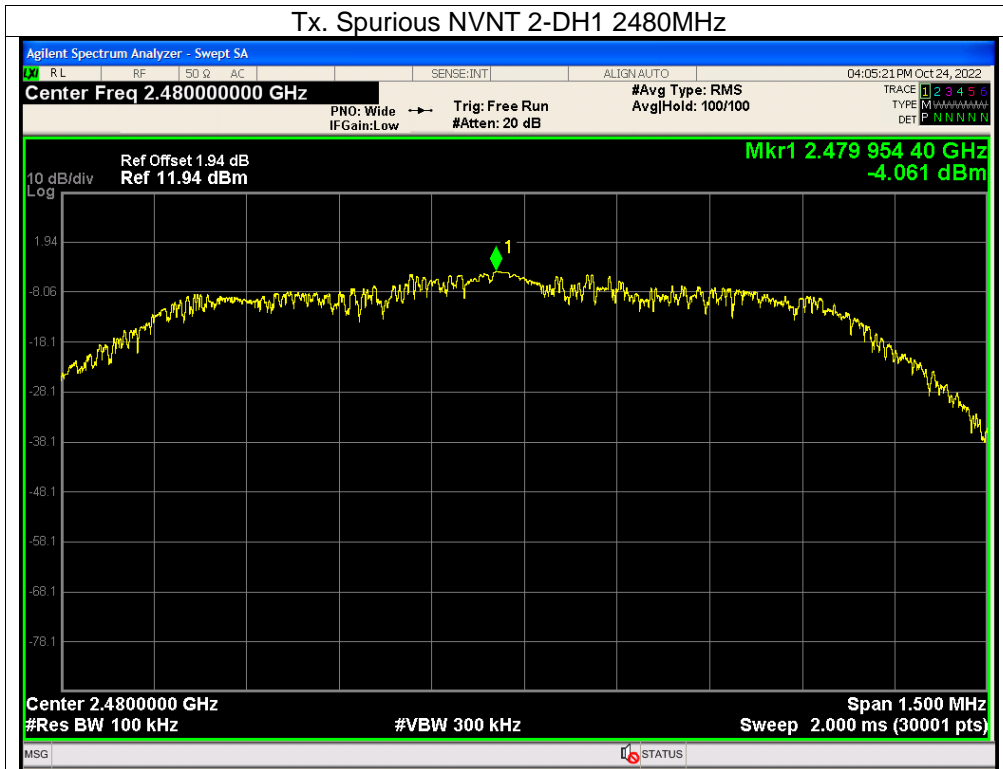


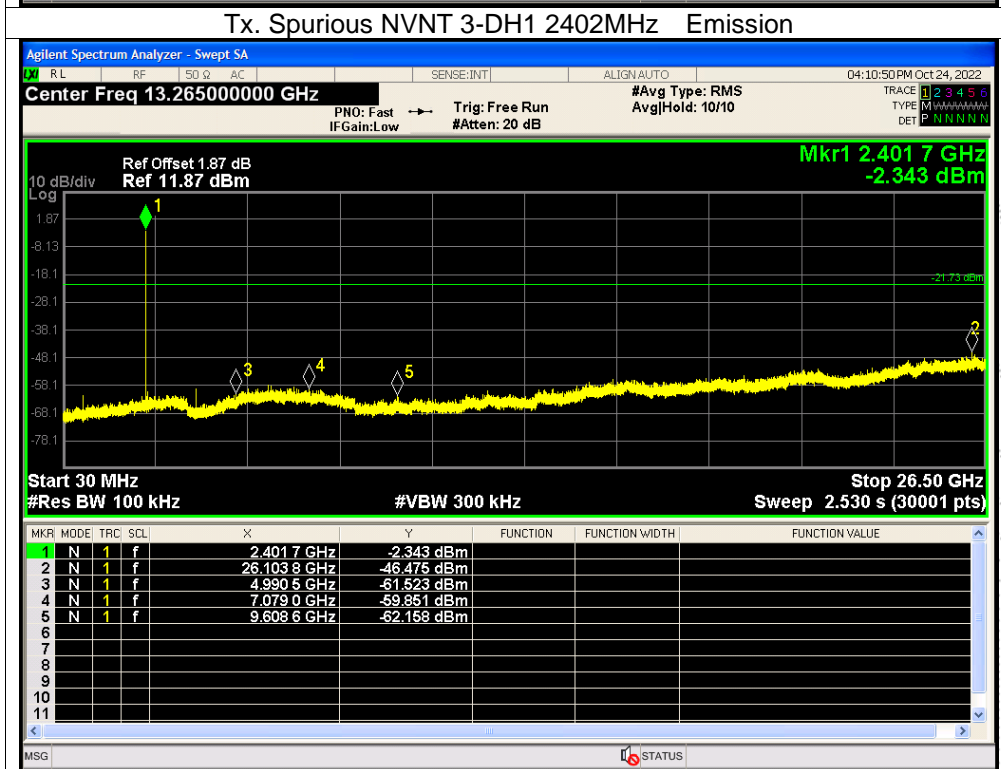
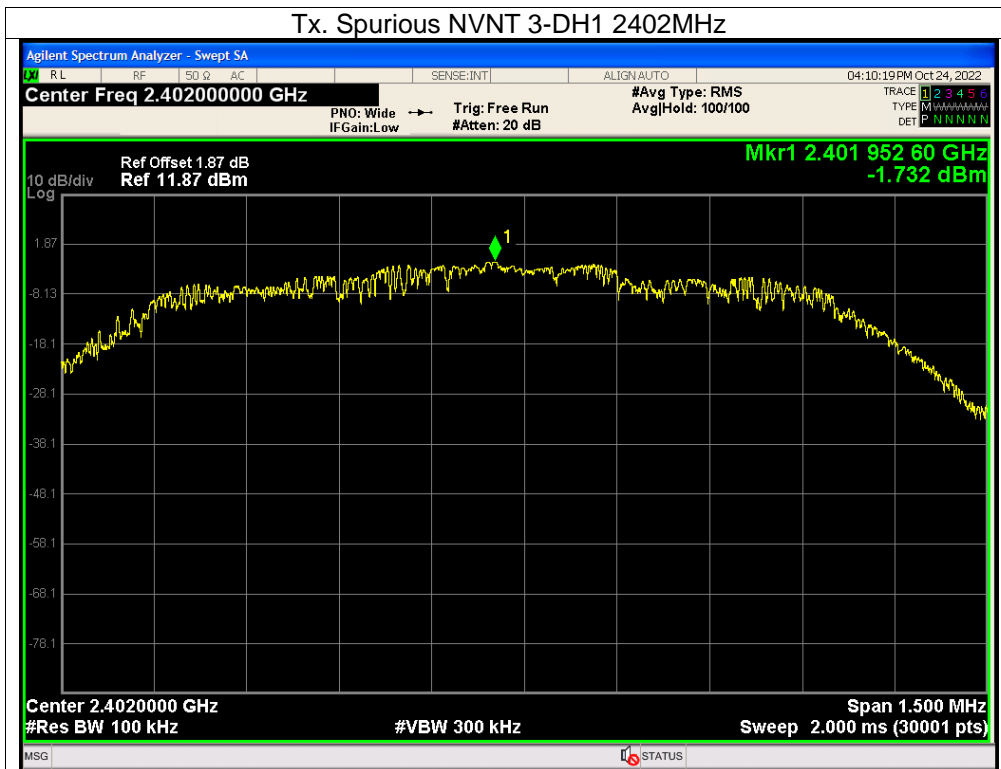


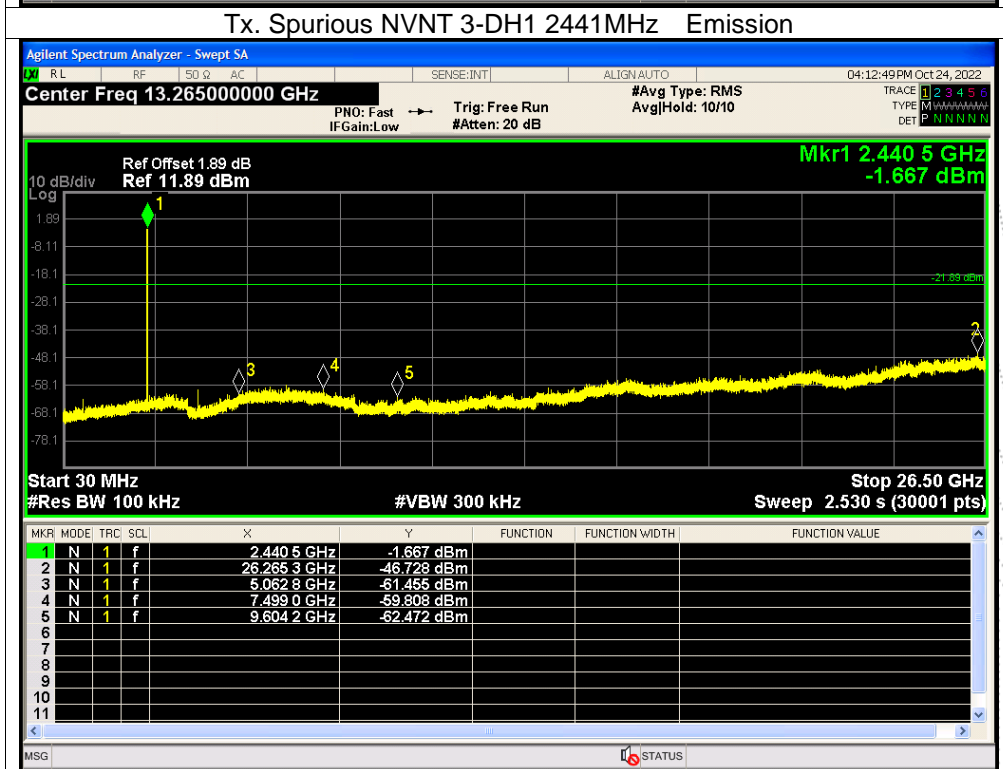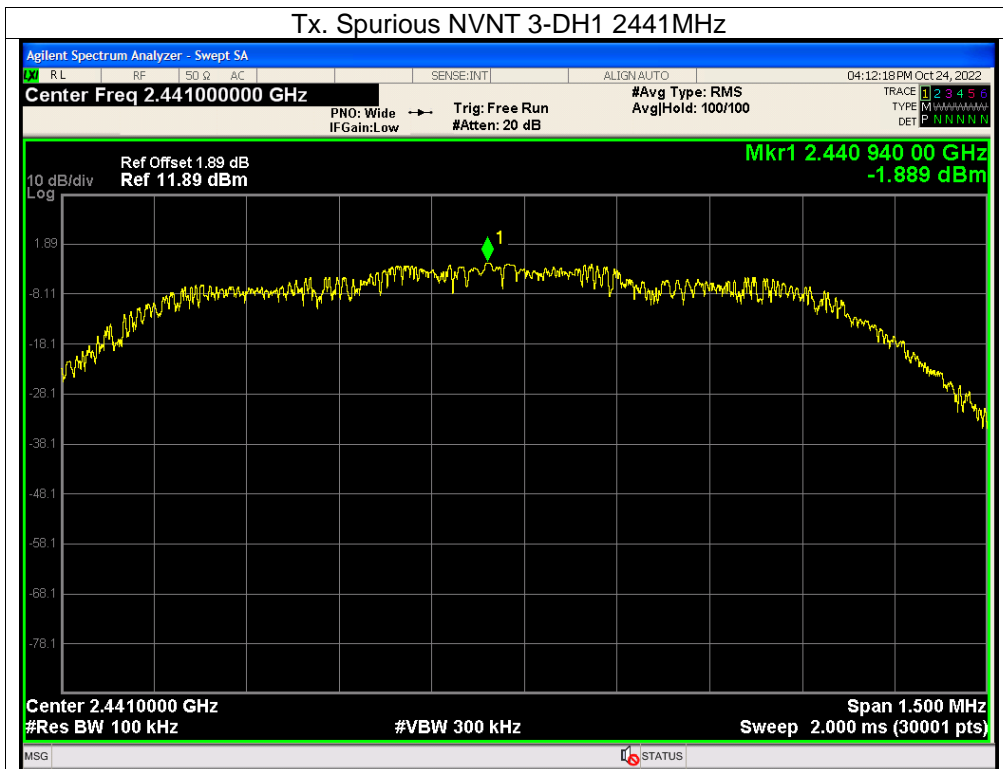

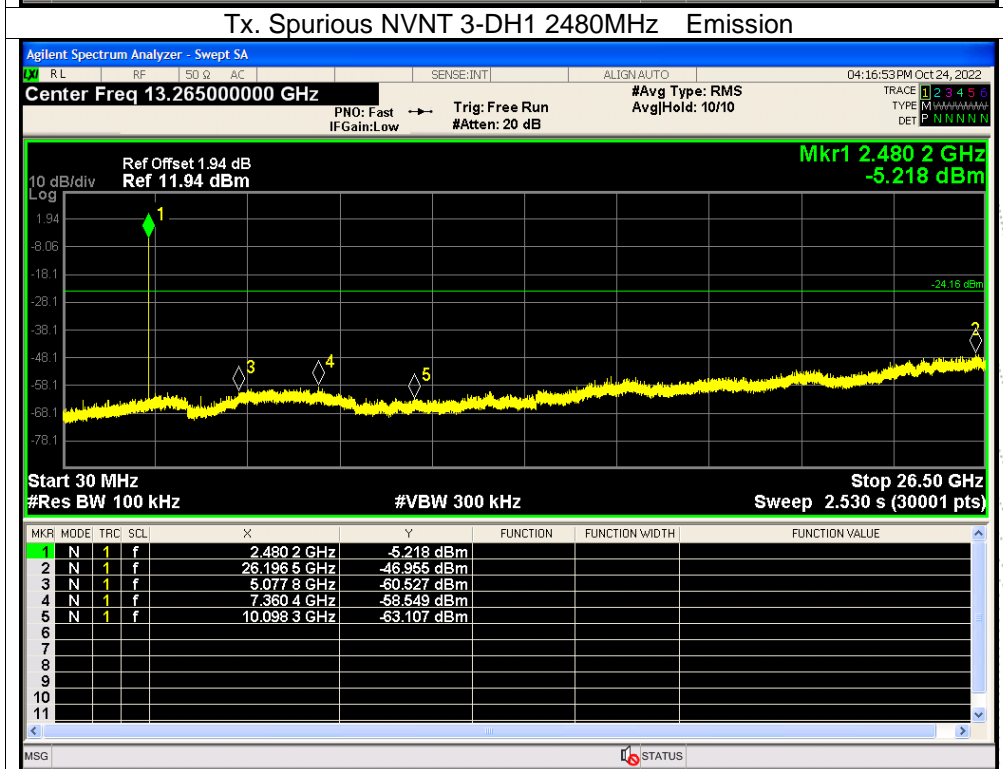
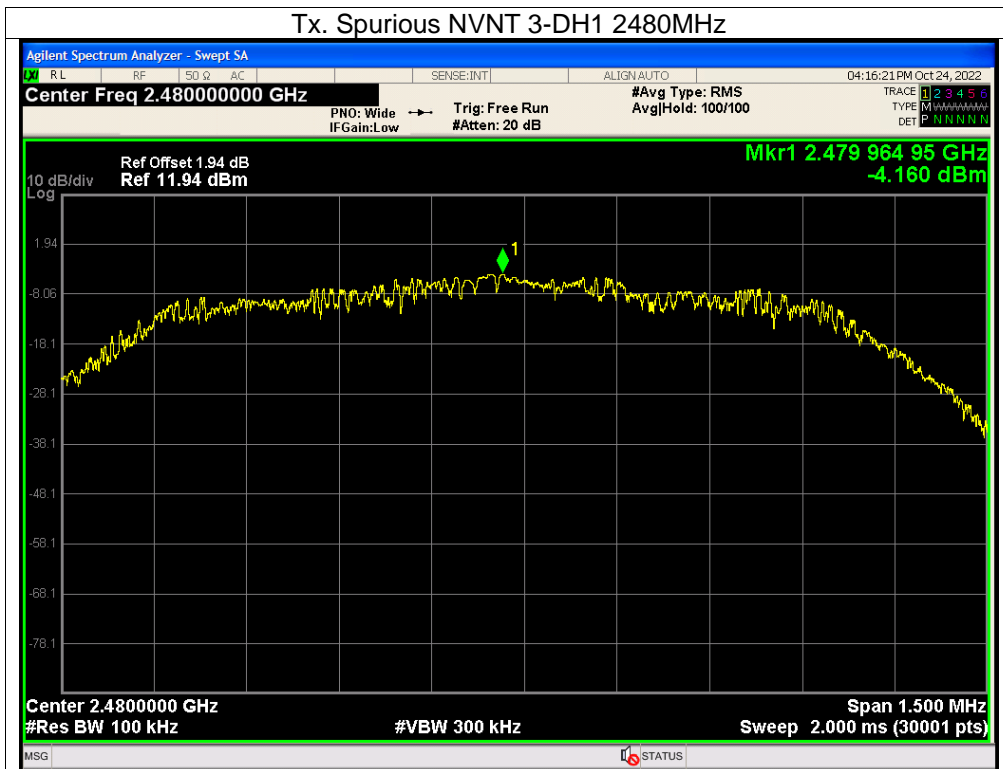


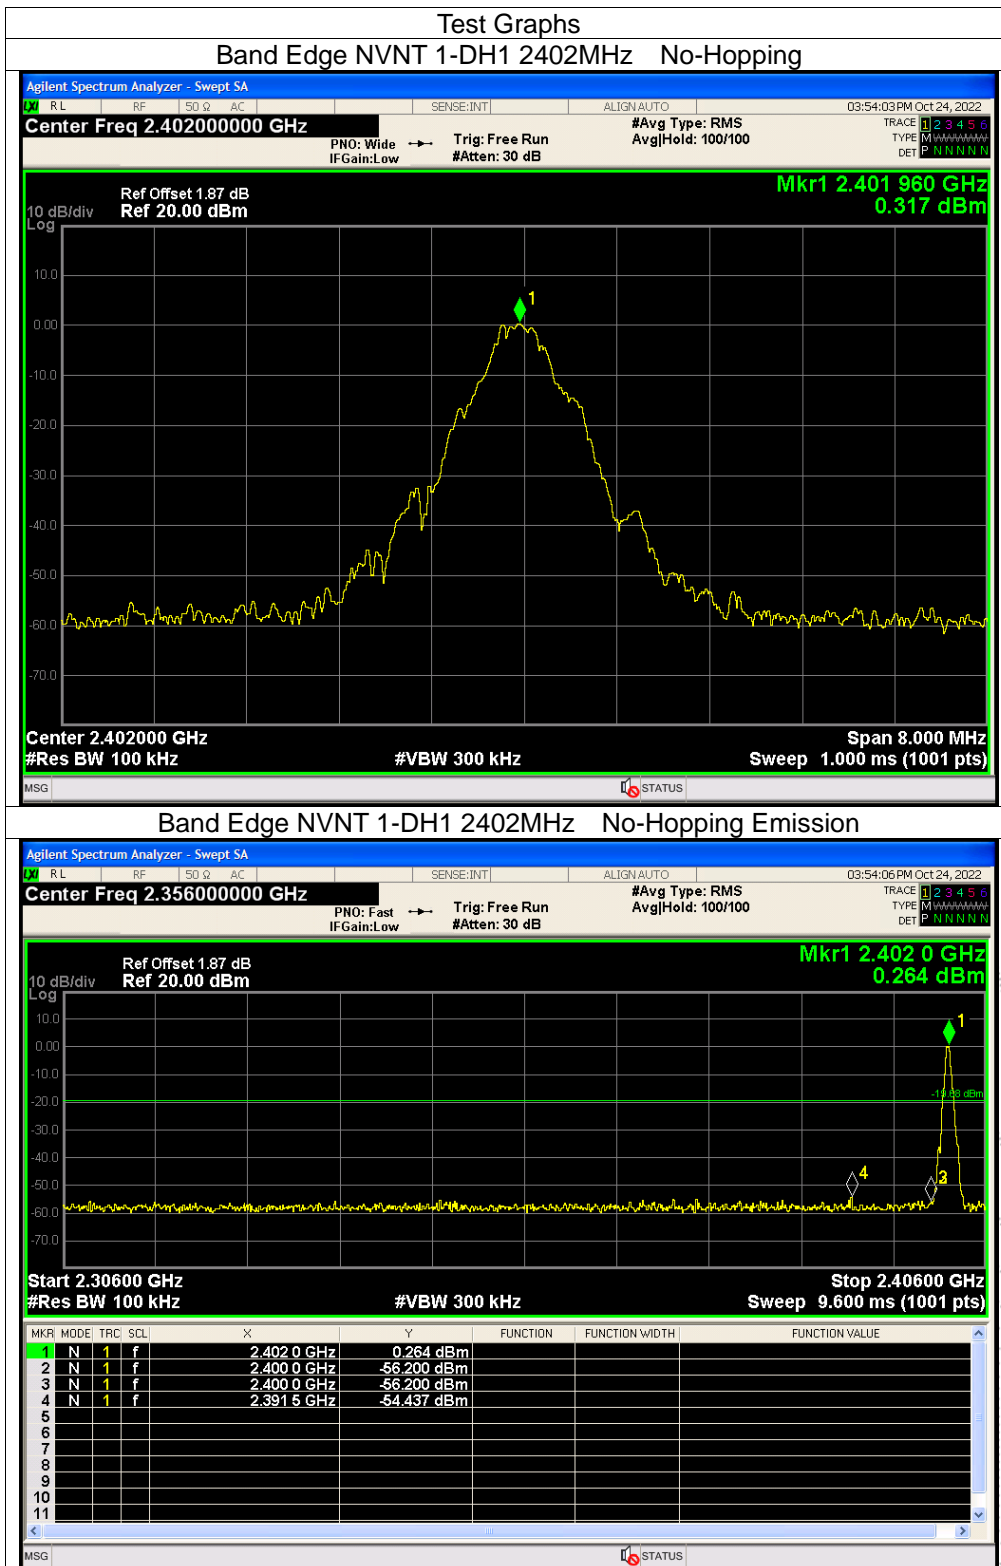


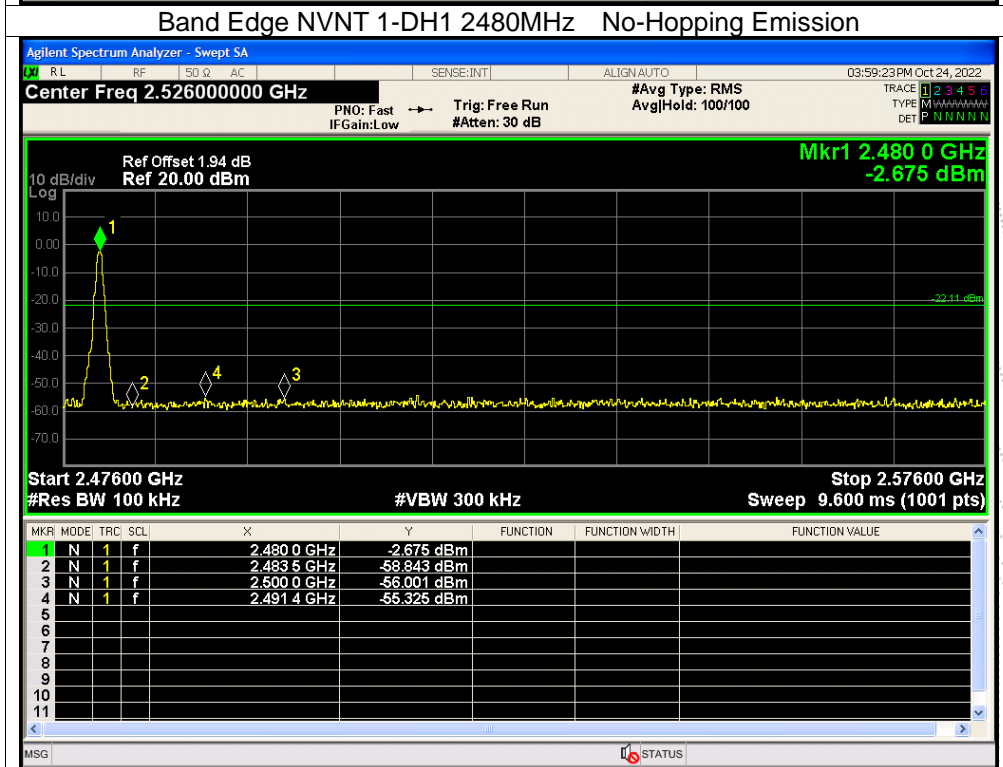
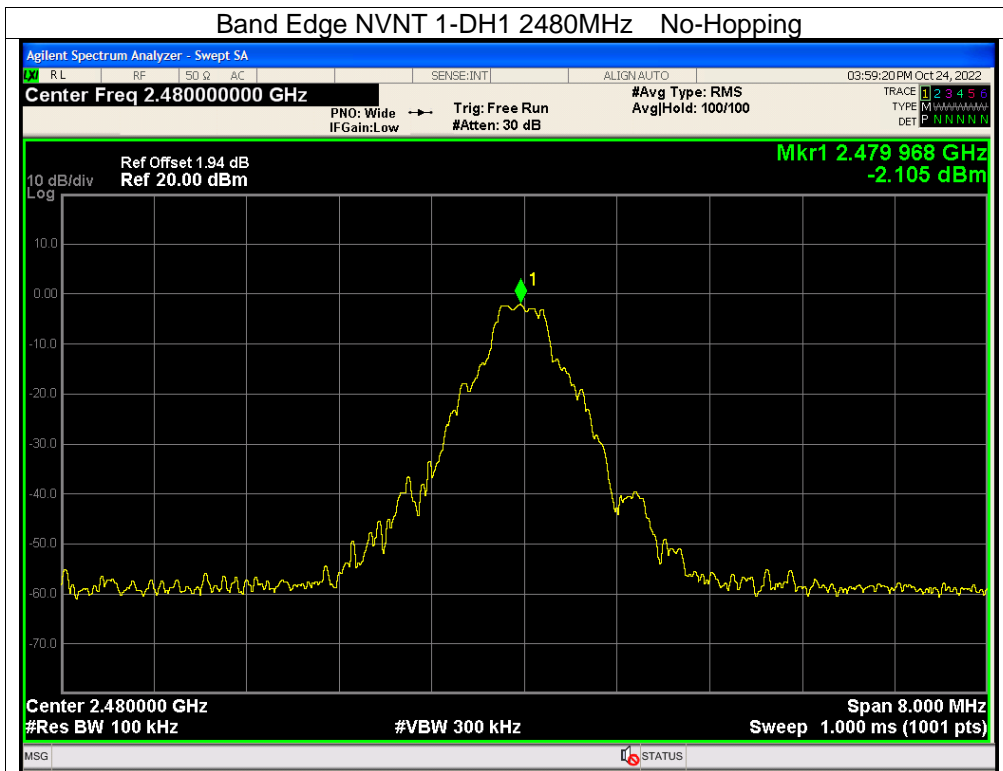


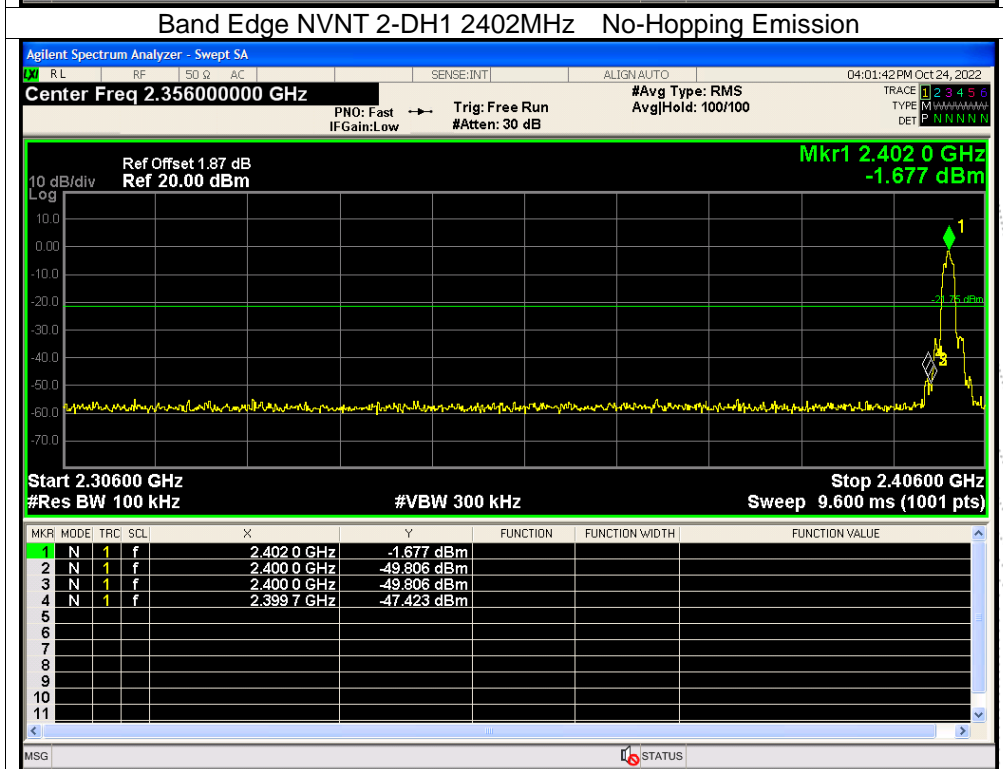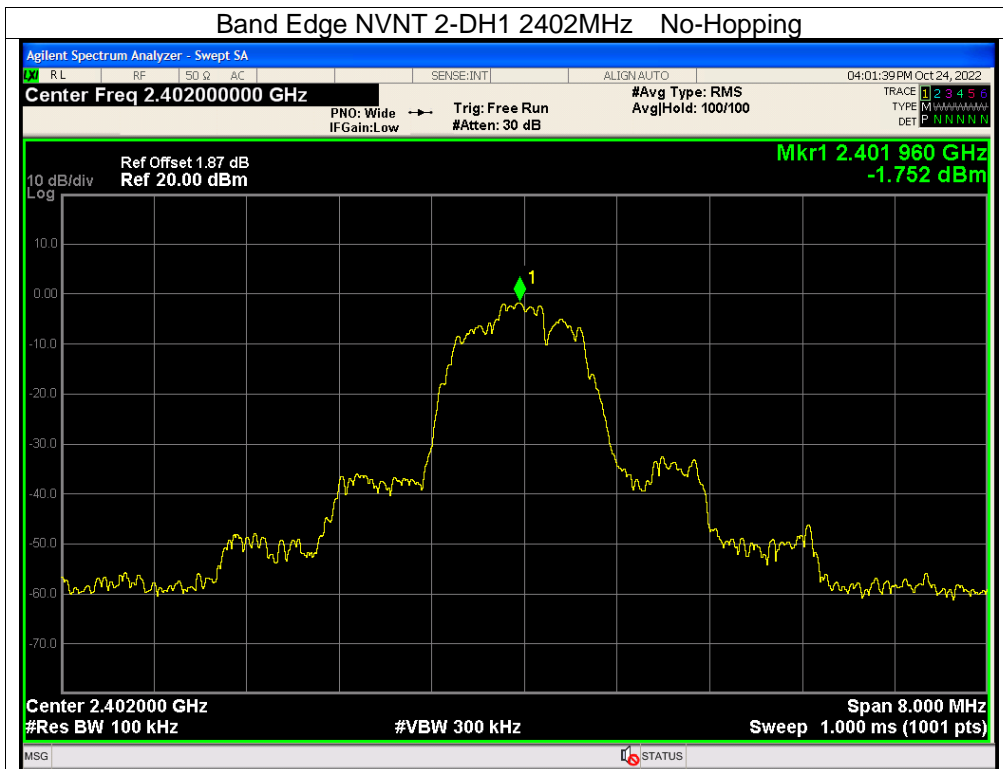






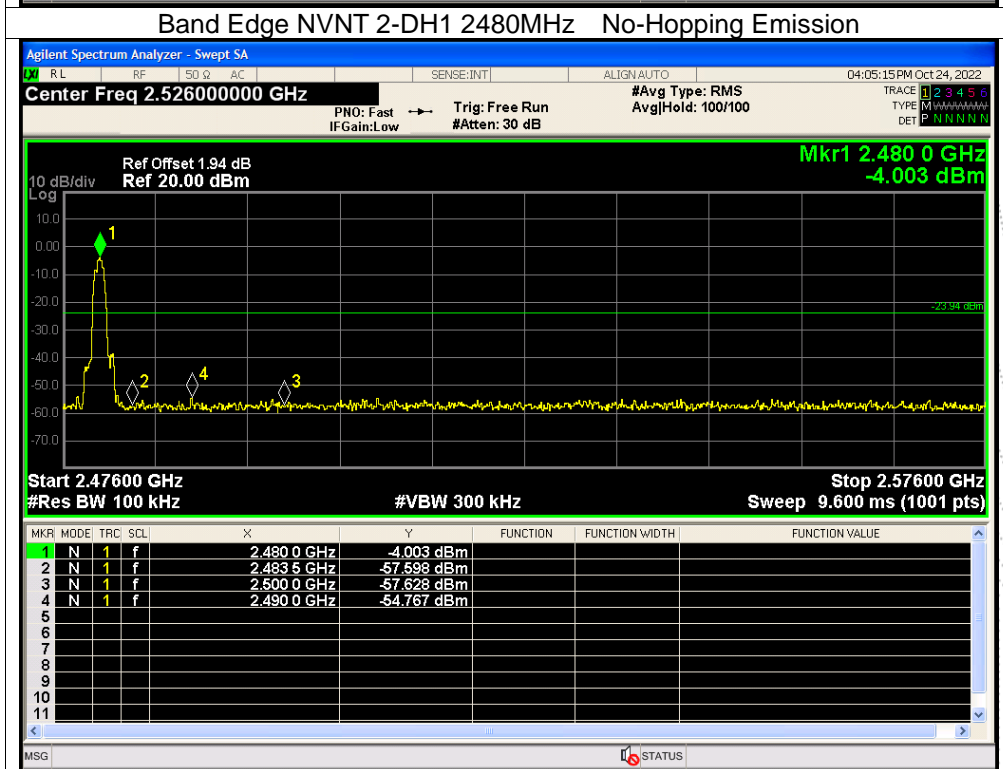
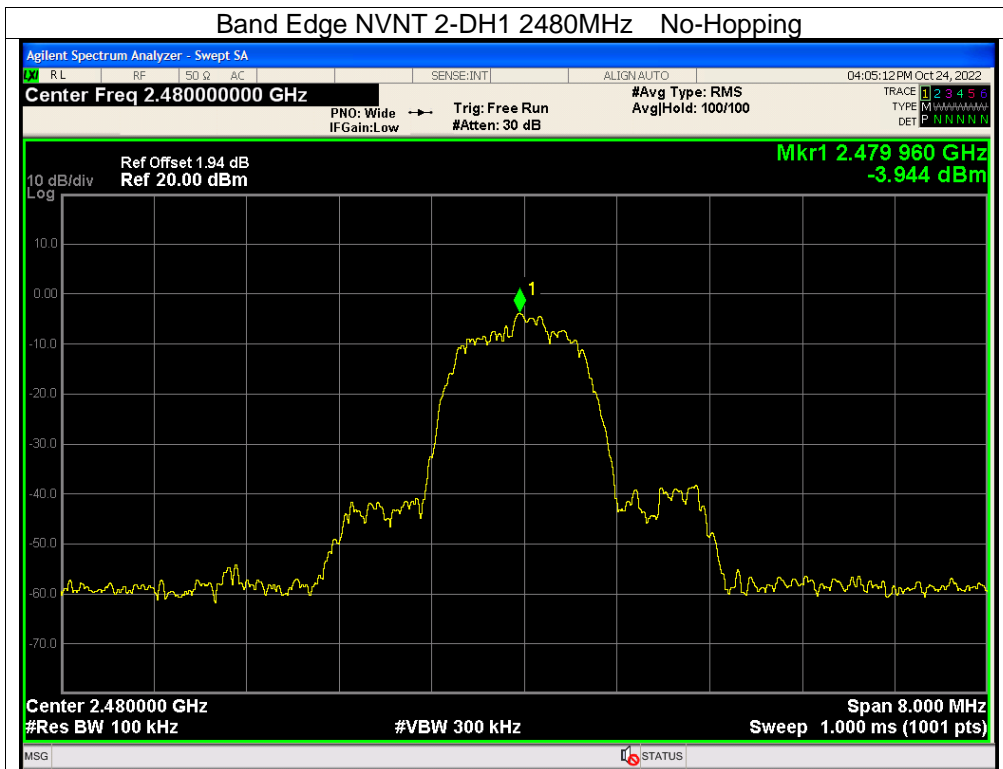



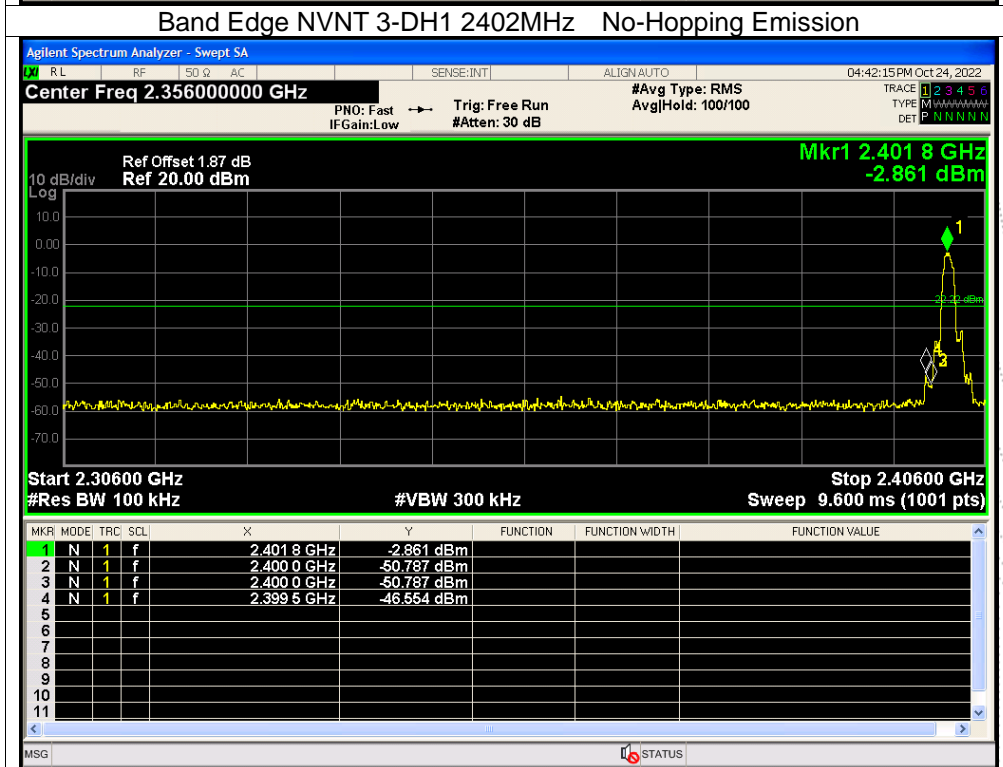


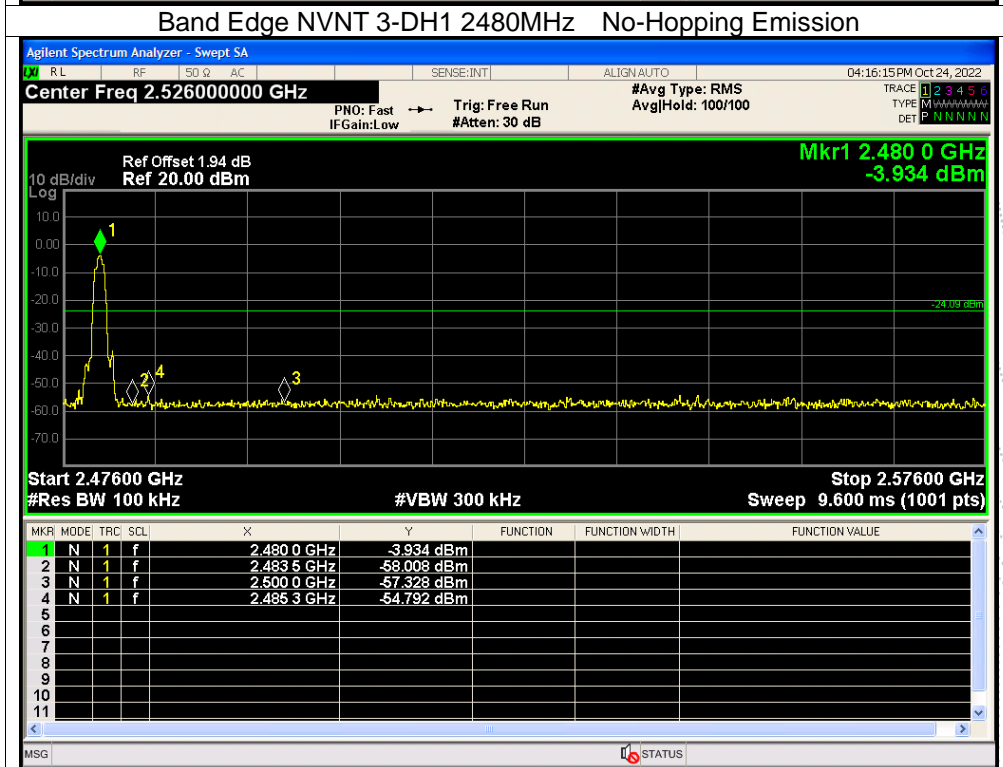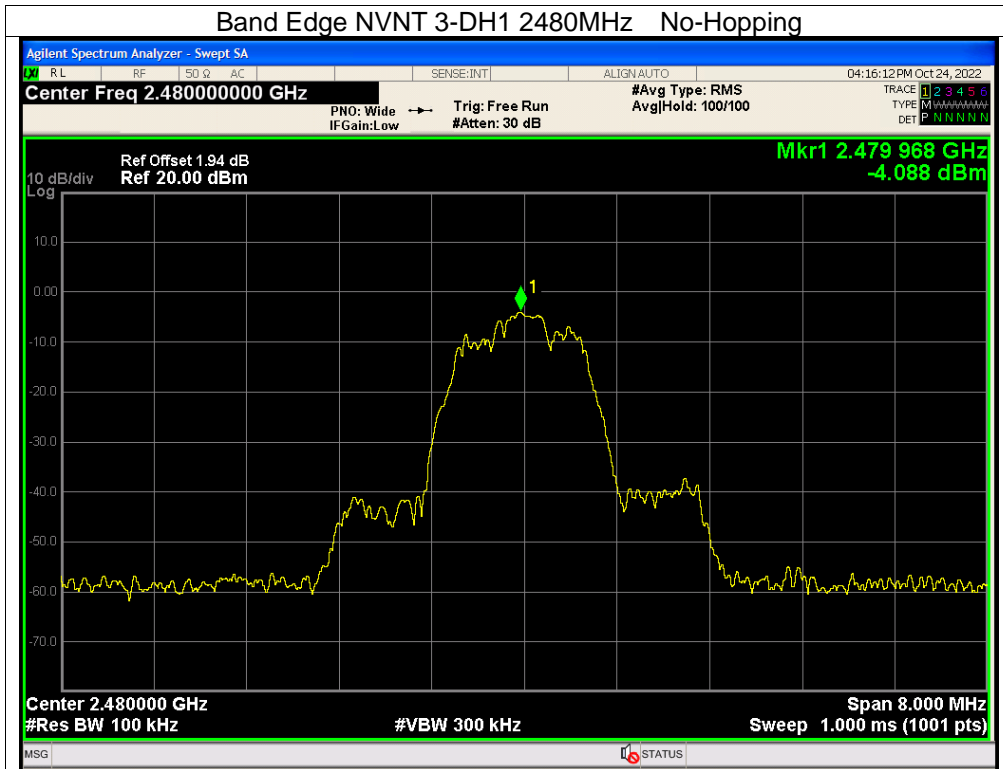


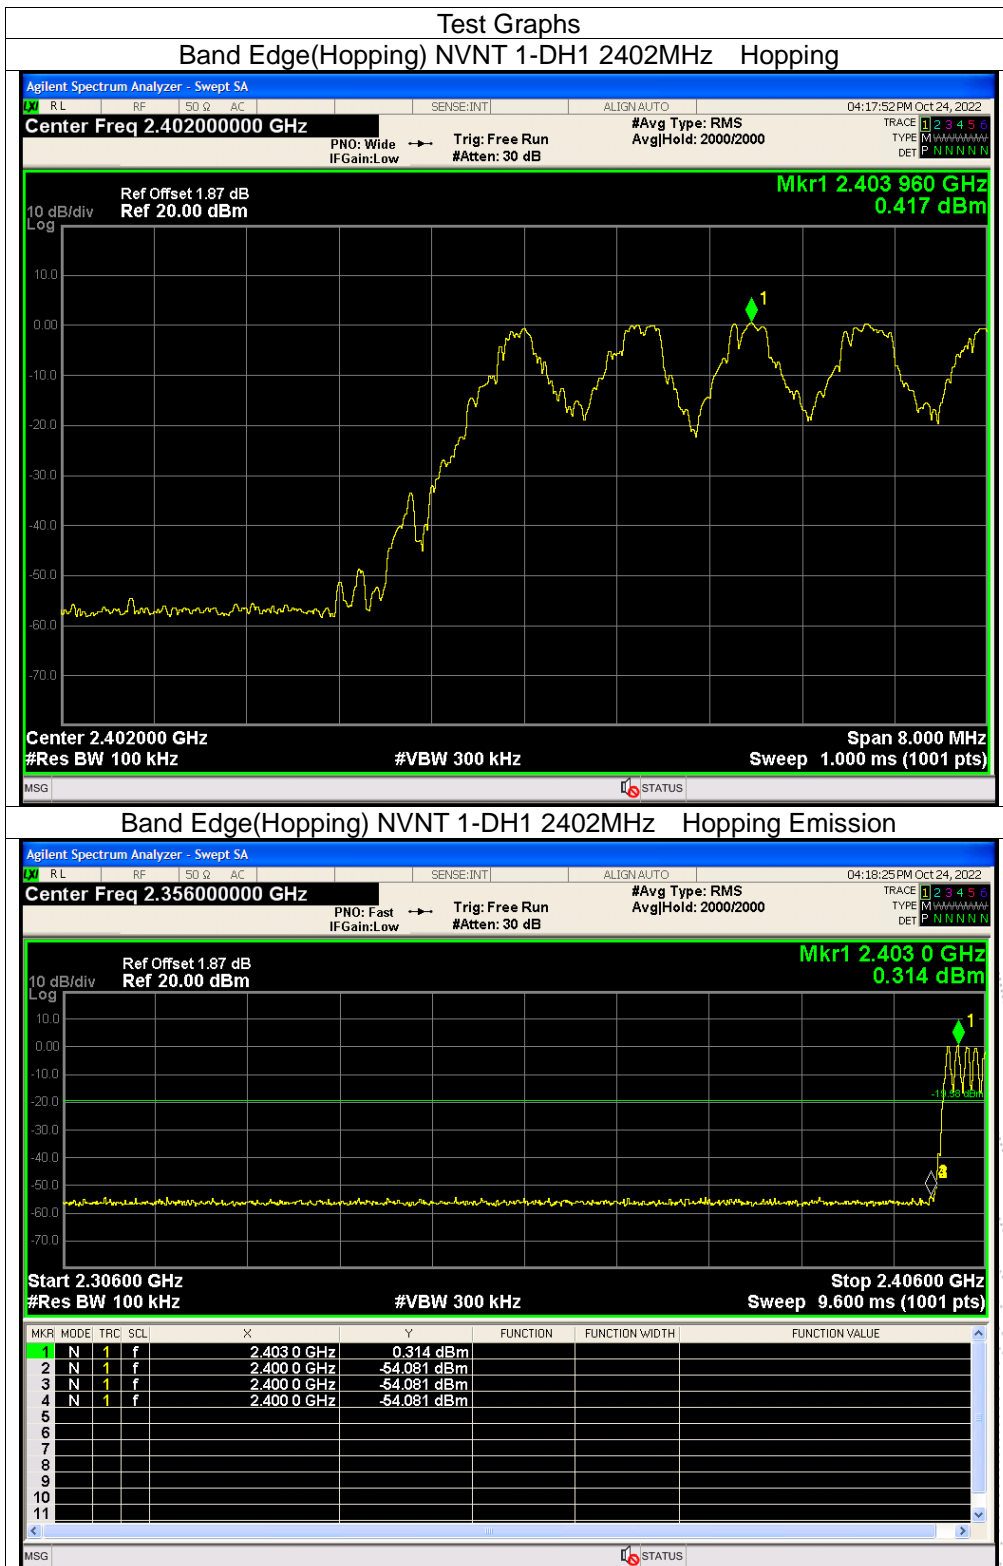


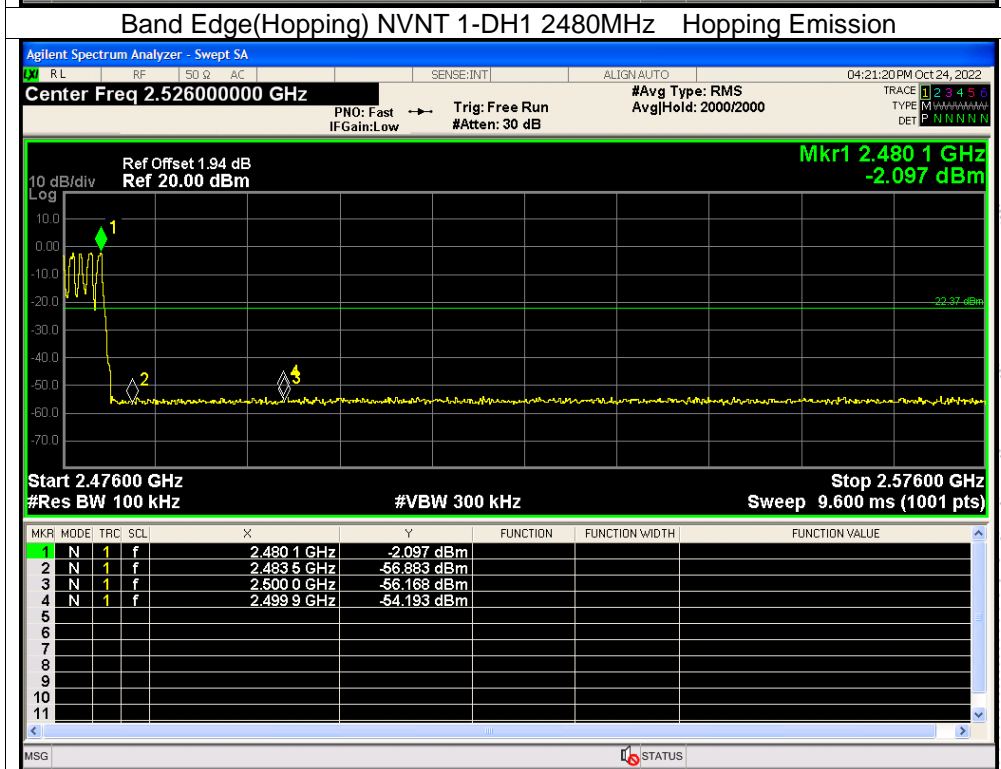
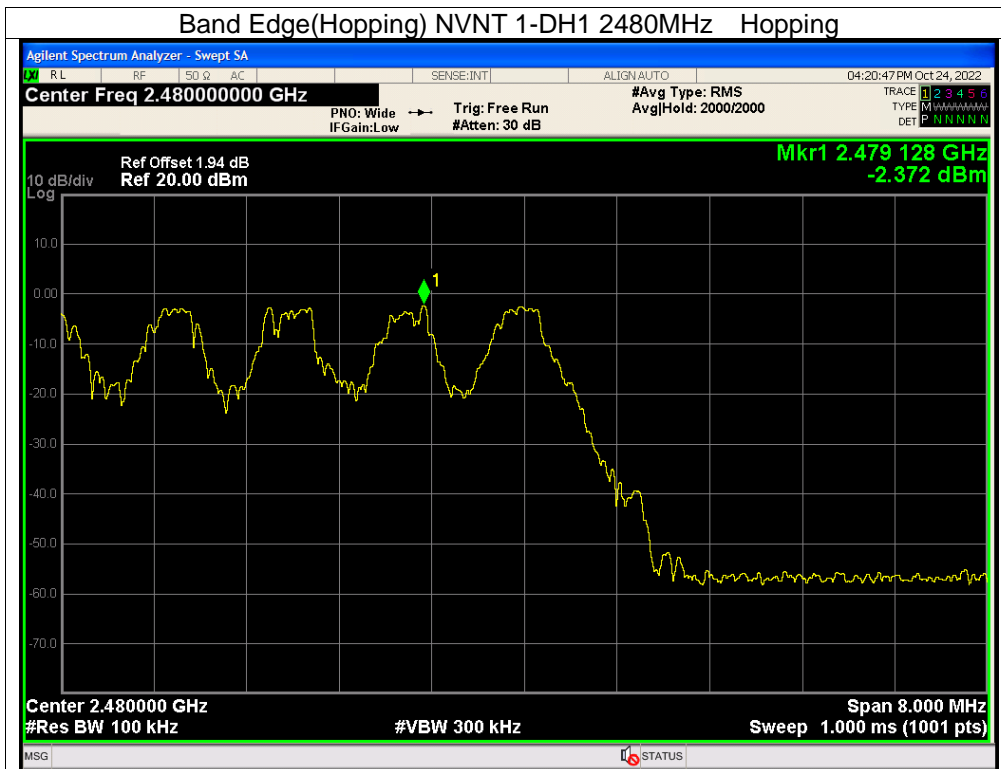


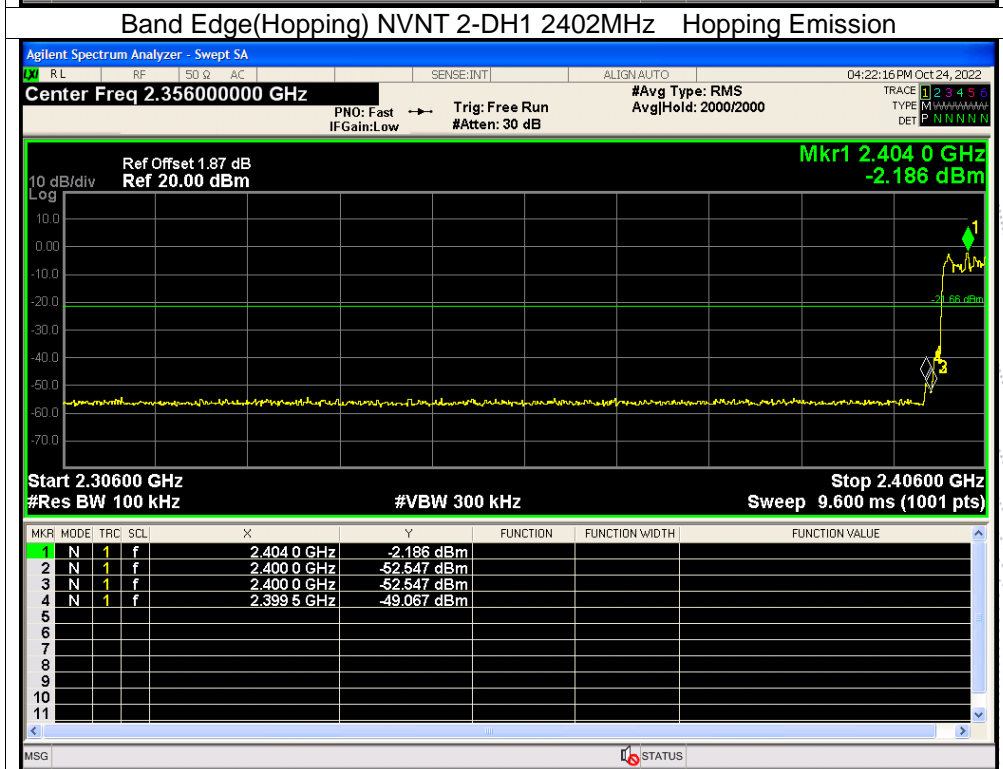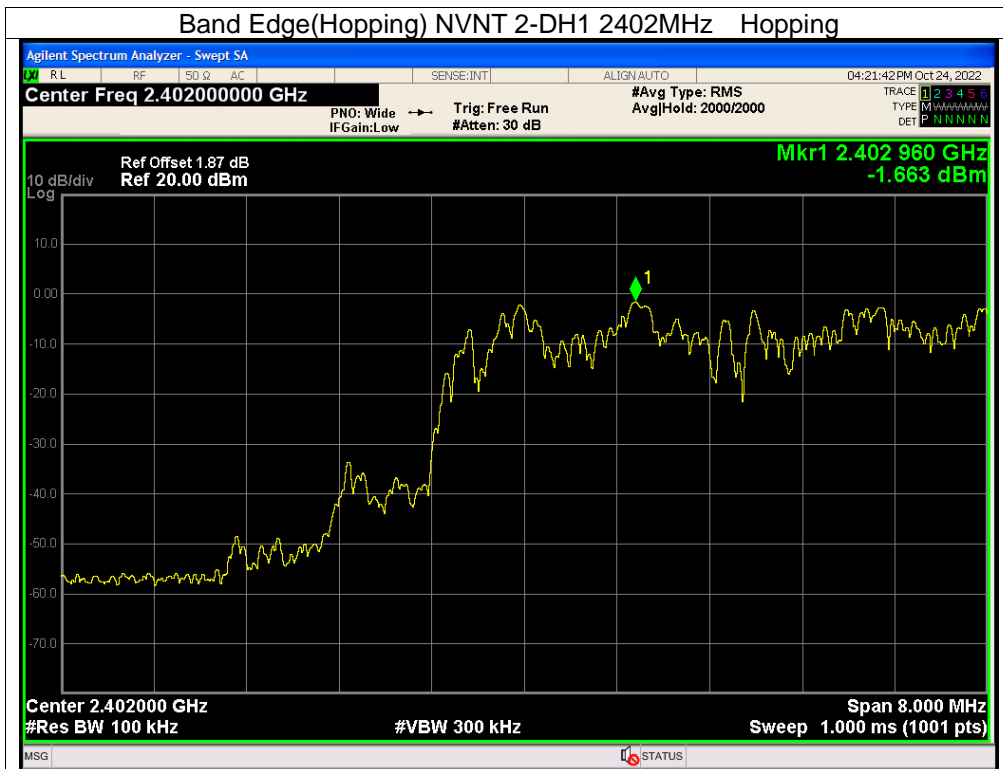

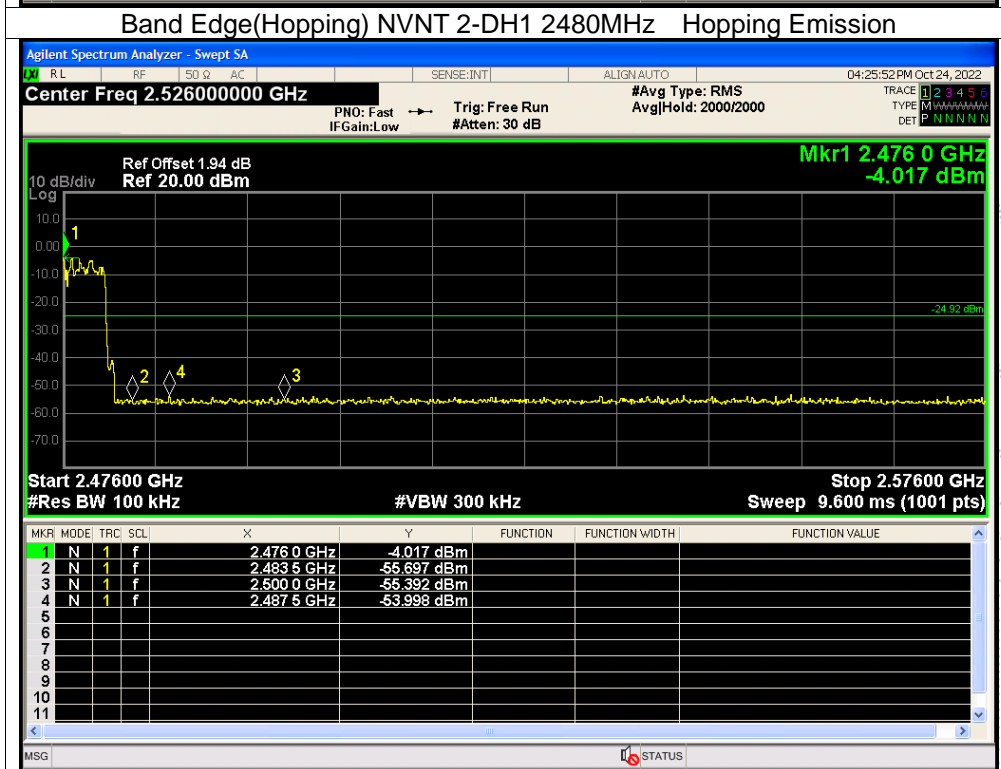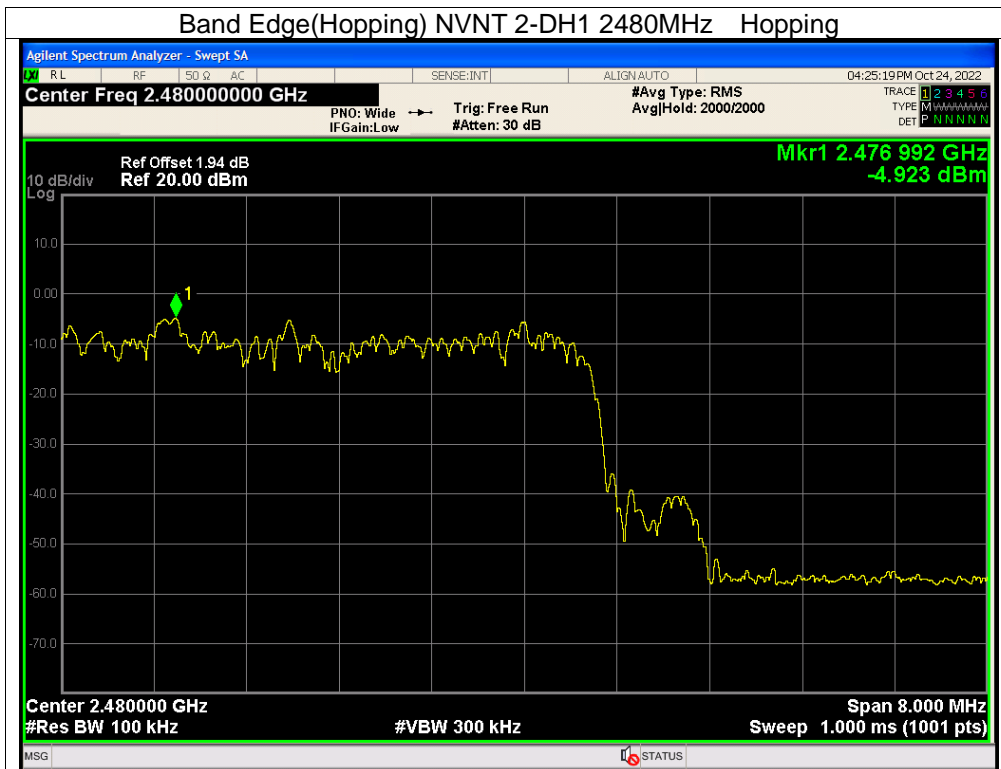




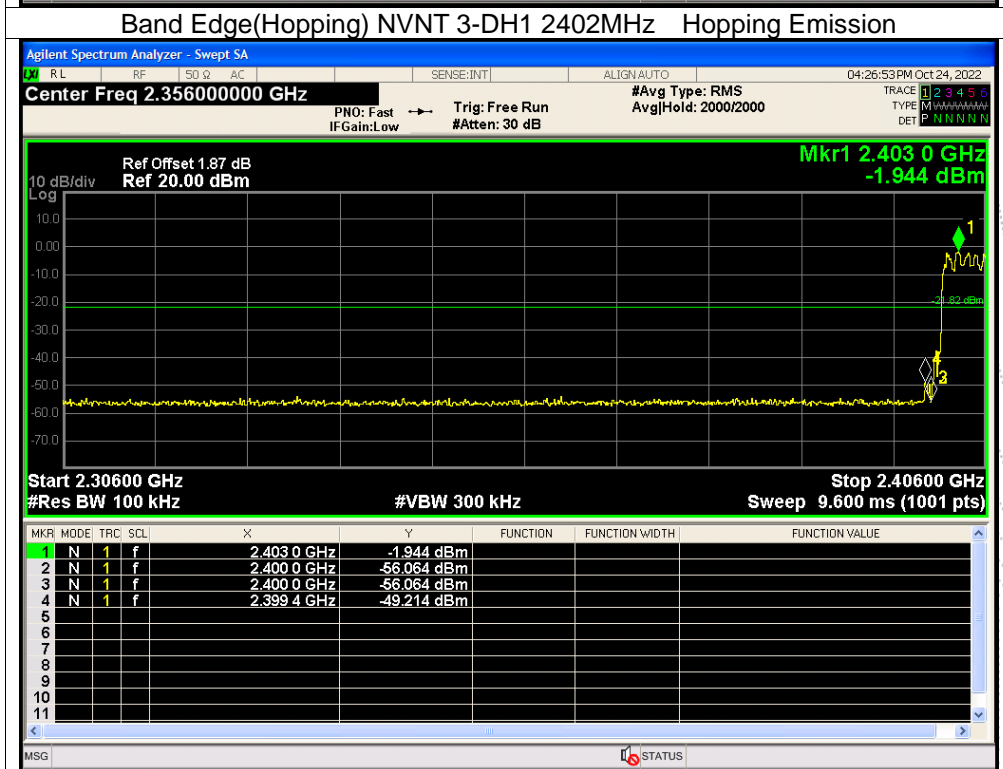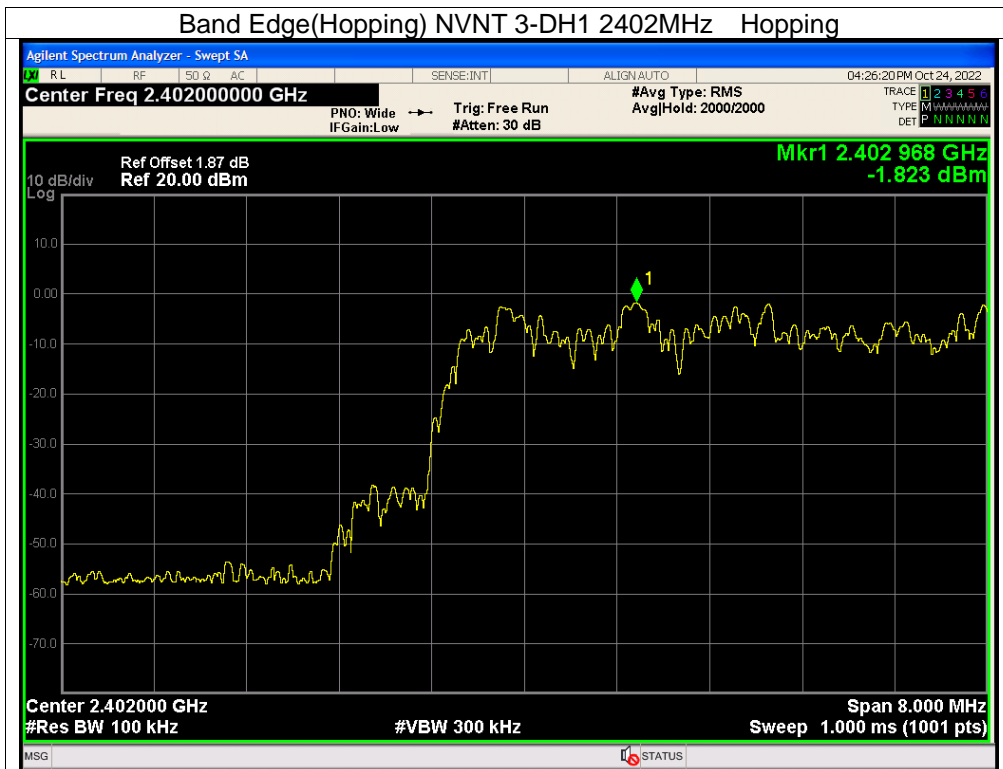

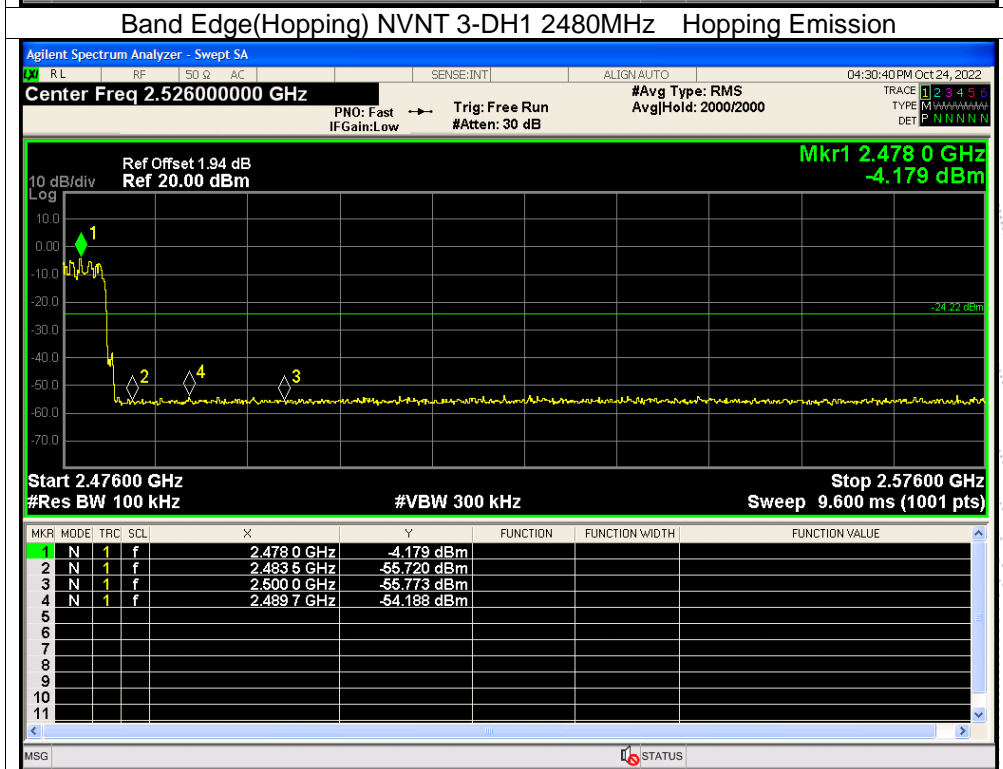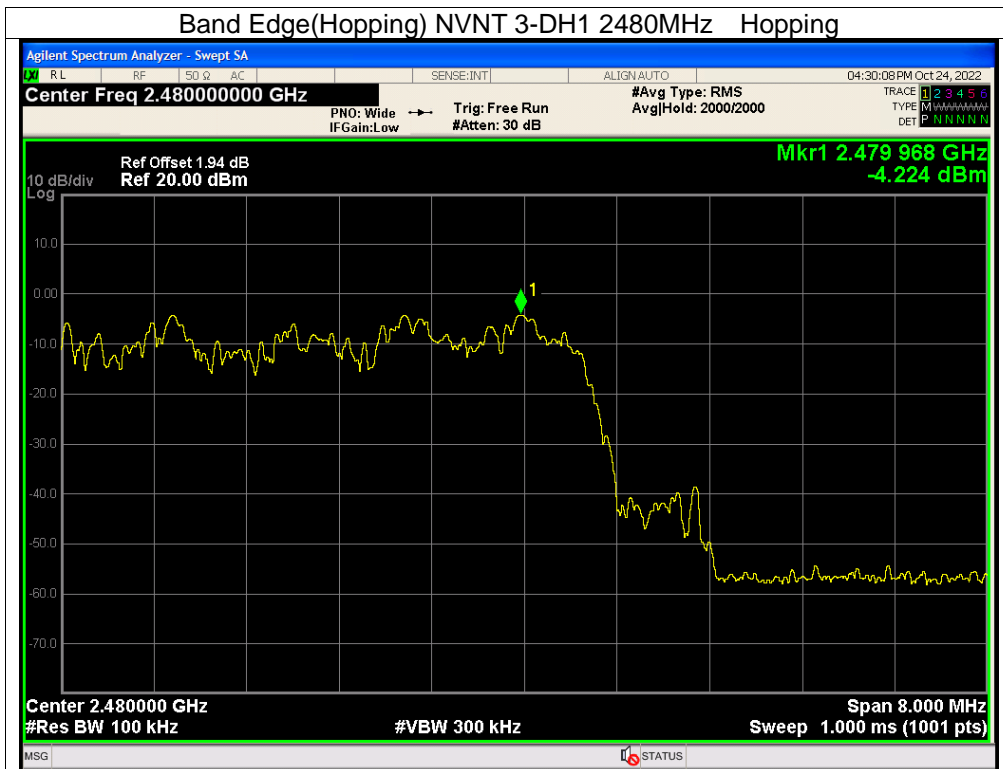

## 10. 20 DB Bandwidth

### 10.1 Block Diagram Of Test Setup

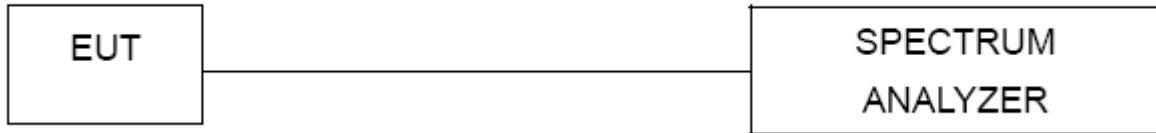

### 10.2 Limit

N/A


### 10.3 Test Procedure



1. Set RBW = 30kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission. .



## 10.4 Test Result



|                |       |                     |     |
|----------------|-------|---------------------|-----|
| Temperature :  | 26°C  | Relative Humidity : | 54% |
| Test Voltage : | DC 5V | Remark              | N/A |

| Condition | Mode  | Frequency (MHz) | -20 dB Bandwidth (MHz) | 99% OBW (MHz) | Verdict |
|-----------|-------|-----------------|------------------------|---------------|---------|
| NVNT      | 1-DH1 | 2402            | 1.036                  | 0.966         | Pass    |
| NVNT      | 1-DH1 | 2441            | 1.034                  | 0.96          | Pass    |
| NVNT      | 1-DH1 | 2480            | 1.031                  | 0.956         | Pass    |
| NVNT      | 2-DH1 | 2402            | 1.346                  | 1.217         | Pass    |
| NVNT      | 2-DH1 | 2441            | 1.319                  | 1.202         | Pass    |
| NVNT      | 2-DH1 | 2480            | 1.344                  | 1.207         | Pass    |
| NVNT      | 3-DH1 | 2402            | 1.318                  | 1.191         | Pass    |
| NVNT      | 3-DH1 | 2441            | 1.301                  | 1.192         | Pass    |
| NVNT      | 3-DH1 | 2480            | 1.294                  | 1.185         | Pass    |


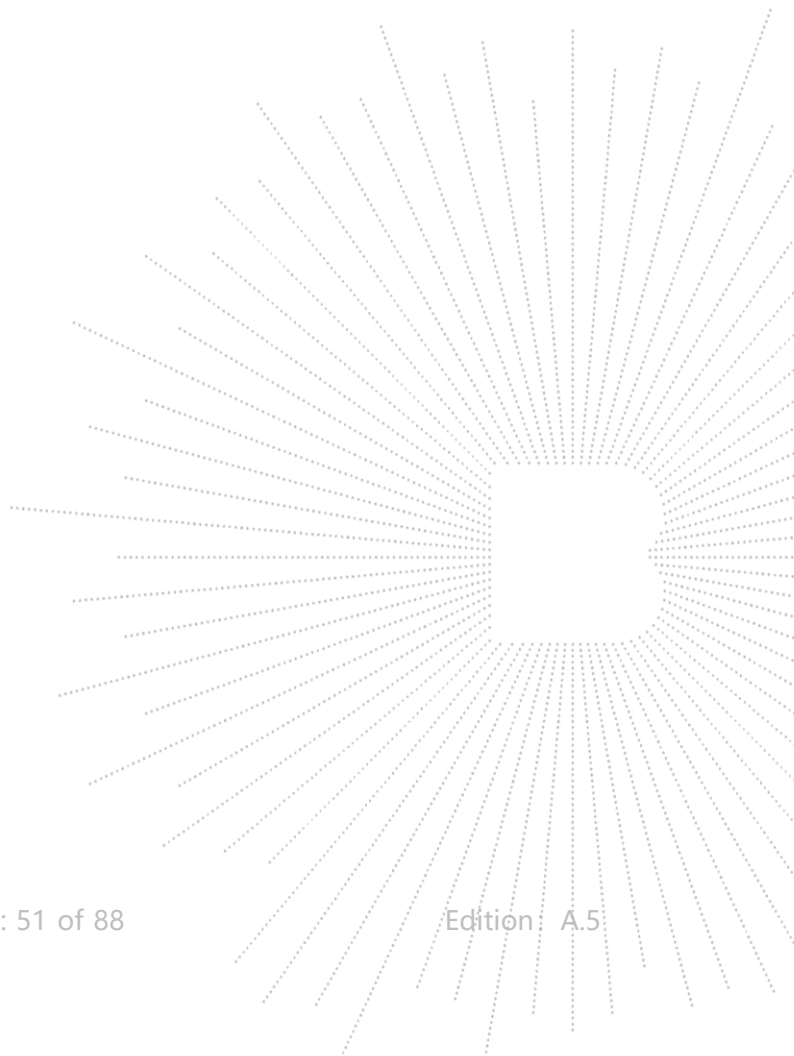


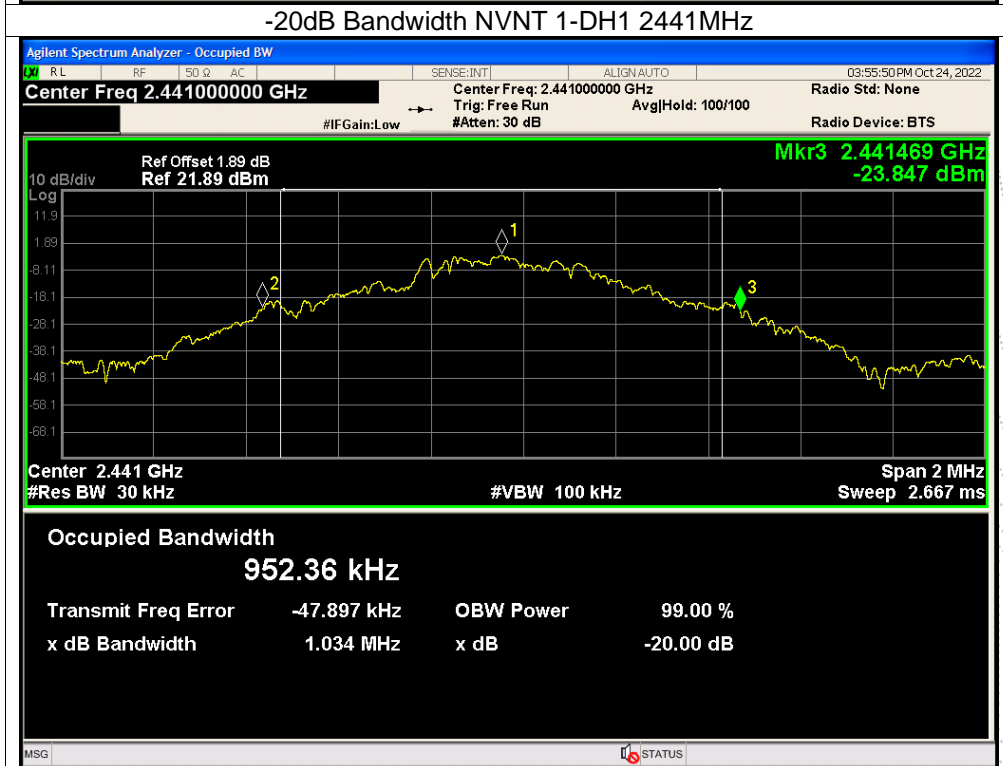
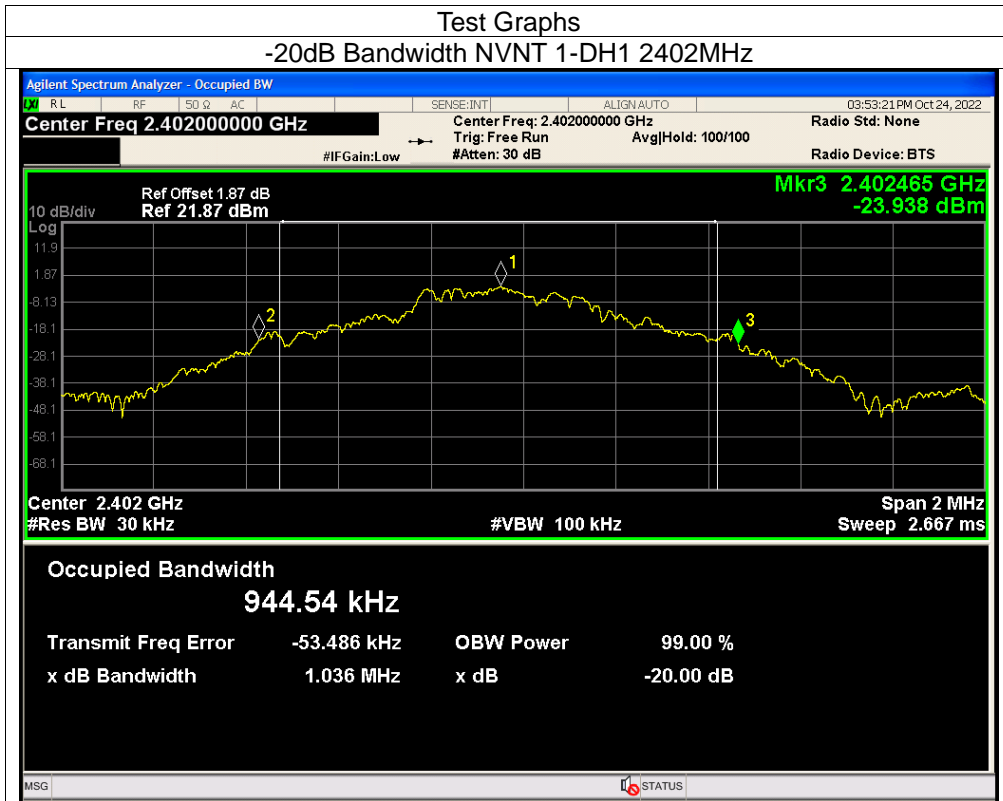


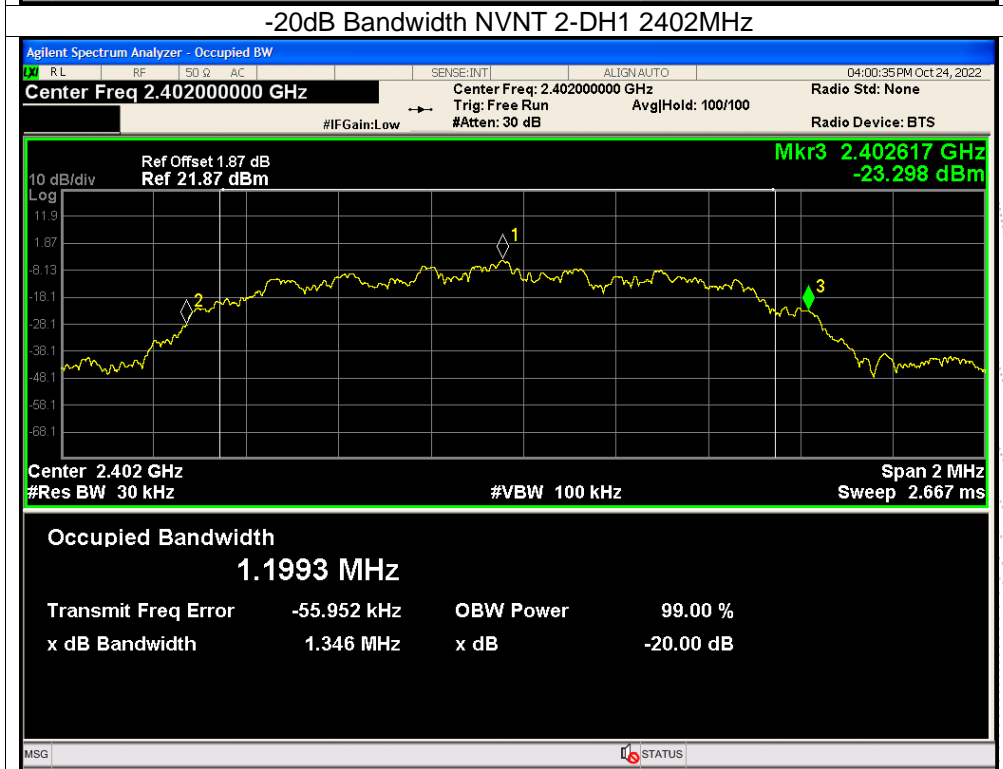
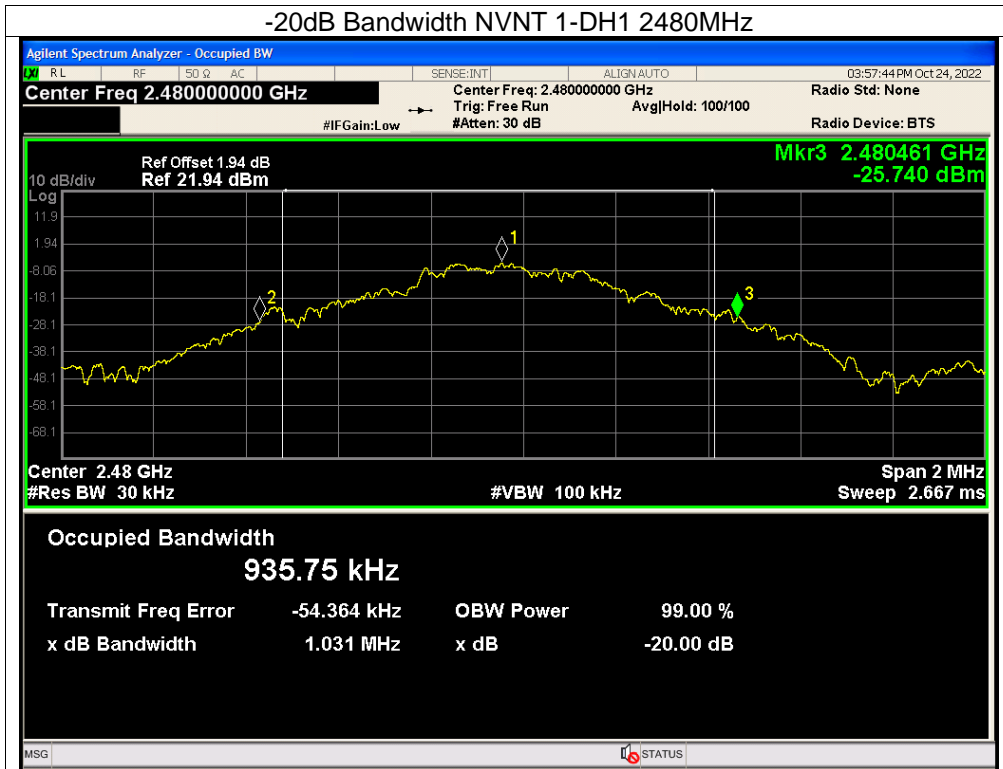


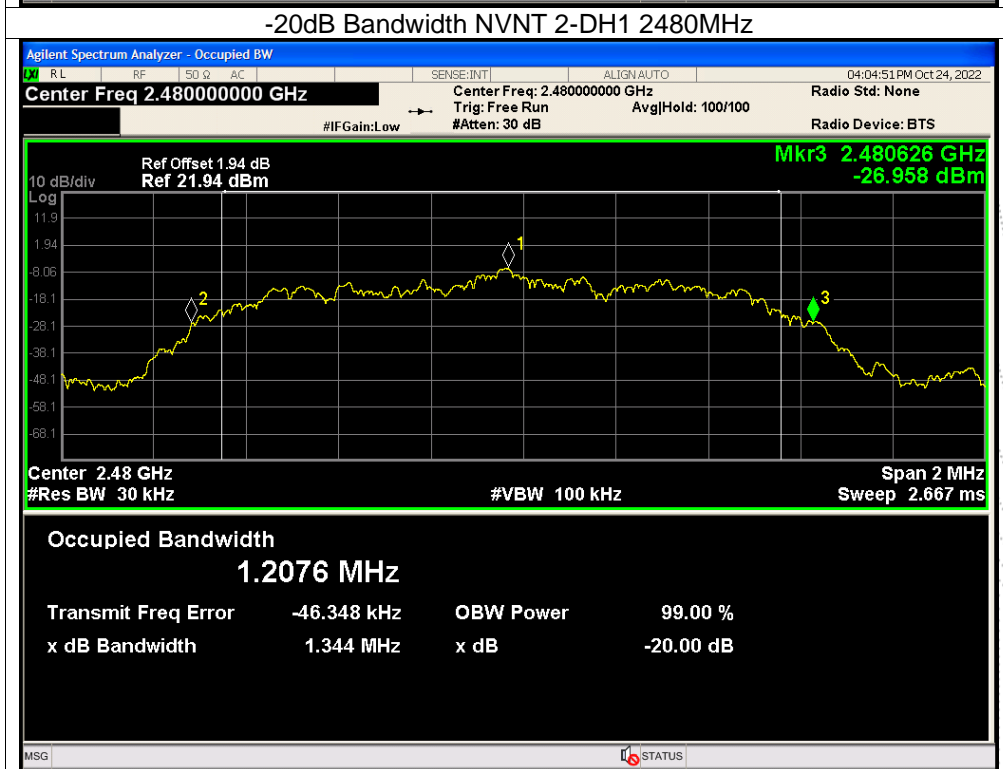
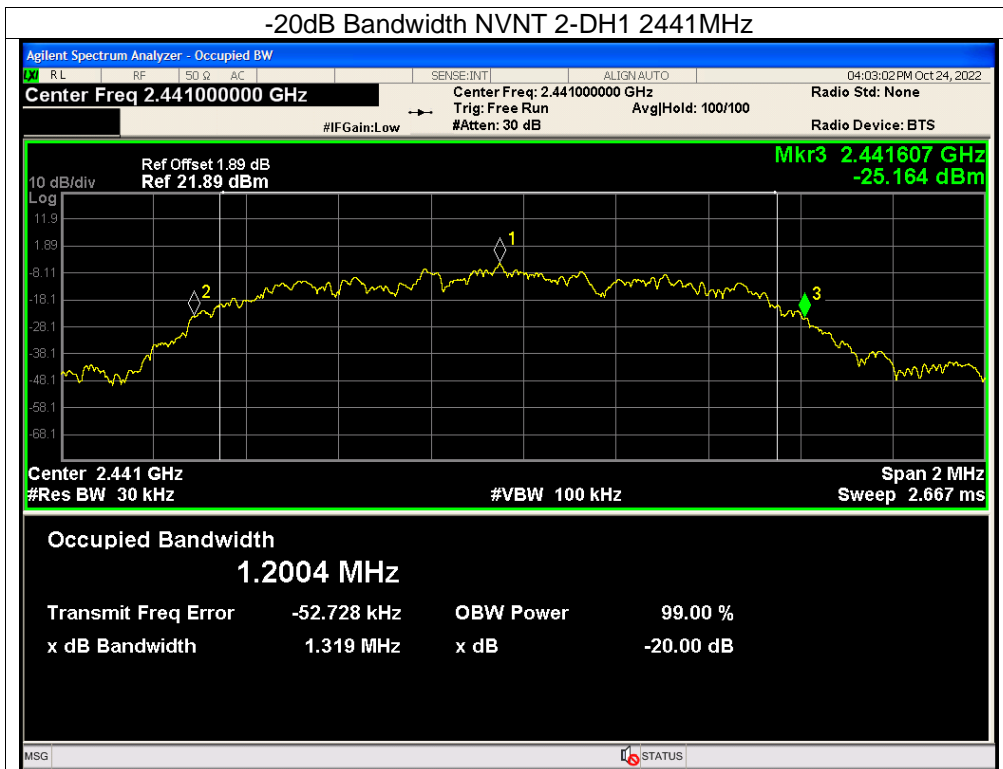






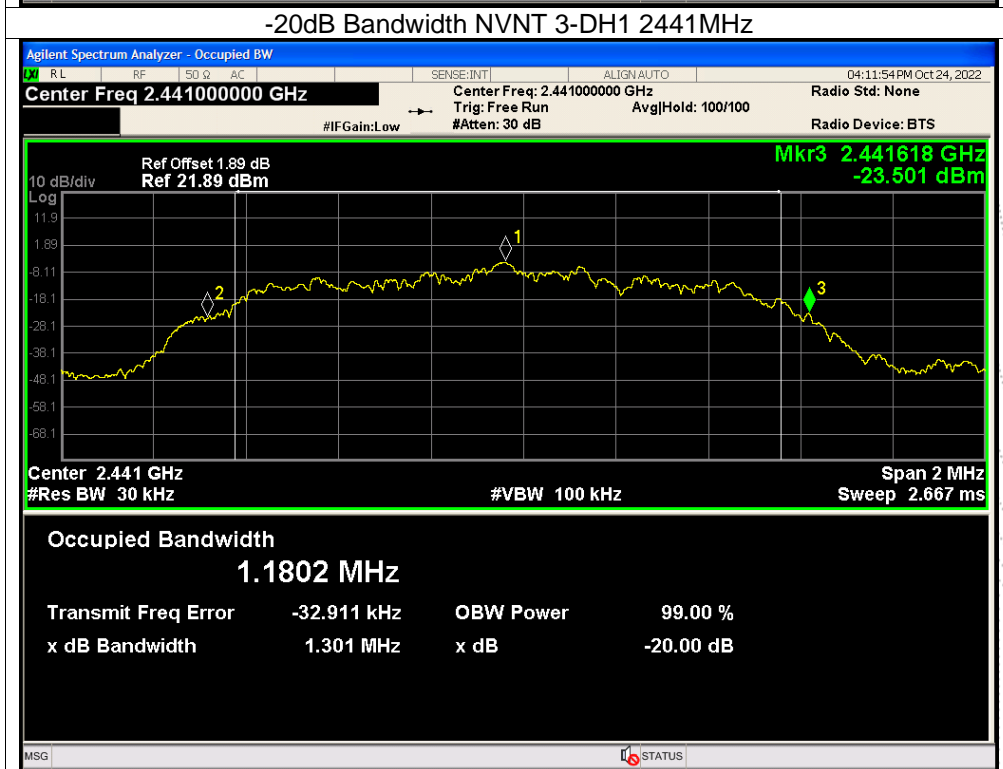
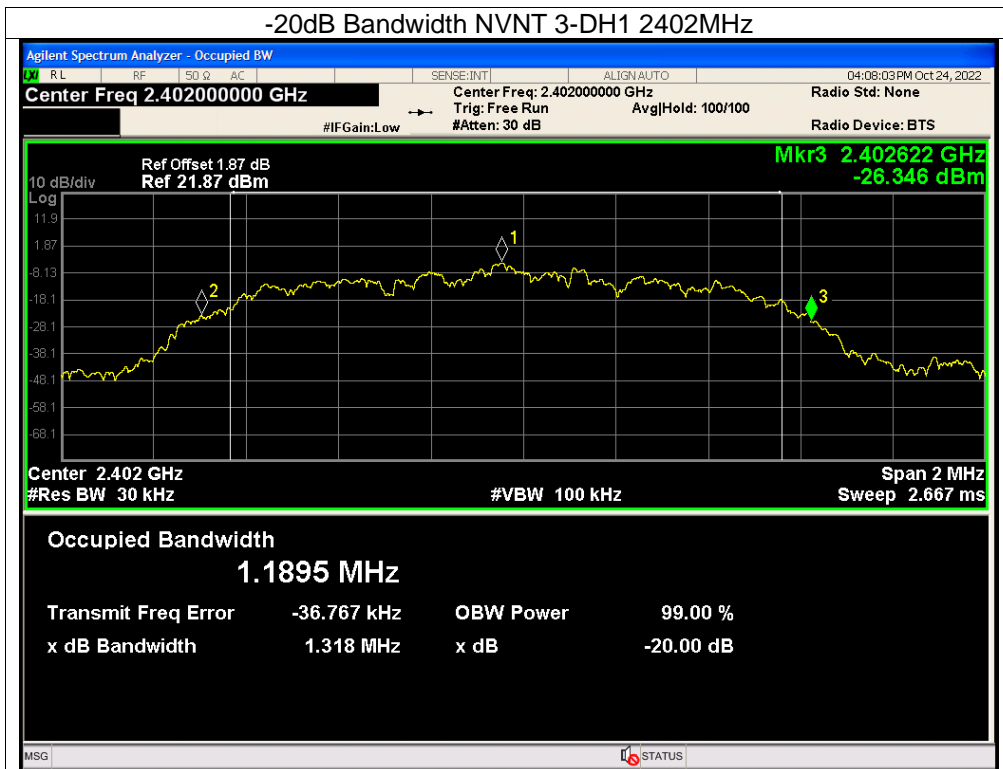


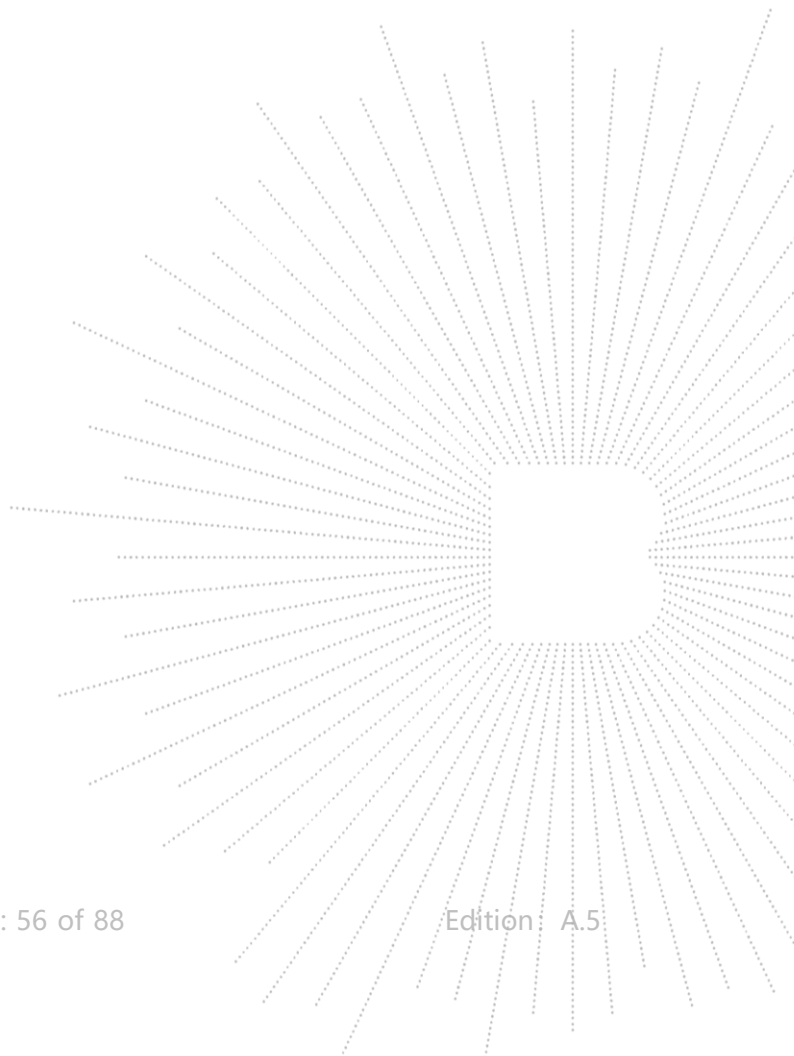
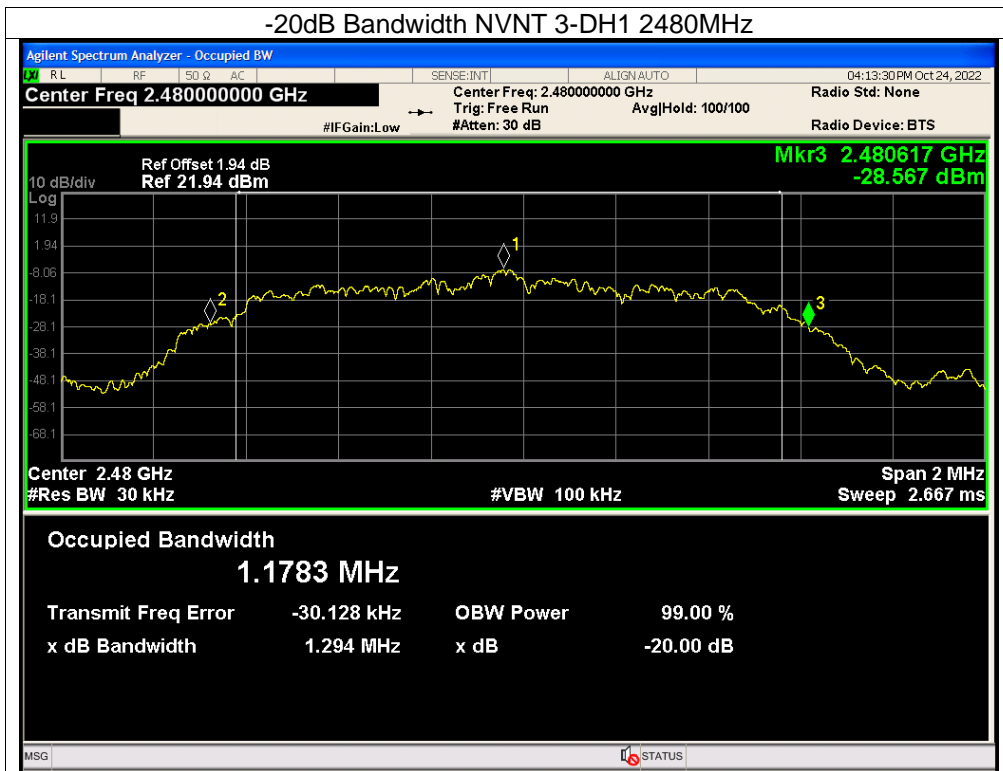


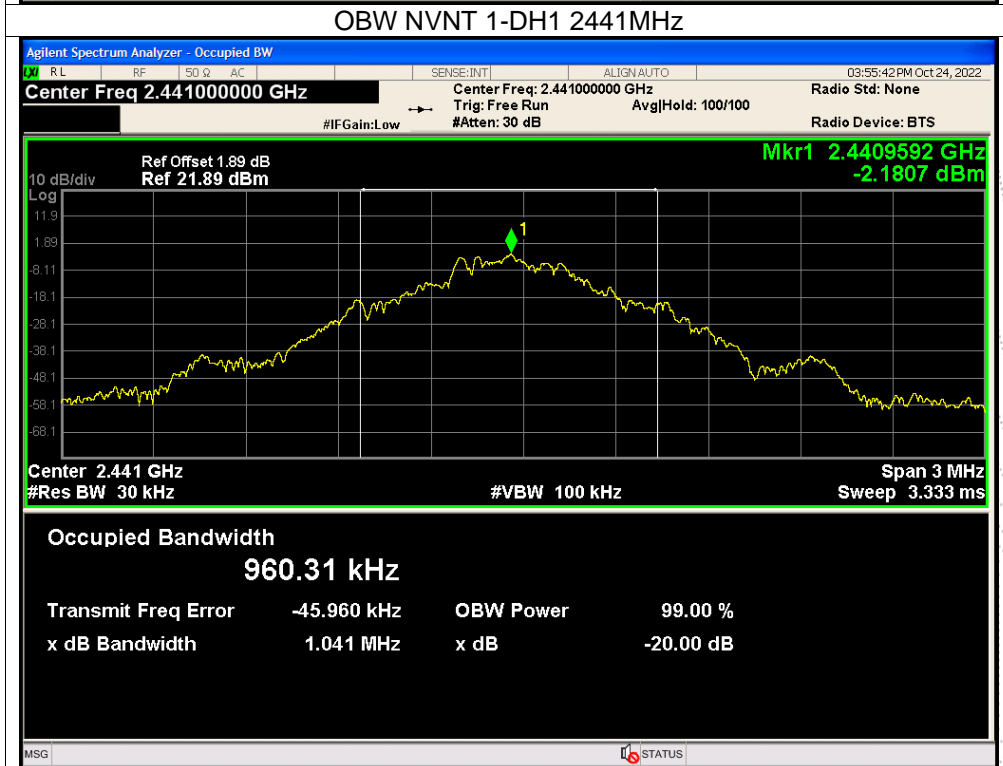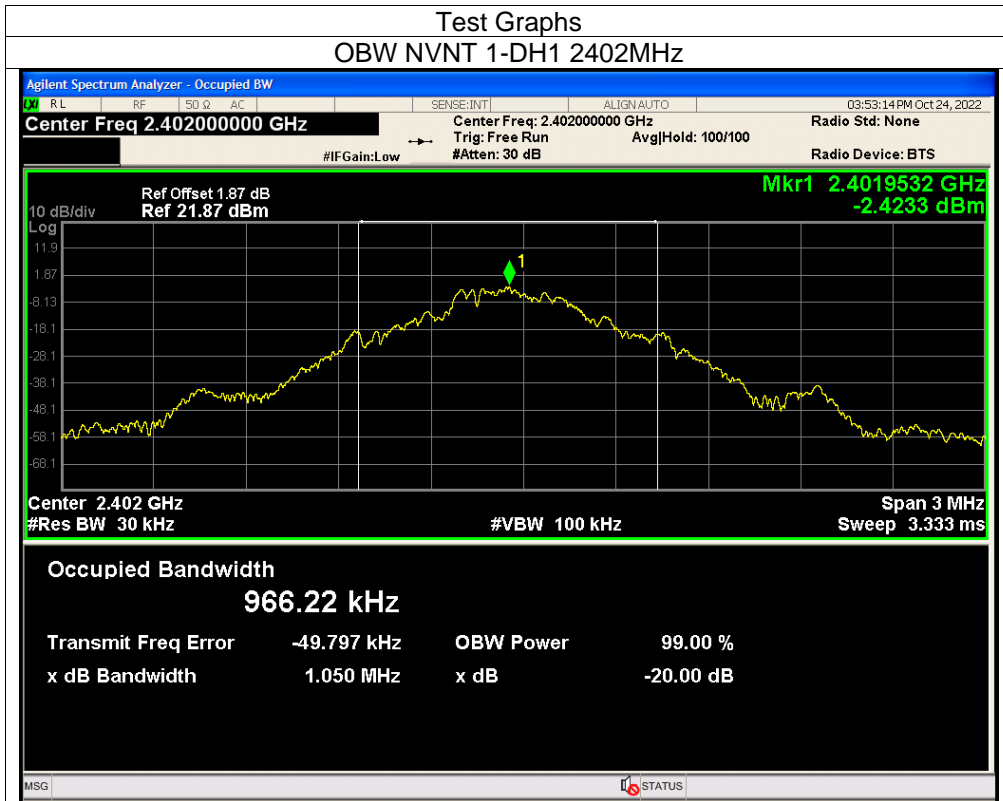

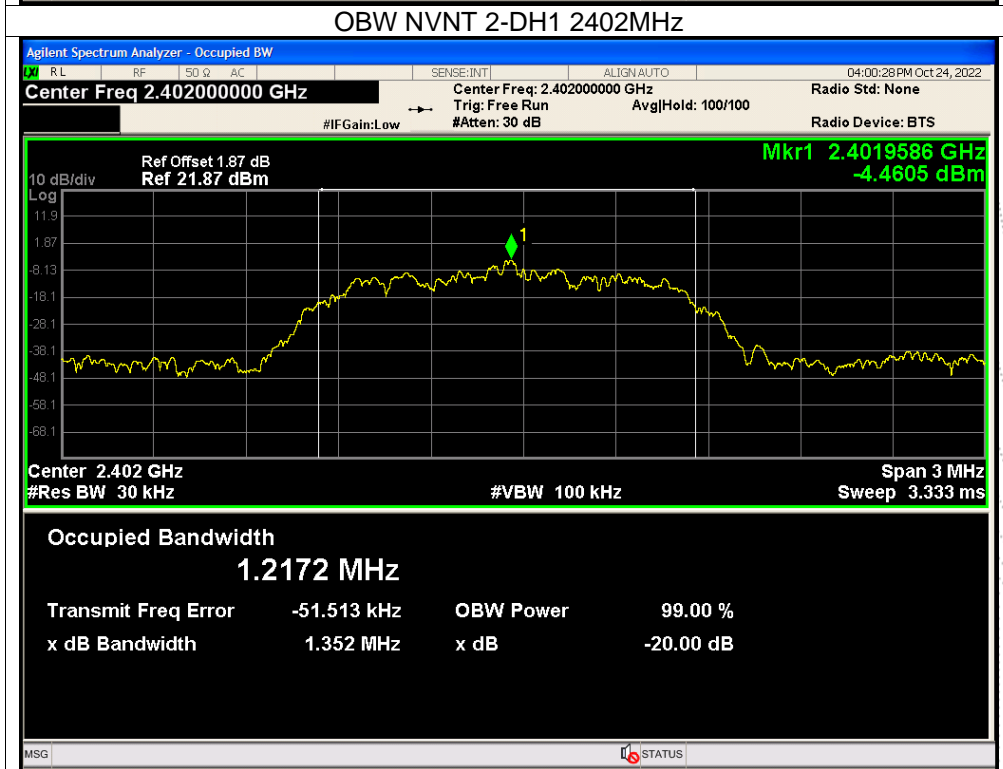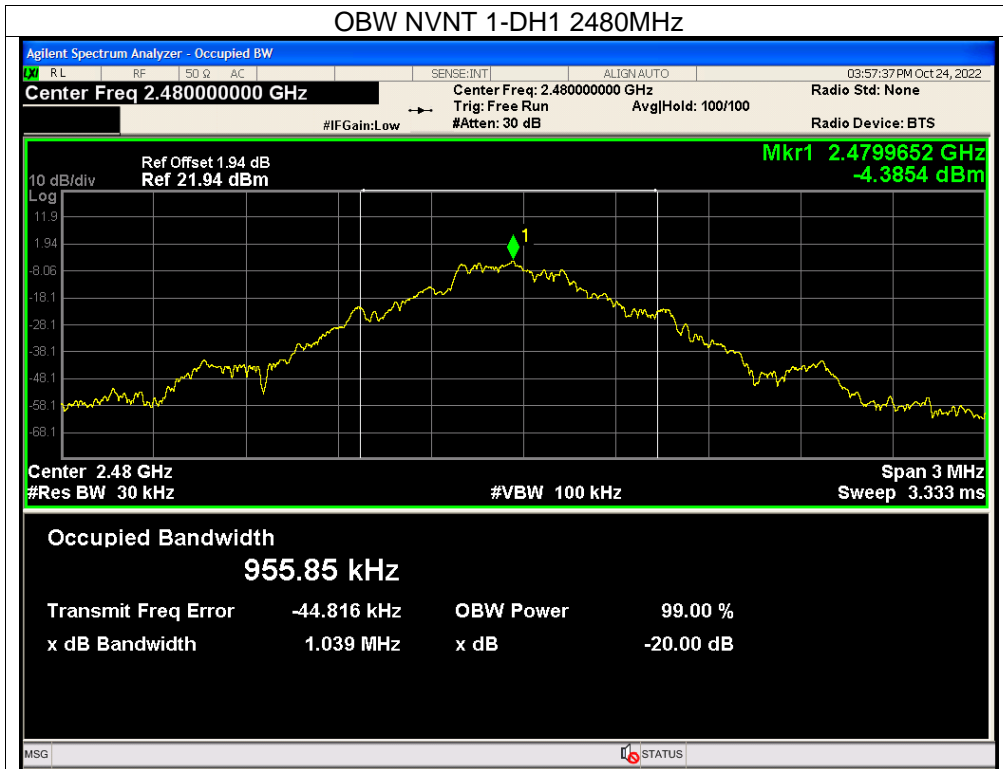

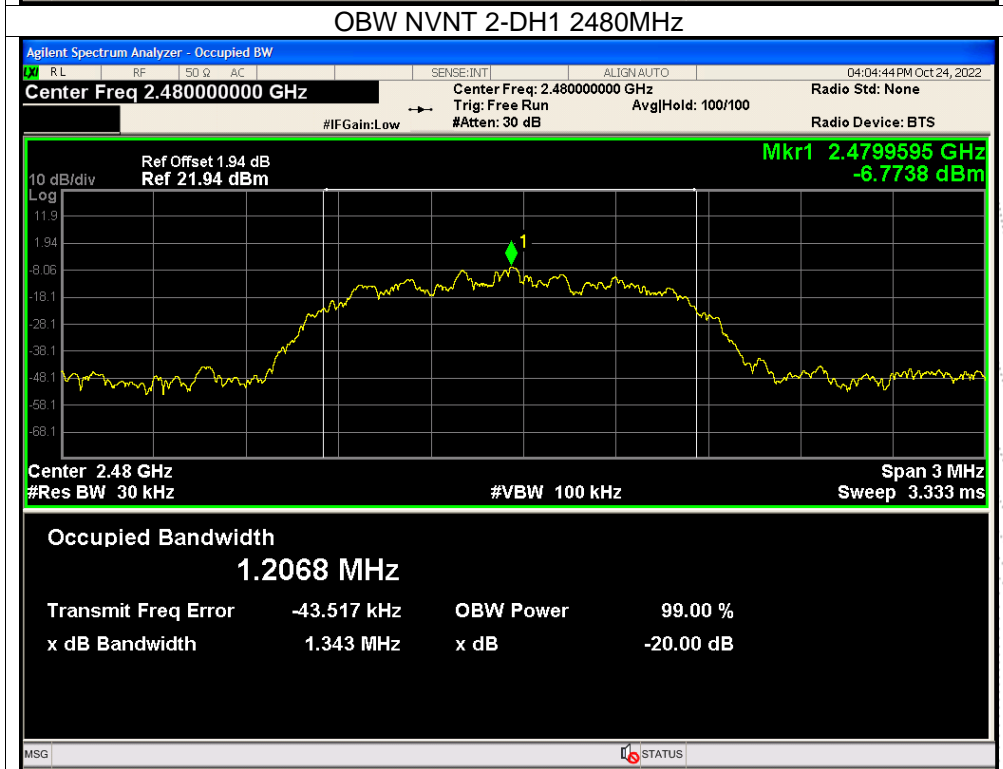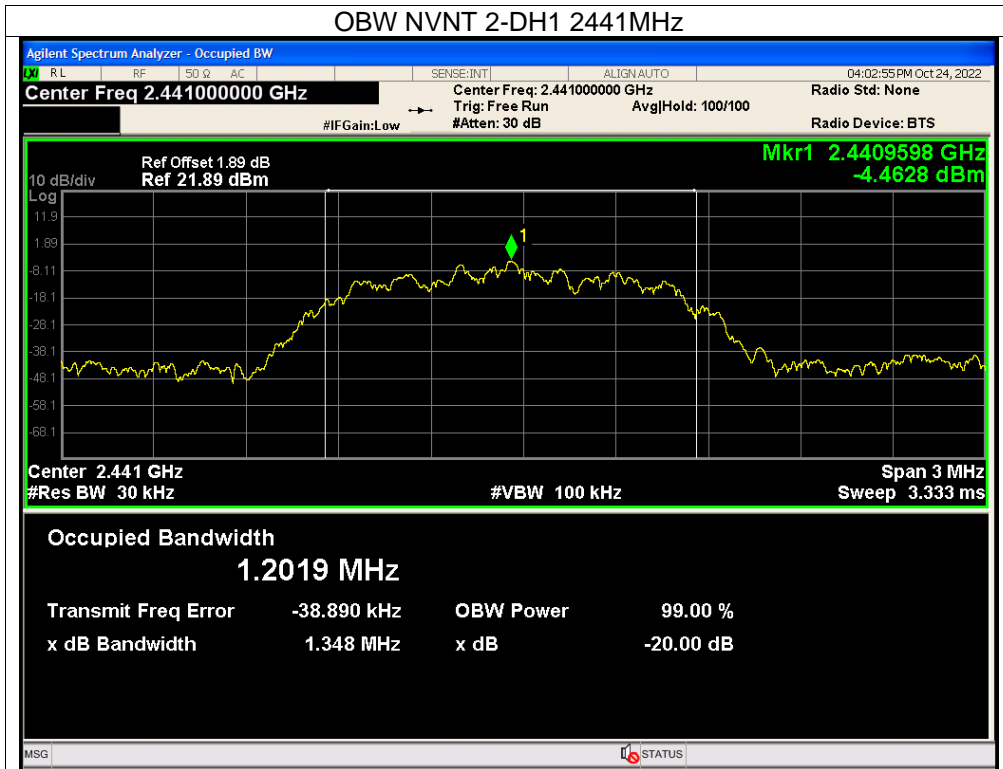

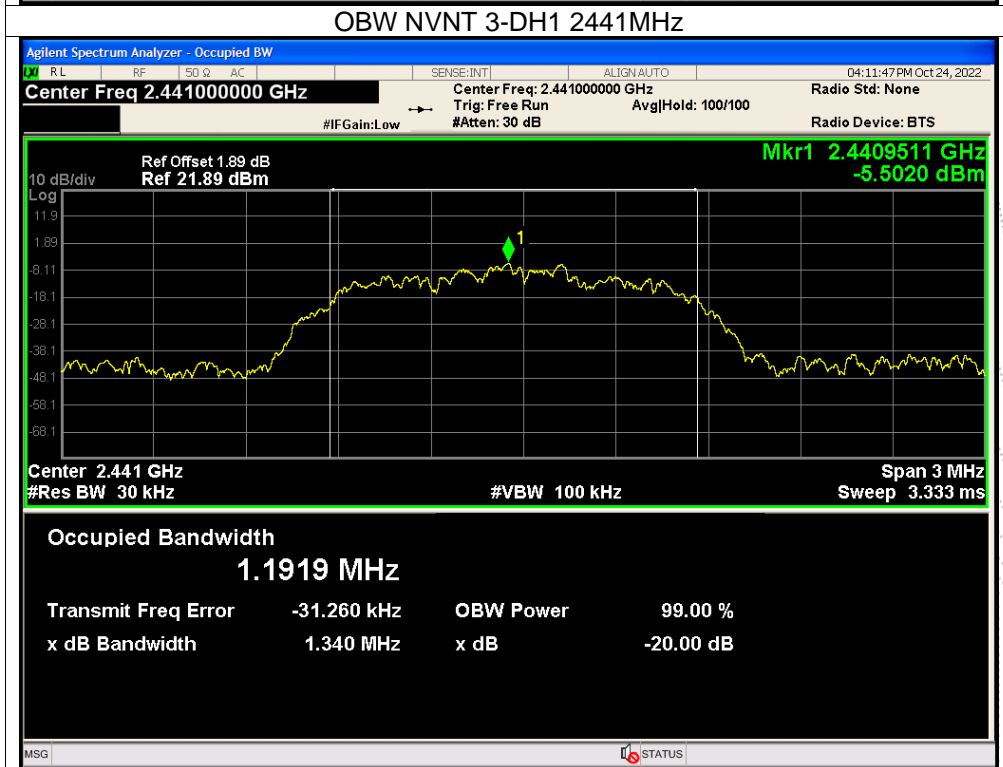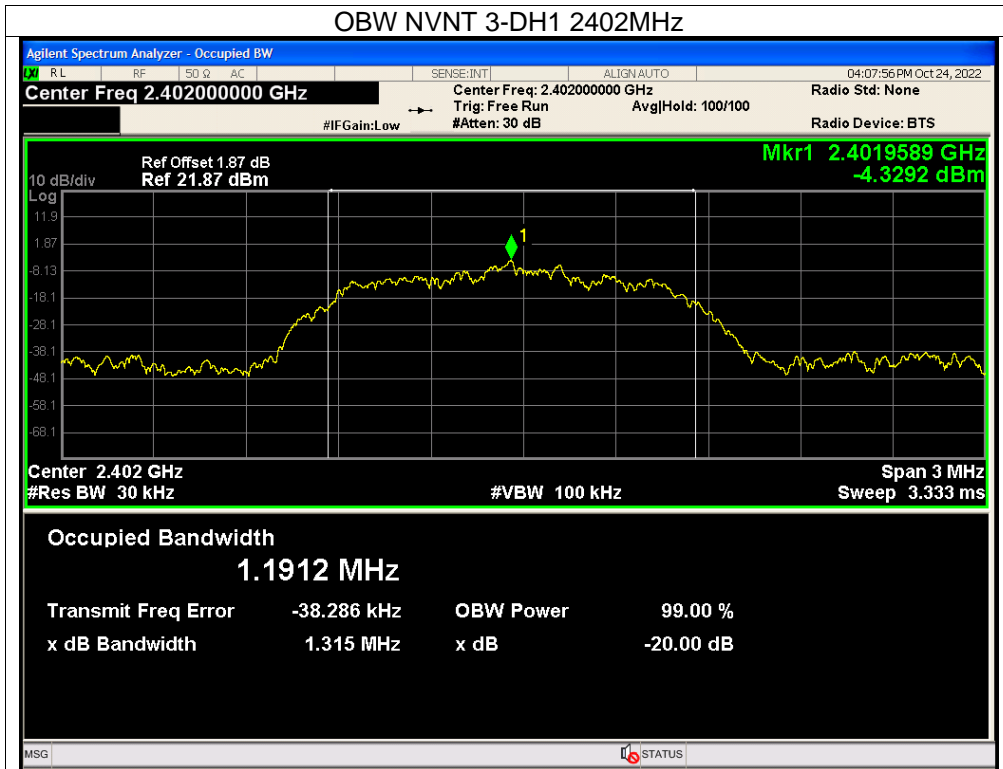


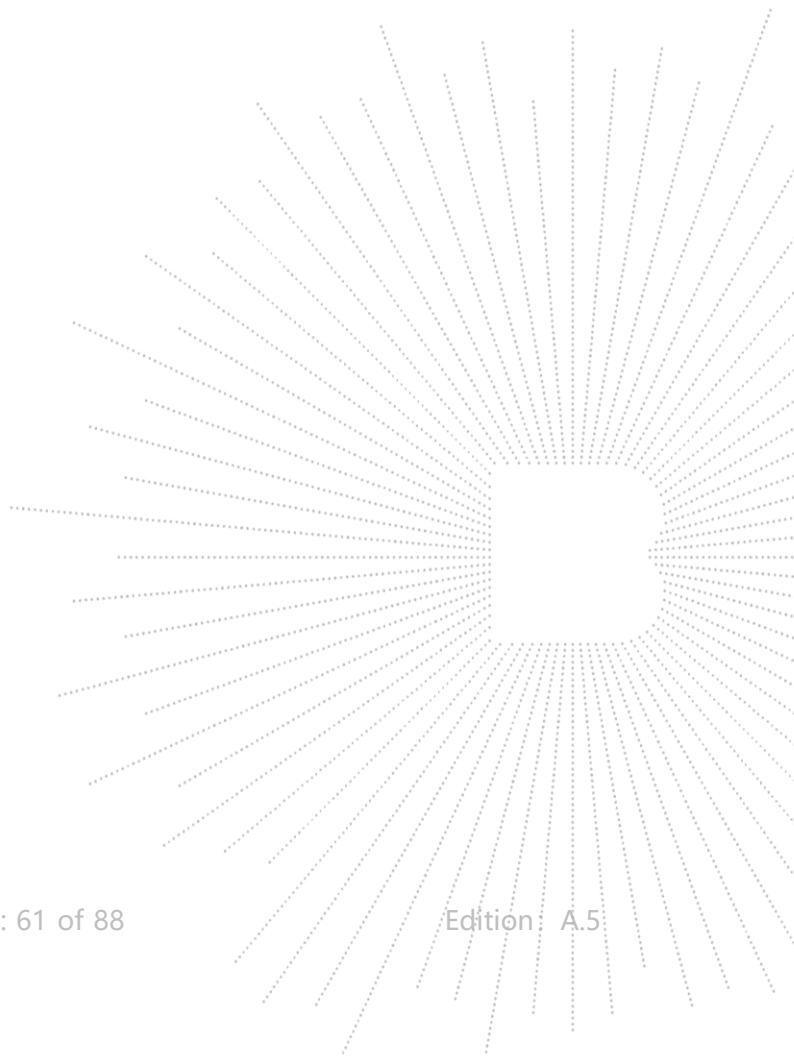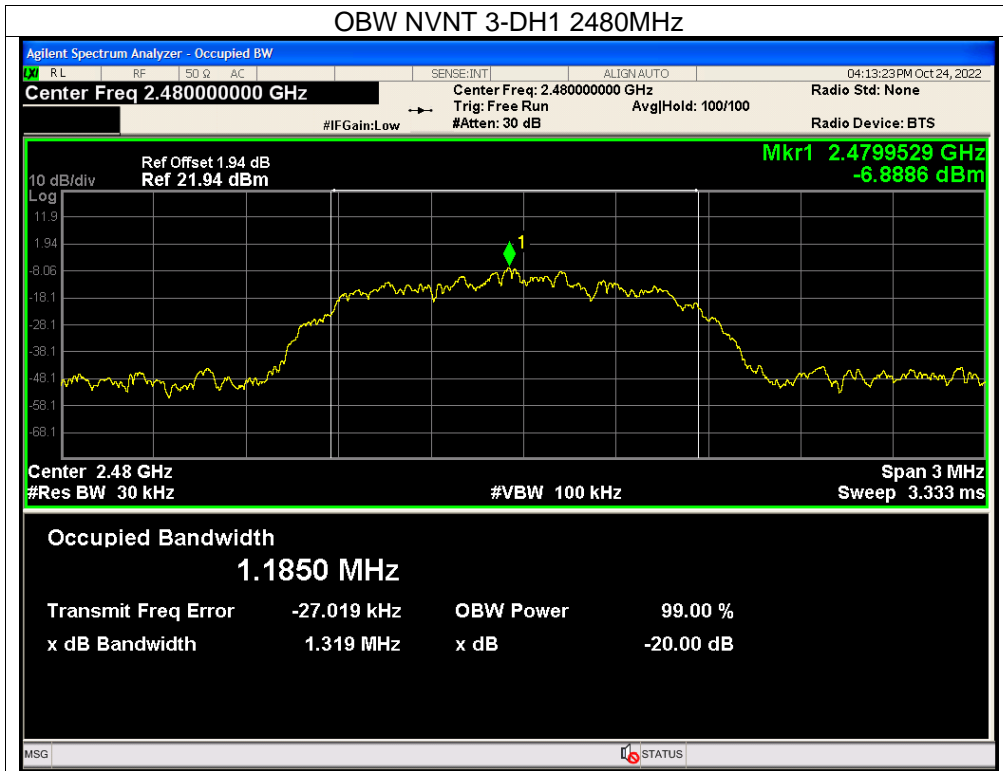



## 11. Maximum Peak Output Power

### 11.1 Block Diagram Of Test Setup

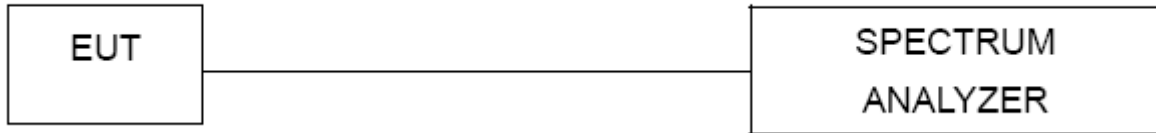


### 11.2 Limit

| RSS-247 Clause 5.4(b)    |                      |                            |             |                             |        |
|--------------------------|----------------------|----------------------------|-------------|-----------------------------|--------|
| Section                  | Test Item            | Limit<br>(connected Power) | Limit(EIRP) | Frequency<br>Range<br>(MHz) | Result |
| RSS-247<br>Clause 5.4(b) | Peak Output<br>Power | 0.125 watt or 21dBm        | 4W or 36dBm | 2400-2483.5                 | PASS   |

### 11.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

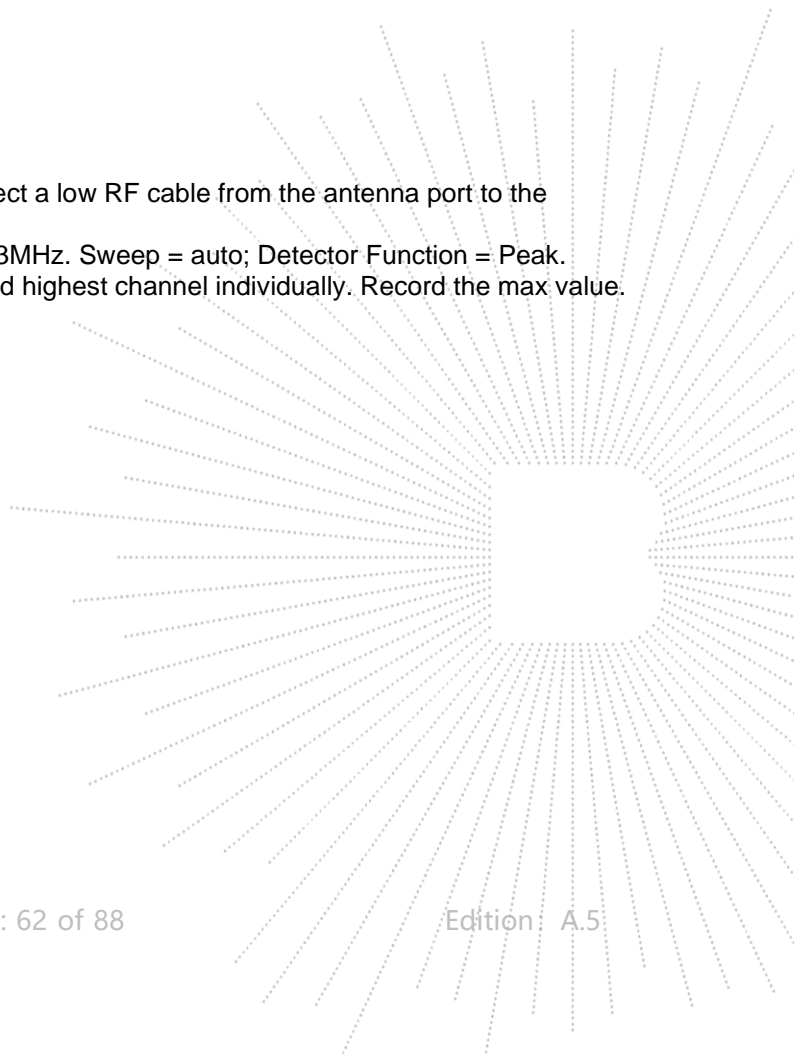


## 11.4 Test Result


|                |       |                     |     |
|----------------|-------|---------------------|-----|
| Temperature :  | 26°C  | Relative Humidity : | 54% |
| Test Voltage : | DC 5V | Remark:             | N/A |



| Condition | Mode  | Frequency (MHz) | Conducted Power (dBm) | Limit (dBm) | EIRP (dBm) | EIRP Limit (dBm) | Verdict |
|-----------|-------|-----------------|-----------------------|-------------|------------|------------------|---------|
| NVNT      | 1-DH1 | 2402            | 0.62                  | 21          | -6.61      | 27               | Pass    |
| NVNT      | 1-DH1 | 2441            | 0.36                  | 21          | -6.87      | 27               | Pass    |
| NVNT      | 1-DH1 | 2480            | -1.87                 | 21          | -9.1       | 27               | Pass    |
| NVNT      | 2-DH1 | 2402            | 0.43                  | 21          | -6.8       | 27               | Pass    |
| NVNT      | 2-DH1 | 2441            | 0.23                  | 21          | -7         | 27               | Pass    |
| NVNT      | 2-DH1 | 2480            | -1.92                 | 21          | -9.15      | 27               | Pass    |
| NVNT      | 3-DH1 | 2402            | 1.25                  | 21          | -5.98      | 27               | Pass    |
| NVNT      | 3-DH1 | 2441            | 1                     | 21          | -6.23      | 27               | Pass    |
| NVNT      | 3-DH1 | 2480            | -1.39                 | 21          | -8.62      | 27               | Pass    |



## Note:



1. Maximum Conducted Output Power= Reading Conducted Output Power+ Offset
2. EIRP= Maximum Conducted Output Power+Antenna gain
3. Antenna gain=-7.23 dBi


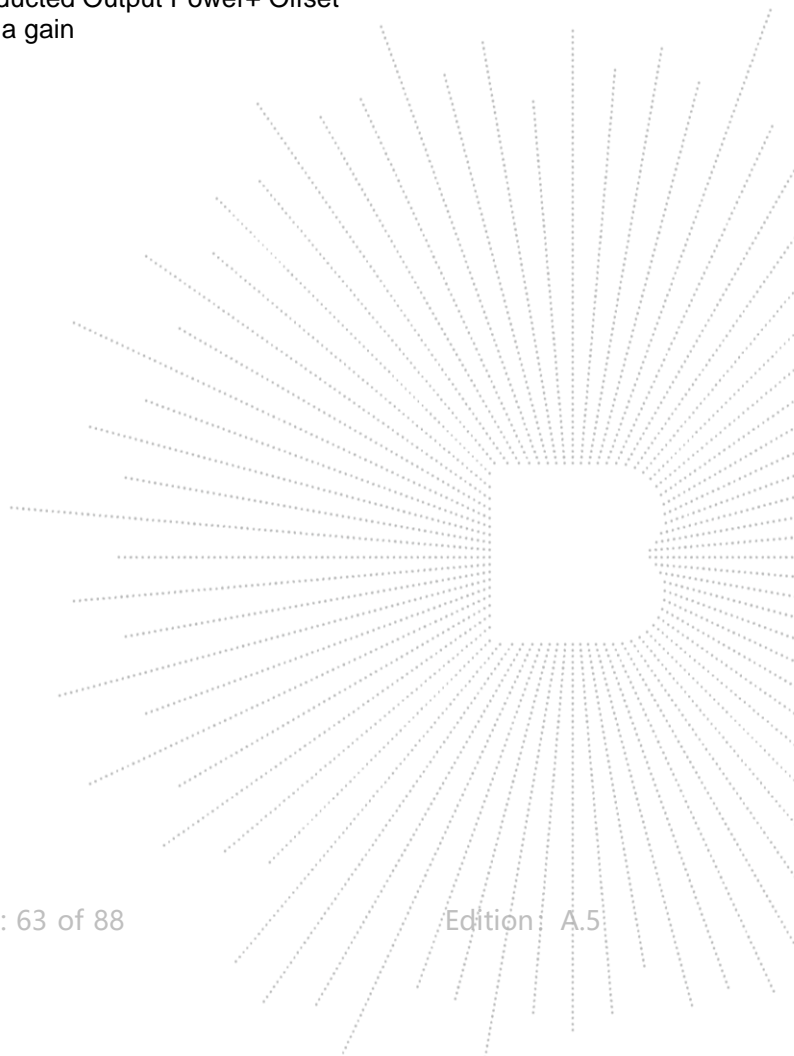


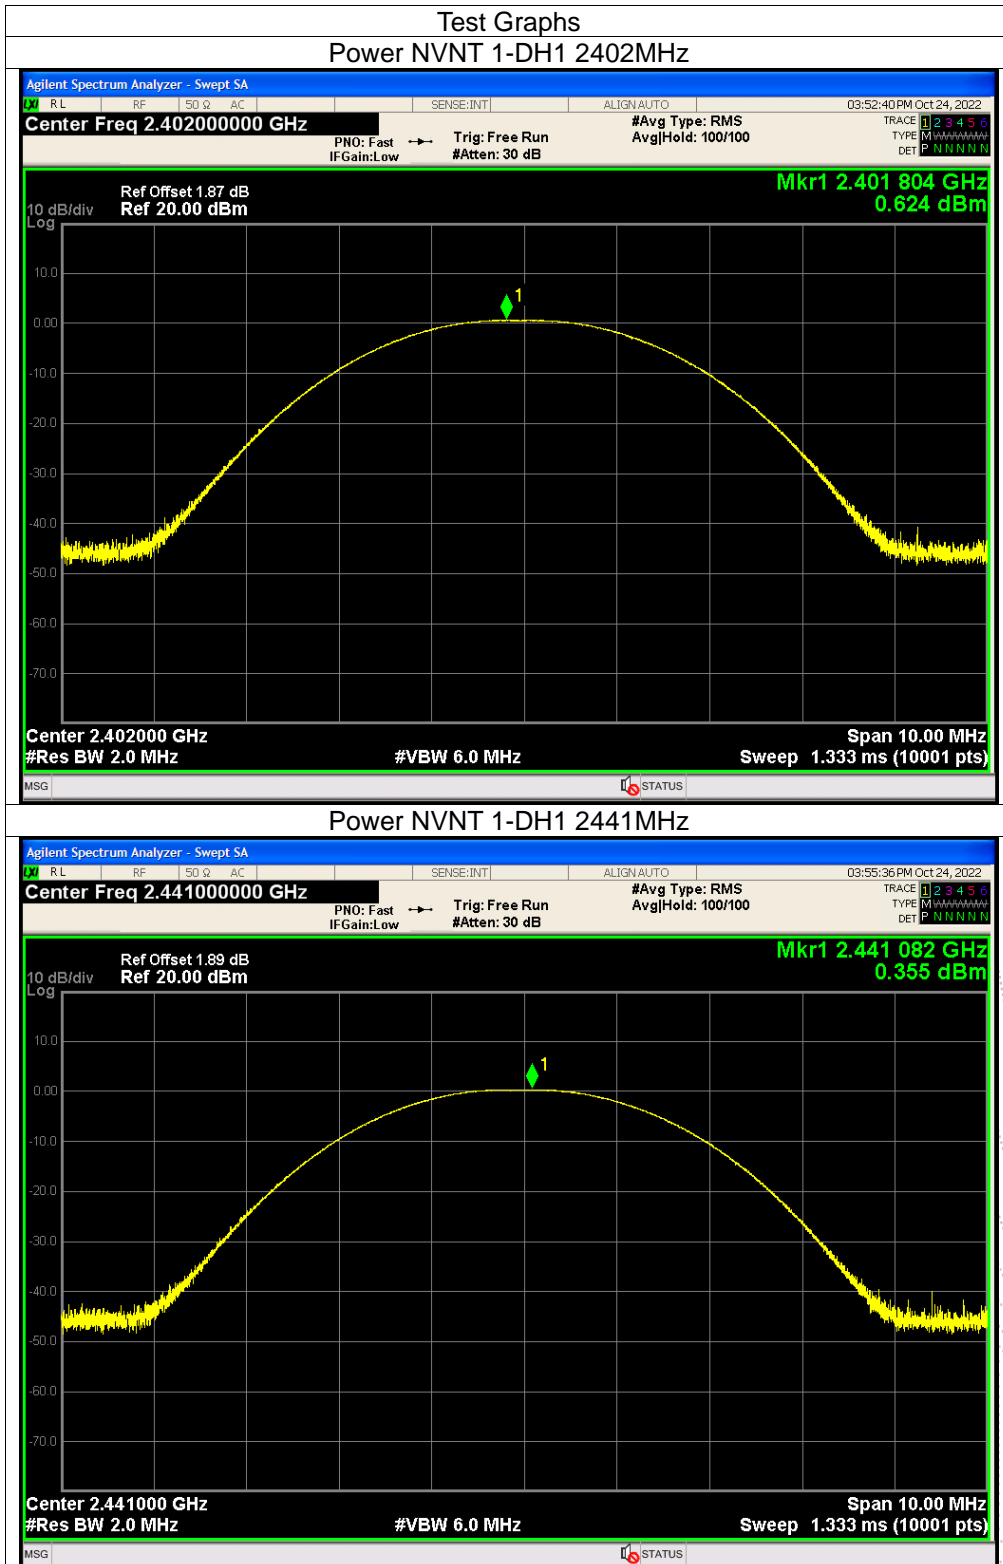

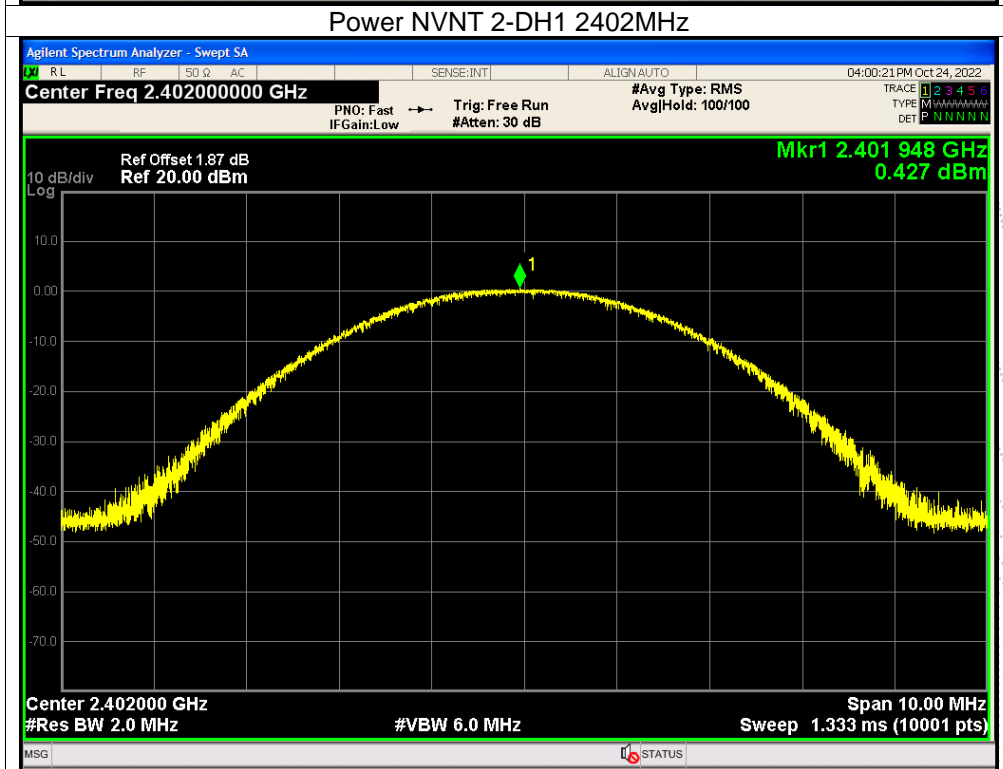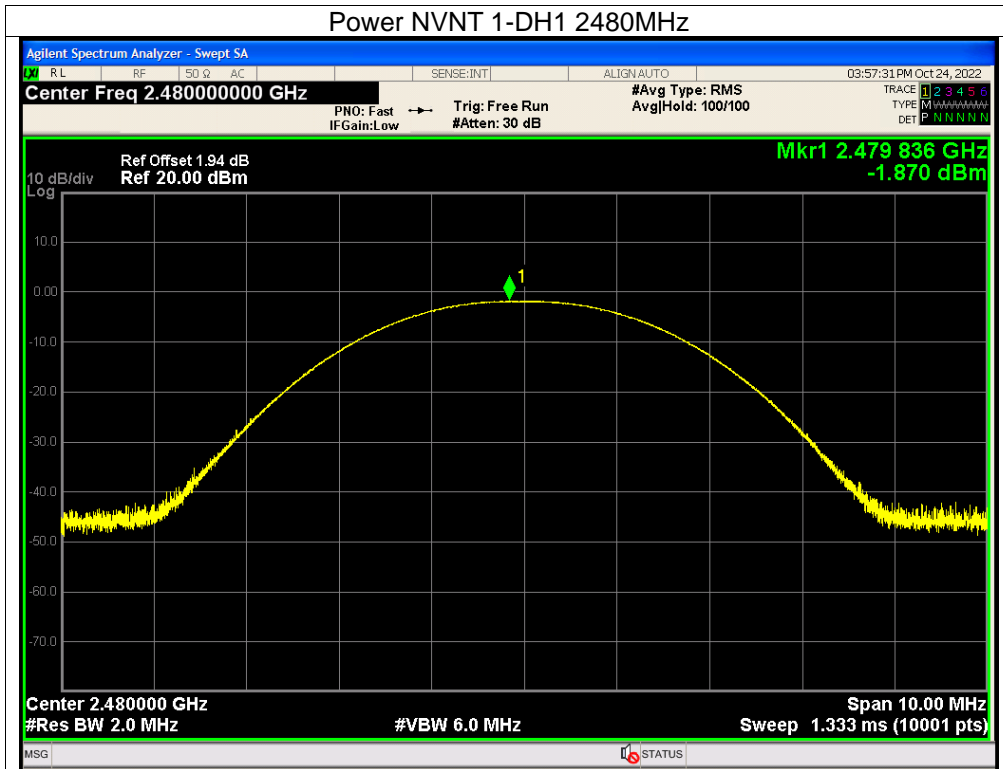

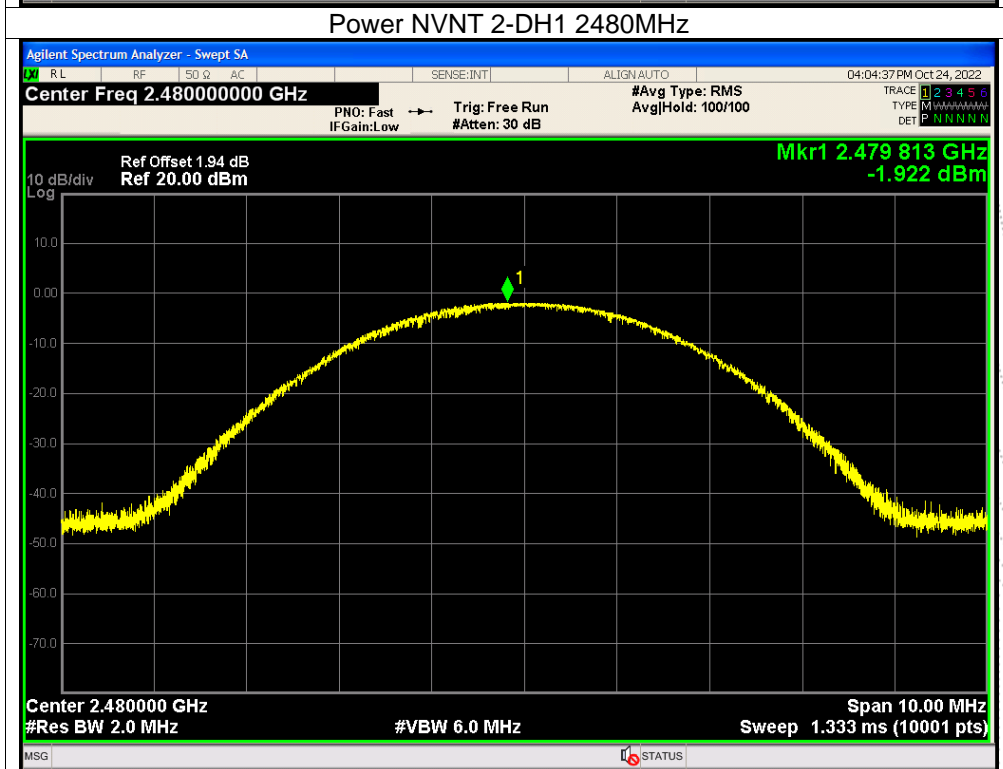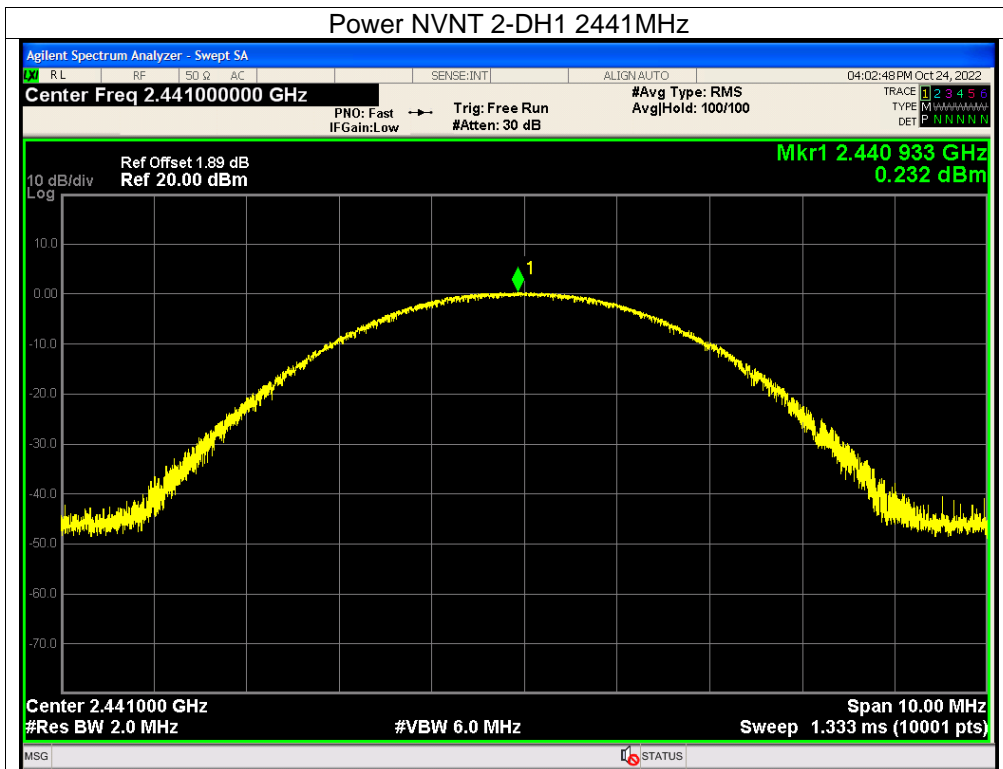

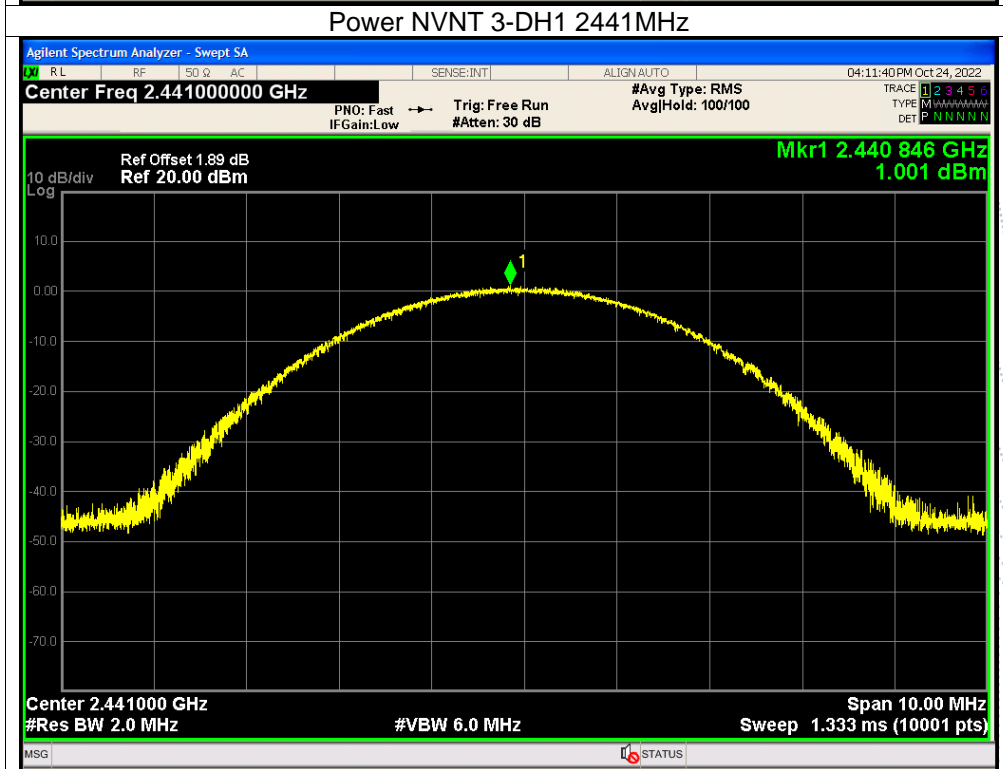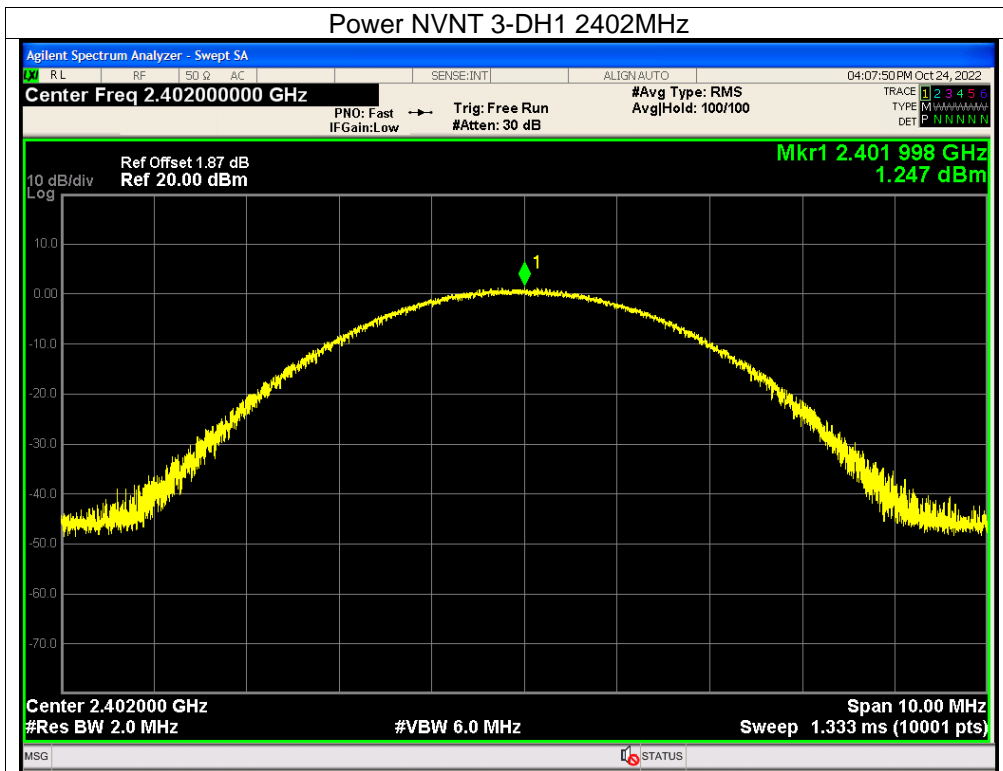


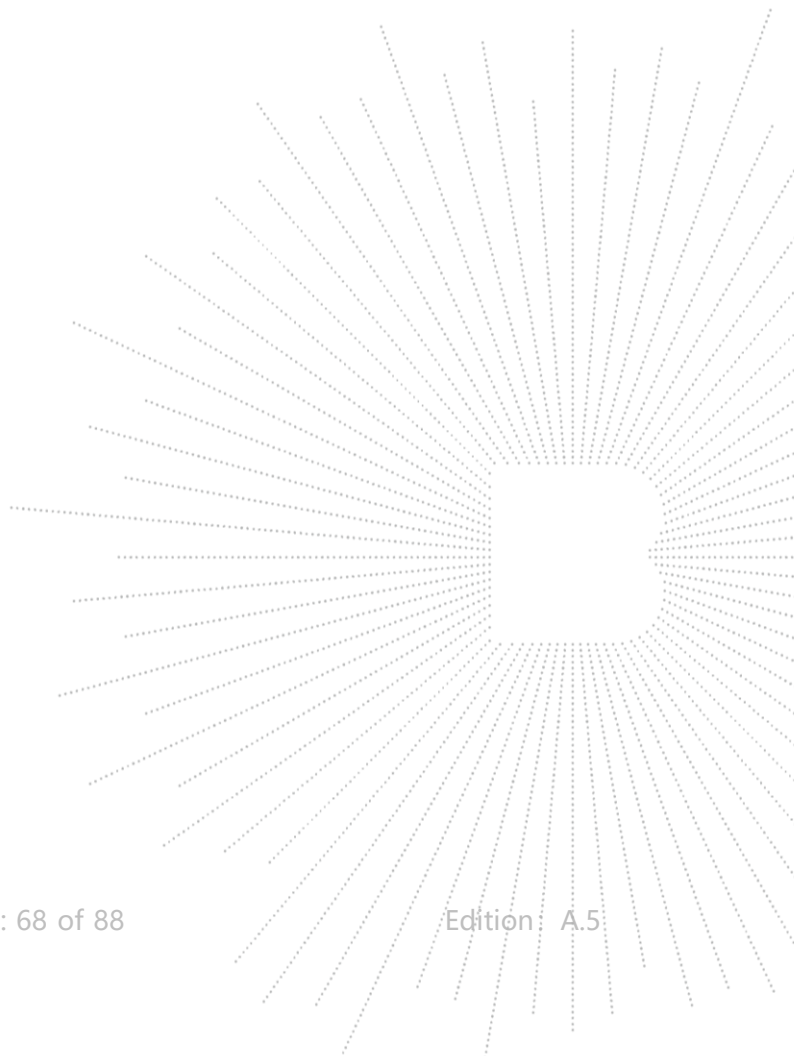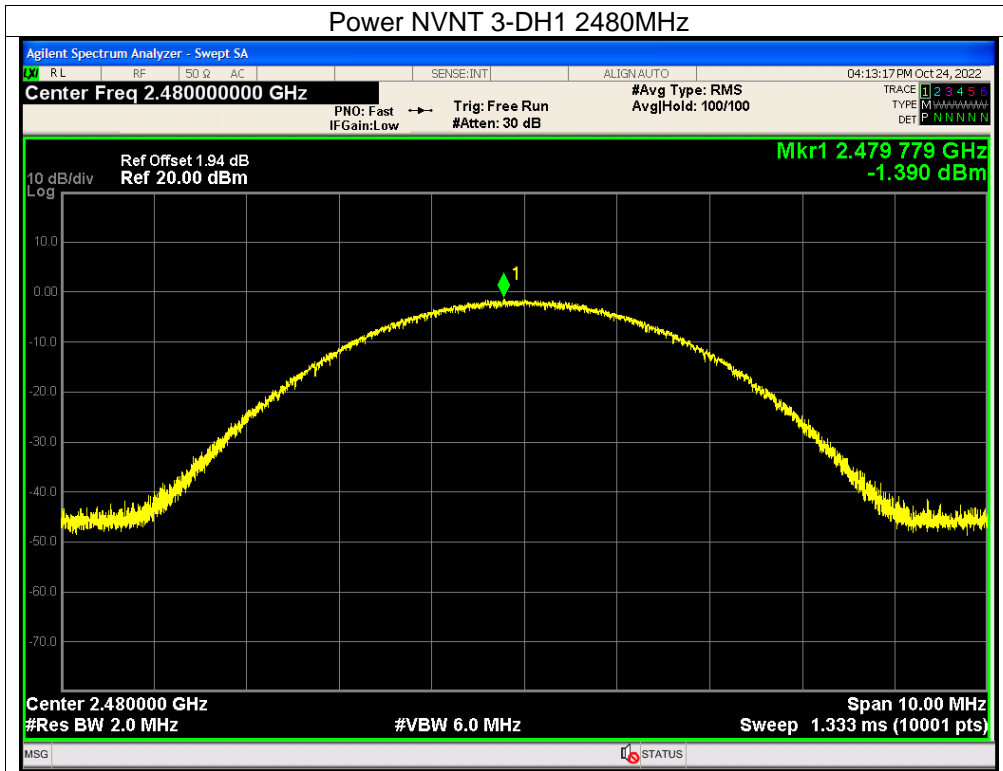



## 12. Hopping Channel Separation

### 12.1 Block Diagram Of Test Setup

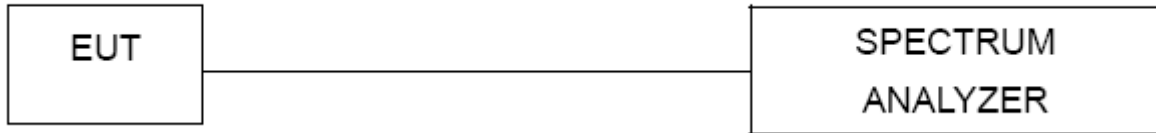

### 12.2 Limit



Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.



### 12.3 Test Procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.



### 12.4 Test Result



| Condition | Mode  | Hopping Freq1 (MHz) | Hopping Freq2 (MHz) | HFS (MHz) | Limit (MHz) | Verdict |
|-----------|-------|---------------------|---------------------|-----------|-------------|---------|
| NVNT      | 1-DH1 | 2401.956            | 2402.958            | 1.002     | 0.691       | Pass    |
| NVNT      | 1-DH1 | 2440.96             | 2441.958            | 0.998     | 0.689       | Pass    |
| NVNT      | 1-DH1 | 2478.964            | 2479.962            | 0.998     | 0.687       | Pass    |
| NVNT      | 2-DH1 | 2401.956            | 2402.958            | 1.002     | 0.897       | Pass    |
| NVNT      | 2-DH1 | 2440.956            | 2441.96             | 1.004     | 0.879       | Pass    |
| NVNT      | 2-DH1 | 2478.962            | 2479.964            | 1.002     | 0.896       | Pass    |
| NVNT      | 3-DH1 | 2401.956            | 2402.95             | 0.994     | 0.879       | Pass    |
| NVNT      | 3-DH1 | 2440.958            | 2441.958            | 1         | 0.867       | Pass    |
| NVNT      | 3-DH1 | 2478.964            | 2479.966            | 1.002     | 0.863       | Pass    |

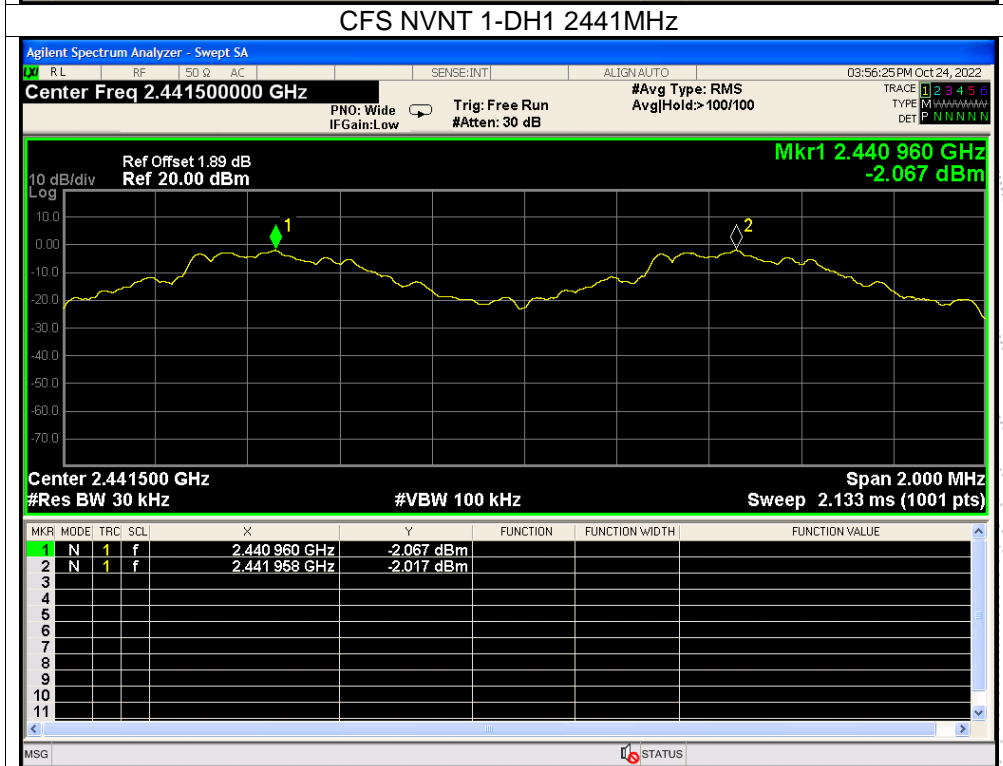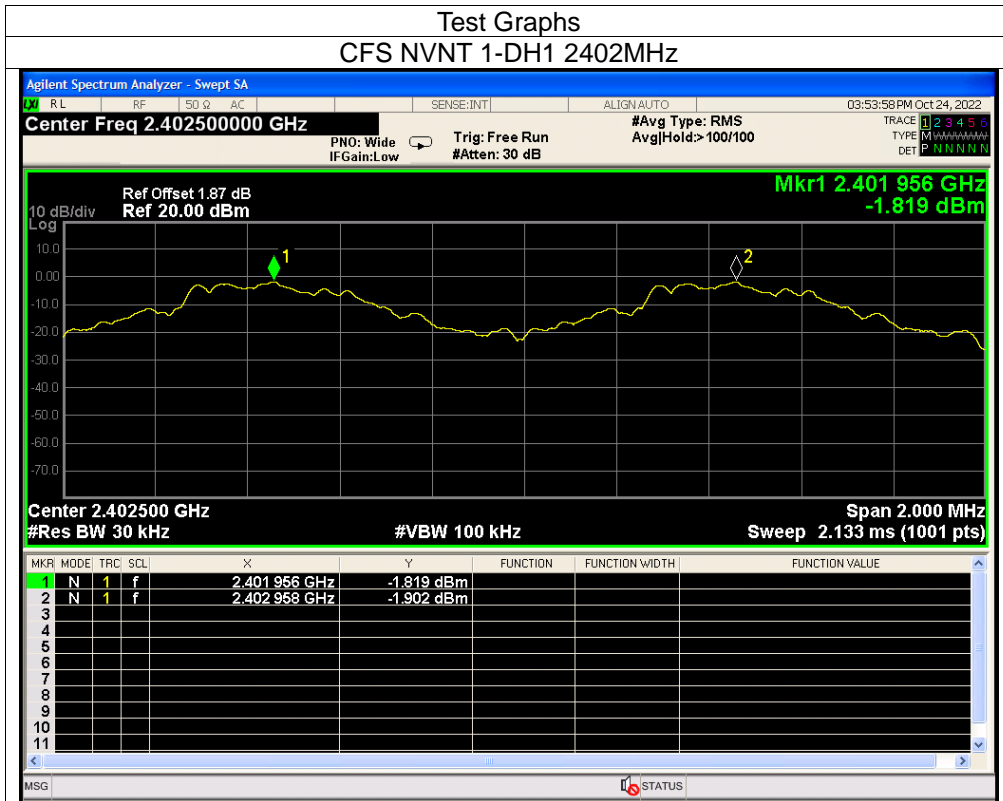

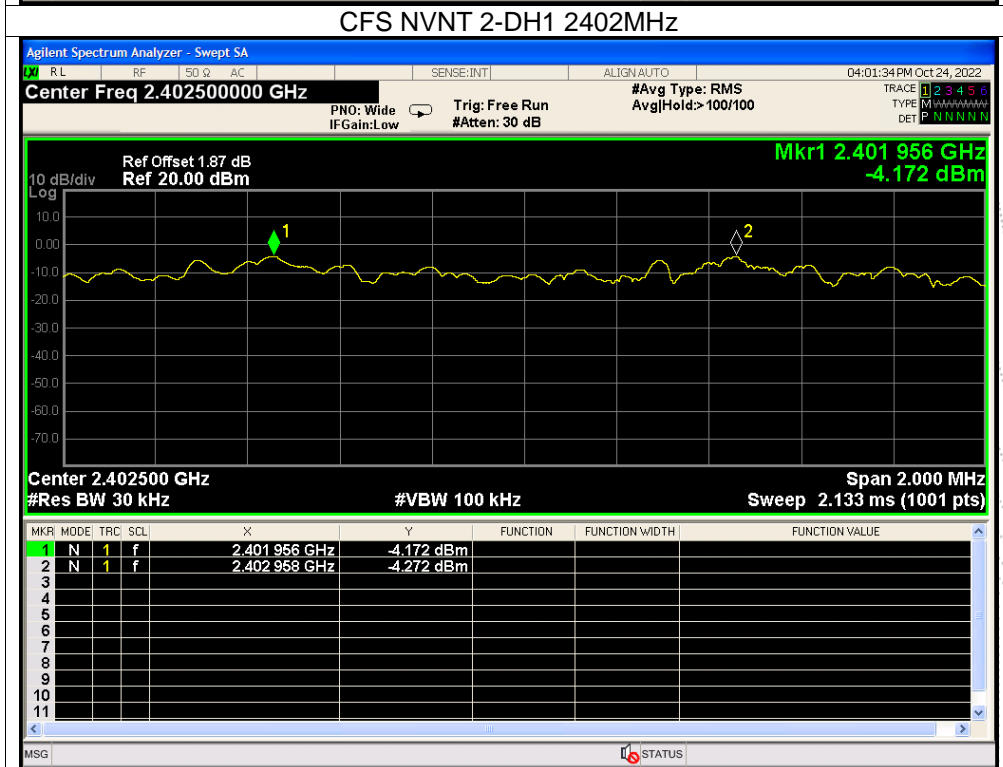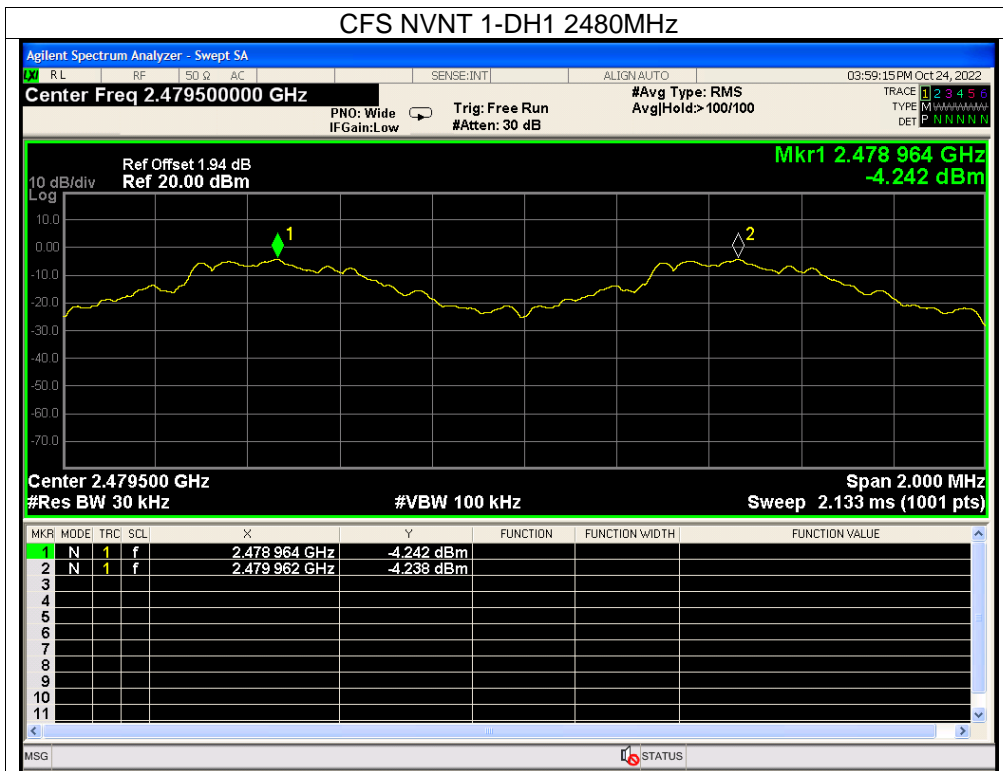

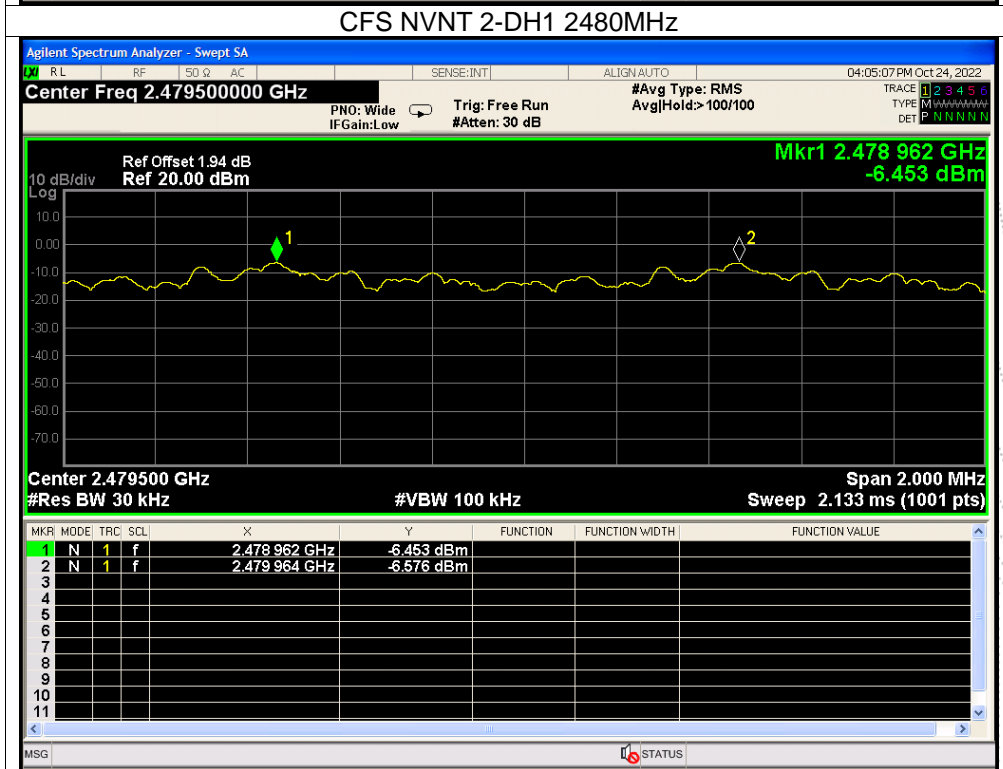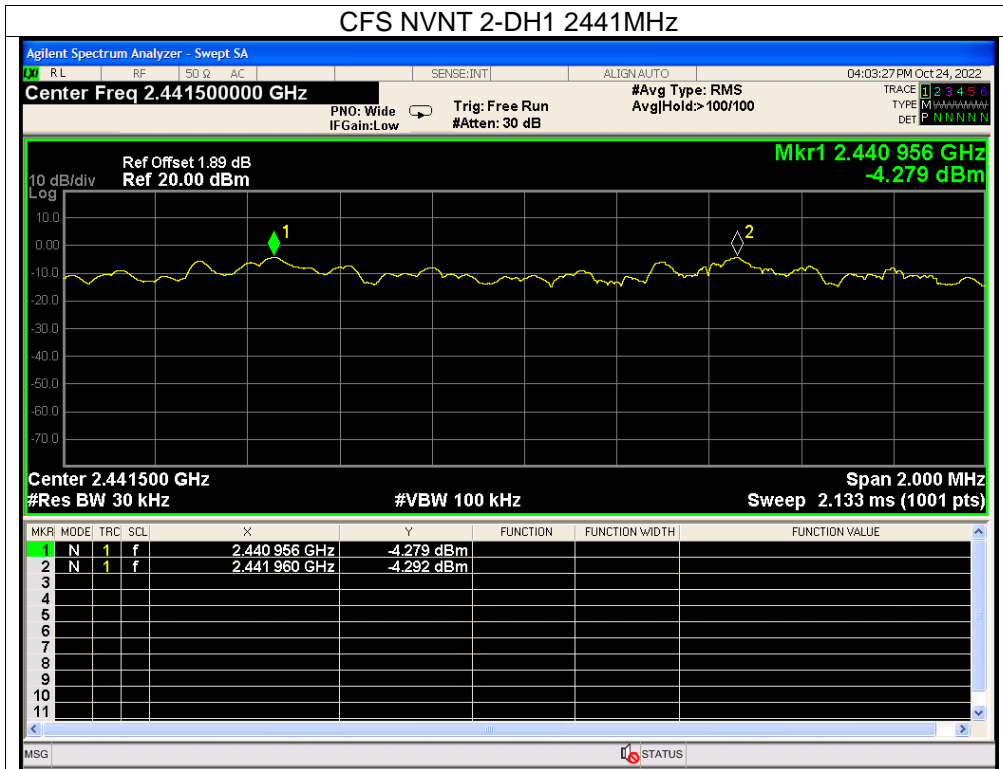

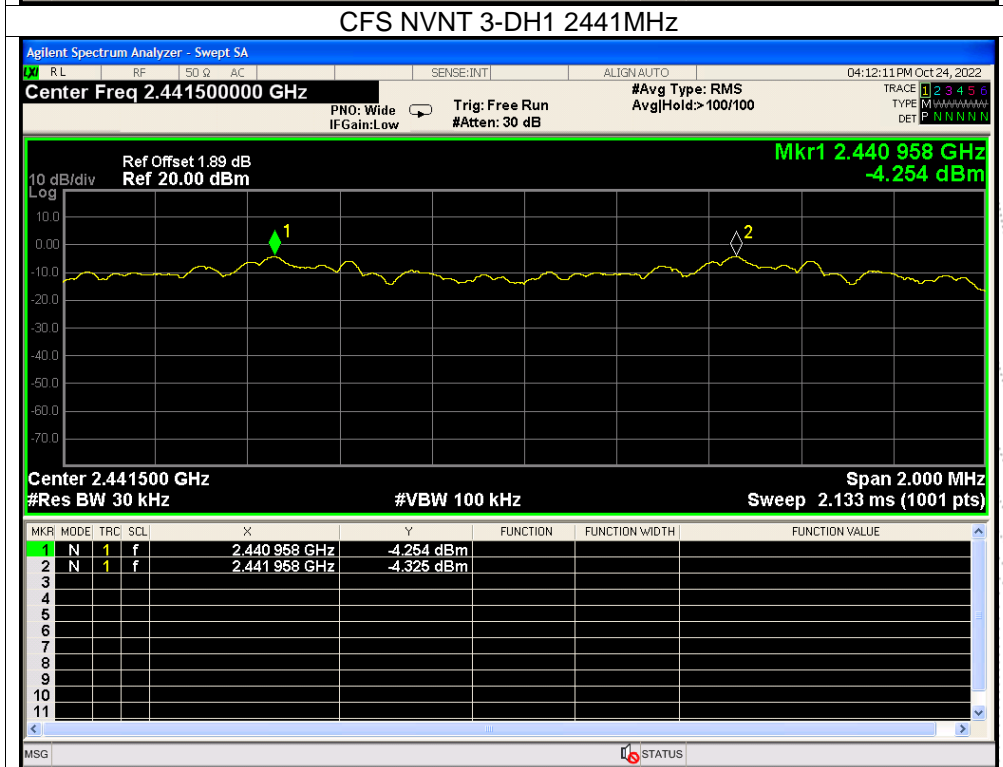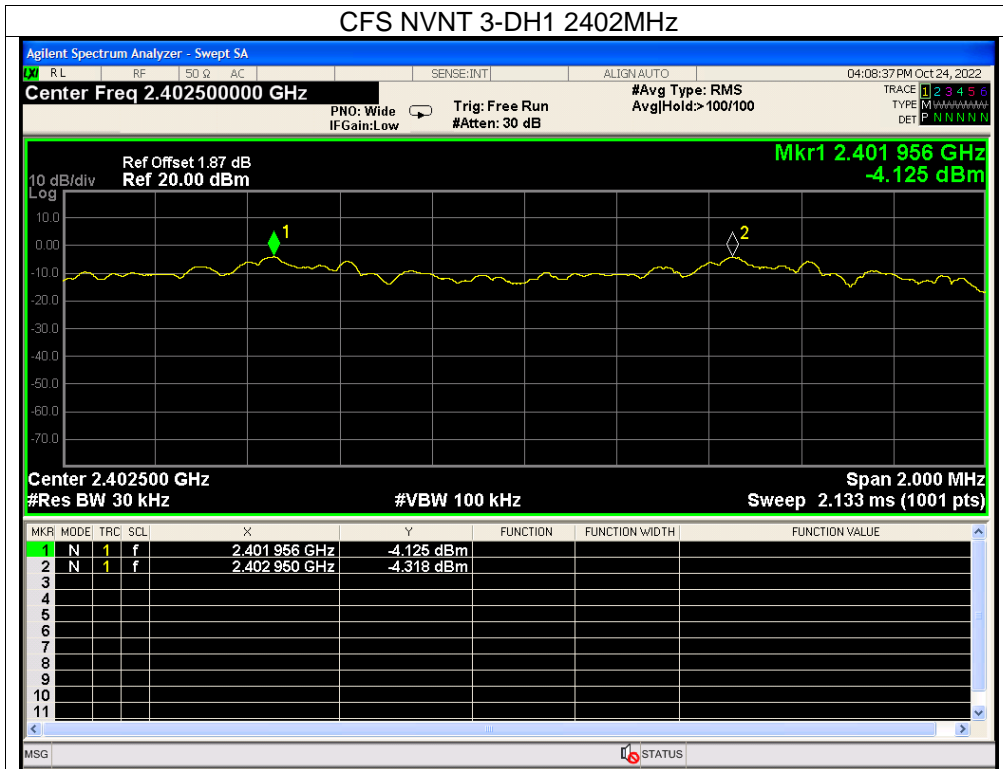

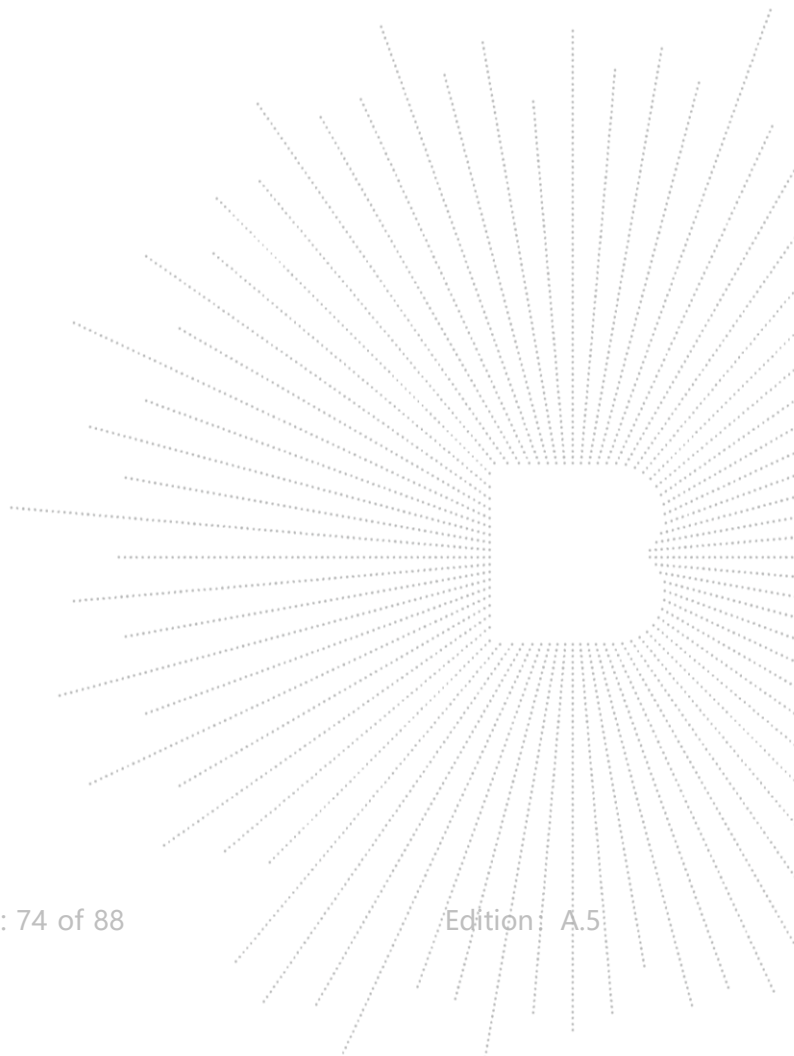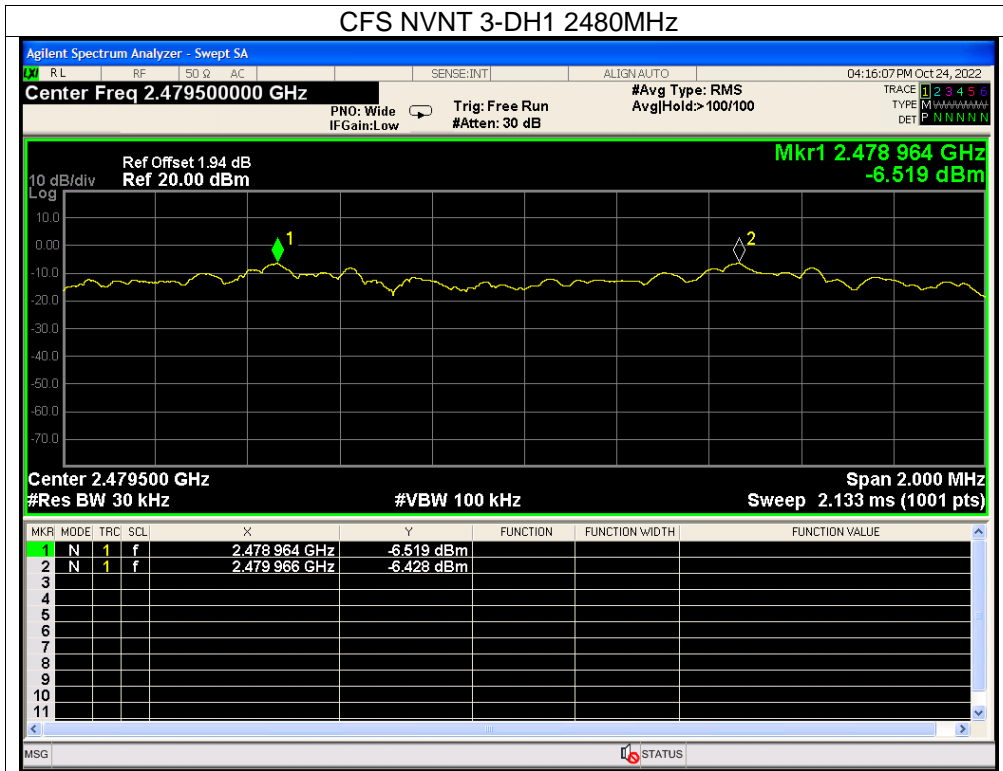

## 13. Number Of Hopping Frequency

### 13.1 Block Diagram Of Test Setup



### 13.2 Limit


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.



### 13.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;



## 13.4 Test Result

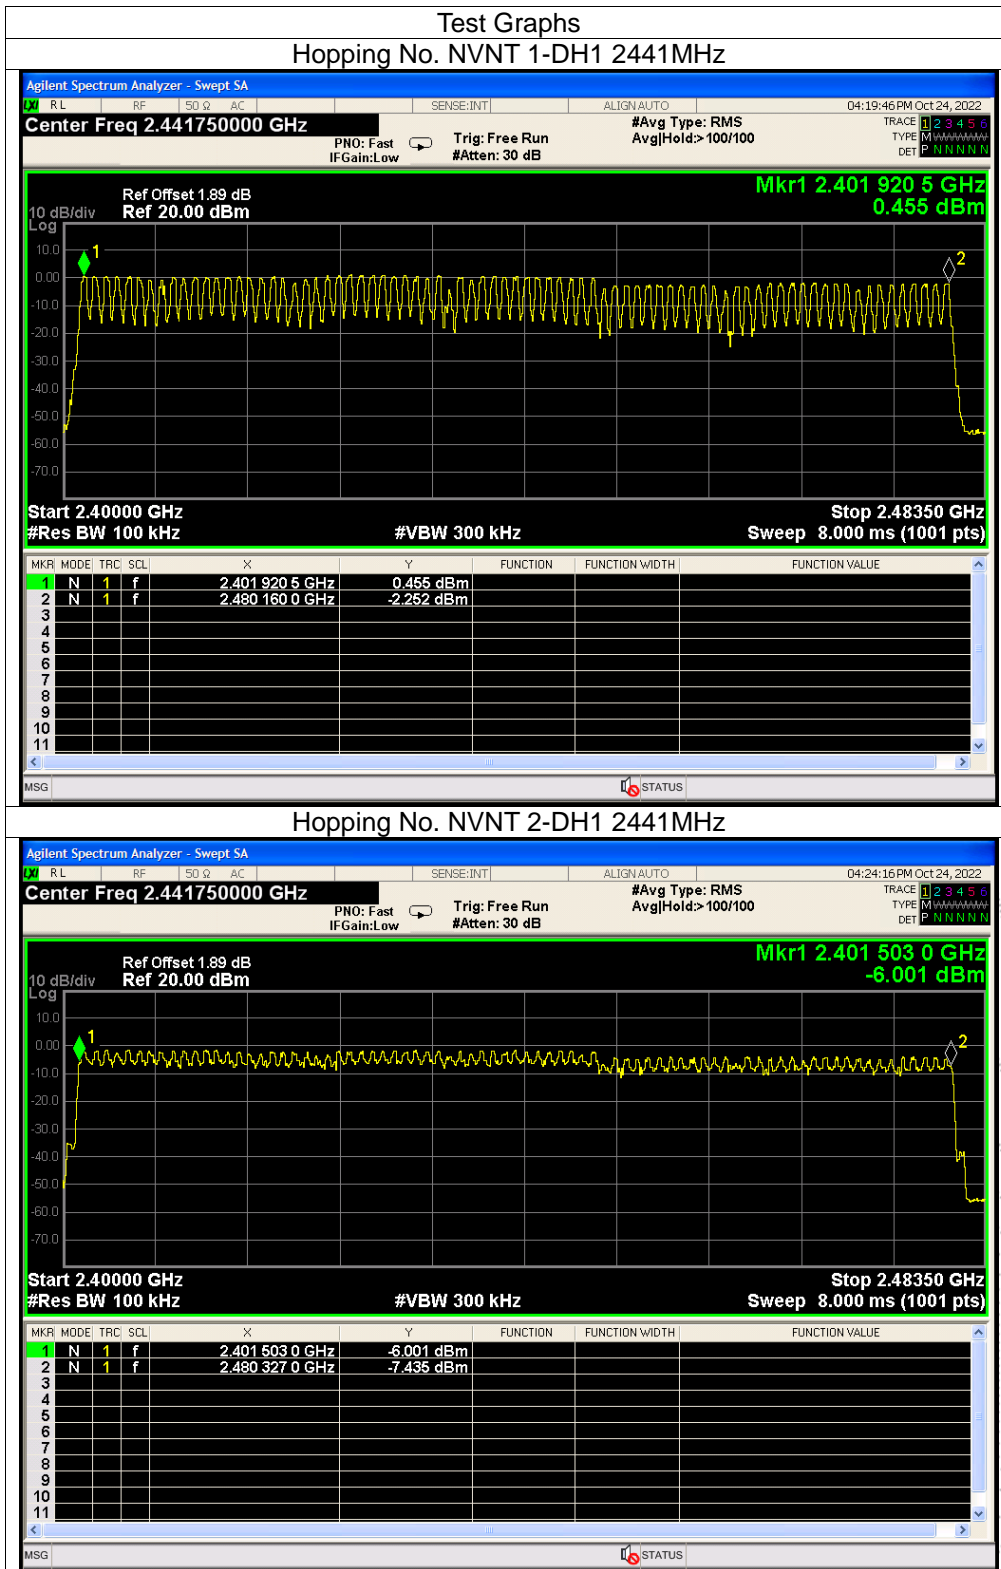

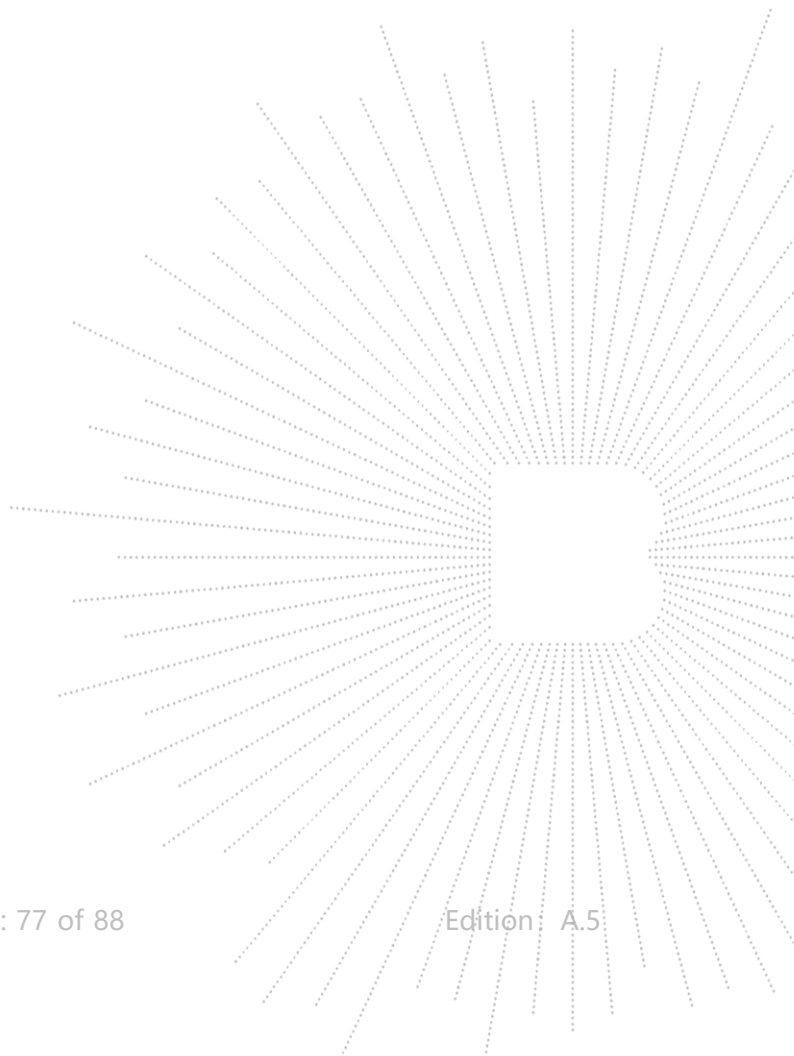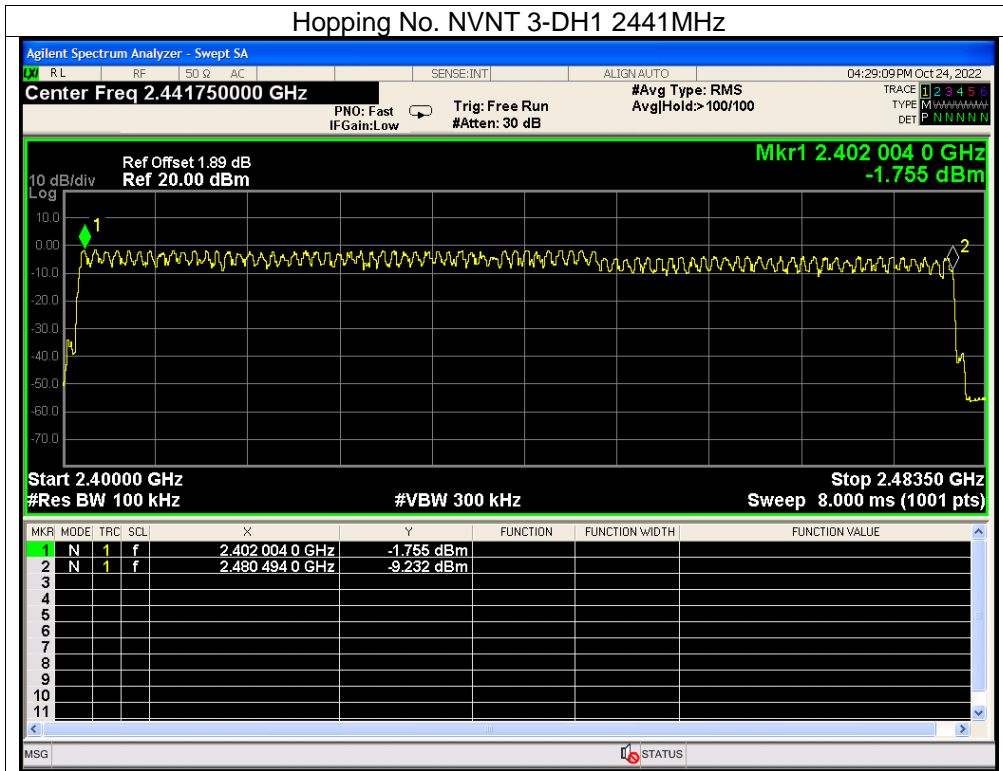

## 14. Dwell Time

### 14.1 Block Diagram Of Test Setup



### 14.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 14.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

### 14.4 Test Result

DH5 Packet permit maximum  $1600 / 79 / 6$  hops per second in each channel  
(5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum  $1600 / 79 / 4$  hops per second in each channel  
(3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum  $1600 / 79 / 2$  hops per second in each channel  
(1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5:  $1600/79/6*0.4*79*(MkrDelta)/1000$



DH3:  $1600/79/4*0.4*79*(MkrDelta)/1000$



DH1:  $1600/79/2*0.4*79*(MkrDelta)/1000$



Remark: Mkr Delta is once pulse time.

| Condition | Mode  | Frequency (MHz) | Pulse Time (ms) | Total Dwell Time (s) | Limit (s) | Verdict |
|-----------|-------|-----------------|-----------------|----------------------|-----------|---------|
| NVNT      | 1-DH1 | 2441            | 0.383           | 0.123                | 0.4       | Pass    |
| NVNT      | 1-DH3 | 2441            | 1.639           | 0.262                | 0.4       | Pass    |
| NVNT      | 1-DH5 | 2441            | 2.888           | 0.308                | 0.4       | Pass    |
| NVNT      | 2-DH1 | 2441            | 0.389           | 0.124                | 0.4       | Pass    |
| NVNT      | 2-DH3 | 2441            | 1.642           | 0.263                | 0.4       | Pass    |
| NVNT      | 2-DH5 | 2441            | 2.889           | 0.308                | 0.4       | Pass    |
| NVNT      | 3-DH1 | 2441            | 0.389           | 0.124                | 0.4       | Pass    |
| NVNT      | 3-DH3 | 2441            | 1.64            | 0.262                | 0.4       | Pass    |
| NVNT      | 3-DH5 | 2441            | 2.891           | 0.308                | 0.4       | Pass    |


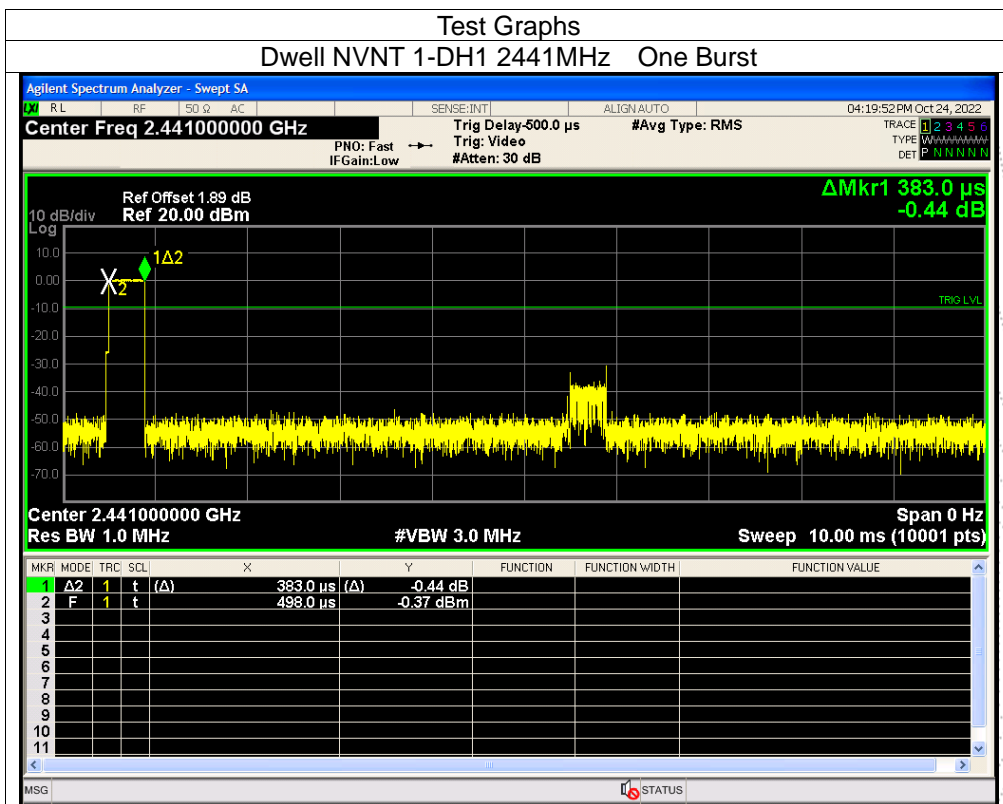


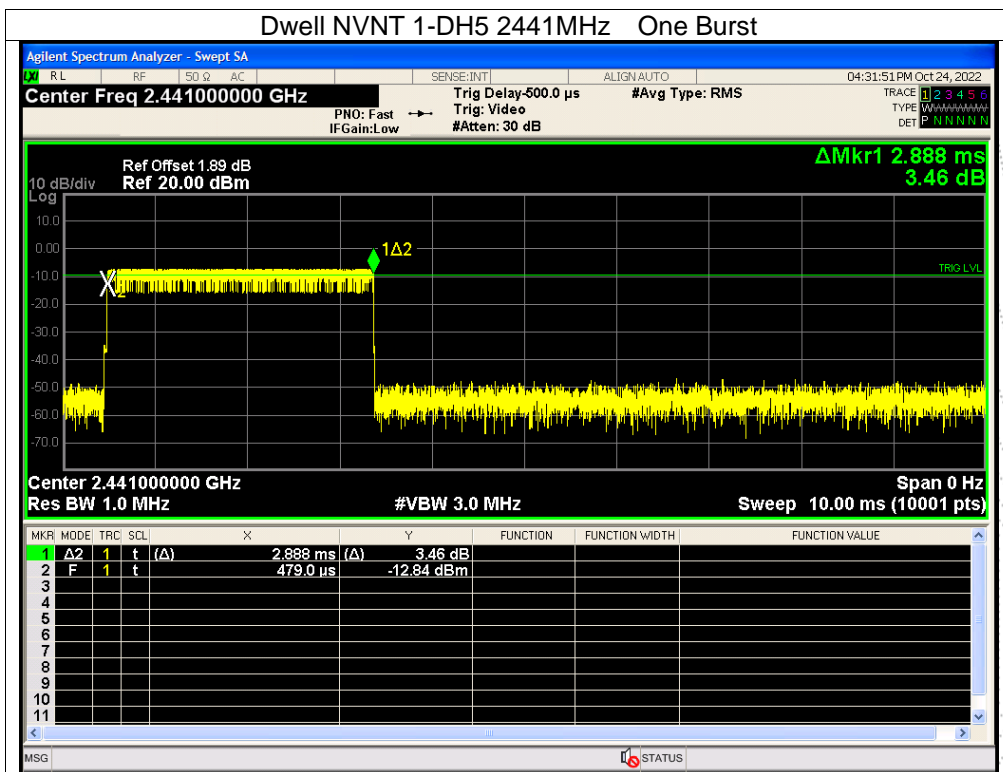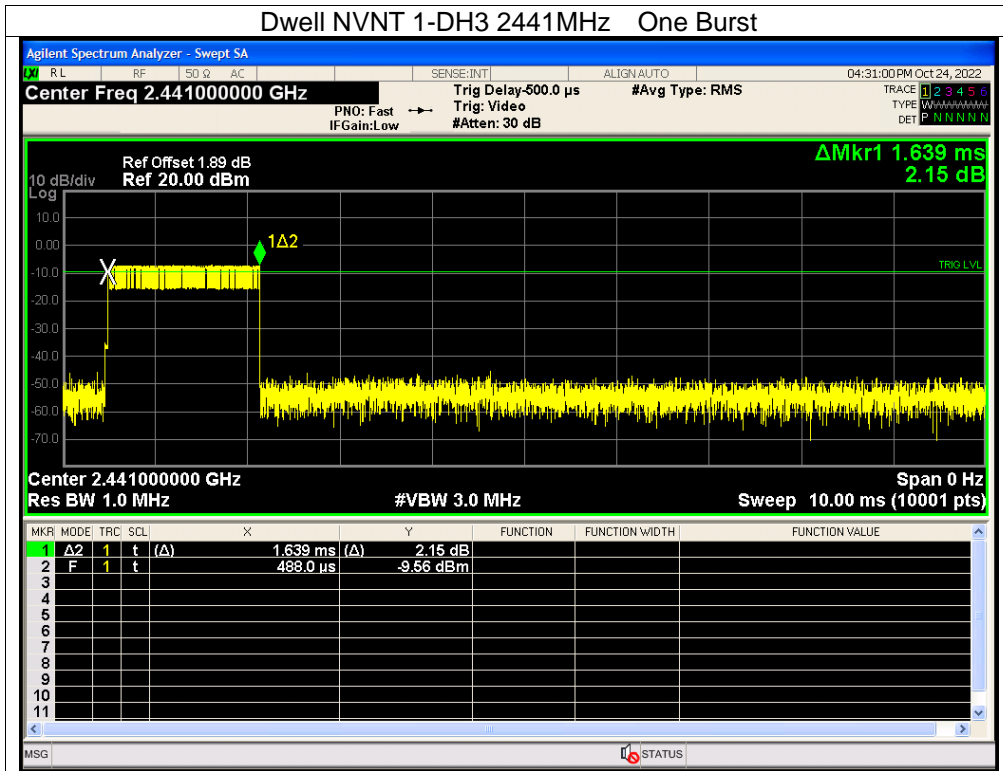

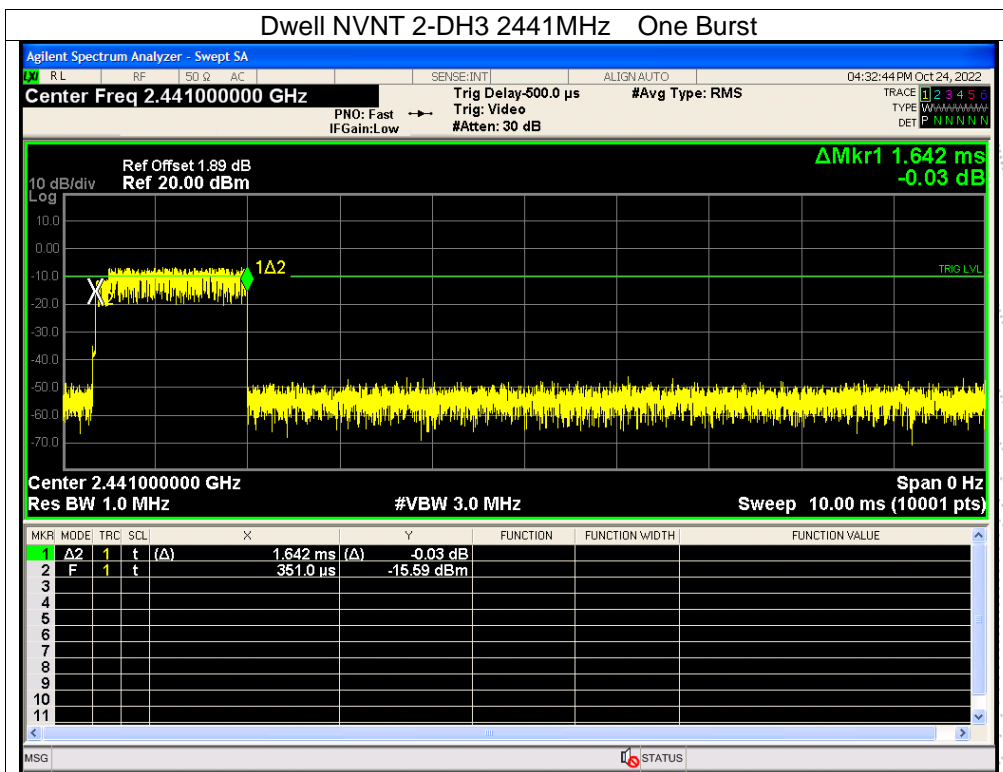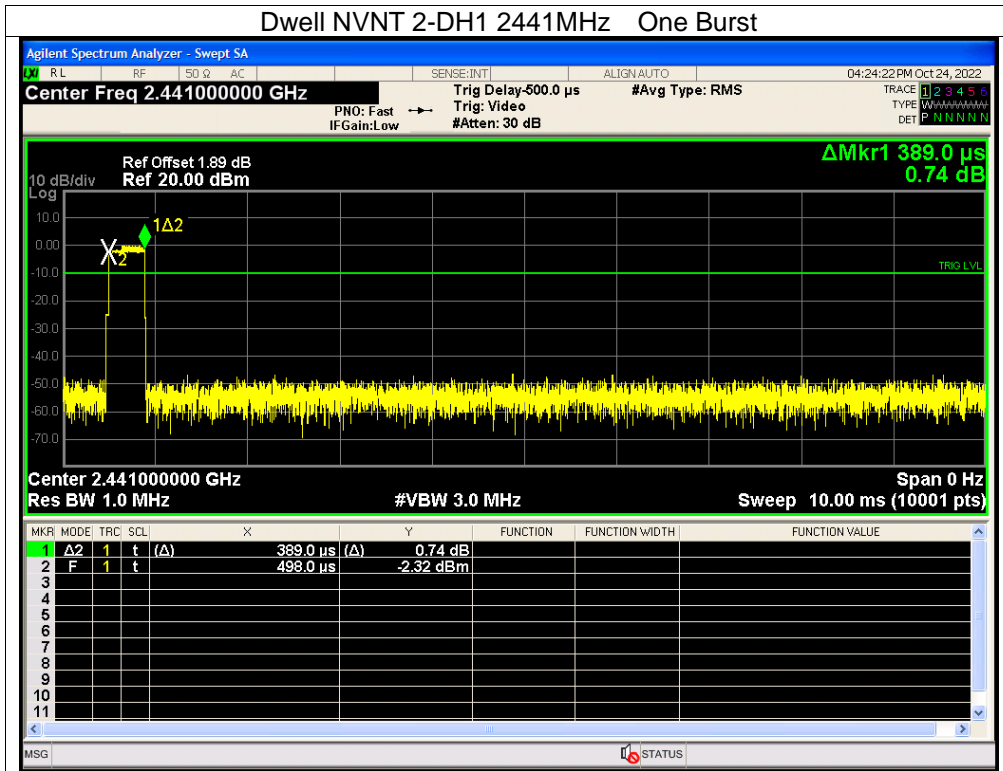

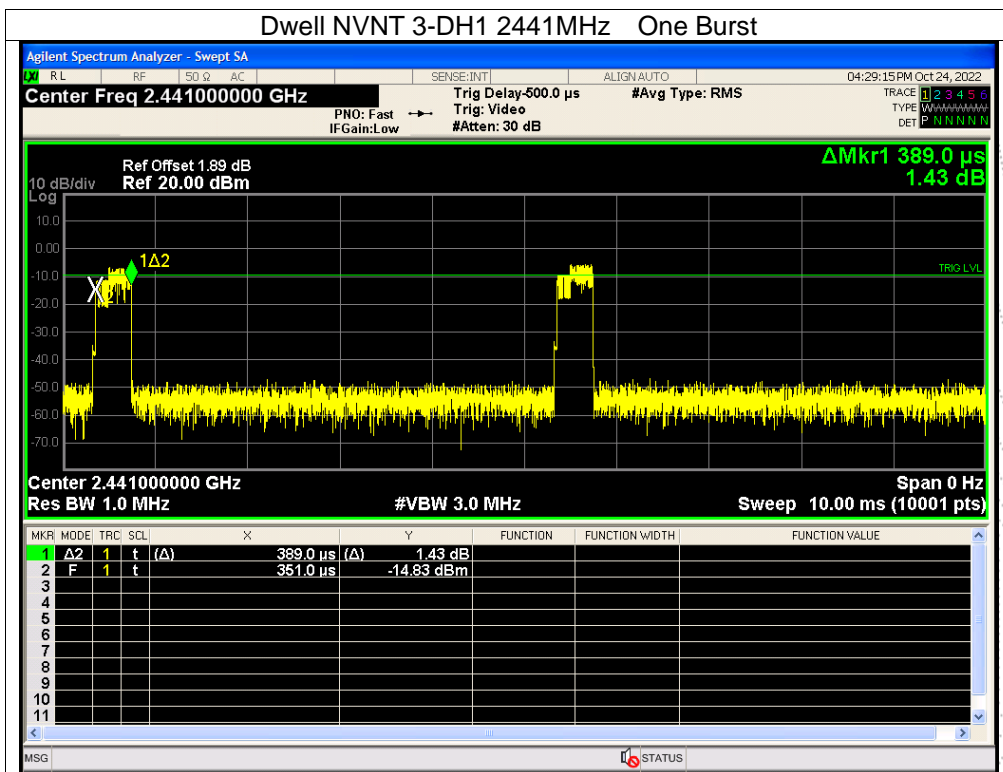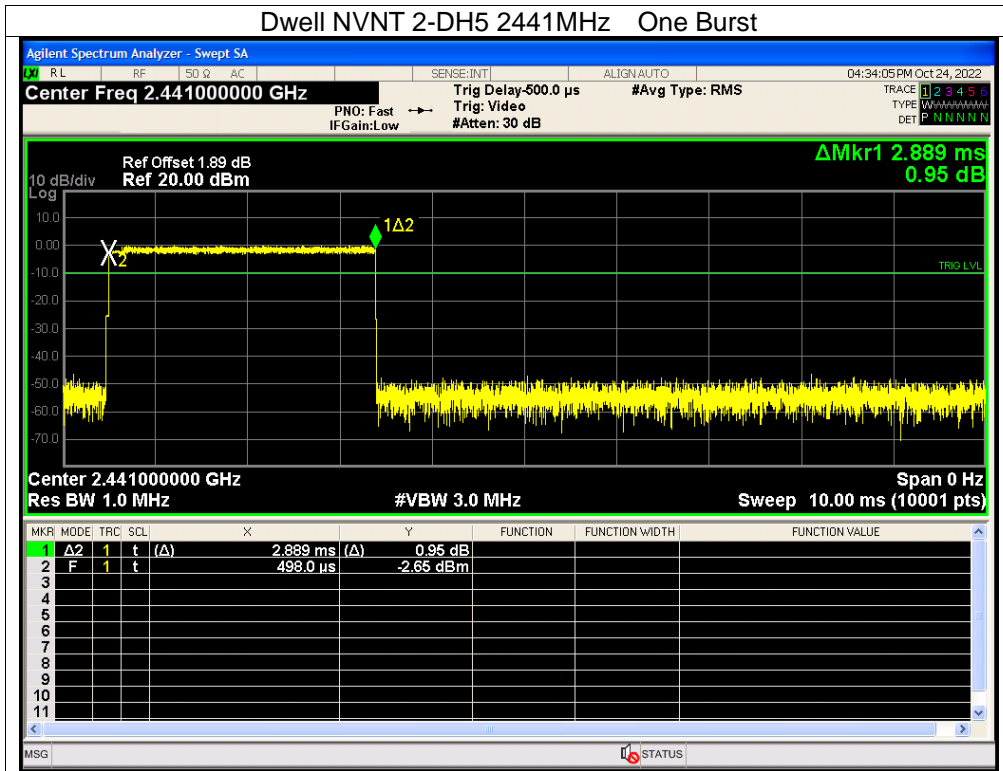



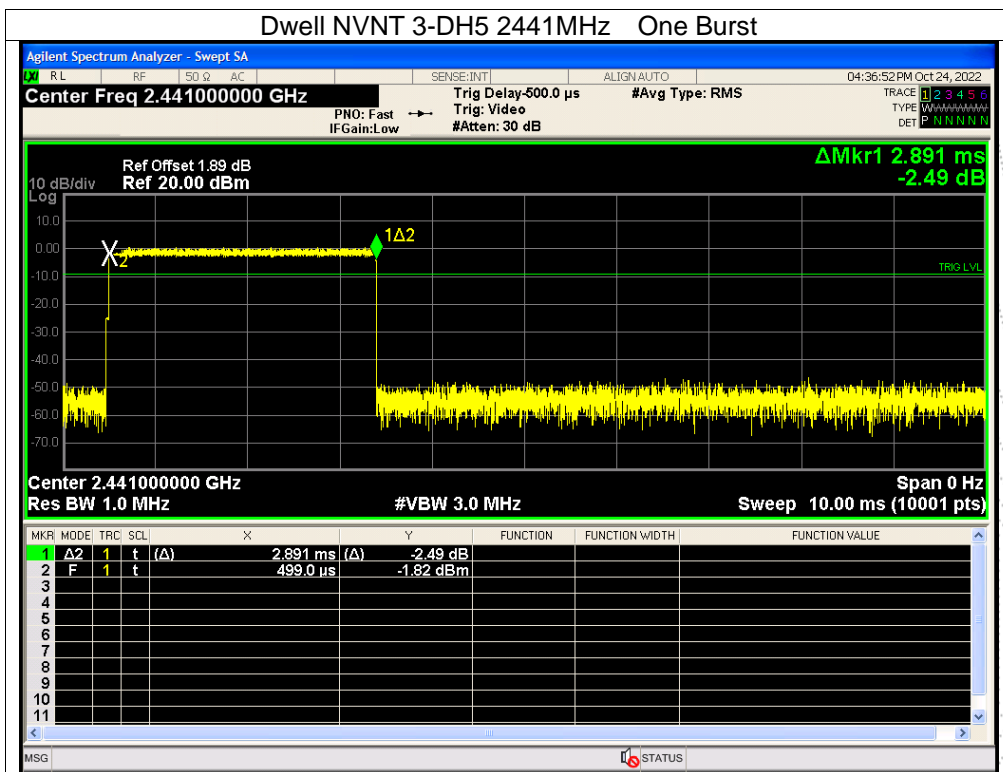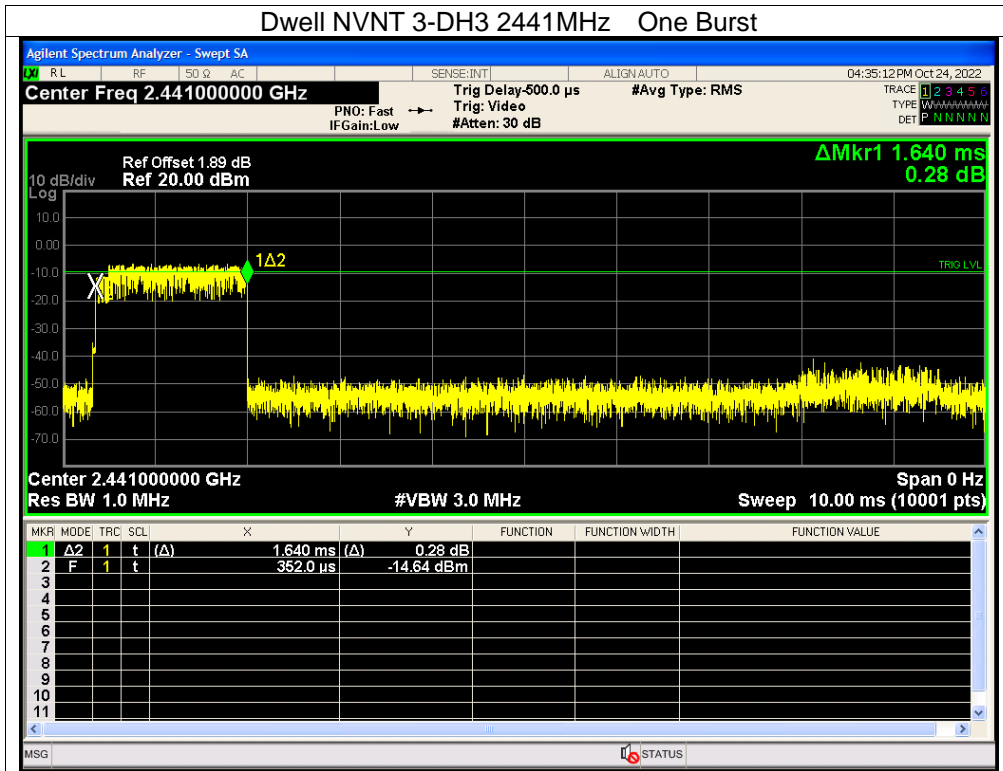




## 15. Antenna Requirement

### 15.1 Limit

According to RSS-Gen issue 5, section 8.3, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns.


### 15.2 Test Result

The EUT antenna is FPC antenna, fulfill the requirement of this section.

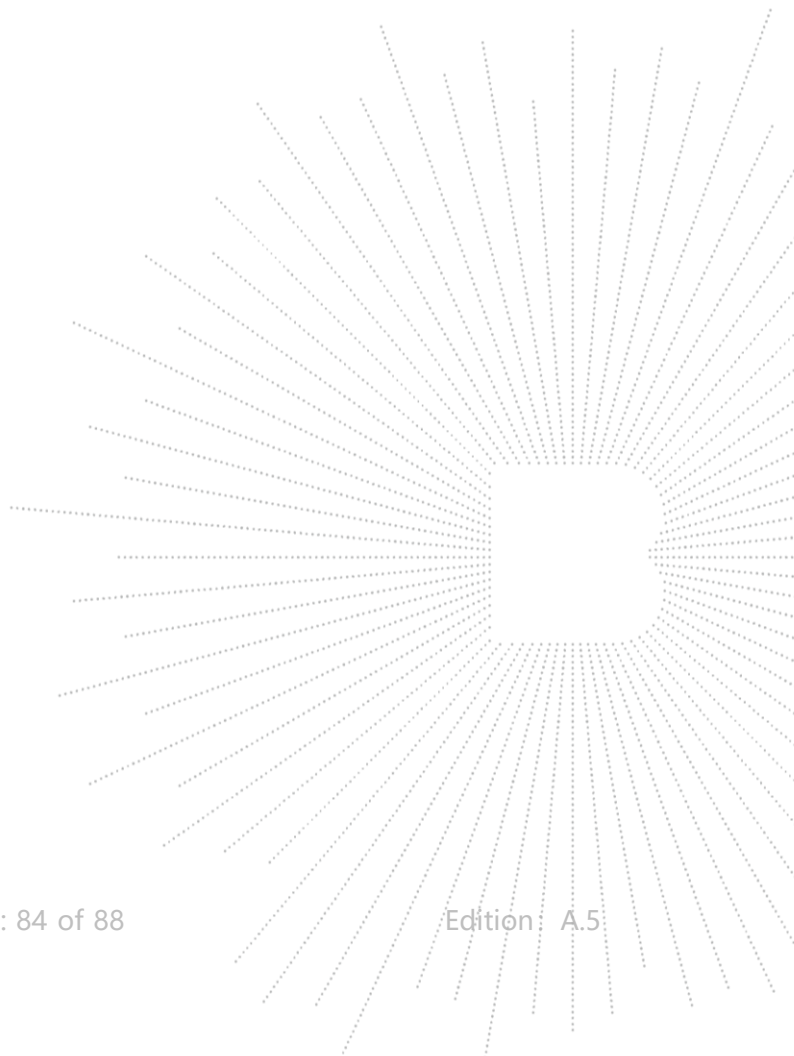


### 16. EUT Photographs

EUT Photo 1

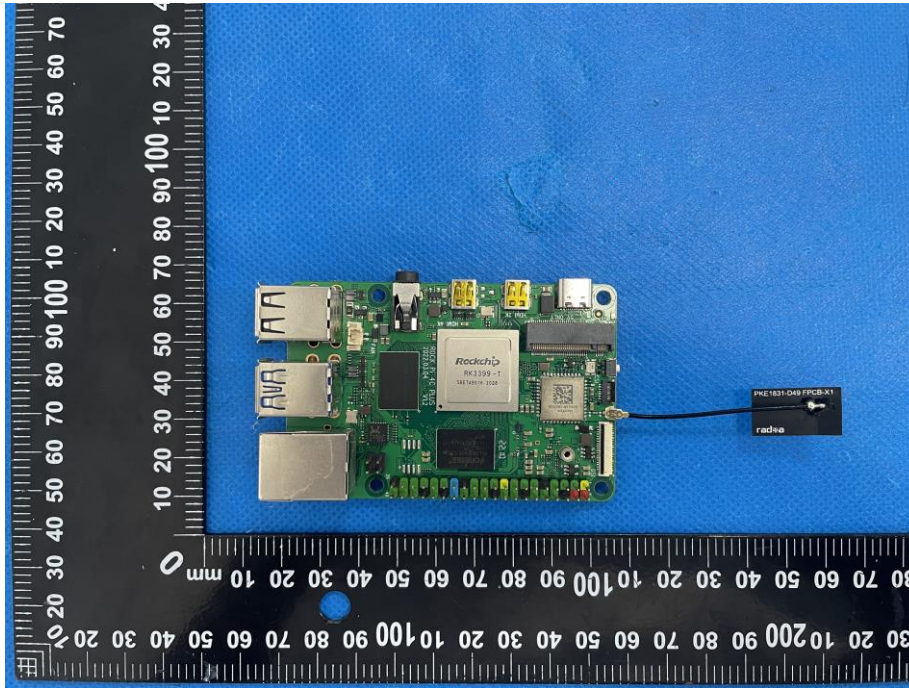

EUT Photo 2

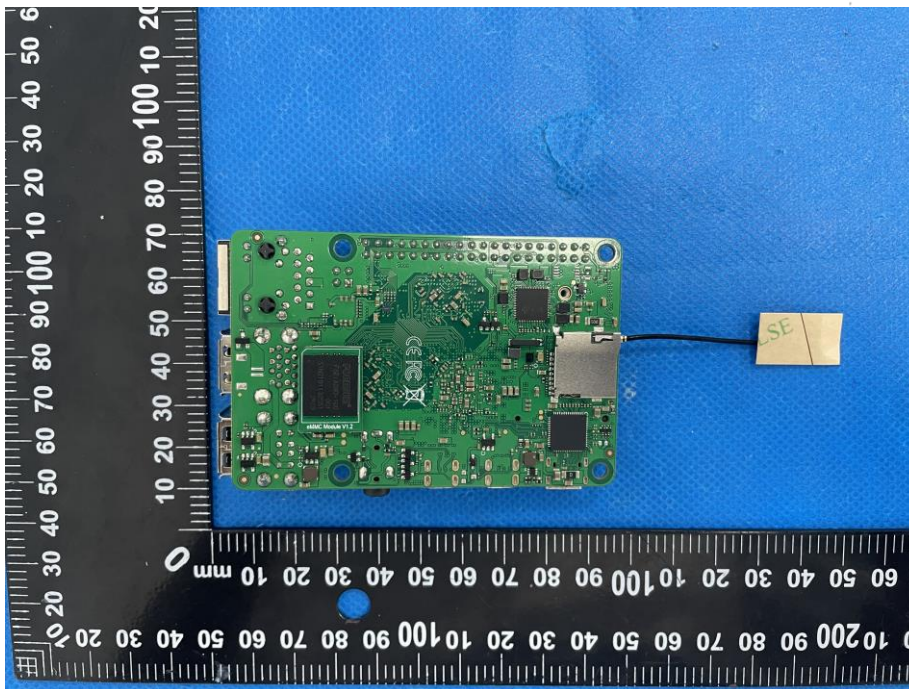




## 17. EUT Test Setup Photographs

### Conducted Emissions Photo



### Radiated Measurement Photos



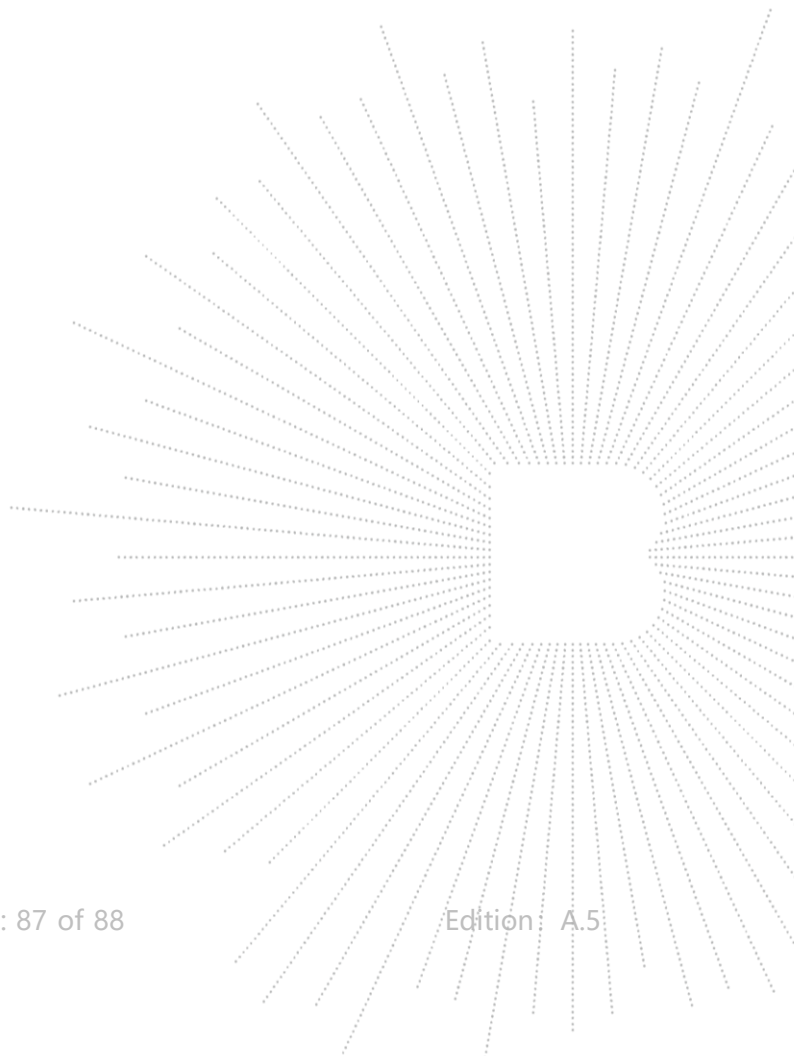

## STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The test report without CMA mark is only used for scientific research, teaching, enterprise product development and internal quality control purposes.
8. The quality system of our laboratory is in accordance with ISO/IEC17025.
9. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

\*\*\*\*\* END \*\*\*\*\*

