

# TEST REPORT

Report No.: BCTC2109795863-2E

---

Applicant: ROCKPI TRADING LIMITED

---

Product Name: ROCK Pi 4

---

Model/Type reference: ROCK Pi 4 MODEL B+

---

Tested Date: 2021-09-15 to 2021-09-29

---

Issued Date: 2021-09-30

---



Shenzhen **BCTC** Testing Co., Ltd.



Product Name: ROCK Pi 4  
Trademark: N/A  
Model/Type reference: ROCK Pi 4 MODEL B+  
ROCK Pi 4 MODEL A, ROCK Pi 4 MODEL A+, ROCK Pi 4 MODEL B  
Prepared For: ROCKPI TRADING LIMITED  
Address: Room 11, 27 / f, Ga wah international centre, 191 Javaroad, north point, Hong Kong  
Manufacturer: ROCKPI TRADING LIMITED  
Address: Room 11, 27 / f, Ga wah international centre, 191 Javaroad, north point, Hong Kong  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China.  
Sample Received Date: 2021-09-15  
Sample tested Date: 2021-09-15 to 2021-09-29  
Issue Date: 2021-09-30  
Report No.: BCTC2109795863-2E  
Test Standards: ETSI EN 301 489-1 V2.2.3 (2019-11)  
ETSI EN 301 489-3 V2.1.1 (2019-03)  
ETSI EN 301 489-17 V3.2.4 (2020-09)  
Test Results: PASS  
Remark: This is RED EMC test report

Tested by:



Kelsey Tan/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table Of Content

Test Report Declaration	Page
1. Version .....	5
2. Test Summary .....	6
3. Measurement Uncertainty .....	7
4. Product Information And Test Setup .....	8
4.1 Product Information.....	8
4.2 Test Setup Configuration .....	8
4.3 Support Equipment .....	8
4.4 Test Mode .....	9
5. Test Facility And Test Instrument Used.....	10
5.1 Test Facility.....	10
5.2 Test Instrument Used.....	10
6. Conducted Emissions.....	12
6.1 Block Diagram Of Test Setup.....	12
6.2 Limit .....	12
6.3 Test procedure.....	13
6.4 Test Result.....	14
7. Radiated EMISSIONS Test .....	17
7.1 Block Diagram Of Test Setup.....	17
7.2 Limits.....	17
7.3 Test Procedure .....	18
7.4 Test Results .....	19
8. Harmonic Current Emission(H).....	21
8.1 Block Diagram of Test Setup .....	21
8.2 Limit .....	21
8.3 Test Procedure .....	21
8.4 Test Results .....	21
9. Voltage Fluctuations & Flicker(F) .....	22
9.1 Block Diagram of Test Setup .....	22
9.2 Limit .....	22
9.3 Test Procedure .....	22
9.4 Test Results .....	22
10. Immunity Test Of General The Performance Criteria .....	23
11. Electrostatic Discharge (ESD).....	25
11.1 Test Specification.....	25
11.2 Block Diagram of Test Setup .....	25
11.3 Test Procedure .....	25
11.4 Test Results .....	26
12. Continuous RF Electromagnetic Field Disturbances(RS).....	27
12.1 Test Specification.....	27
12.2 Block Diagram of Test Setup .....	27
12.3 Test Procedure .....	28
12.4 Test Results .....	28
13. Electrical Fast Transients/Burst (EFT).....	29
13.1 Test Specification.....	29
13.2 Block Diagram of EUT Test Setup .....	29
13.3 Test Procedure .....	29


13.4	Test Results .....	29
14.	Surges Immunity Test .....	30
14.1	Test Specification.....	30
14.2	Block Diagram of EUT Test Setup .....	30
14.3	Test Procedure .....	30
14.4	Test Result.....	30
15.	Continuous Induced RF Disturbances (CS) .....	31
15.1	Test Specification.....	31
15.2	Block Diagram of EUT Test Setup .....	31
15.3	Test Procedure .....	31
15.4	Test Result.....	31
16.	Voltage Dips And Interruptions (DIPS) .....	32
16.1	Test Specification.....	32
16.2	Block Diagram of EUT Test Setup .....	32
16.3	Test Procedure .....	32
16.4	Test Result.....	32
17.	EUT Photographs.....	33
18.	EUT Test Setup Photographs.....	34

(Note: N/A Means Not Applicable)

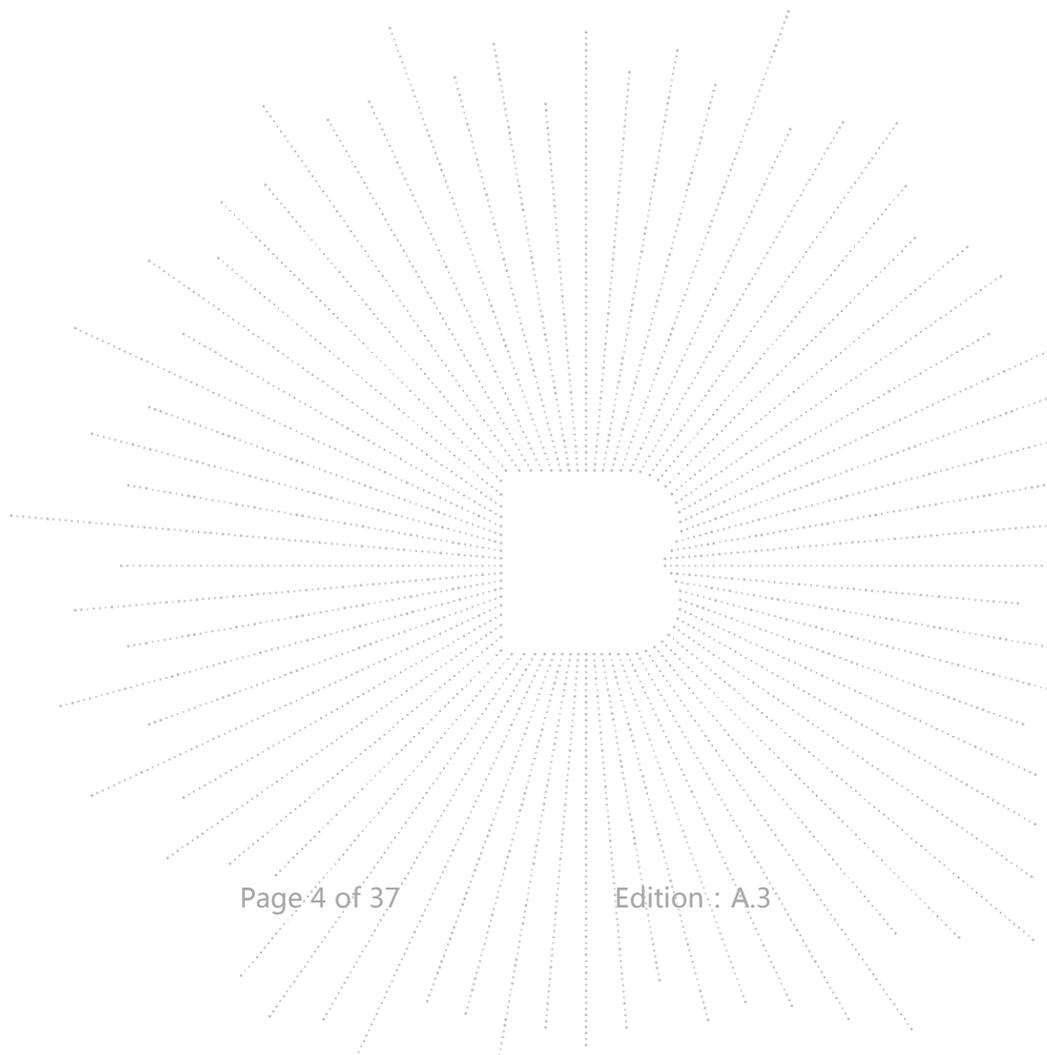

**1. Version**

<b>Report No.</b>	<b>Issue Date</b>	<b>Description</b>	<b>Approved</b>
BCTC2109795863-2E	2021-09-30	Original	Valid

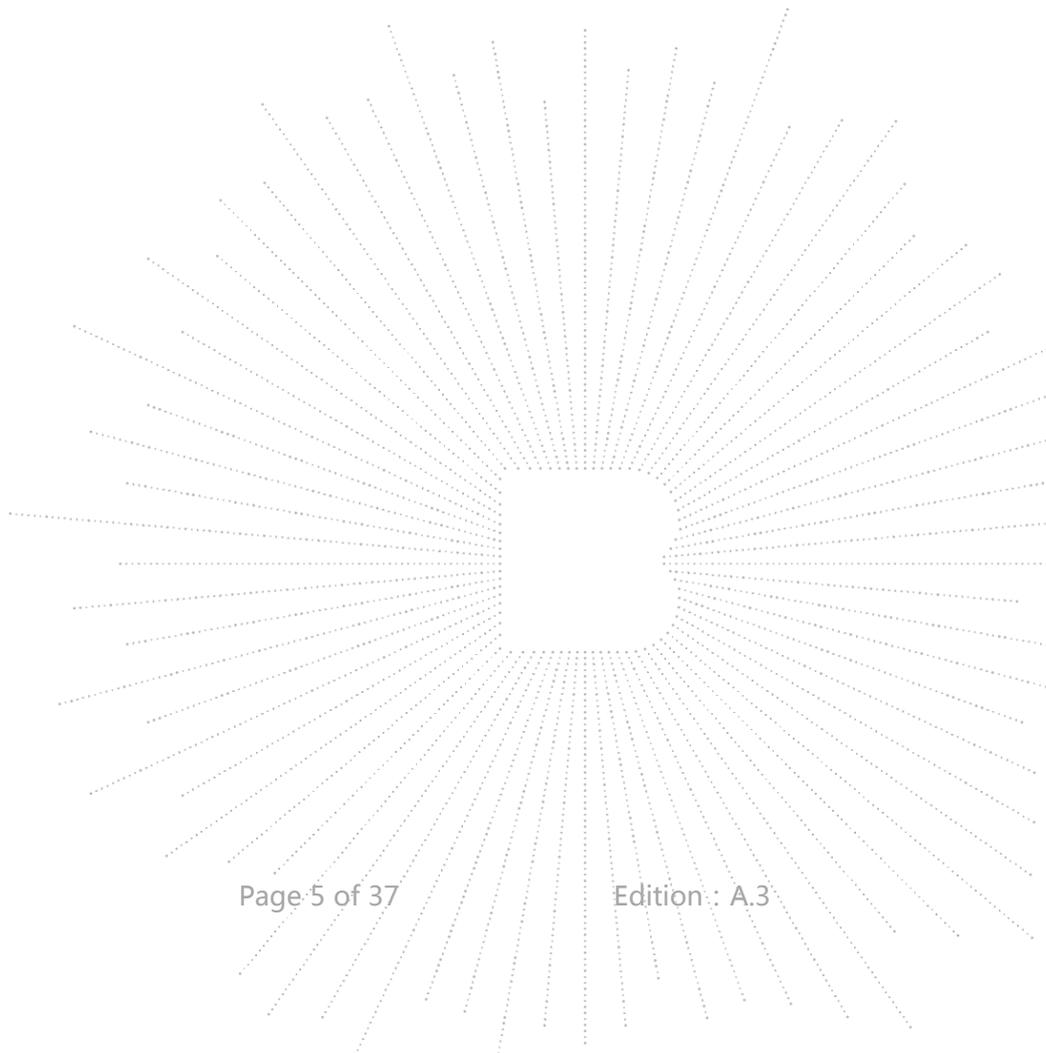

## 2. Test Summary

The Product has been tested according to the following specifications:

EMISSION		
Standard	Test Item	Test result
EN 55032	Conducted emissions from the AC mains power ports	Pass
EN 55032	Asymmetric mode conducted emissions	Pass
EN 55032	Conducted differential voltage emissions	N/A <sup>1</sup>
EN 55032	Radiated emissions	Pass
EN 61000-3-2	Harmonic current emission(H)	N/A <sup>2</sup>
EN 61000-3-3	Voltage fluctuations & flicker(F)	N/A <sup>2</sup>

IMMUNITY		
Standard	Test Item	Test result
IEC 61000-4-2	Electrostatic discharge (ESD)	Pass
IEC 61000-4-3	Continuous RF electromagnetic field disturbances(RS)	Pass
IEC 61000-4-4	Electrical fast transients/burst (EFT)	N/A <sup>2</sup>
IEC 61000-4-5	Surges	N/A <sup>2</sup>
IEC 61000-4-6	Radio frequency, common mode	N/A <sup>2</sup>
IEC 61000-4-11	Voltage dips and interruptions (DIPS)	N/A <sup>2</sup>

Remark:

1. The Product has no antenna port.
2. The EUT is powered by the DC only, the test item is not applicable.

### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Test item	Value (dB)
Conducted Emission (150kHz-30MHz)	3.20
Radiated Emission(30MHz~1GHz)	4.80
Radiated Emission(1GHz~6GHz)	4.90

## 4. Product Information And Test Setup

### 4.1 Product Information

Model/Type reference:	ROCK Pi 4 MODEL B+ ROCK Pi 4 MODEL A, ROCK Pi 4 MODEL A+, ROCK Pi 4 MODEL B
Model differences:	All the model are the same circuit and RF module, except model names.
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	WiFi(2.4GHz): IEEE 802.11b/g/n HT20: 2412MHz-2472MHz WiFi (5.1GHz): IEEE 802.11a/n/ac HT20/HT40/HT80:5180-5240MHz Bluetooth (BLE) 2402-2480MHz Bluetooth (EDR): 2402-2480MHz Bluetooth (BLE): -1.69 dBm Bluetooth(EDR): 2.51dBm
Max. RF output power:	WiFi (2.4GHz) : 8.94 dBm WiFi (5.1GHz): 8.14 dBm Bluetooth (BLE): GFSK Bluetooth(EDR): GFSK, $\pi/4$ DQPSK, 8DPSK
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	Internal antenna
Antenna Gain:	1dBi
Ratings:	DC 5V

### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

### 4.3 Support Equipment


No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	Adapter	Ugreen	CD122	---	---	--

#### Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 4.4 Test Mode

Test item	Test Mode	Test Voltage
Conducted emissions from the AC mains power ports (150KHz-30MHz) Class B	BT+WIFI LINK	AC 230V/50Hz
Asymmetric mode conducted emissions(150KHz-30MHz) Class B	PING IP	AC230V/50Hz
Radiated emissions(30MHz-6GHz) Class B	BT+WIFI LINK	AC 230V/50Hz
Electrostatic discharge (ESD) <input checked="" type="checkbox"/> Air Discharge: $\pm 2,4,8\text{kV}$ <input checked="" type="checkbox"/> Contact Discharge: $\pm 2,4\text{kV}$ <input checked="" type="checkbox"/> HCP & VCP: $\pm 2,4\text{kV}$	BT+WIFI LINK	AC 230V/50Hz
Continuous RF electromagnetic field disturbances(RS) <input checked="" type="checkbox"/> 80MHz-6000MHz , 3V/m,80% Front, Rear, Left, Right H/V	BT+WIFI LINK	AC 230V/50Hz

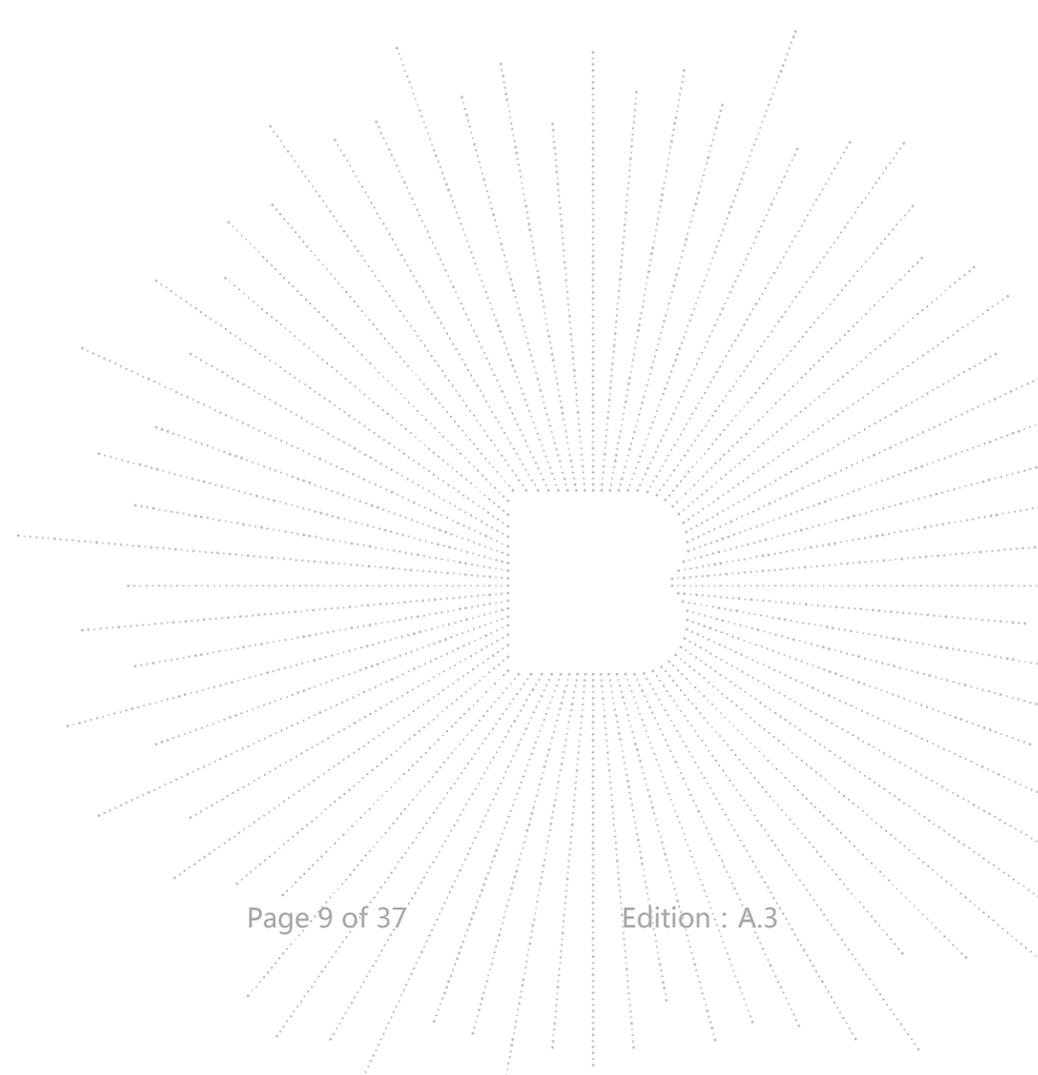

## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.


### 5.2 Test Instrument Used

Conducted emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
LISN	R&S	ENV216	101375	May 28, 2021	May 27, 2022
ISN	HPX	ISN T800	S1509001	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

Radiated emissions Test (966 chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESRP	101154	May 28, 2021	May 27, 2022
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 28, 2021	May 27, 2022
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 28, 2021	May 27, 2022
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	VULB9163-9 42	Jun. 01, 2021	May 31, 2022
Horn Antenna	SCHWARZBECK	BBHA9120D	1541	Jun. 02, 2021	Jun. 01, 2022
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Electrostatic discharge Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
ESD Tester	KIKUSUI	KES4201A	UH002321	May 31, 2021	May 30, 2022


Continuous RF electromagnetic field disturbances Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419B	GB42421440	May 28, 2021	May 27, 2022
Power sensor	Keysight	E9 300A	US39211305	May 28, 2021	May 27, 2022
Power sensor	Keysight	E9 300A	US39211659	May 28, 2021	May 27, 2022
Amplifier	SKET	HAP_801000 M-250W	\	May 28, 2021	May 27, 2022
Amplifier	SKET	HAP_0103G-7 5W	\	May 28, 2021	May 27, 2022
Amplifier	SKET	HAP_0306G-5 0W	\	May 28, 2021	May 27, 2022
Stacked double Log.-Per. Antenna	Schwarzbeck	STLP 9129	077	\	\
Field Probe	Narda	EP-601	80256	May 28, 2021	May 27, 2022
Signal Generator	Agilent	N5181A	MY50143748	May 28, 2021	May 27, 2022
Software	SKET	EMC-S	1.2.0.18	\	\

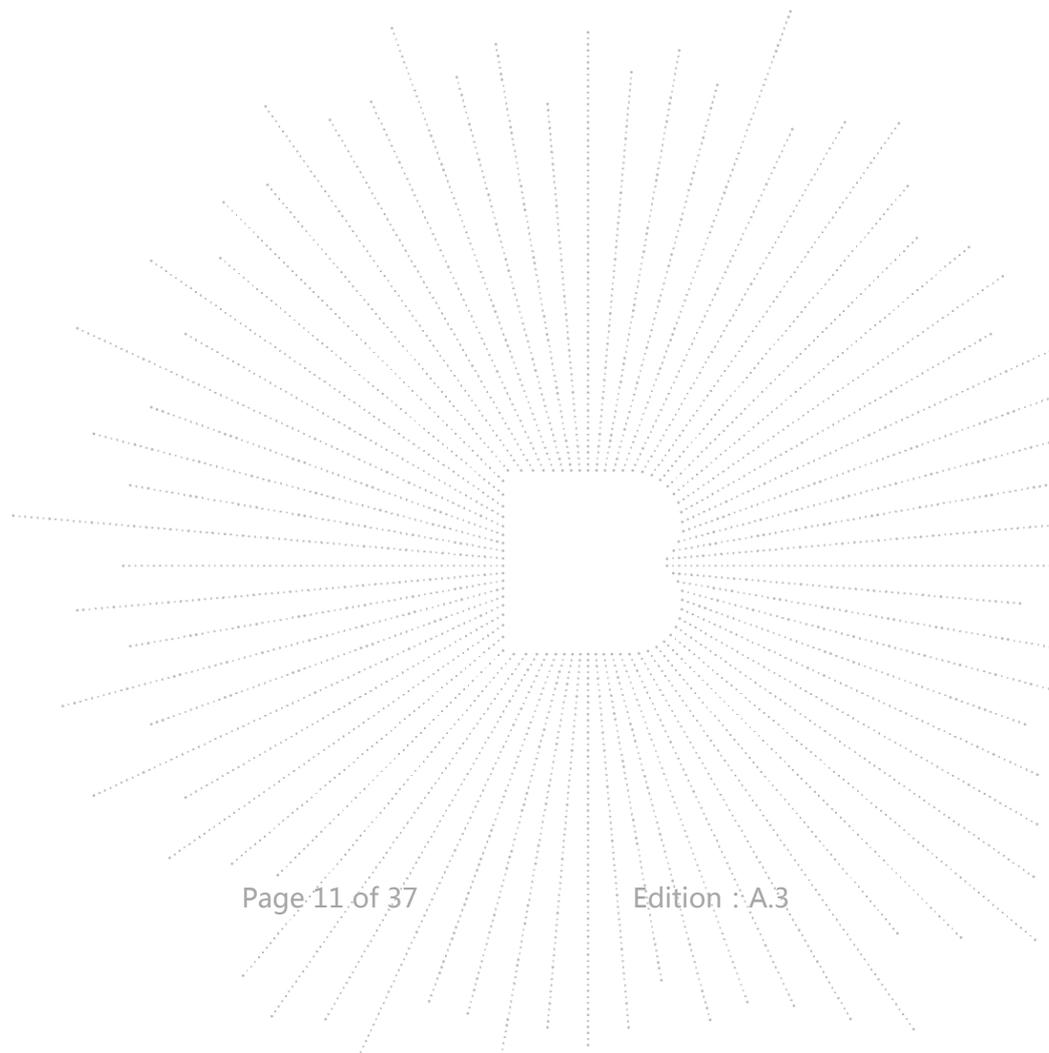


## 6. Conducted Emissions

### 6.1 Block Diagram Of Test Setup

For mains ports:

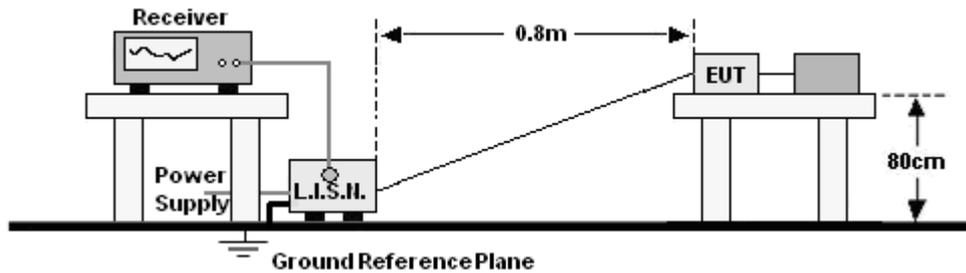

For asymmetric mode ports:

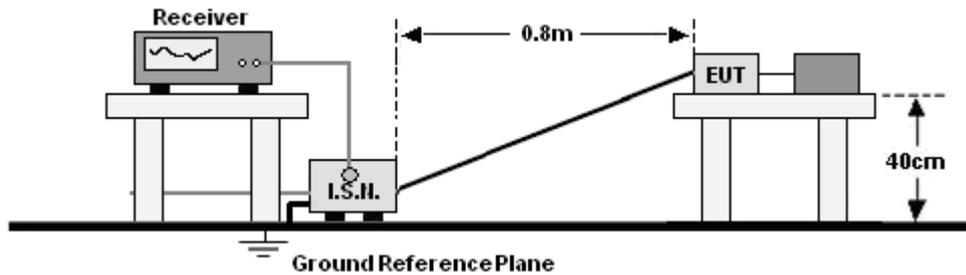

### 6.2 Limit

#### Limits for Conducted emissions at the mains ports of Class B MME

Frequency range (MHz)	Limits dB( $\mu$ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56*	56 to 46*
0,50 to 5	56	46
5 to 30	60	50

Notes: 1. \*Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

#### Limits for asymmetric mode conducted emissions of Class B MME

Frequency range (MHz)	Voltage Limits dB( $\mu$ V)		Current Limits dB( $\mu$ A)	
	Quasi-peak	Average	Quasi-peak	Average
0,15 to 0,50	84-74*	74-64	40-30*	30-20
0,50 to 30	74	64	30	20

Notes: \*Decreasing linearly with logarithm of frequency.

### 6.3 Test procedure

#### **For mains ports:**


- a. The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

#### **For asymmetric mode ports:**

- a. The Product was placed on a non-conductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the associated port through current probe.
- b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

### 6.4 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	BT+WIFI LINK	Remark:	N/A

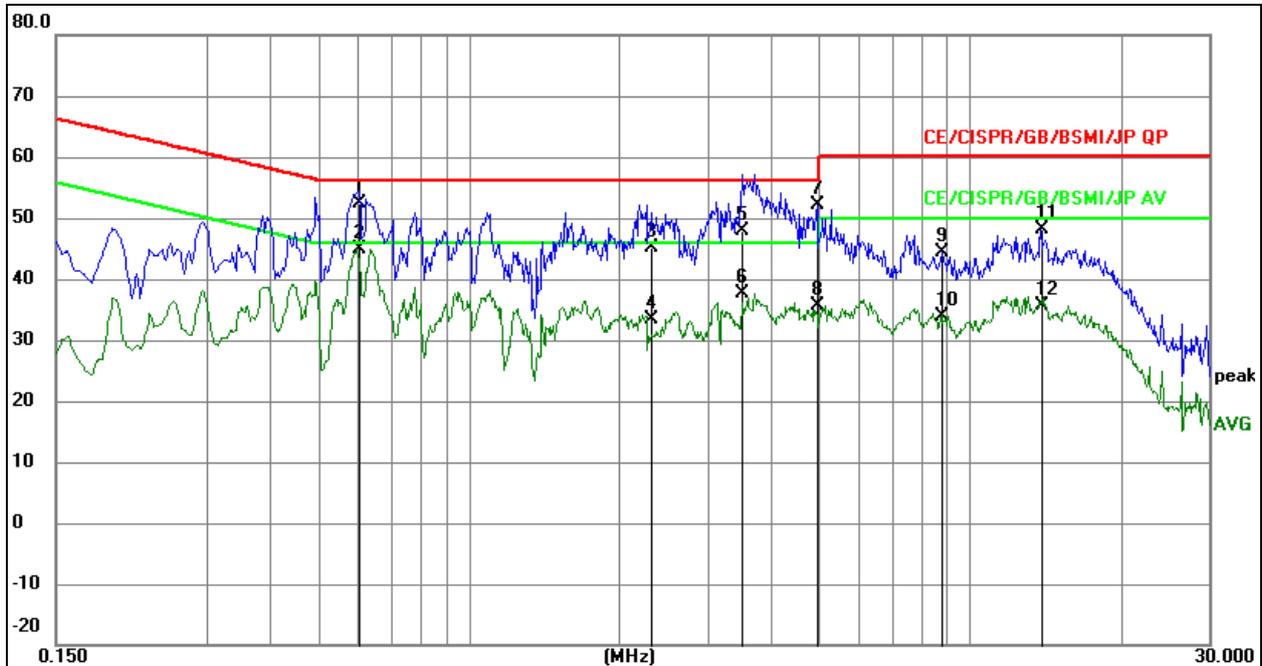


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz		dB	dBuV	dBuV	dB	
1		0.6040	42.87	9.62	52.49	56.00	-3.51	QP
2	*	0.6040	35.33	9.62	44.95	46.00	-1.05	AVG
3		2.2969	35.53	9.64	45.17	56.00	-10.83	QP
4		2.2969	23.83	9.64	33.47	46.00	-12.53	AVG
5		3.5010	38.31	9.67	47.98	56.00	-8.02	QP
6		3.5010	27.98	9.67	37.65	46.00	-8.35	AVG
7		4.9740	42.50	9.71	52.21	56.00	-3.79	QP
8		4.9740	25.97	9.71	35.68	46.00	-10.32	AVG
9		8.8035	34.53	9.78	44.31	60.00	-15.69	QP
10		8.8035	24.07	9.78	33.85	50.00	-16.15	AVG
11		13.9110	38.35	9.78	48.13	60.00	-11.87	QP
12		13.9110	25.73	9.78	35.51	50.00	-14.49	AVG


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode:	BT+WIFI LINK	Remark:	N/A

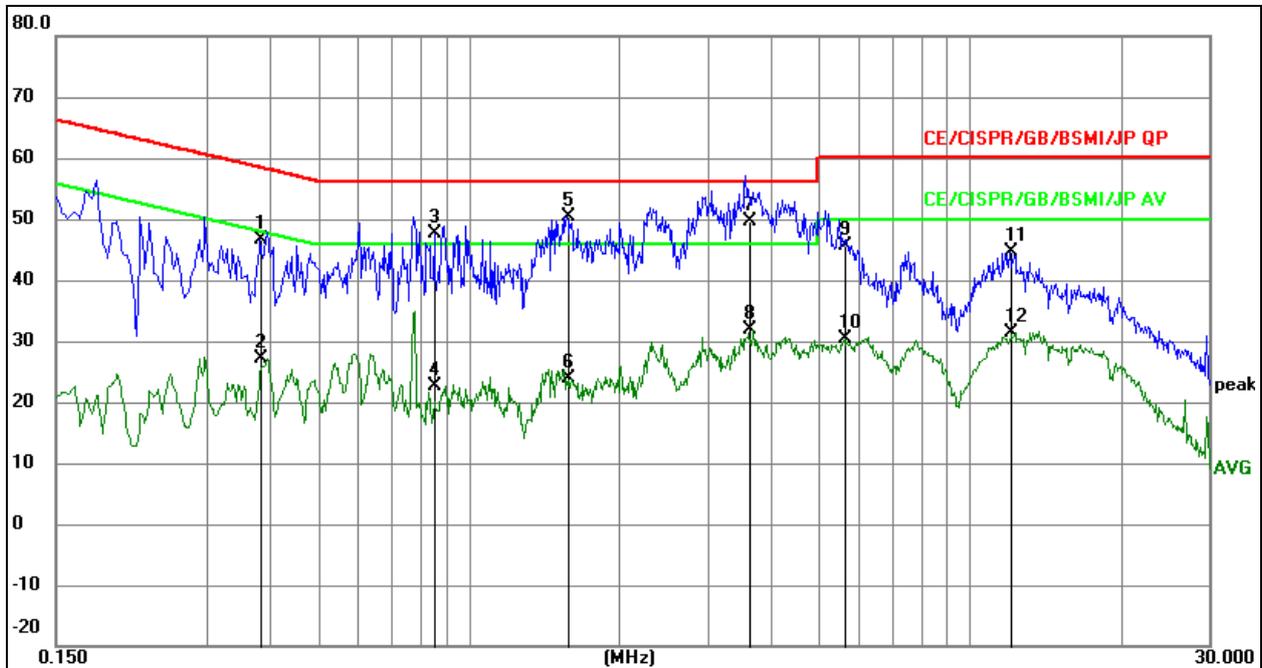
**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.3840	36.97	9.62	46.59	58.19	-11.60	QP
2		0.3840	17.42	9.62	27.04	48.19	-21.15	AVG
3		0.8565	37.91	9.62	47.53	56.00	-8.47	QP
4		0.8565	12.90	9.62	22.52	46.00	-23.48	AVG
5	*	1.5720	40.82	9.63	50.45	56.00	-5.55	QP
6		1.5720	14.13	9.63	23.76	46.00	-22.24	AVG
7		3.6320	39.89	9.67	49.56	56.00	-6.44	QP
8		3.6320	22.16	9.67	31.83	46.00	-14.17	AVG
9		5.6490	36.00	9.72	45.72	60.00	-14.28	QP
10		5.6490	20.61	9.72	30.33	50.00	-19.67	AVG
11		12.0030	34.87	9.79	44.66	60.00	-15.34	QP
12		12.0030	21.70	9.79	31.49	50.00	-18.51	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	TELE
Test Mode:	PING IP	Remark:	N/A

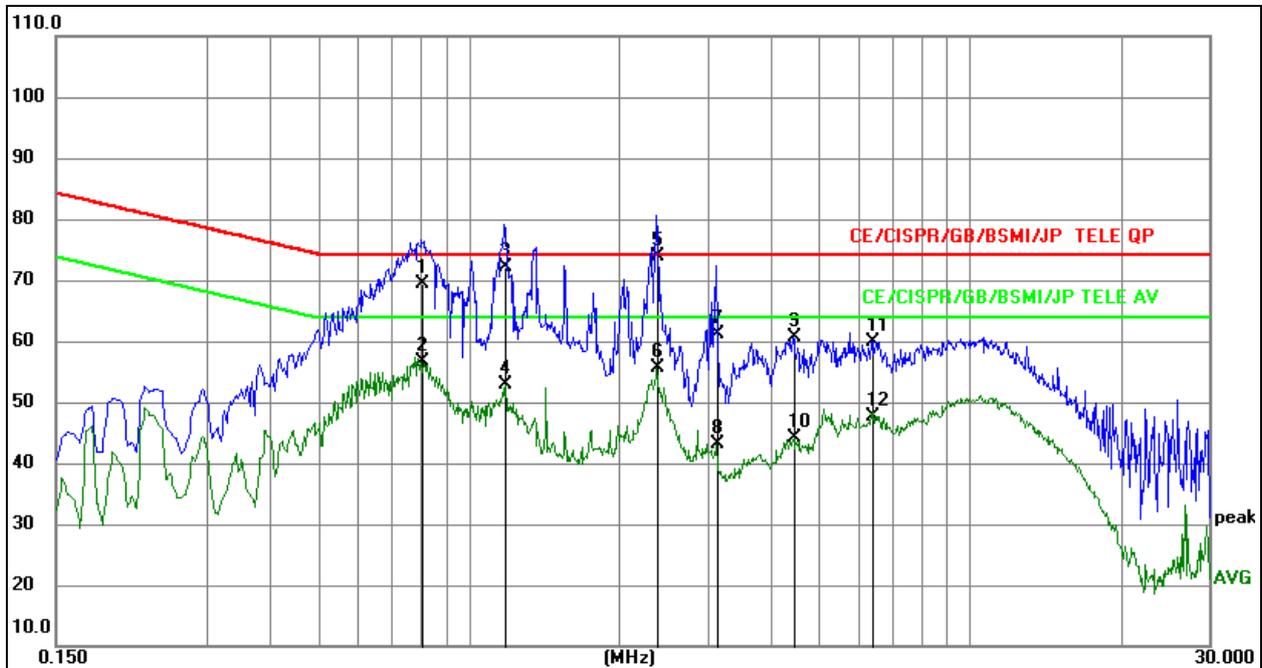
**Remark:**


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz		dB	dBuV	dBuV	dB	
1		0.8080	59.72	9.62	69.34	74.00	-4.66	QP
2		0.8080	47.02	9.62	56.64	64.00	-7.36	AVG
3		1.1790	62.61	9.63	72.24	74.00	-1.76	QP
4		1.1790	43.34	9.63	52.97	64.00	-11.03	AVG
5	*	2.3710	64.33	9.64	73.97	74.00	-0.03	QP
6		2.3710	45.98	9.64	55.62	64.00	-8.38	AVG
7		3.1240	51.52	9.66	61.18	74.00	-12.82	QP
8		3.1240	33.56	9.66	43.22	64.00	-20.78	AVG
9		4.4340	50.90	9.69	60.59	74.00	-13.41	QP
10		4.4340	34.38	9.69	44.07	64.00	-19.93	AVG
11		6.3600	50.13	9.73	59.86	74.00	-14.14	QP
12		6.3600	37.90	9.73	47.63	64.00	-16.37	AVG


## 7. Radiated EMISSIONS Test

### 7.1 Block Diagram Of Test Setup

30MHz ~ 1GHz:

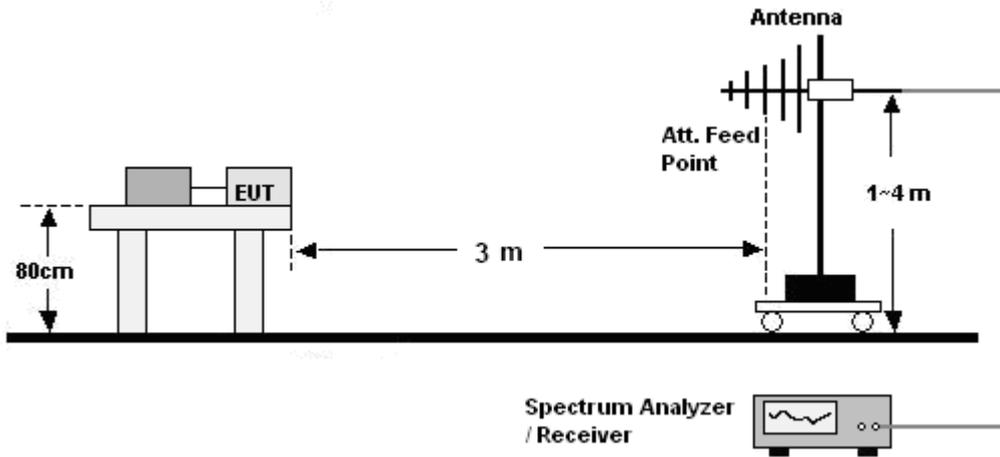

Above 1GHz:

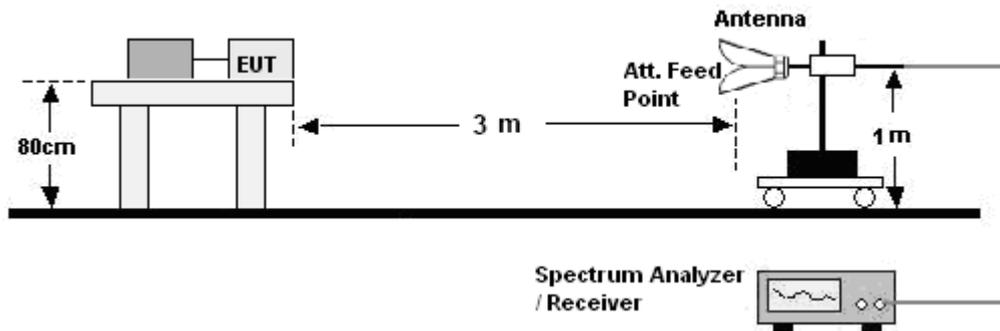

### 7.2 Limits

Limits for radiated disturbance of Class B MME

Frequency (MHz)	Quasi-peak limits at 3m Db(Mv/m)	
30-230	40	
230-1000	47	
Frequency (GHz)	limit above 1G at 3m Db(Mv/m)	
	Average	peak
1-3	50	70
3-6	54	74

**Note:** The lower limit shall apply at the transition frequencies.

### 7.3 Test Procedure

#### **30MHz ~ 1GHz:**


- a. The Product was placed on the nonconductive turntable 0.8 above the ground in a semi anechoic chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

#### **Above 1GHz:**

- a. The Product was placed on the non-conductive turntable 0.8 m above the ground in a full anechoic chamber..
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.


#### Above 1GHz

The amplitude of spurious emissions which are attenuated by more than 20Db below the permissible value has no need to be reported.

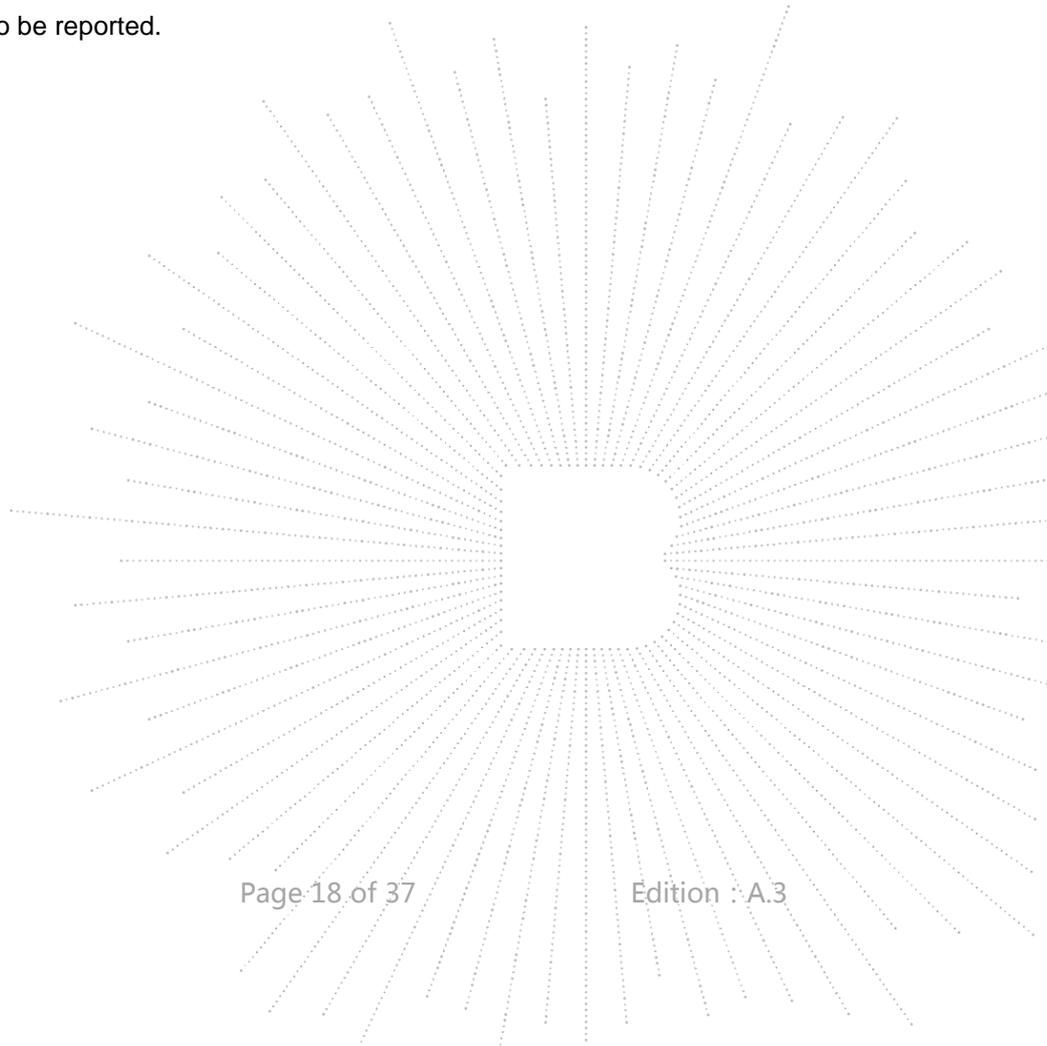

## 7.4 Test Results


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	BT+WIFI LINK	Remark:	N/A

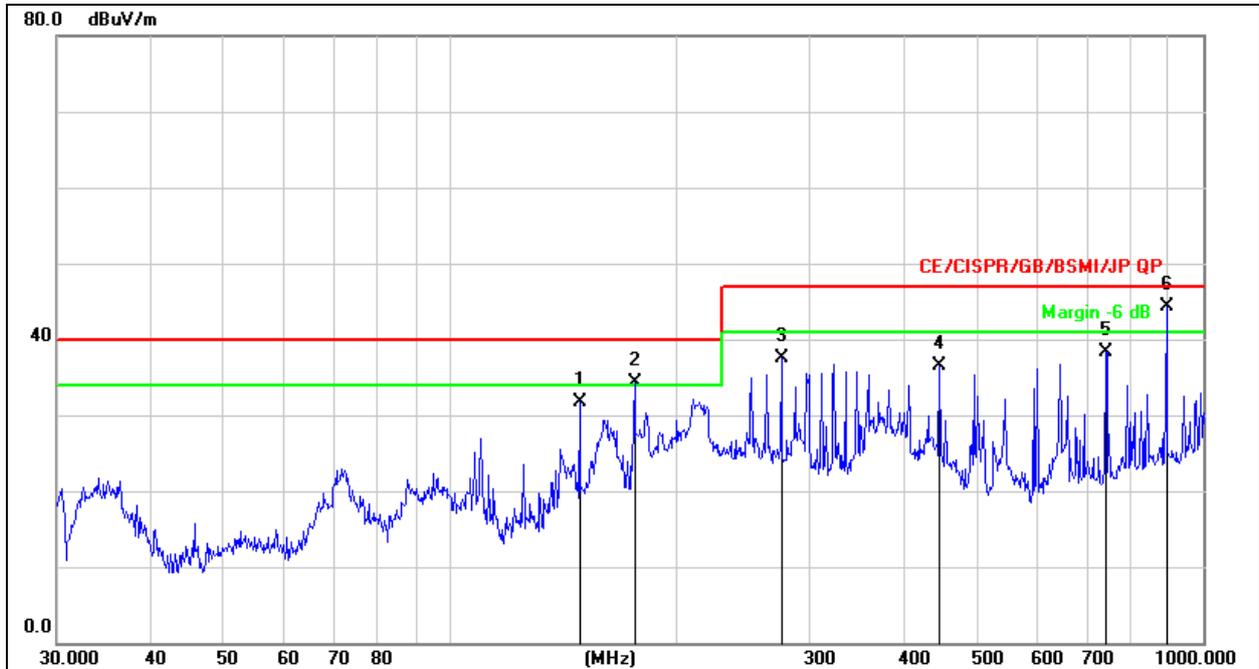

Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		148.4410	51.10	-19.39	31.71	40.00	-8.29	QP
2	!	175.6516	51.69	-17.42	34.27	40.00	-5.73	QP
3		275.1570	51.79	-14.20	37.59	47.00	-9.41	QP
4		446.4141	46.14	-9.67	36.47	47.00	-10.53	QP
5		742.2587	41.25	-2.99	38.26	47.00	-8.74	QP
6	*	893.8567	44.06	0.31	44.37	47.00	-2.63	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	BT+WIFI LINK	Remark:	N/A

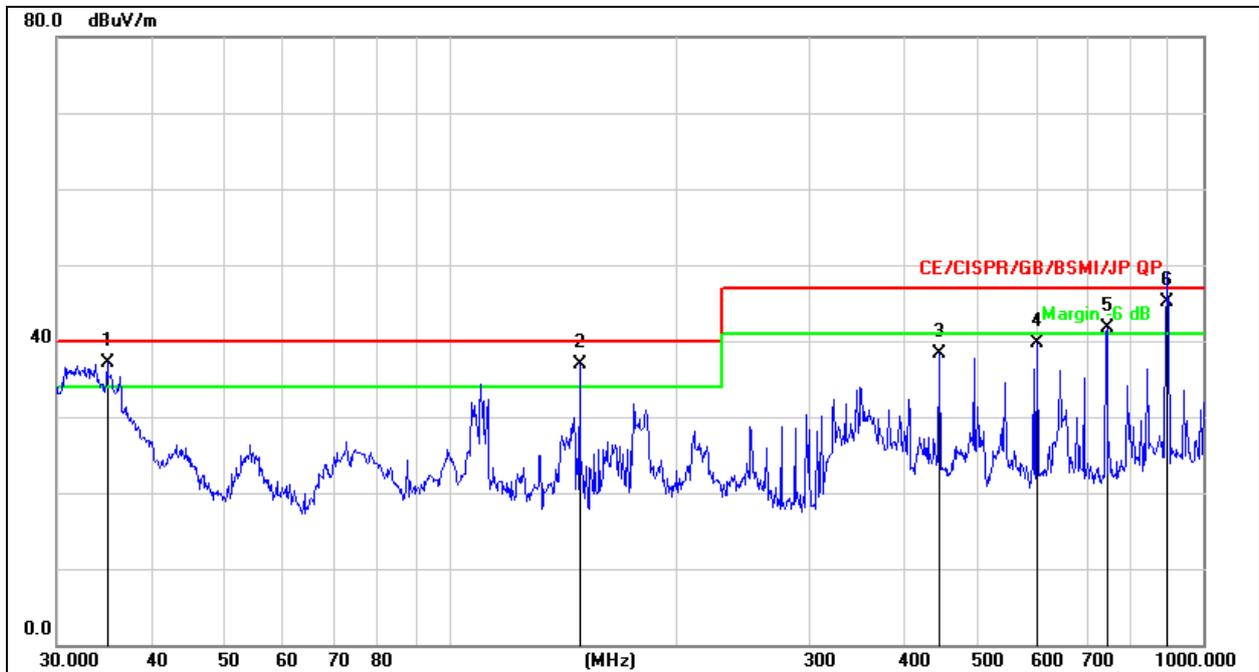


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	35.0048	54.76	-17.67	37.09	40.00	-2.91	QP
2	!	148.4410	56.24	-19.39	36.85	40.00	-3.15	QP
3		446.4141	48.05	-9.67	38.38	47.00	-8.62	QP
4		601.4265	45.67	-5.99	39.68	47.00	-7.32	QP
5	!	744.8661	44.61	-2.95	41.66	47.00	-5.34	QP
6	*	891.0225	44.88	0.24	45.12	47.00	-1.88	QP

## 8. Harmonic Current Emission(H)

### 8.1 Block Diagram of Test Setup

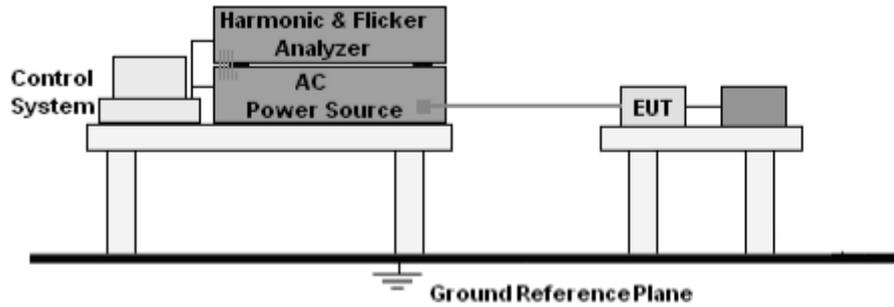

### 8.2 Limit

EN IEC 61000-3-2:2019 Clause 7.

### 8.3 Test Procedure


- The Product was placed on the top of a non-conductive table above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- The correspondent test program of test instrument to measure the current harmonics emanated from Product was chosen. The measure time shall be not less than the time necessary for the Product to be exercised.

### 8.4 Test Results

The EUT is powered by the DC only, the test item is not applicable.

## 9. Voltage Fluctuations & Flicker(F)

### 9.1 Block Diagram of Test Setup

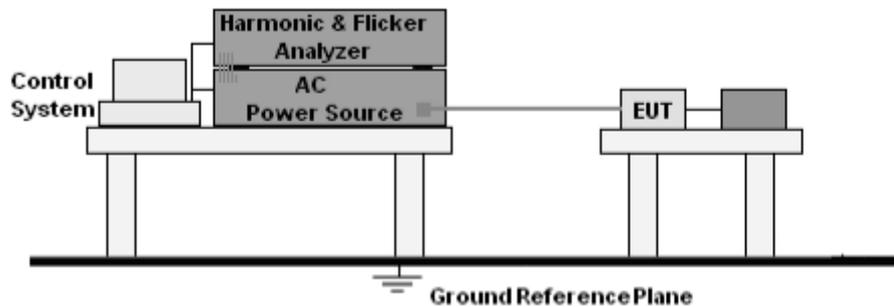

### 9.2 Limit

EN 61000-3-3:2013+A1:2019 Clause 5.

### 9.3 Test Procedure

- The Product was placed on the top of a non-conductive table above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- During the flick test, the measure time shall include that part of whole operation cycle in which the Product produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

### 9.4 Test Results

The EUT is powered by the DC only, the test item is not applicable.

## 10. Immunity Test Of General The Performance Criteria

According To EN 301489 -3standard, The General Performance Criteria As Following:

Criteria	During the test	After the test
<b>A</b>	Operate as intended No loss of function No unintentional responses	Operate as intended No loss of function No degradation of performance No loss of stored data or user programmable functions
<b>B</b>	May show loss of function No unintentional responses	Operate as intended Lost function(s) shall be self-recoverable No degradation of performance No loss of stored data or user programmable functions

According To EN 301489 -17standard, The General Performance Criteria As Following:

Criteria	During test	After test (i.e. as a result of the application of the test)
<b>A</b>	Shall operate as intended. (see note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of critical stored data.
<b>B</b>	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
<b>C</b>	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.

NOTE: Operate as intended during the test allows a level of degradation in accordance with Minimum performance level.

Minimum performance level:

For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER, the minimum performance level shall be no loss of the wireless transmission function needed for the intended use of the equipment.

**PERFORMANCE FOR TT**

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply. Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an acknowledgement (ACK) or not-acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

**PERFORMANCE FOR TR**


The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration for which performance criteria C shall apply. Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

**PERFORMANCE FOR CT**

The performance criteria A shall apply. Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an Acknowledgement (ACK) or Not Acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

**PERFORMANCE FOR CR**

The performance criteria A shall apply. Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

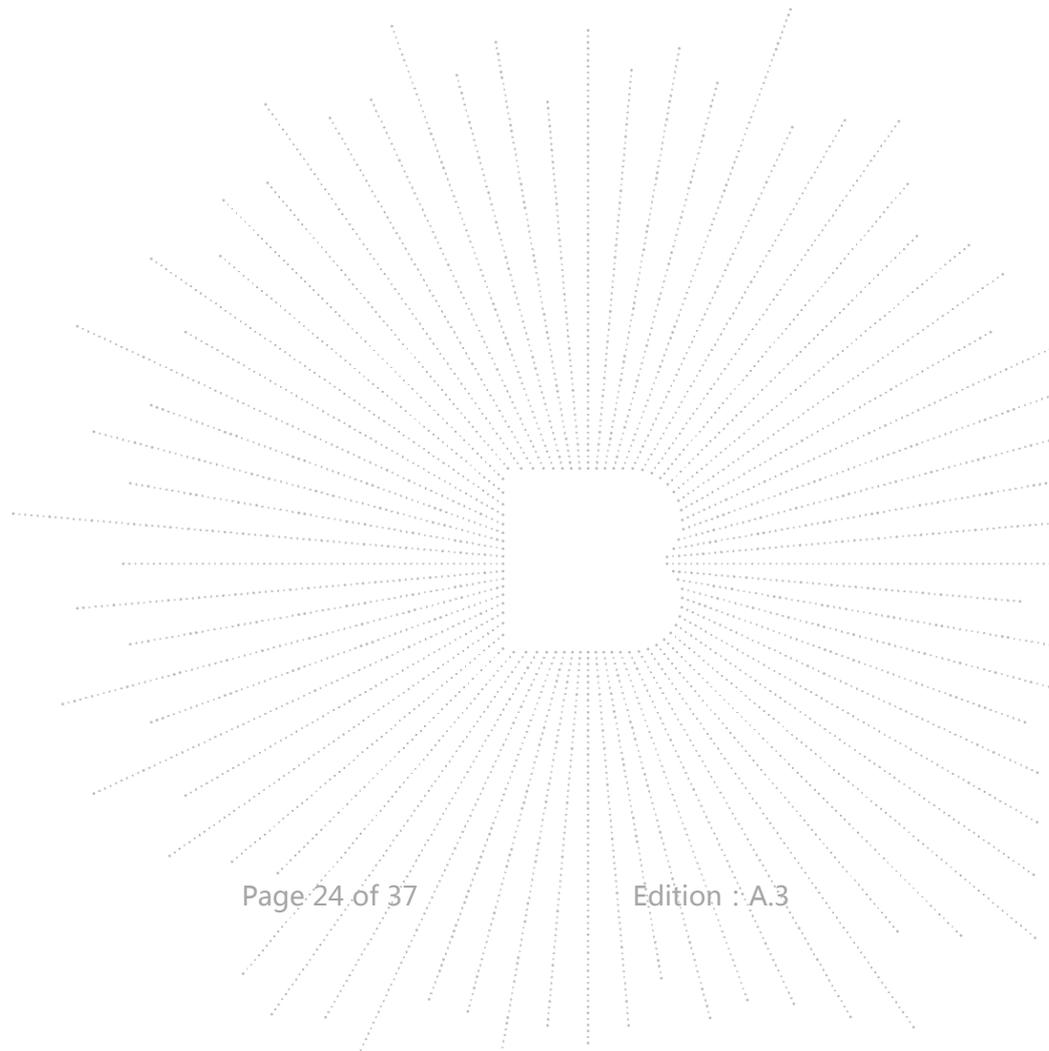


## 11. Electrostatic Discharge (ESD)

### 11.1 Test Specification

<b>Test Port</b>	:	Enclosure port
<b>Discharge Impedance</b>	:	330 ohm / 150 pF
<b>Discharge Mode</b>	:	Single Discharge
<b>Discharge Period</b>	:	one second between each discharge

### 11.2 Block Diagram of Test Setup

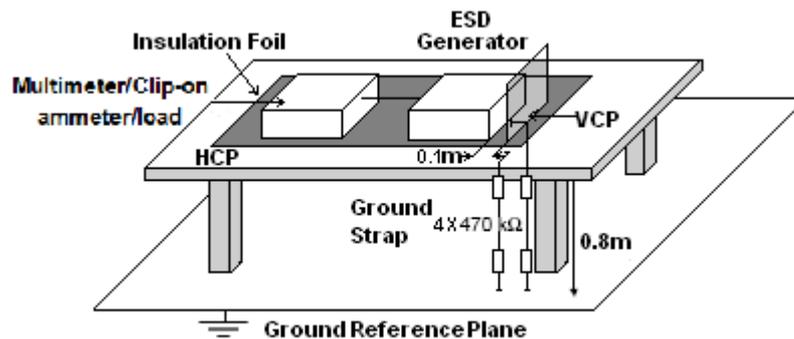

### 11.3 Test Procedure

- Electrostatic discharges were applied only to those points and surfaces of the Product that are accessible to users during normal operation.
- The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- The time interval between two successive single discharges was at least 1 second.
- The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the Product.
- Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- Air discharges were applied with the round discharge tip of the discharge electrode approaching the Product as fast as possible (without causing mechanical damage) to touch the Product. After each discharge, the ESD generator was removed from the Product and re-triggered for a new single discharge. The test was repeated until all discharges were complete.


### 11.4 Test Results

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101KPa	Test Mode:	BT+WIFI LINK

Mode	Air Discharge (Test result)								Contact Discharge (Test result)								Perform Criteria	Judgment
	2		4		8		15		2		4		6		8			
Test level (kV)																		
Test Location	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-		
HCP									A	A	A	A					TT,TR	PASS
VCP									A	A	A	A					TT,TR	PASS
port									A	A	A	A					TT,TR	PASS
Keys	A	A	A	A	A	A											TT,TR	PASS

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) Test condition:  
 Direct / Indirect (HCP/VCP) discharges: Minimum 50 times (Positive/Negative) at each point. Air discharges: Minimum 10 times (Positive/Negative) at each point.
- 3) N/A - denotes test is not applicable in this test report
- 4) There was not any unintentional transmission in standby mode

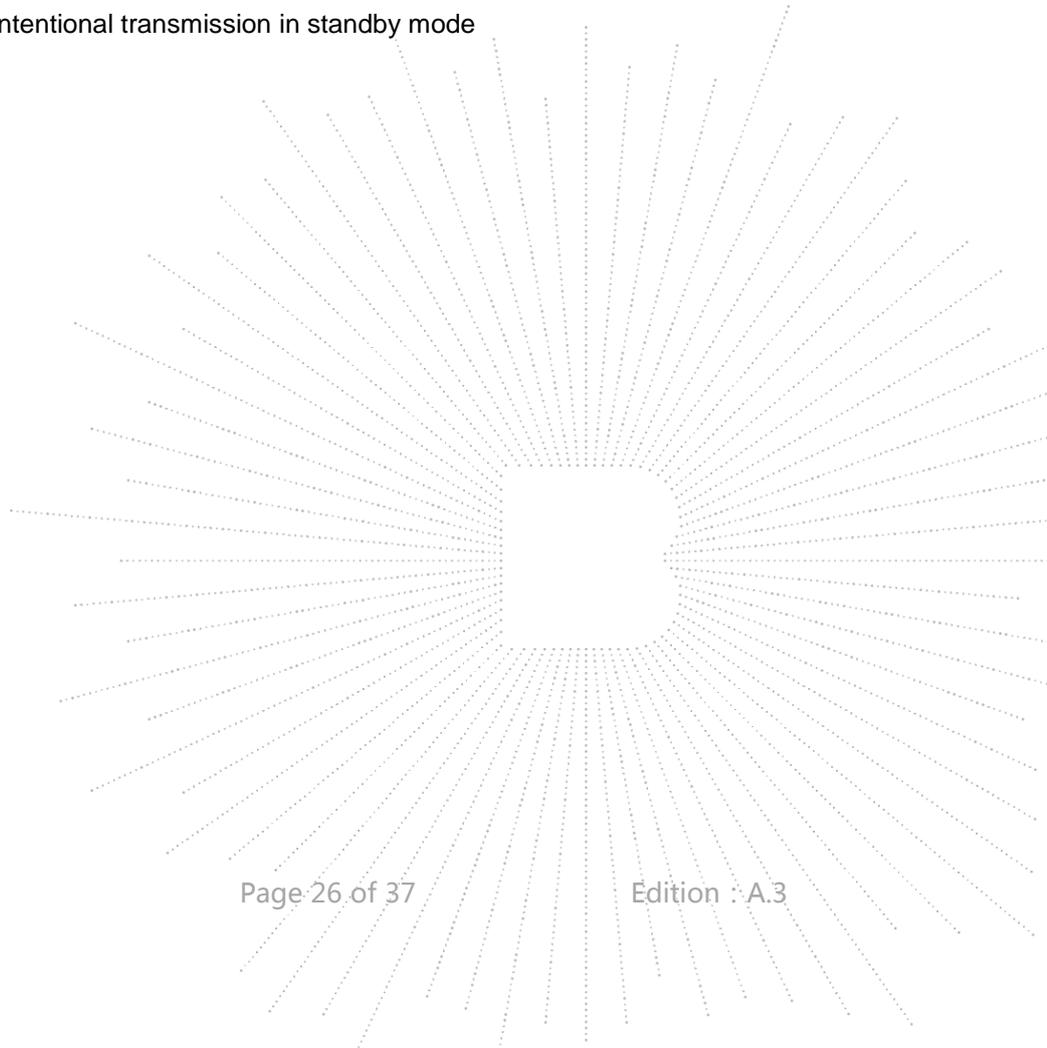


## 12. Continuous RF Electromagnetic Field Disturbances(RS)

### 12.1 Test Specification


<b>Test Port</b>	: Enclosure port
<b>Step Size</b>	: 1%
<b>Modulation</b>	: 1kHz, 80% AM
<b>Dwell Time</b>	: 1 second
<b>Polarization</b>	: Horizontal & Vertical

### 12.2 Block Diagram of Test Setup

Below 1GHz:

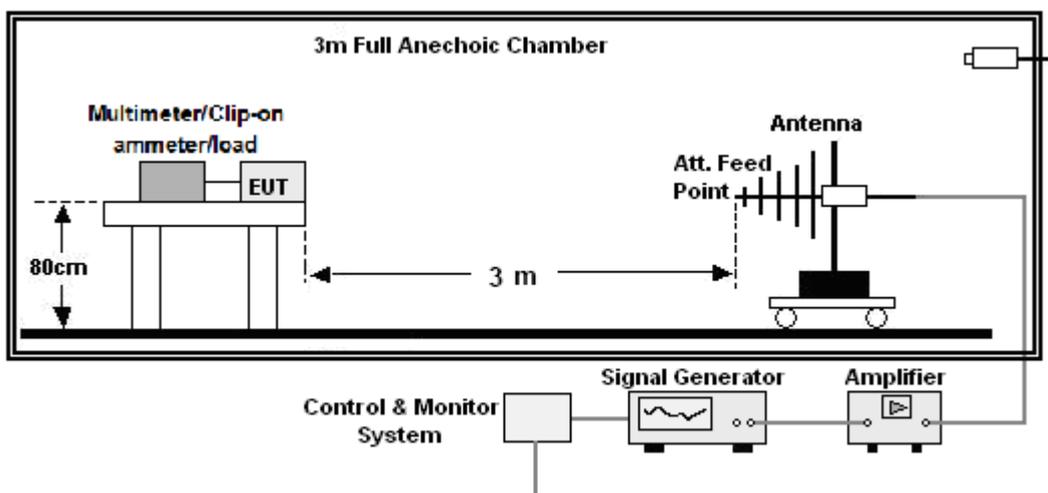

Above 1GHz:

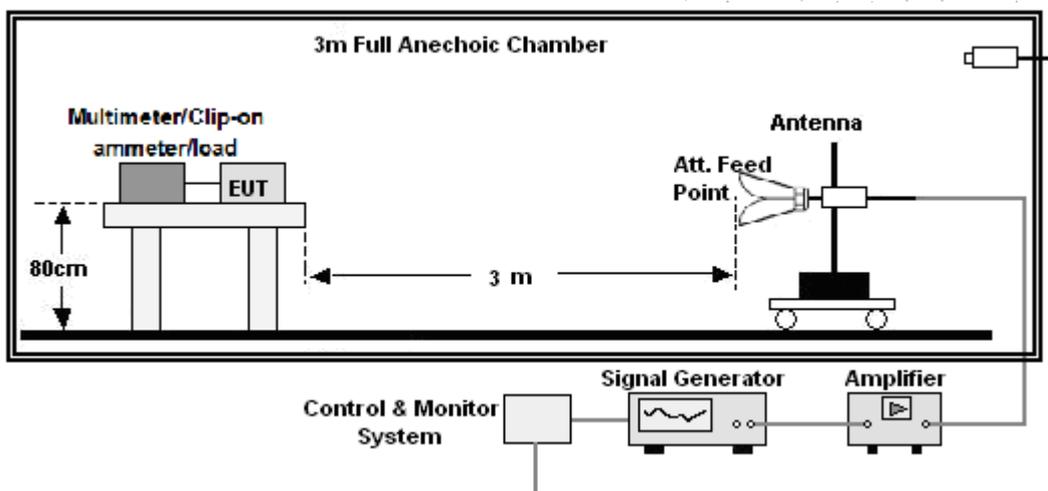

### 12.3 Test Procedure

- a. The testing was performed in a fully-anechoic chamber. The transmit antenna was located at a distance of 3 meters from the Product.
- b. The frequency range is swept from 80MHz to 6000MHz, with the signal 80% amplitude modulated with a 1 kHz sine wave, and the step size was 1%.
- c. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to be able to respond, but should not exceed 5 s at each of the frequencies during the scan.
- d. The test was performed with the Product exposed to both vertically and horizontally polarized fields on each of the four sides.
- e. For Broadcast reception function: Group 2 not apply in this test.

### 12.4 Test Results

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101KPa	Test Mode:	BT+WIFI LINK

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Perform Criteria	Test Result	Judgment
80~6000	H / V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front	CT,CR	A	PASS
			Rear			
			Left			
			Right			

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A - denotes test is not applicable in this test report.
- 3) There was no change operated with initial operating during the test.
- 4) There was not any unintentional transmission in standby mode


### 13. Electrical Fast Transients/Burst (EFT)

#### 13.1 Test Specification

<b>Test Port</b>	: input AC / DC power port
<b>Impulse Frequency</b>	: 5 kHz
<b>Impulse Wave-shape</b>	: 5/50 ns
<b>Burst Duration</b>	: 15 ms
<b>Burst Period</b>	: 300 ms
<b>Test Duration</b>	: 2 minutes per polarity

#### 13.2 Block Diagram of EUT Test Setup

For input AC / DC power port:

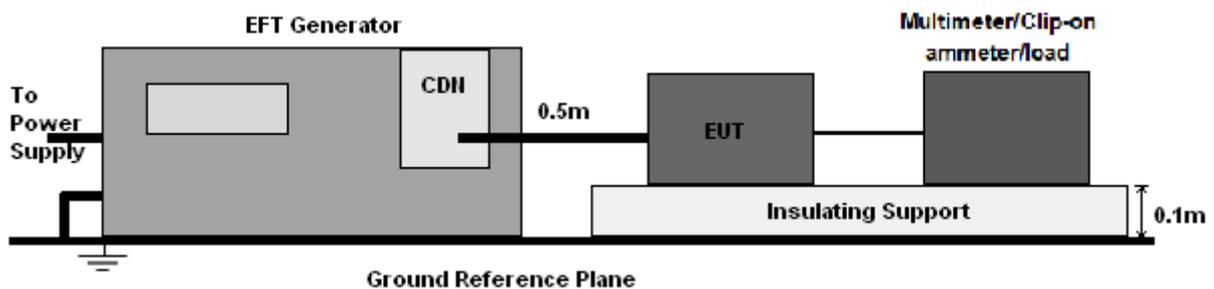

#### 13.3 Test Procedure

- The Product and support units were located on a non-conductive table above ground reference plane.
- A 0.5m-long power cord was attached to Product during the test.

#### 13.4 Test Results


The EUT is powered by the DC only, the test item is not applicable.

## 14. Surges Immunity Test

### 14.1 Test Specification

<b>Test Port</b>	: input AC / DC power port
<b>Wave-Shape</b>	: Open Circuit Voltage - 1.2 / 50 us Short Circuit Current - 8 / 20 us
<b>Pulse Repetition Rate</b>	: 1 pulse / min.
<b>Phase Angle</b>	: 0° / 90° / 180° / 270°
<b>Test Events</b>	: 5 pulses (positive & negative) for each polarity

### 14.2 Block Diagram of EUT Test Setup

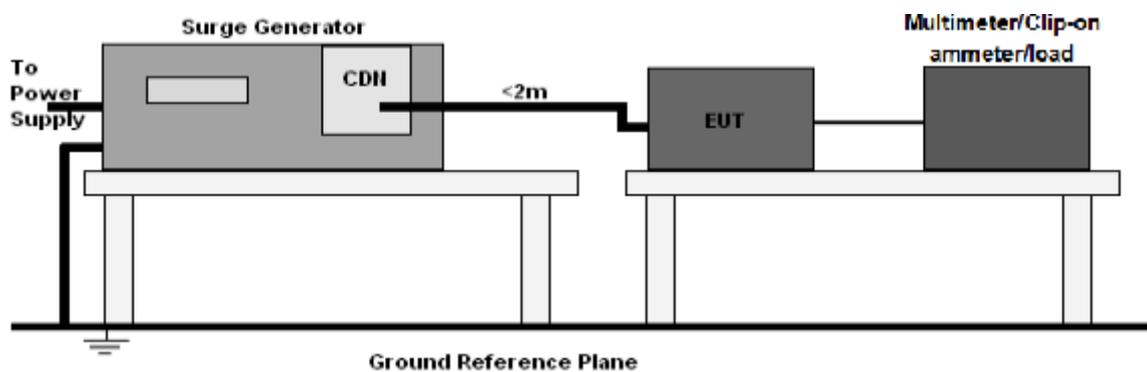

### 14.3 Test Procedure

- The surge is to be applied to the Product power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave.
- The power cord between the Product and the coupling/decoupling networks shall be 2 meters in length (or shorter). Interconnection line between the Product and the coupling/decoupling networks shall be 2 meters in length (or shorter).

### 14.4 Test Result

The EUT is powered by the DC only, the test item is not applicable.


## 15. Continuous Induced RF Disturbances (CS)

### 15.1 Test Specification

<b>Test Port</b>	: input AC / DC power port
<b>Step Size</b>	: 1%
<b>Modulation</b>	: 1kHz, 80% AM
<b>Dwell Time</b>	: 1 second

### 15.2 Block Diagram of EUT Test Setup

For input AC / DC power port:

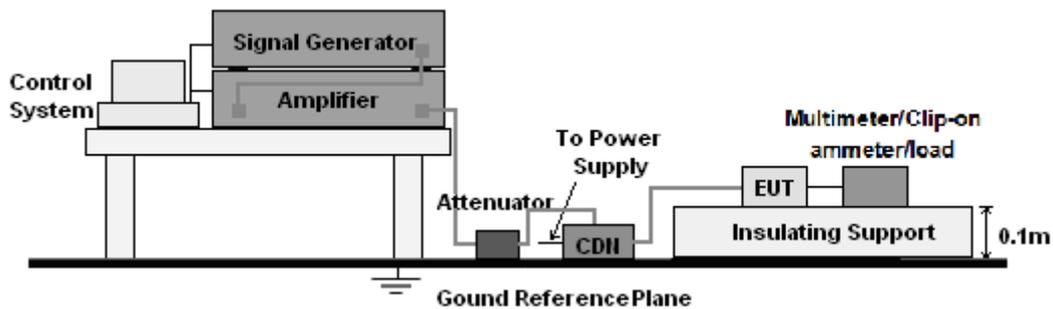

### 15.3 Test Procedure

For input AC/ DC power port:

- The Product and support units were located at a ground reference plane with the interposition of a 0.1 m thickness insulating support and the CDN was located on GRP directly.
- The frequency range is swept from 150 kHz to 10MHz, 10MHz to 30MHz, 30MHz to 80MHz with the signal 80% amplitude modulated with a 1 kHz sine wave, and the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the Product to be able to respond.

### 15.4 Test Result


The EUT is powered by the DC only, the test item is not applicable.

## 16. Voltage Dips And Interruptions (DIPS)

### 16.1 Test Specification

<b>Test Port</b>	: input AC power port
<b>Phase Angle</b>	: 0°, 180°
<b>Test cycle</b>	: 3 times

### 16.2 Block Diagram of EUT Test Setup

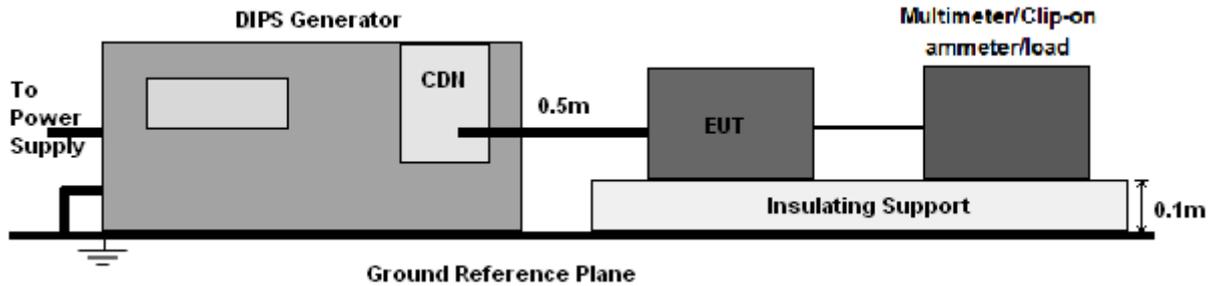

### 16.3 Test Procedure


- The Product and support units were located on a non-conductive table above ground floor.
- Set the parameter of tests and then perform the test software of test simulator.
- Conditions changes to occur at 0 degree crossover point of the voltage waveform.

### 16.4 Test Result


The EUT is powered by the DC only, the test item is not applicable.

### 17. EUT Photographs

EUT Photo 1

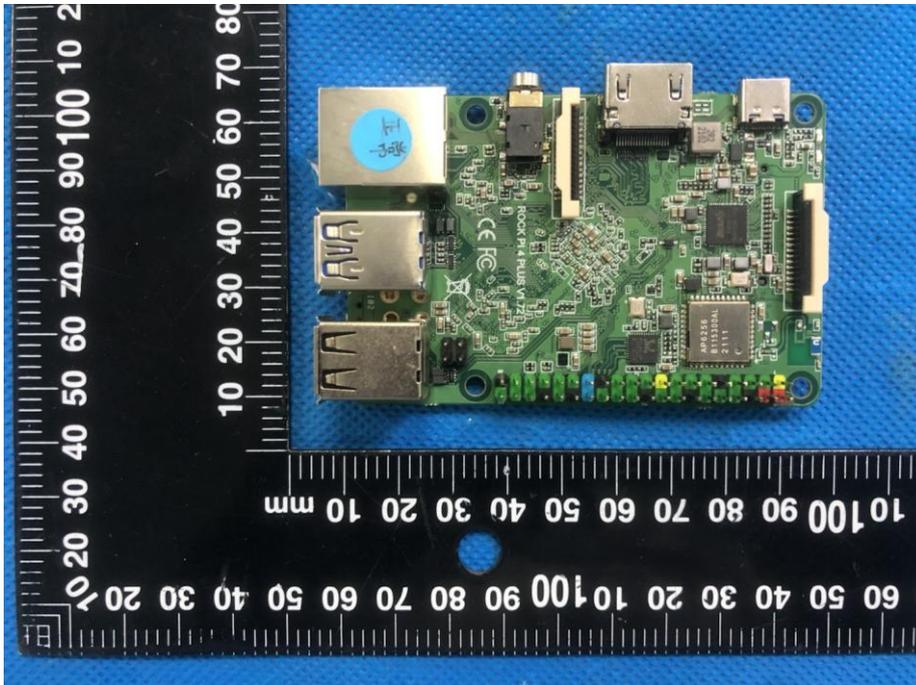

EUT Photo 2

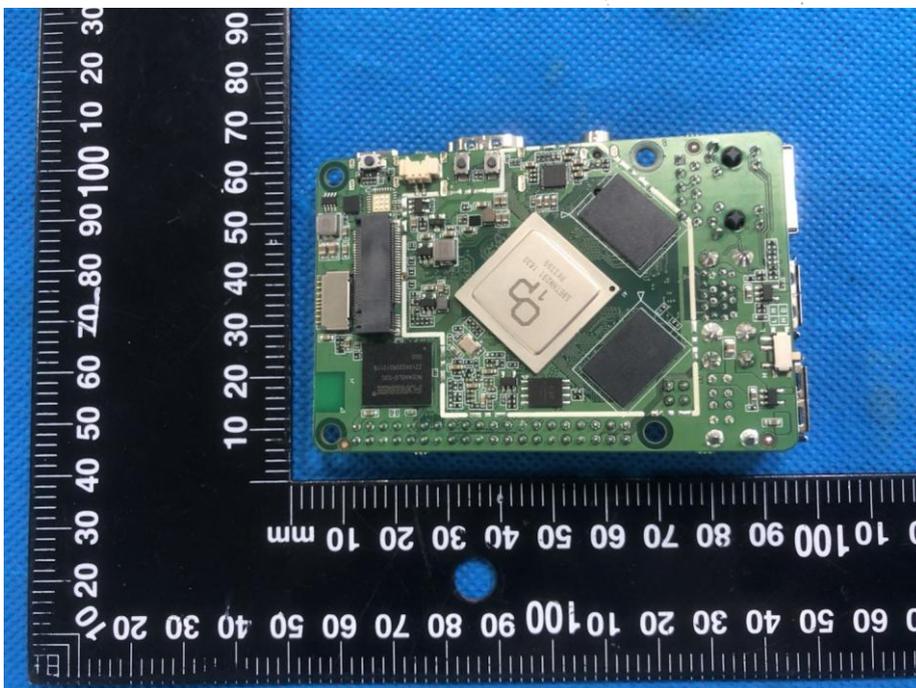


### 18. EUT Test Setup Photographs

Conducted emissions




TELE

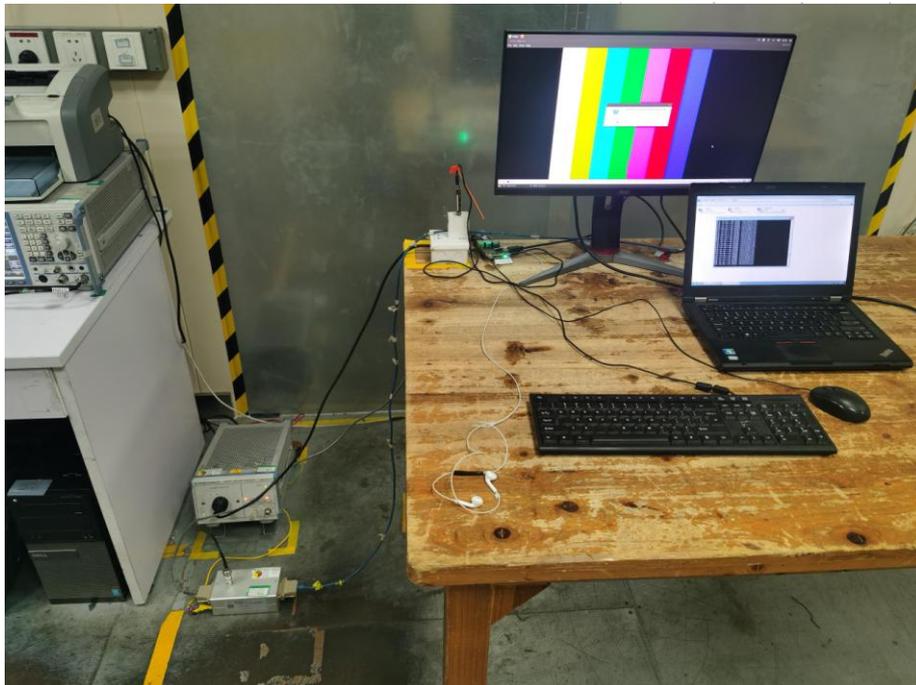


Radiated emissions



ESD

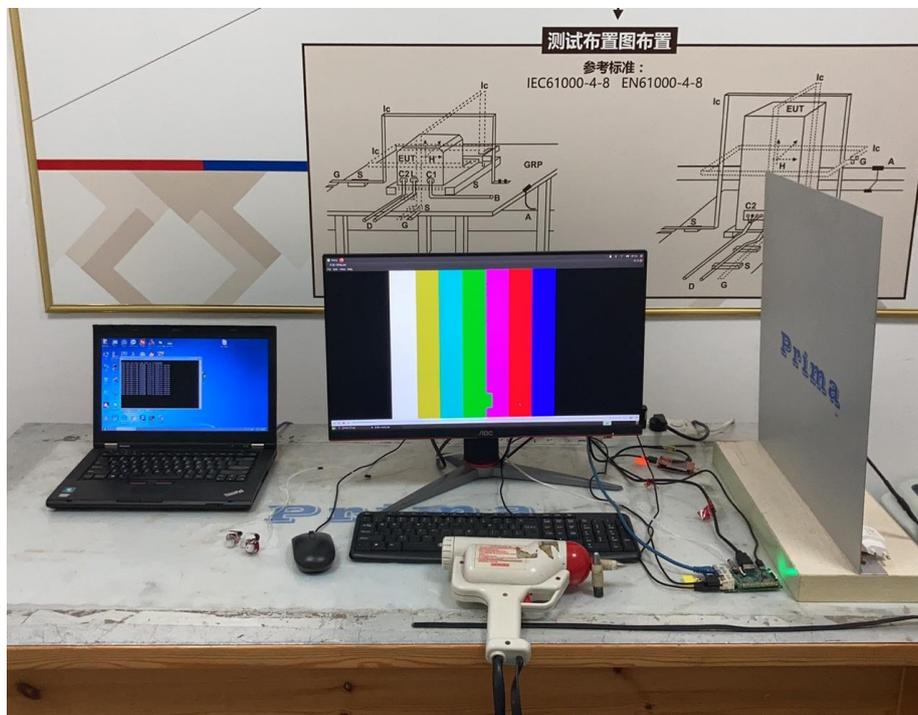

RS

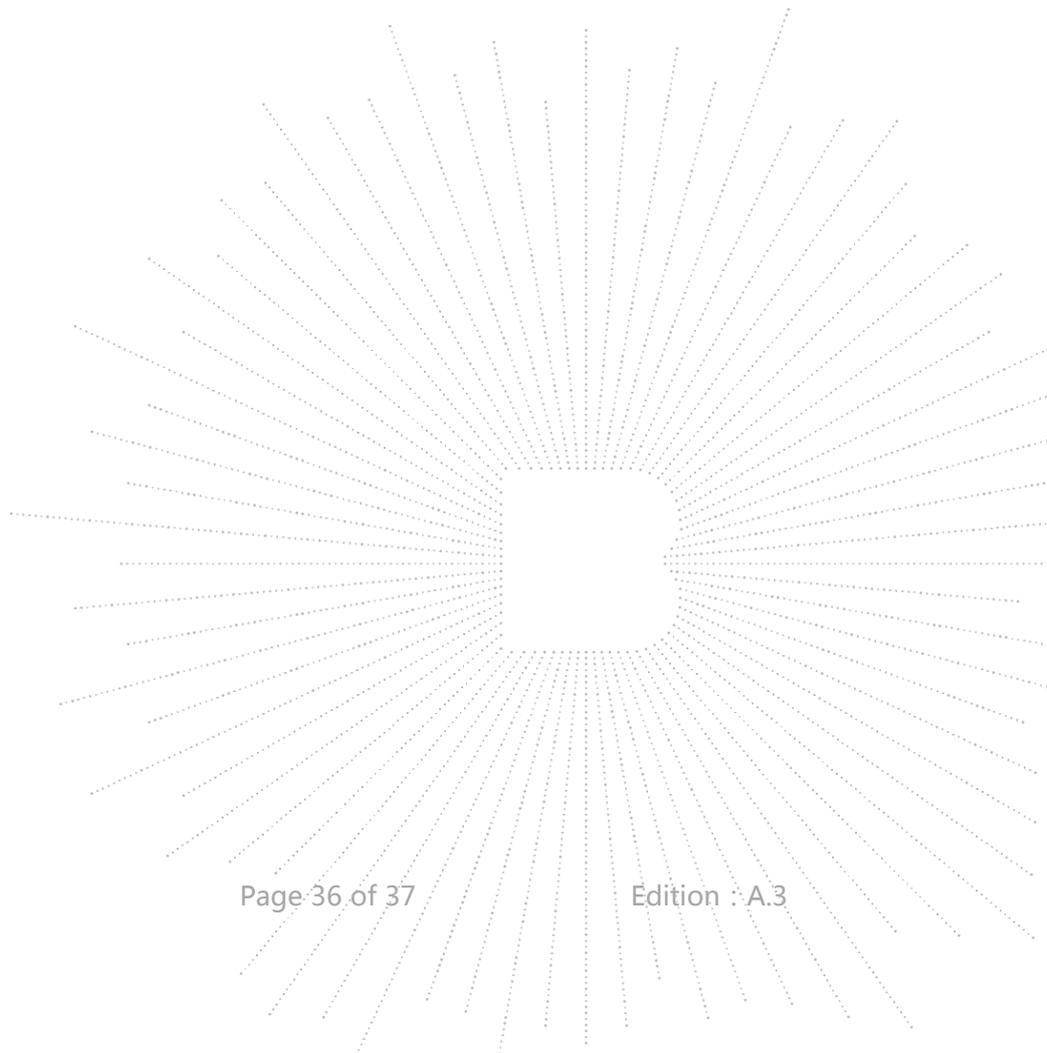

## STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL : 400-788-9558

P.C.: 518103

FAX : 0755-33229357

Website : <http://www.chnbctc.com>

E-Mail : [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

\*\*\*\*\* END \*\*\*\*\*